SCHEMATIC DIAGRAM

NOTES 1 UNLESS OTHERWISE SPECIFIED
(1) RESISTORS ARE 1/4 (1/8)W (Ω) AND IN OHMS (K=1000) ±5% (J)
(2) RATED VOLTAGE OF STYROL MYLAR AND DISK CAPACITORS ARE DC 50V
TOLLERANCE ARE AS MENTIONED BELOW
MYLAR CERAMIC AND STYROL ±5%
DISK CERAMIC ±0.25 PF (LESS THAN 5PF)
±0.5 PF (6PF 9PF) ±5% (10PF 820PF)
% (GREATER THAN 1000PF)
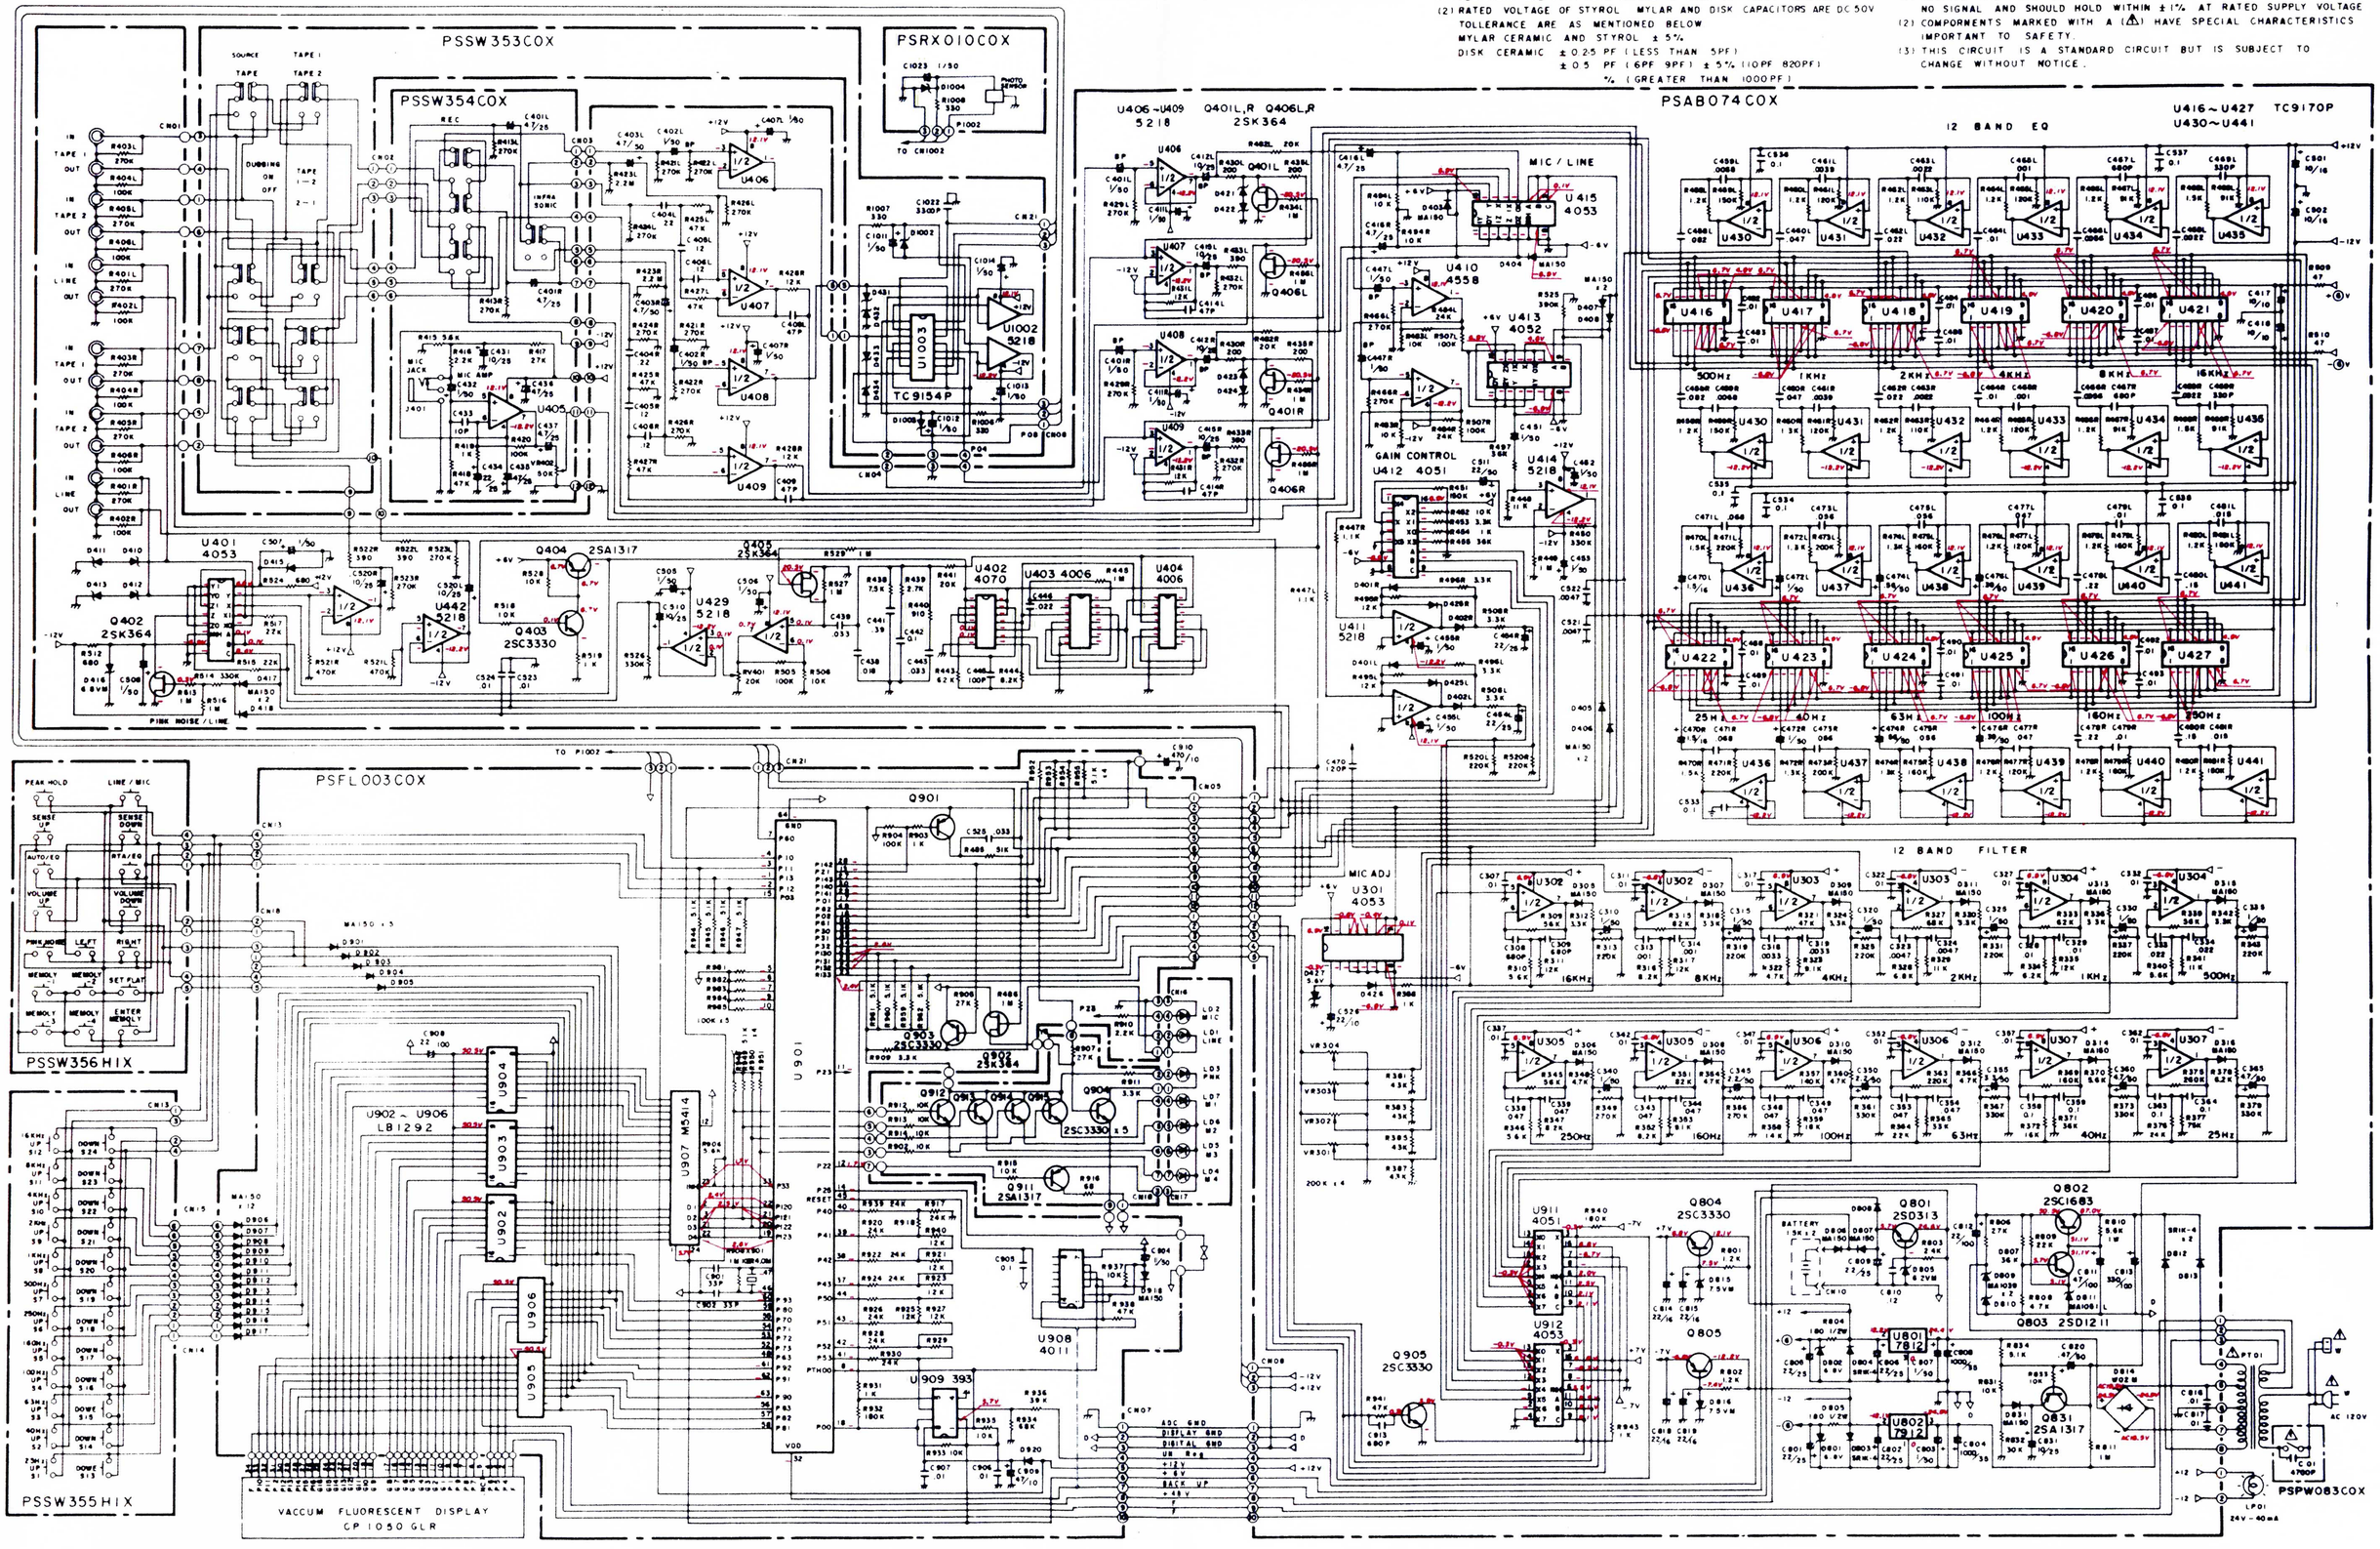
NOTES 2 UNLESS OTHERWISE SPECIFIED
(1) VOLTAGE ARE MEASURED TO CHASSIS GROUND WITH A VOLTMETER
NO SIGNAL AND SHOULD HOLD WITHIN ±1% AT RATED SUPPLY VOLTAGE
(2) COMPORNENTS MARKED WITH A (△) HAVE SPECIAL CHARACTERISTICS
IMPORTANT TO SAFETY.
(3) THIS CIRCUIT IS A STANDARD CIRCUIT BUT IS SUBJECT TO
CHANGE WITHOUT NOTICE.