


INPUT PCB A2069A501A

- 1 PB 1-L
- 2 PB 2-L
- 3 PB 3-L
- 4 GND
- 5 PB 3-R
- 6 PB 2-R
- 7 PB 1-R

- TAPE 2
- TAPE 1
- PHONO
- CD

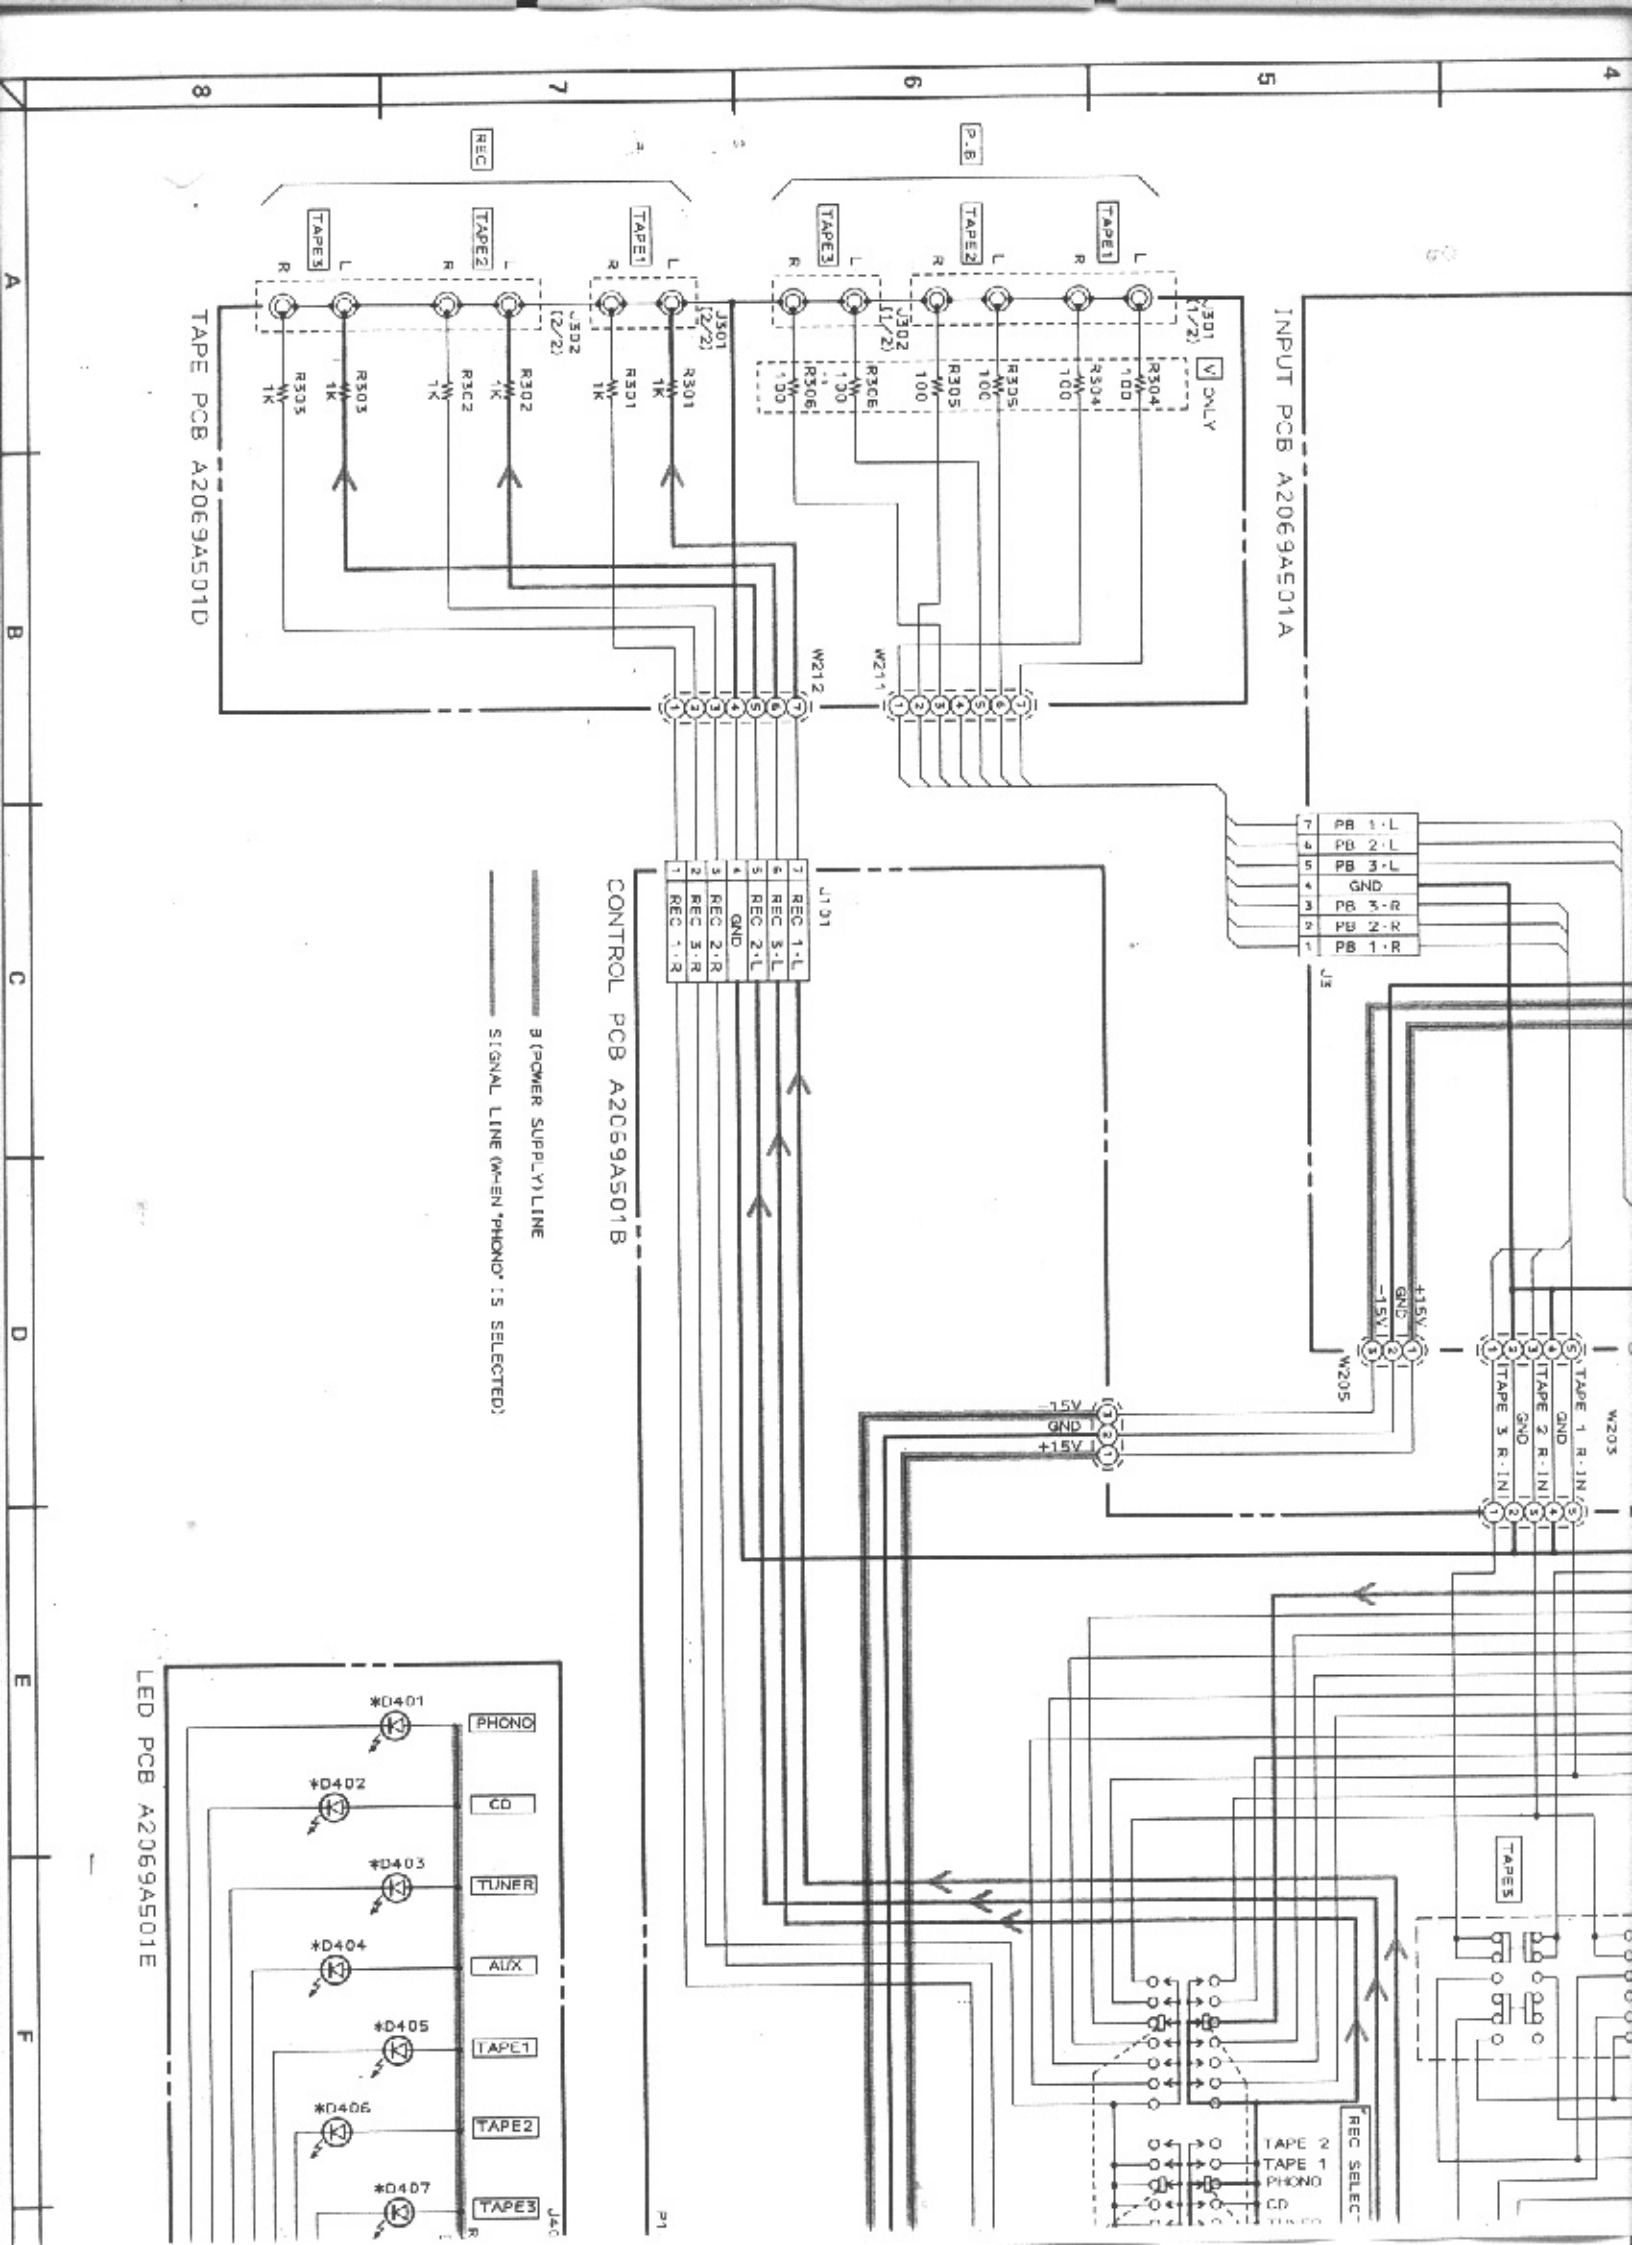

INPUT PCB A2069A501A

TAPE PCB A2069A501D

CONTROL PCB A2069A501B


LED PCB A2069A501E

—— POWER SUPPLY LINE
 - - - - SIGNAL LINE (WHEN 'PHONO' IS SELECTED)

- 7 PB 1-L
- 6 PB 2-L
- 5 PB 3-L
- 4 GND
- 3 PB 3-R
- 2 PB 2-R
- 1 PB 1-R

- 7 REC 1-L
- 6 REC 3-L
- 5 REC 2-L
- 4 GND
- 3 REC 2-R
- 2 REC 3-R
- 1 REC 1-R


- TAPE 2
- TAPE 1
- PHONO
- CD
- PHONO

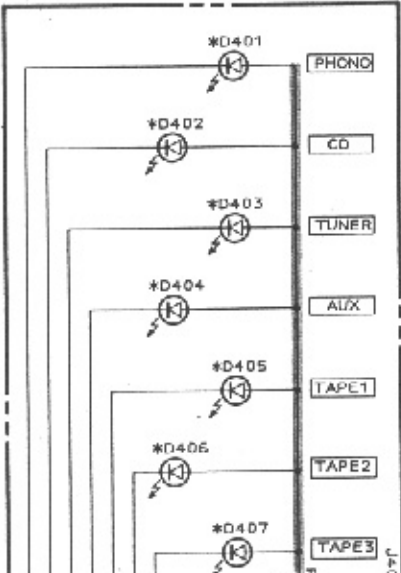

4 5 6 7 8 A B C D E F

R23 AM-37 750
AM-47 750

MAIN AMP PCB A. A2061A501A

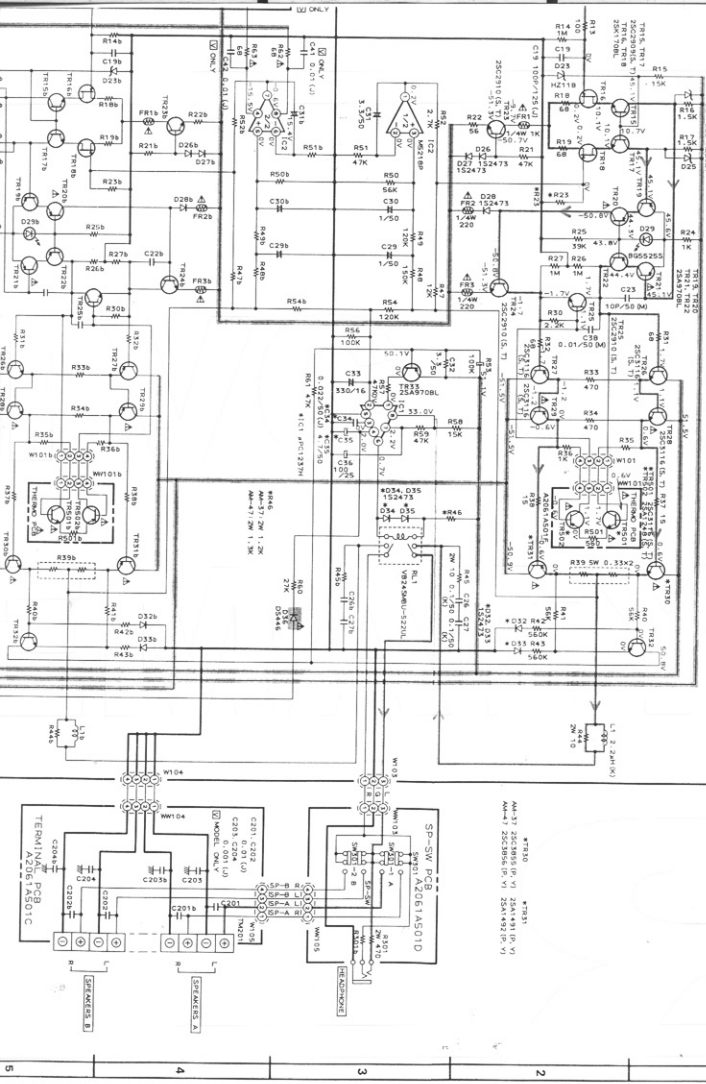


*TR20
AM-37 25218555 (P, V) 25A1491 (P, V)
AM-47 25218555 (P, V) 25A1492 (P, V)

*TR31
SP-SW PCB
SW201 A2061A501D

C201 C202
C203 C204
E. 0.001 (U)
MODEL ONLY

TERMINAL PCB
A2061A501C

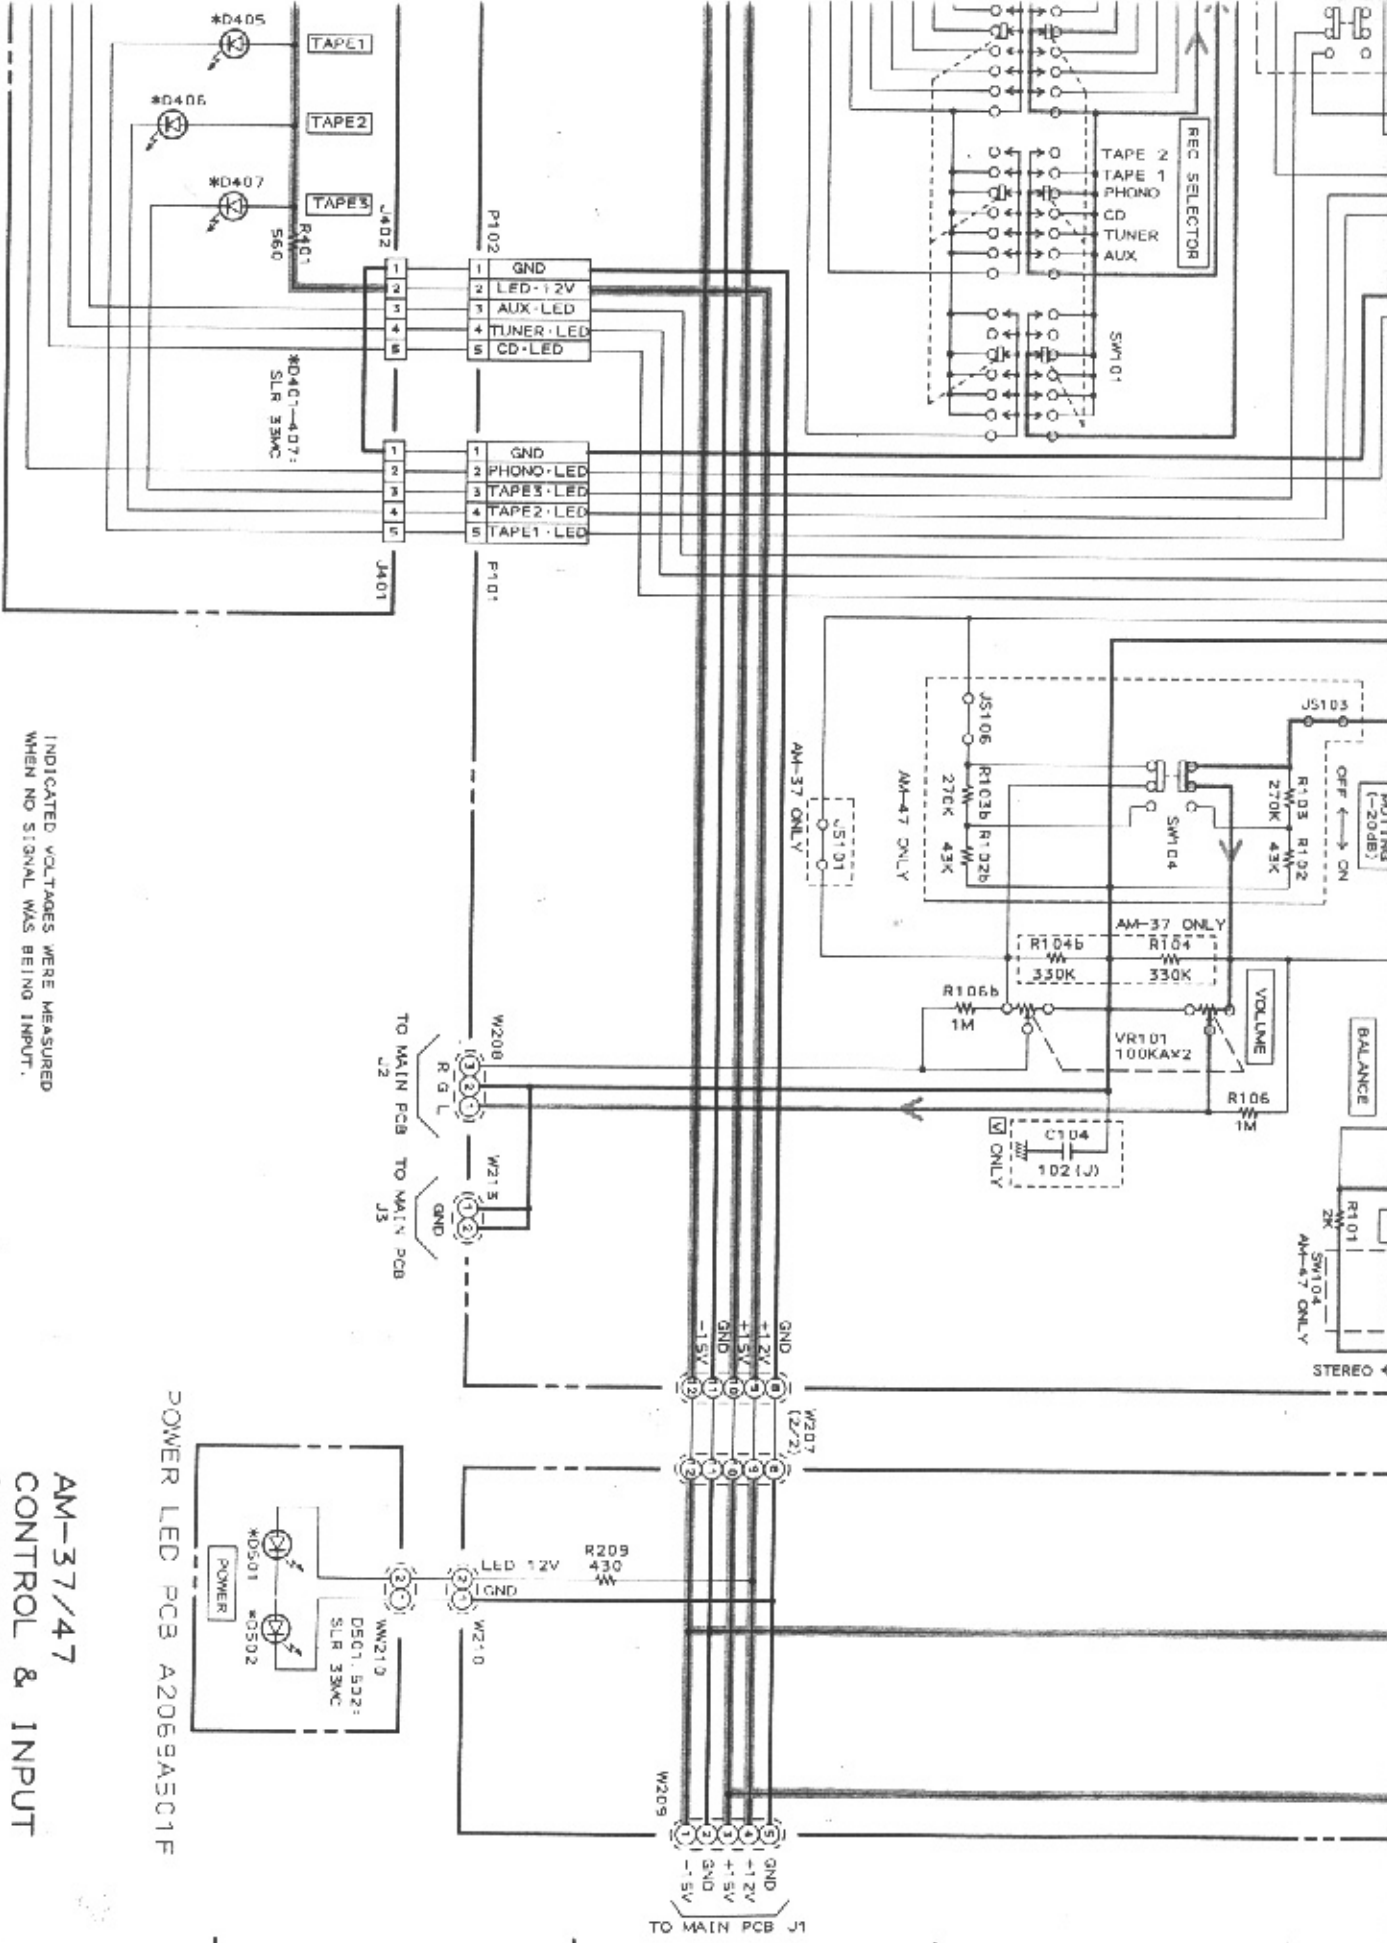



INDICATED VOLTAGES WERE MEASURED
WHEN NO SIGNAL WAS BEING INPUT.

AM-37/47
CONTROL & INPUT
SCHEMATIC DIAGRAM
NO. 2-2 A206902M

F G H J K 8 7 6 5



SELECTOR


SW103

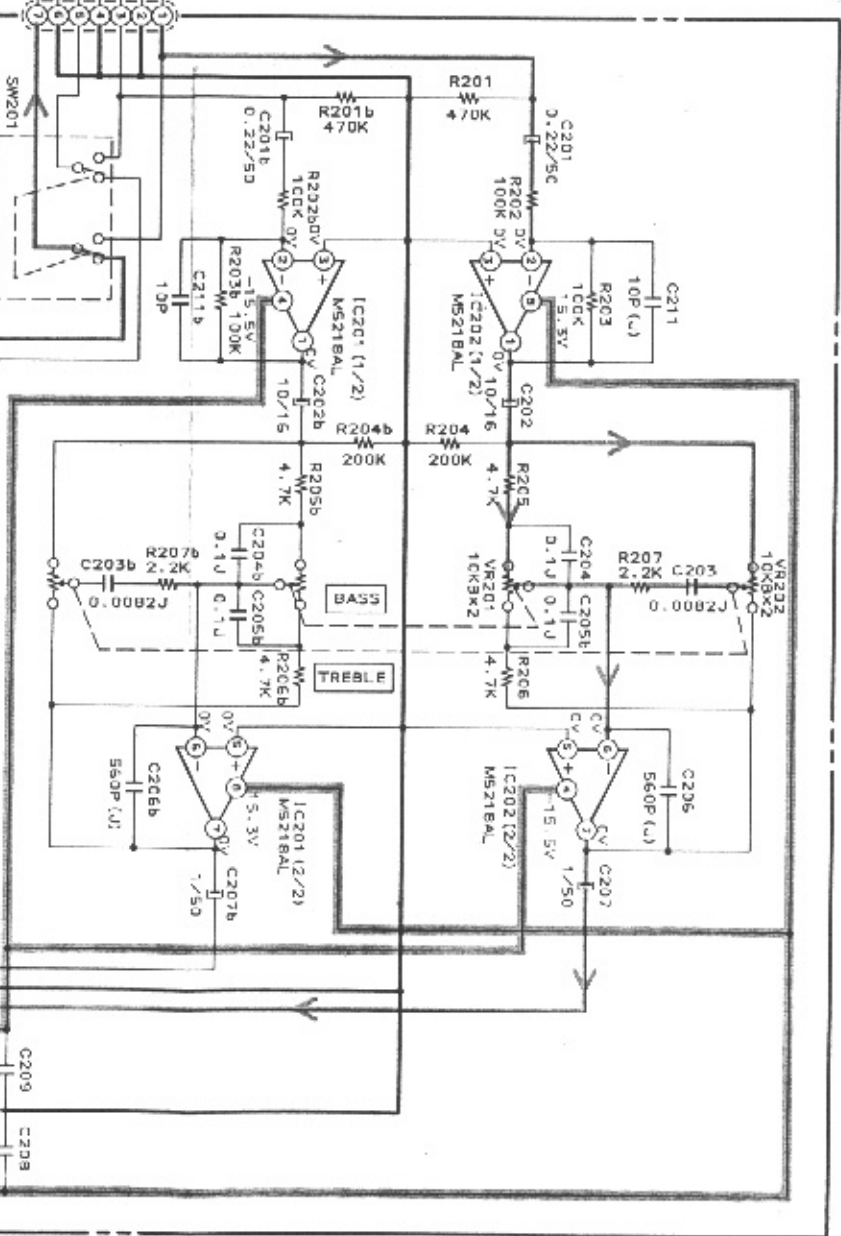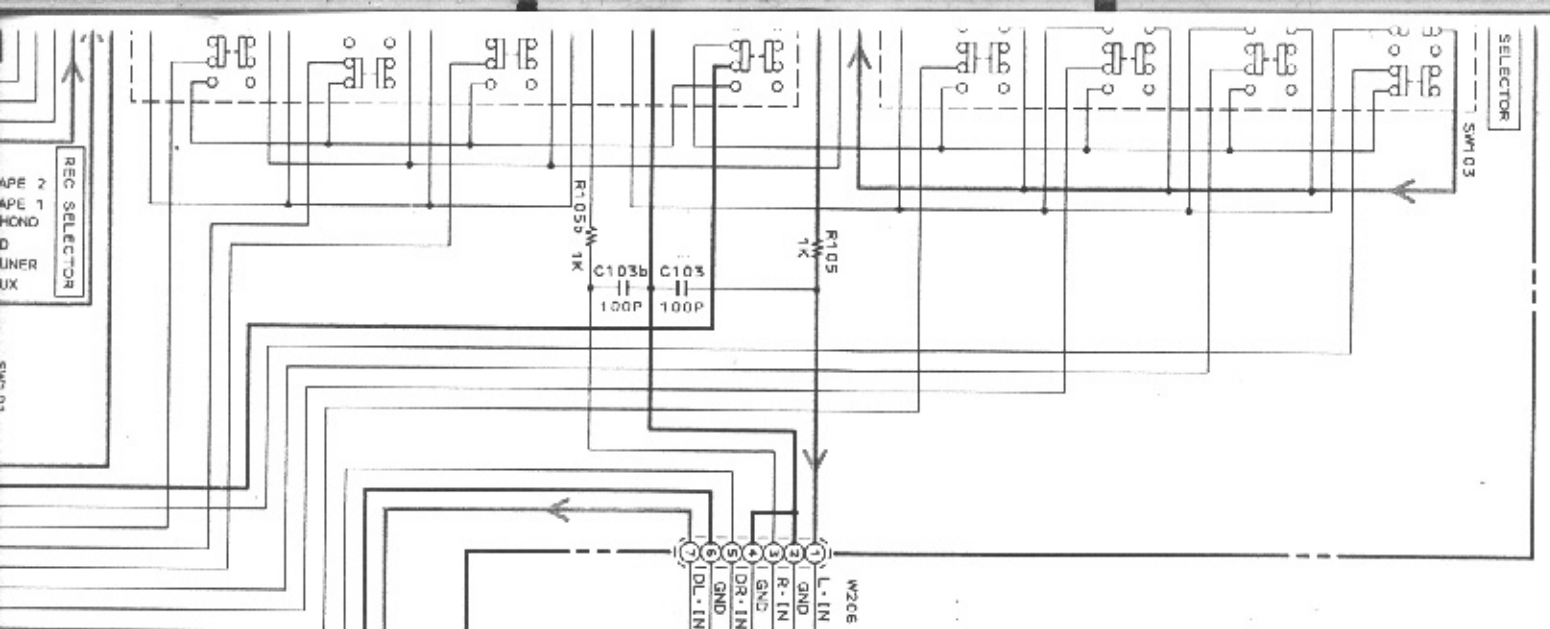

DIRECT SW PCB A2065A501C

SOURCE ← OFF (SUBSONIC)
DIRECT OPERATION →

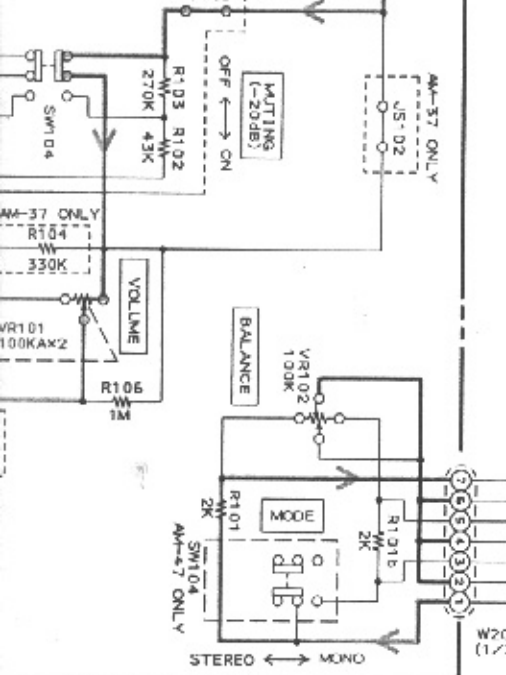



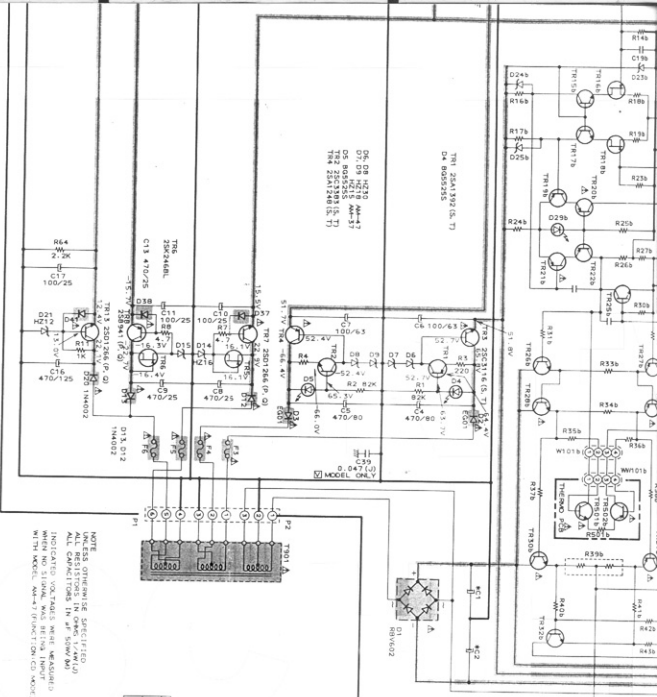


NOTE:
 UNLESS OTHERWISE SPECIFIED,
 ALL RESISTORS IN OHMS (V/L/Ω)
 ALL CAPACITORS IN μF (500V MIN)
 INDICATED VOLTAGES WERE MEASURED
 WITH MODEL 0N1A1 (PANEL ON) MODEL 0N1A2 (PANEL OFF)

MODEL NO.	A	B	C	D	E	F	G	H	I	J	K
AM-37	61	62	73	64	75	66					
AM-41	61	62	73	64	75	66					
EV A S	71	5A	T900A	T900A	T900A	T900A					

WARNING: A AND B INDICATE SAFETY CRITICAL. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED EQUIVALENTS. ALL INDICATED VOLTAGES WERE MEASURED WITH MODEL 0N1A1 (PANEL ON) MODEL 0N1A2 (PANEL OFF). RECOMMENDEES PAR LE FABRICANT.

AM-37/47
 MAIN AMP &
 CONNECTION DIAGRAM
 NO-2-1 A206901M



F G H I J K