

Index nr	BC 214 BL	BC 263 B	BC 154	BC 158 B	BC 322 B	BC 309 B
8320050	BC 214 BL	BC 263 B	BC 154	BC 158 B	BC 322 B	BC 309 B
8320069			BF 121			
8320167						
8320234						
8320104			BC 154		BC 321 B	BC 308 B
8320225					MPS 6519	

- Condensators marked: HK: High-K, KBL: Barrier layer, MK: Metallized plastic, PS: Polyester, PS: Polystyren
- Condensators without specifications: 45%
- Condensators without specifications: Ceramic
- Resistors without specifications: Keramik
- Resistors without specifications: Keramik
- Widerstände ohne Angabe: Keramik
- Modstande uden angivelse: GBT 1/2W, 10%

Subject to change without notice
 Technische Änderungen vorbehalten
 Ret til ændringer forbeholdes

Current at 50mW output: ~65 mA
 Strøm ved 50mW udgangsleistung: ~65mA
 Current at 50mW output: ~65mA
 Strøm ved 50mW udgangsleistung: ~65mA



The voltages specified are negative with respect to chassis and are measured without input-signal with a tube voltmeter.
 AF-sensitivities are measured at 500mW $\Delta f = 22.5$ KHz, $f_{mod} = 400$ Hz
 Die angegebenen Spannungen sind negativ in Bezug auf Masse, und sind ohne Eingangssignal mit einem Röhrevoltmeter gemessen (u 0,45V über $4,7n$)
 UKW-ZF ... 500 mW $\Delta f = 22.5$ KHz, $f_{mod} = 400$ Hz
 De angivne spændinger er negative i forhold til stel, er målt med rørvoltmeter og uden signal.
 FM-HF ... 500 mW udgangsleistung (u 0,45V over $4,7n$)
 FM-HF ... 500 mW $\Delta f = 22.5$ KHz, $f_{mod} = 400$ Hz

Bang & Olufsen



Beolit 500-505, type 1506-1516

11-74 3531017

Form. 6767
 PRINTED IN DENMARK
 U.S. EXPORT-TRYKKERIEBET-STRUER

Pool

9221018 T-1 C
 9221018 T-2

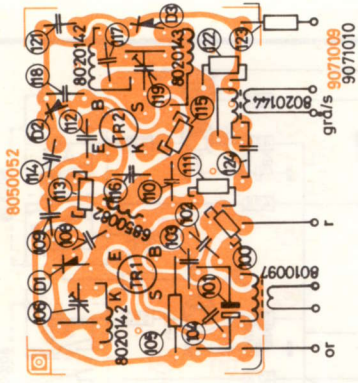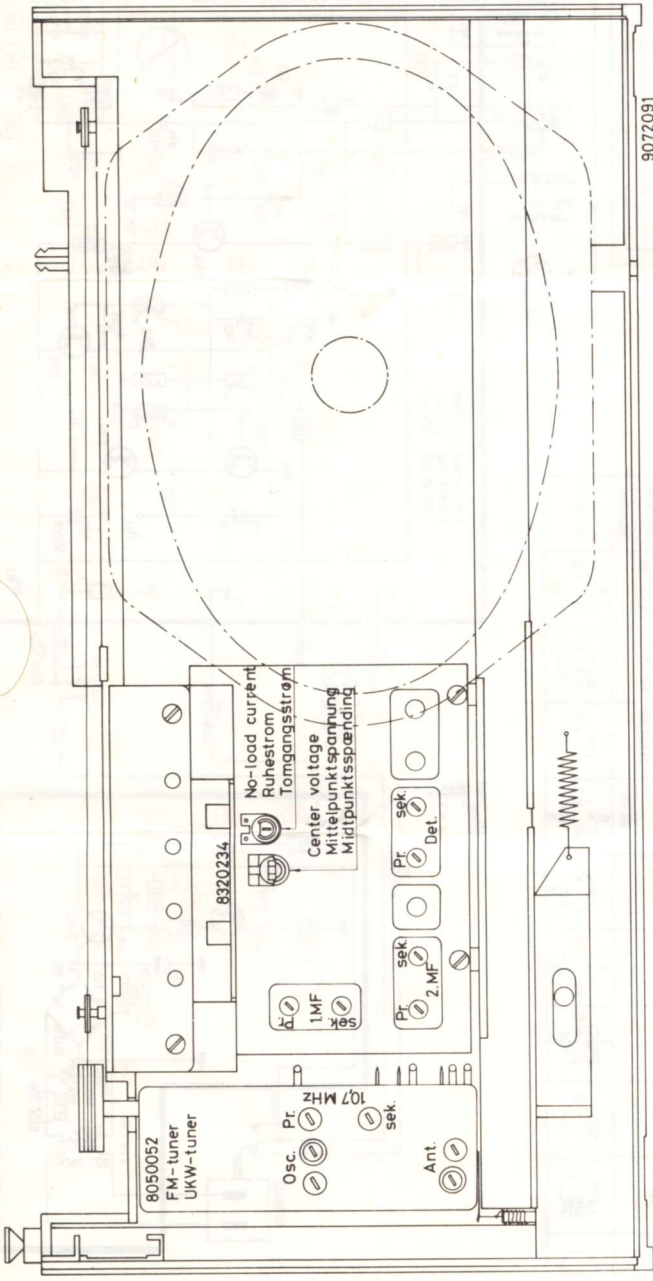

Ledningsfarver - Colour of wires - Kabelfarben

bl	: blå	blue	blau
br	: brun	brown	braun
g	: gul	yellow	gelb
gr	: grøn	green	grün
grå	: grå	grey	grau
hv	: hvid	white	weiss
or	: orange	orange	orange
r	: rød	red	rot
s	: sort	black	schwarz
v	: violet	violet	violett

