

SPECIFICATIONS

Receiver unit (A-711/L)

Amplifier section

Rated power output

35 watts per channel minimum RMS, both channels driven, at 6 Ω from 40 Hz to 20,000 Hz with no more than 0.09% total harmonic distortion (FTC)

(IEC/NF) From 63 to 12,500 Hz, 0.7% T.H.D. at 6 Ω 40 W + 40 W
(DIN) 1 kHz, at 6 Ω 43 W + 43 W
(IHF '66) From 40 to 20 kHz, 0.09% T.H.D. at 6 Ω 39 W + 39 W
(EIAJ) Maximum useful power output at 6 Ω 50 W + 50 W

Total harmonic distortion 0.09% at rated power
0.04% at 1 kHz, 1/2 rated power

Frequency response CD, TUNER, AUX, TAPE 40 Hz ~ 70 kHz, +1.5 dB, -3 dB

Signal to noise ratio (IHF '66) DAT INPUT 85 dB

Input sensitivity/impedance DAT INPUT 150 mV/47 kΩ

N.B. circuit (-30 dB VOLUME level) -20 dB (at 60 Hz)

Output level/impedance SUB WOOFER OUT 1.0 V/3.6 kΩ

Power consumption 200 W (IEC)

Dimensions 1.5 A (for U.S.A. and Canada)
W: 270 mm (10-5/8")
H: 120 mm (4-3/4")
D: 292 mm (11-1/2")

Weight (Net) 5.4 kg (11.88 lb)

A-711L FM tuner section

Tuning frequency range 87.5 MHz ~ 108 MHz

Usable sensitivity (DIN at 75 Ω) MONO 0.8 μV
STEREO 2.9 μV

Total harmonic distortion (DIN at 1 kHz) MONO 0.2% (65 dB input)
STEREO 0.3% (65.2 dB input)

Signal to noise ratio (DIN weighted at 1 kHz) MONO 88 dB (65.2 dB input)
STEREO 83 dB (65.2 dB input)

Note:

KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

Stereo separation (DIN) 1 kHz 45 dB

Frequency response 30 Hz ~ 15 kHz, +0.5 dB, -3.5 dB

MW tuner section

Tuning frequency range 531 kHz ~ 1,602 kHz

Usable sensitivity 14 μV (500 μV/m)

Signal to noise ratio (at 30% mod, 1 mV input) 50 dB

LW tuner section

Tuning frequency range 153 kHz ~ 281 kHz

Usable sensitivity 25 μV (1,000 μV/m)

Signal to noise ratio (at 30% mod, 1 mV input) 47 dB

A-711 FM tuner section

Tuning frequency range 87.5 MHz ~ 108 MHz

Usable sensitivity (MONO at 75 Ω) 0.95 μV (10.8 dB)

Total harmonic distortion (at 1 kHz) MONO 0.2% (65 dB input)
STEREO 0.3% (65 dB input)

Signal to noise ratio (at 1 kHz) MONO 76 dB (65 dB input)
STEREO 70 dB (65 dB input)

Stereo separation 1 kHz 45 dB

Frequency response 30 Hz ~ 15 kHz, +0.5 dB, -3.5 dB

AM tuner section

Tuning frequency range 531 kHz ~ 1,602 kHz

9 kHz step 530 kHz ~ 1,610 kHz

10 kHz step 530 kHz ~ 1,610 kHz

Usable sensitivity 14 μV (500 μV/m)

Signal to noise ratio (at 30% mod, 1 mV input) 50 dB

KENWOOD CORPORATION

KENWOOD U.S.A. CORPORATION
2201 East Dominguez Street, Long Beach, CA 90810
561-434-1170

KENWOOD ELECTRONICS CANADA INC.
P.O. Box 1070, 950 Gana Court, Mississauga, Ontario, Canada L4Y 4C2

TRIO-KENWOOD U.K. LTD.
KENWOOD House, Dwight Road, Watford, Herts, Wat 166, United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.
Moluksesteenweg 11 B-1000 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rempferker Str. 15, 60566 Heusenstamm, West Germany

TRIO-KENWOOD FRANCE S.A.
13 Boulevard Ney, 75018 Paris, France

KENWOOD LINEAR S.p.A.
20125 MILANO via ARBE, 5C, ITALY

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (INCORPORATED IN NSW)
46 Woodcock Place, Lane Cove, N.S.W. 2066, Australia


KENWOOD & LEE ELECTRONICS, LTD.
Wing Kee Building, 4th Floor, 34-37, Connaught Road Central, Hong Kong

A-711/711L

SERVICE MANUAL


(COMPACT HI-FI SYSTEM UD COMPONENT SYSTEM UD-7)

©1990-6 PRINTED IN JAPAN
B51-4166-001/13452

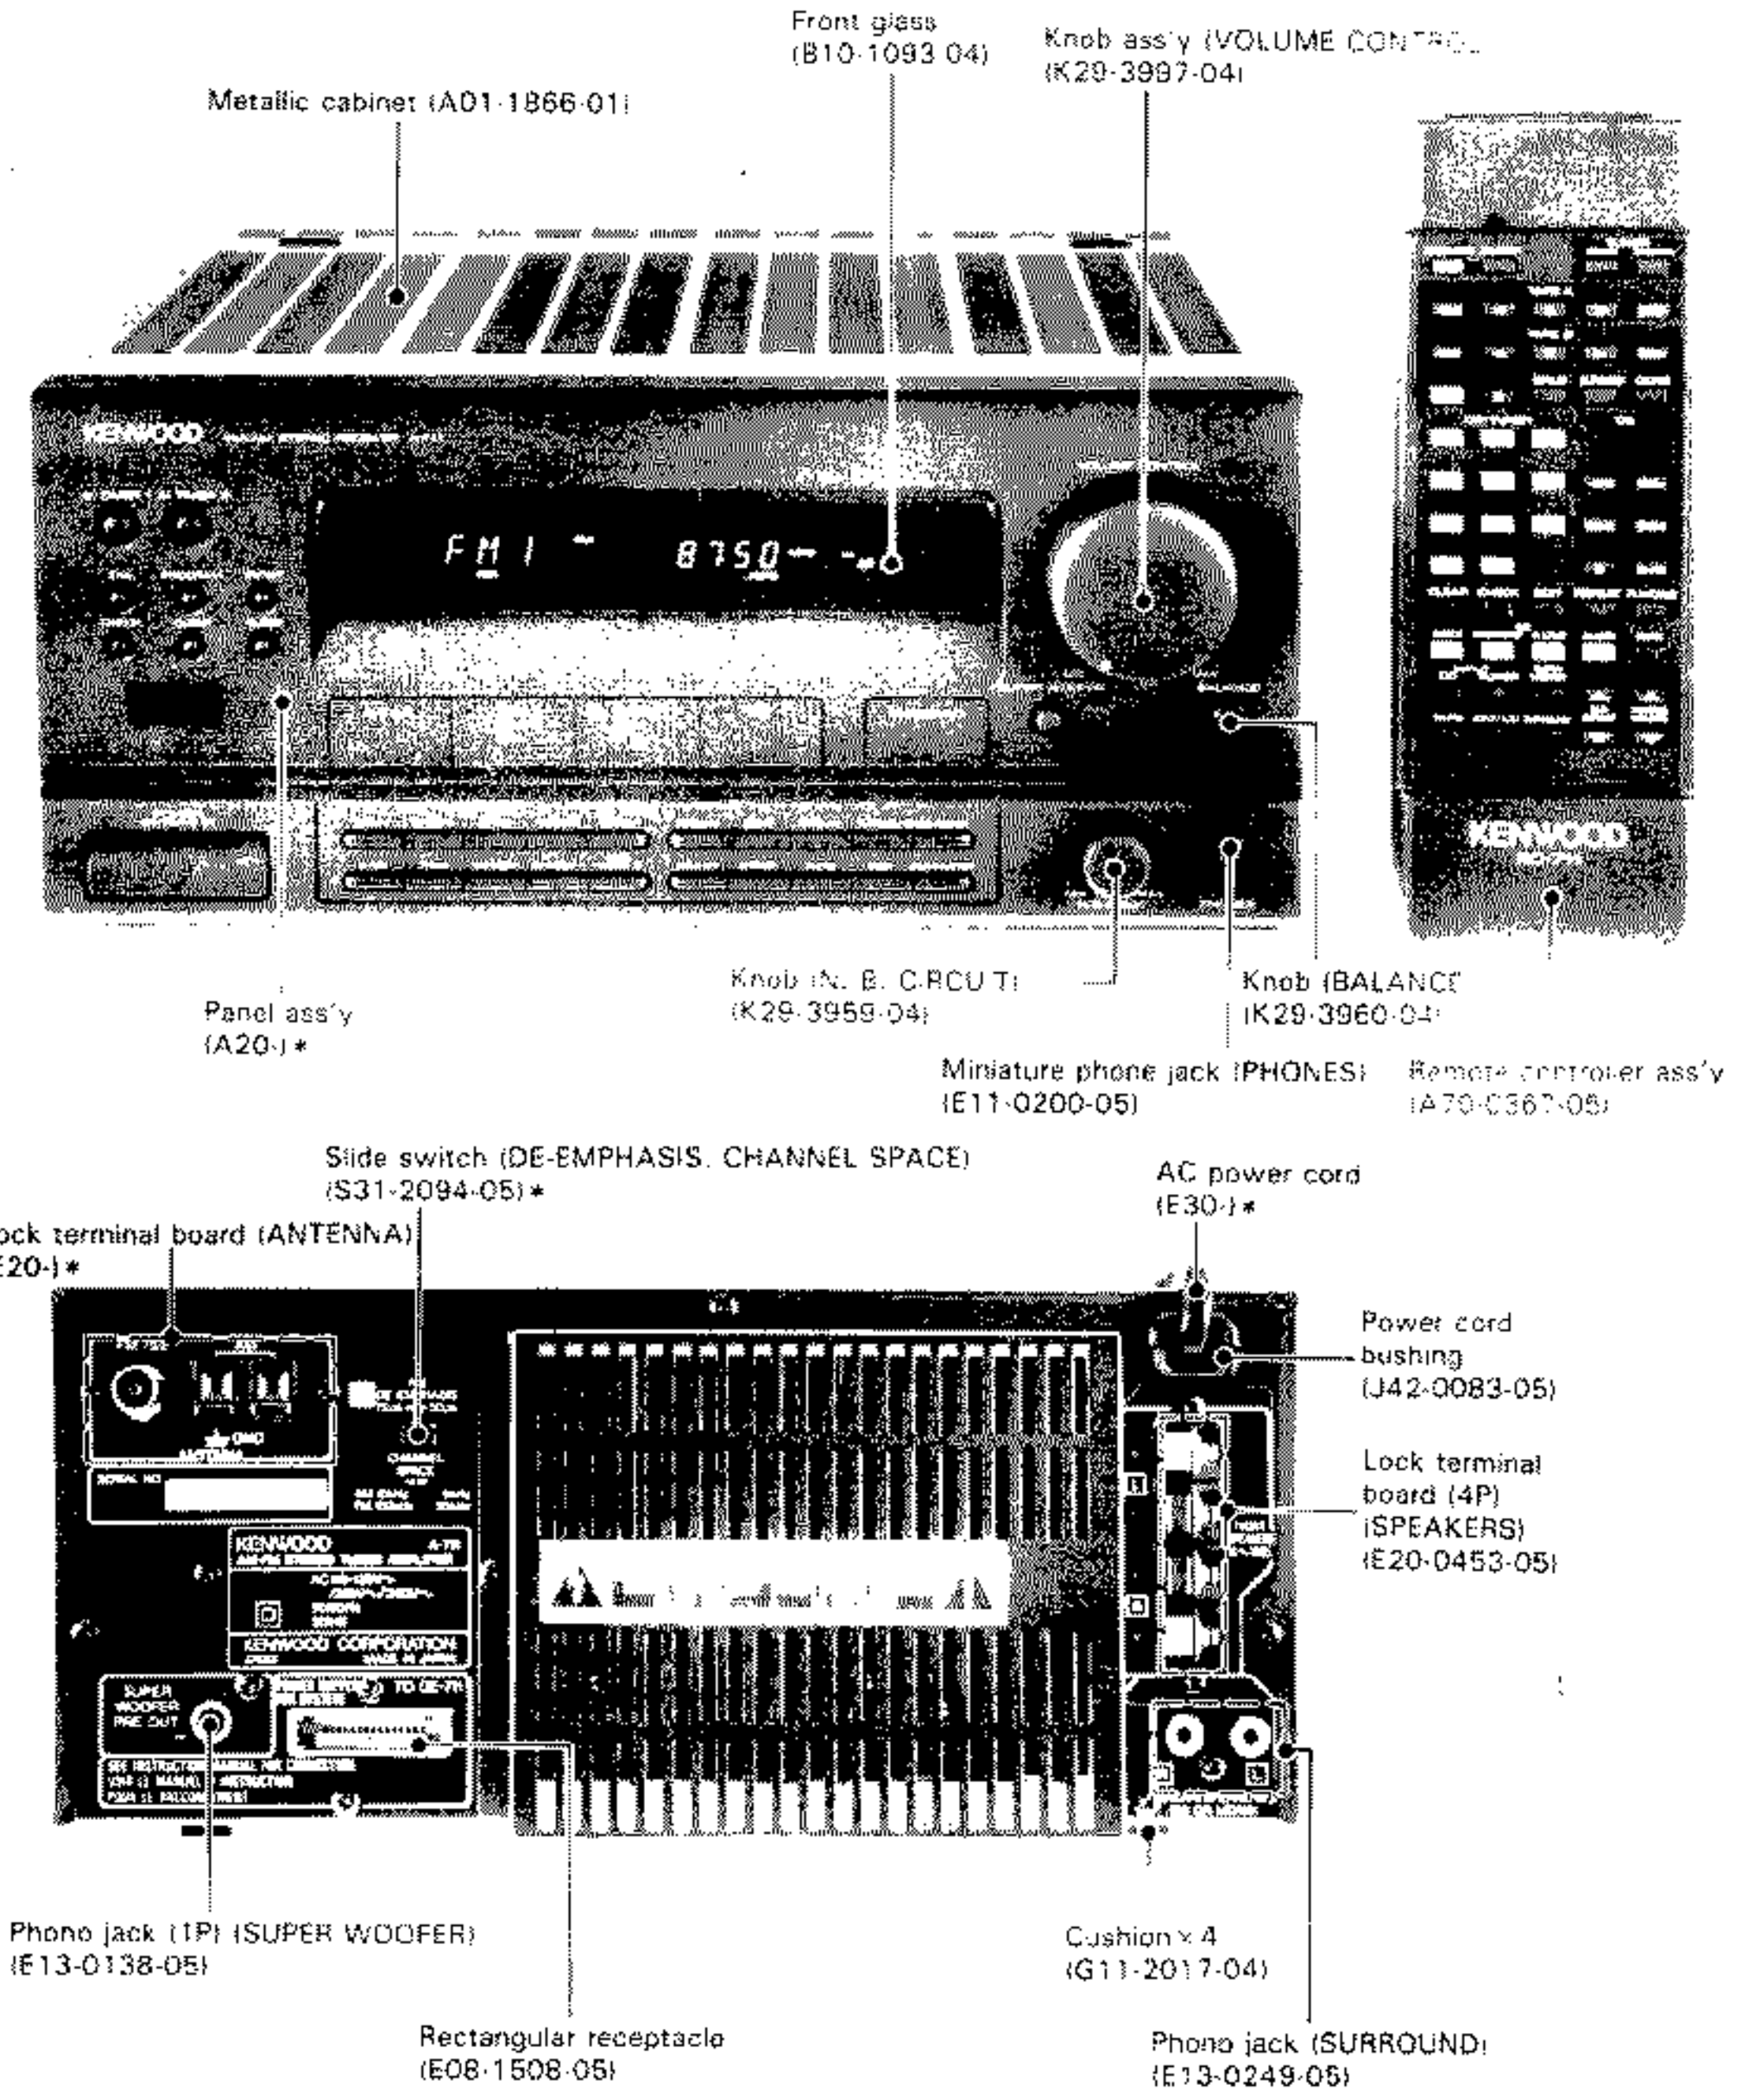


A-711 : K, P, Y, M, X type
A-711L : T, E type

*Refer to parts list on page 46.
Photo is A-711.

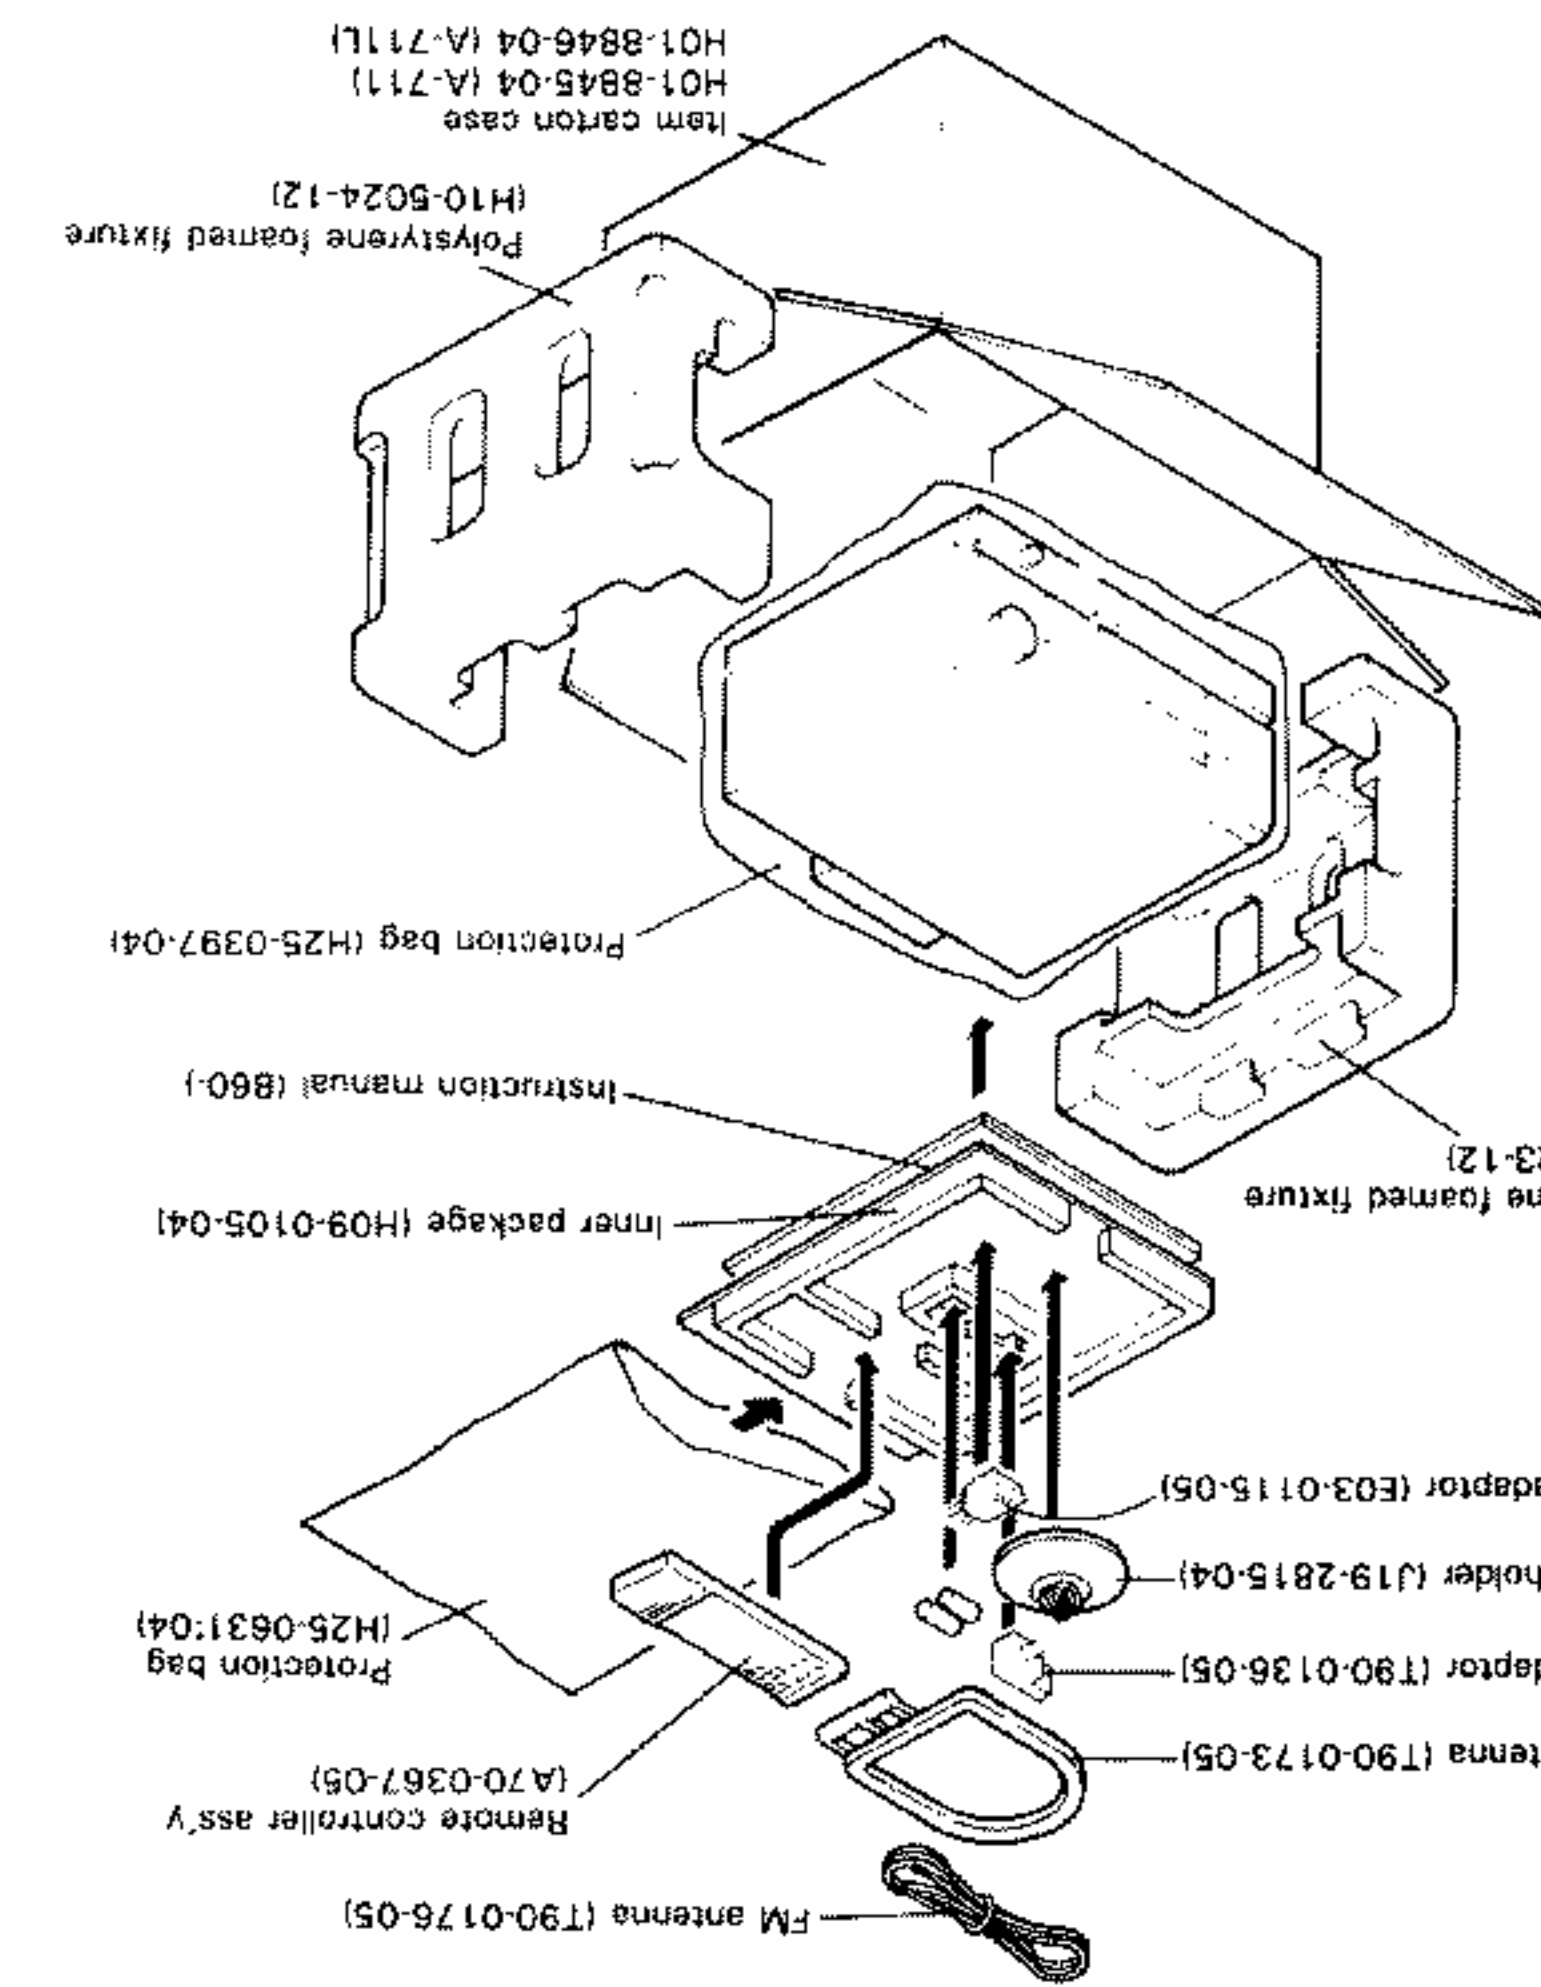

PACKING

7 Exchange the fuse resistance mounted on the printed board of power-source transformer for a new one after removing the transformer and putting it on the side of the set.

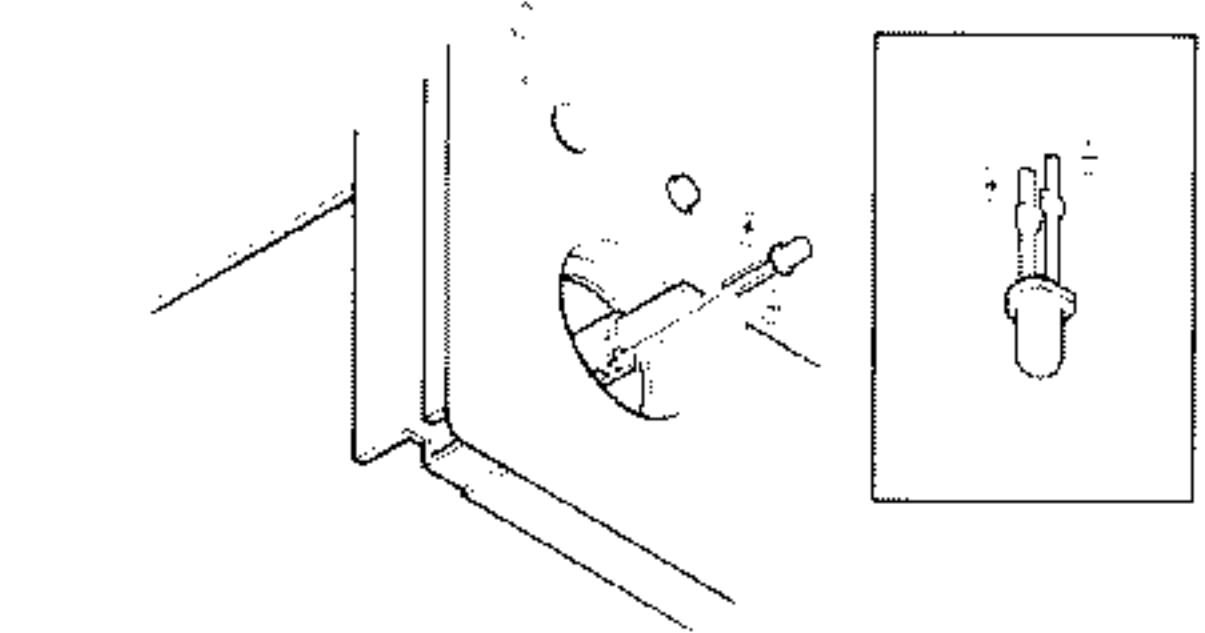

1. Be sure to refer to the instruction manual of UD-7 of this system for the operation.
2. This unit is the receiver that is mounted with tuner and amplifier. However, as INPUT SELECTOR IC is incorporated into the graphic equalizer, therefore, radio waves cannot be received with this unit alone.
3. When you listen to radio waves with this unit alone, connection must be made by the following method:
a) Facilitated connection method, or b) Regular connection method.
(Instead of tuner output, AG output can also be connected to X09 side)
4. As a new function, one pattern of graphic equalizer has been able to be selected and stored into memory at each INPUT SELECTOR. The REC level set by CRTS at each INPUT SELECTOR (excluding TAPE) can also be stored into memory. The memory can be conducted by DECK method for repair)
5. Regular connection method (Refer to disassembling partly because of the relation with input impedance)

1. Be sure to refer to the instruction manual of UD-7 of this system for the operation.
2. This unit is the receiver that is mounted with tuner and amplifier. However, as INPUT SELECTOR IC is incorporated into the graphic equalizer, therefore, radio waves cannot be received with this unit alone.
3. When you listen to radio waves with this unit alone, connection must be made by the following method:
a) Facilitated connection method, or b) Regular connection method.
(Instead of tuner output, AG output can also be connected to X09 side)
4. As a new function, one pattern of graphic equalizer has been able to be selected and stored into memory at each INPUT SELECTOR. The REC level set by CRTS at each INPUT SELECTOR (excluding TAPE) can also be stored into memory. The memory can be conducted by DECK method for repair)
5. Regular connection method (Refer to disassembling partly because of the relation with input impedance)

NOTES REGARDING SERVICES OF THIS UNIT AND FEATURES OF SYSTEM

11 CIRCUIT DESCRIPTION

27 ADJUSTMENT

29 PC BOARD (Component side view) SCHEMATIC DIAGRAM

35 EXPLODED VIEW

44 PARTS LIST

46 SPECIFICATIONS

7 BACK COVER

10 BLOCK DIAGRAM

11 NOTES REGARDING SERVICES OF THIS UNIT AND FEATURES OF SYSTEM

NOTES REGARDING SERVICES OF THIS UNIT AND FEATURES OF SYSTEM

PARTS LIST


Ref. No.	Parts No.	Description	Destination marks
Q7-10	2SC1845(F, E)	TRANSISTOR	
Q7-11	2SC4137F19(V, W)	TRANSISTOR	
Q7-12	2SD2255BT*5	TRANSISTOR	
Q7-13	2SB1493BT*5	TRANSISTOR	
Q7-14	2SC2631(R, S)	TRANSISTOR	
Q7-15	*		
Q7-16	2SC1845(F, E)	TRANSISTOR	
Q7-17	2SC2631(R, S)	TRANSISTOR	
Q81-10	2SC1740S(Q, R)	TRANSISTOR	
Q81-11	2SA733(A)(Q, P)	TRANSISTOR	
Q81-12	2SA933S(Q, R)	TRANSISTOR	
Q81-13	2SA992(F, E)	TRANSISTOR	
Q81-14	2SC3666	TRANSISTOR	
Q81-15	2SC2878(B)	TRANSISTOR	
Q82-53	2SC4137F19(V, W)	TRANSISTOR	
Q82-53	2SA733(A)(Q, P)	TRANSISTOR	
Q82-53	2SA933S(Q, R)	TRANSISTOR	
Q82-53	2SA992(F, E)	TRANSISTOR	
Q84	2SC3666	TRANSISTOR	
Q85	2SC1740S(Q, R)	TRANSISTOR	
Q86	2SC945(A)(Q, P)	TRANSISTOR	
Q87	2SD1266(Q, P)	TRANSISTOR	

* New Parts
 Parts without Parts No. are not supplied.
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.
 Teile ohne Parts No. werden nicht geliefert.

E: Scandinavia & Europe K: USA P: Canada W: Europe
 V: Far East (Japan) T: England M: Other Areas
 Y: Africa (Europe) X: Australia
 ⚠ indicates safety critical components.

A-711/711L


DISASSEMBLY FOR REPAIR

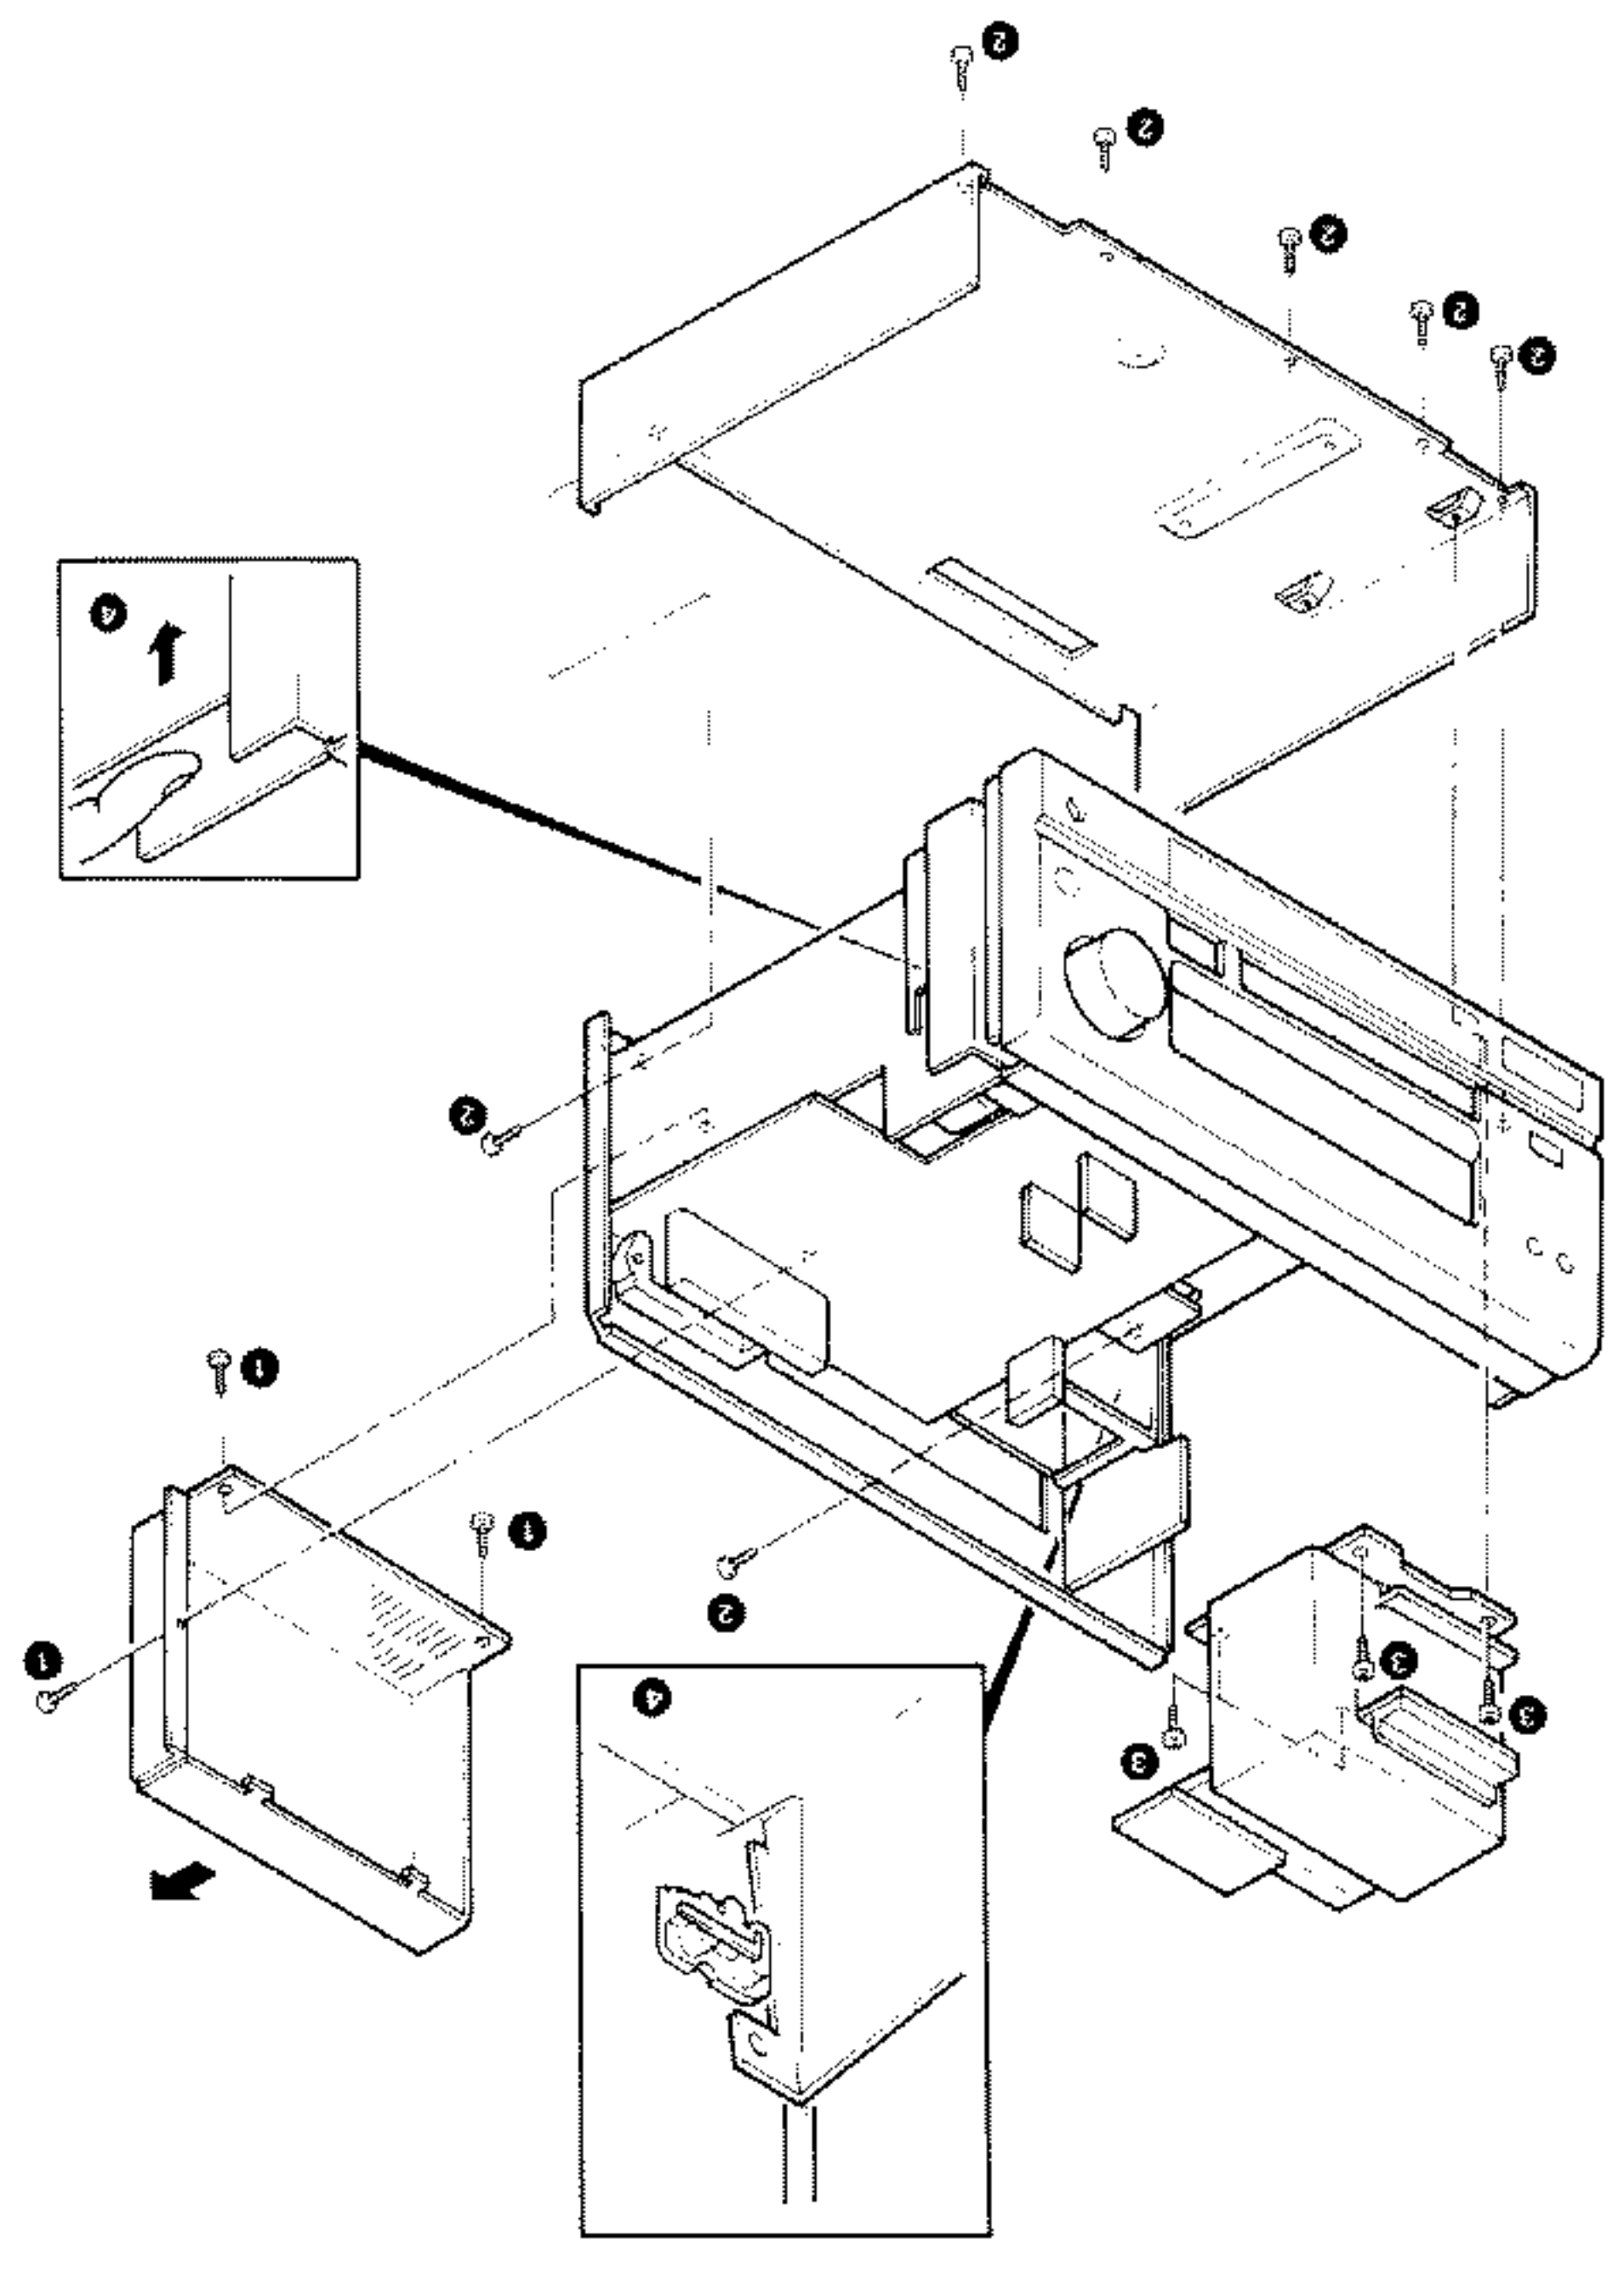


How to remove the chassis of bottom board
 1 Detach the radiator cover by removing the three screws from the cover of rear side. It is used for check and so on of power transistor.
 2 Remove seven screws (2) of chassis of added bottom board.
 3 Remove four screws (3) of the transformer.
 4 Remove the chassis of bottom board from the right side of front panel by paying attention not to hook it with surround terminals (4).

A-711/711L

Operation of remote control unit

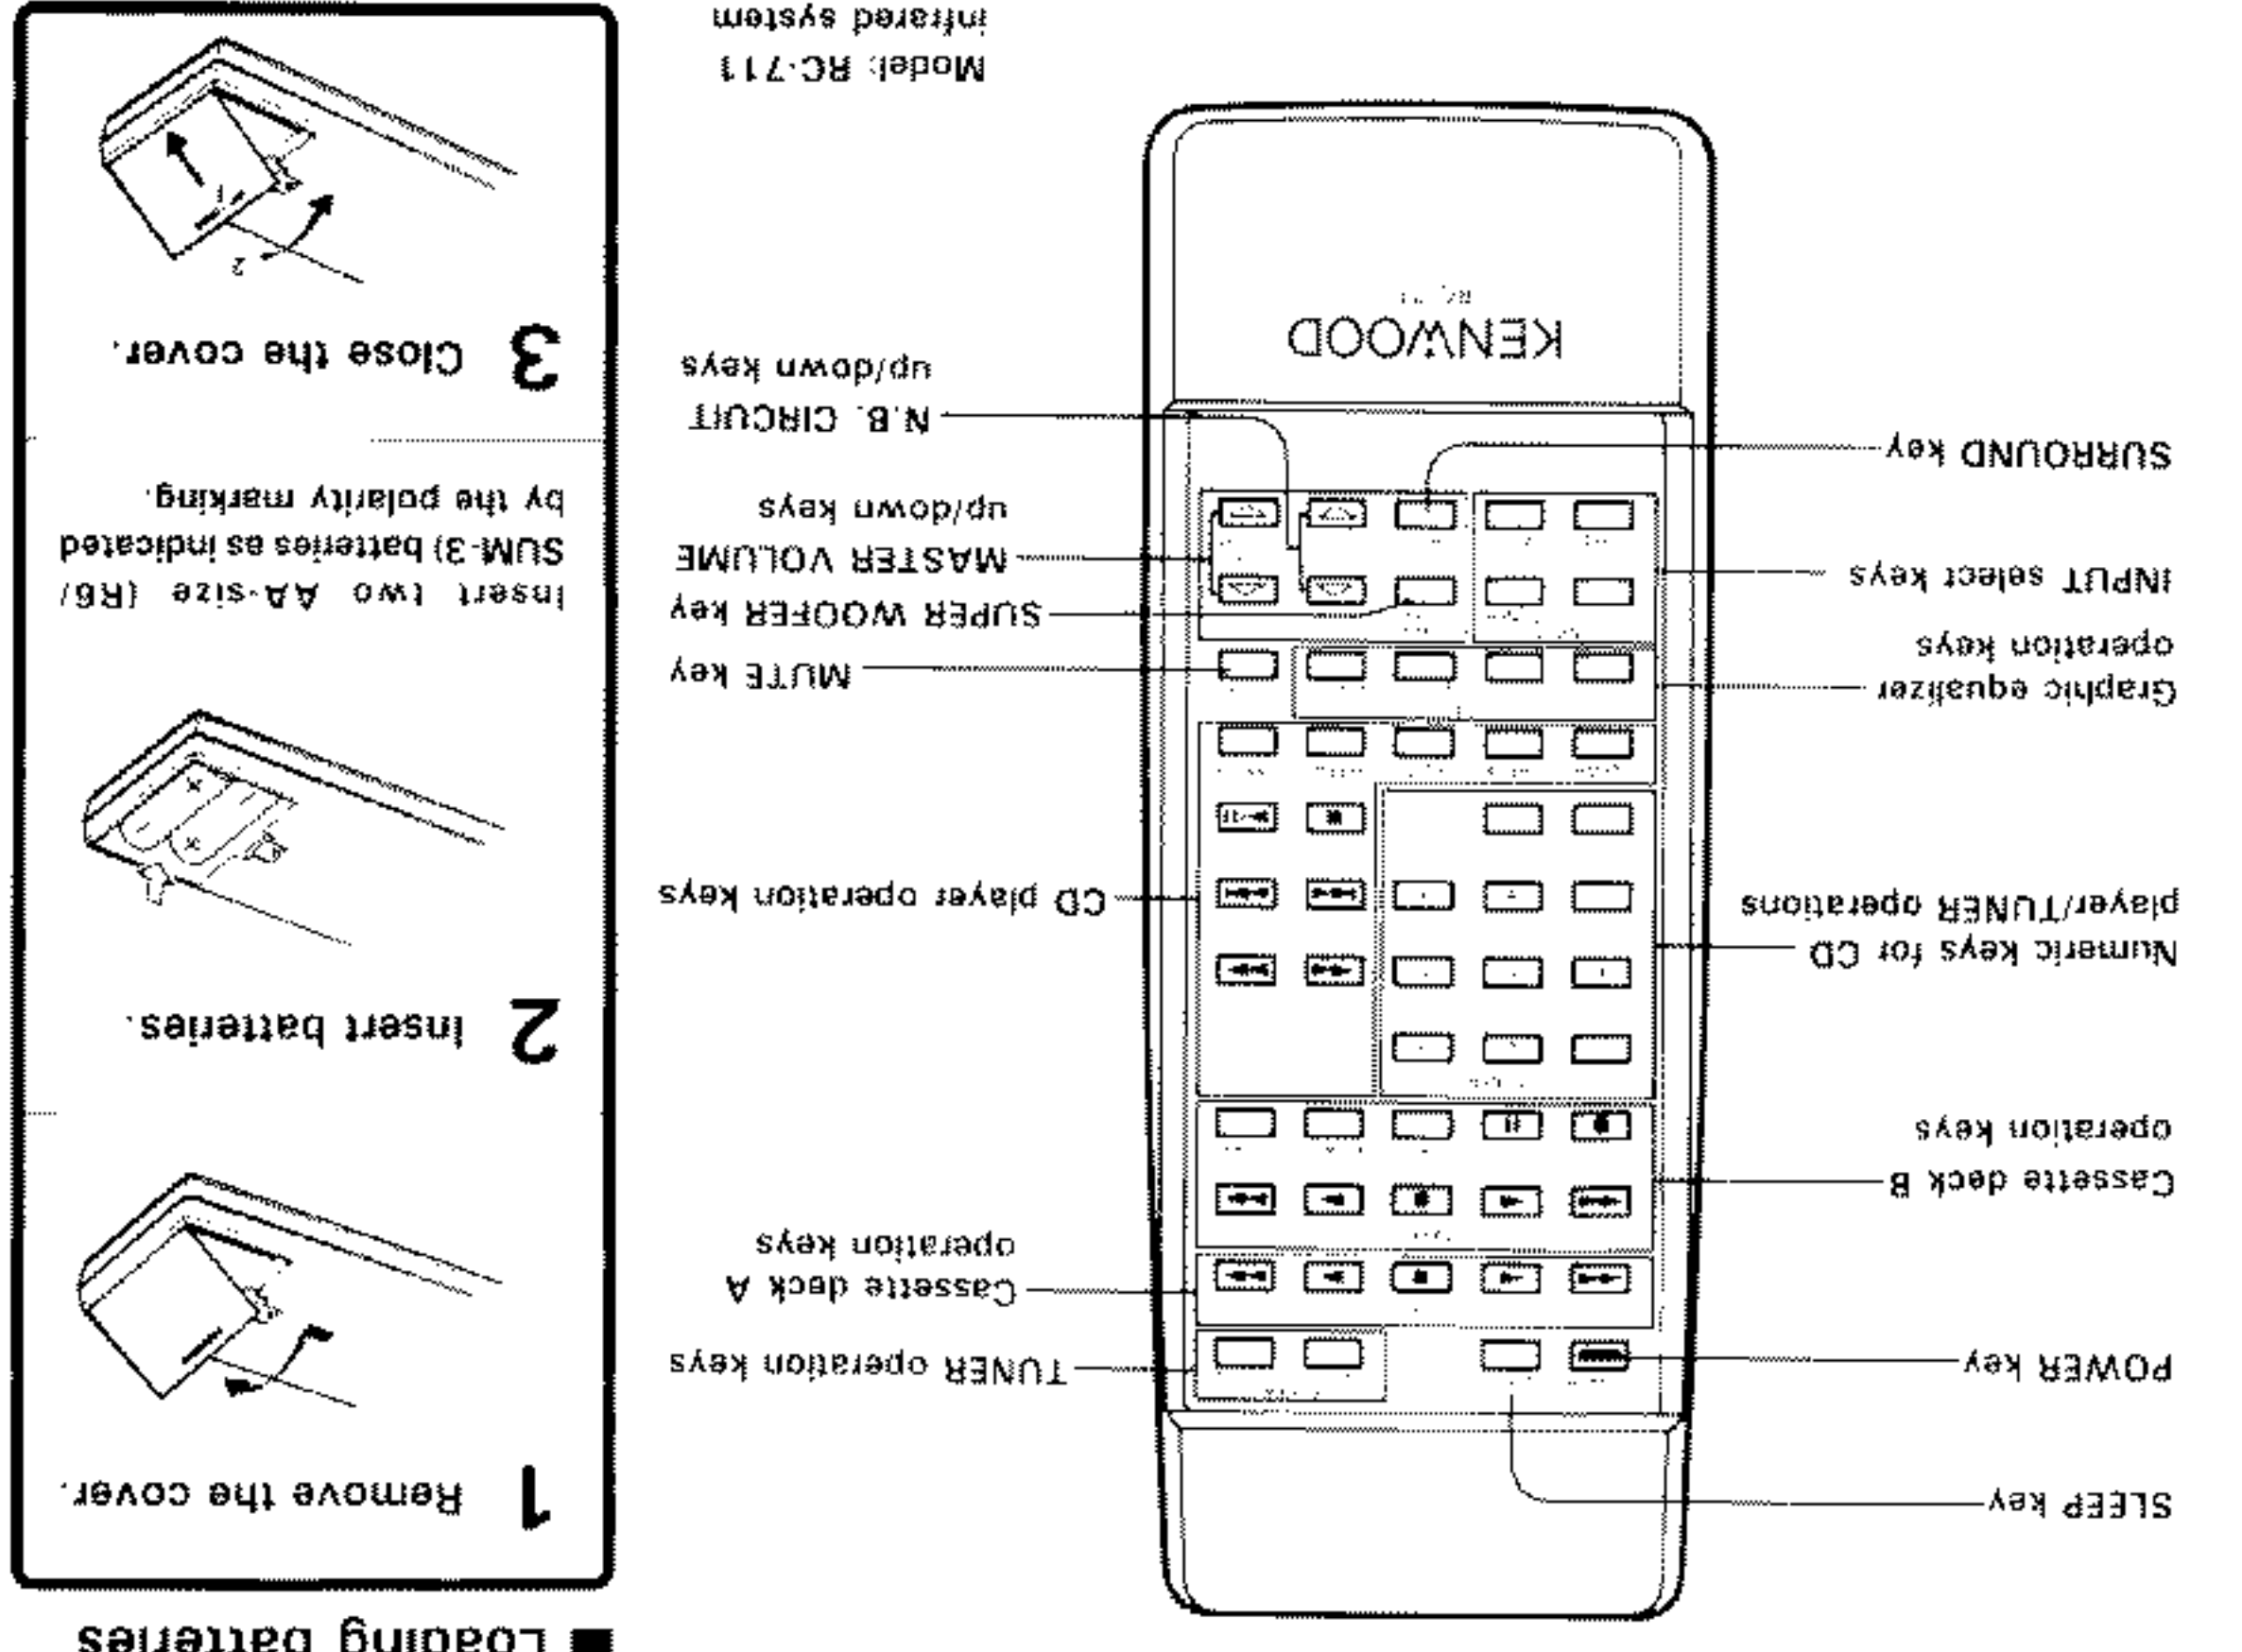

Plug the power cord of the system into an AC wall outlet, and press the POWER key on the remote control unit to turn the power on.
 When the power is turned on, press the key of the source component to be operated.
 Operation procedure

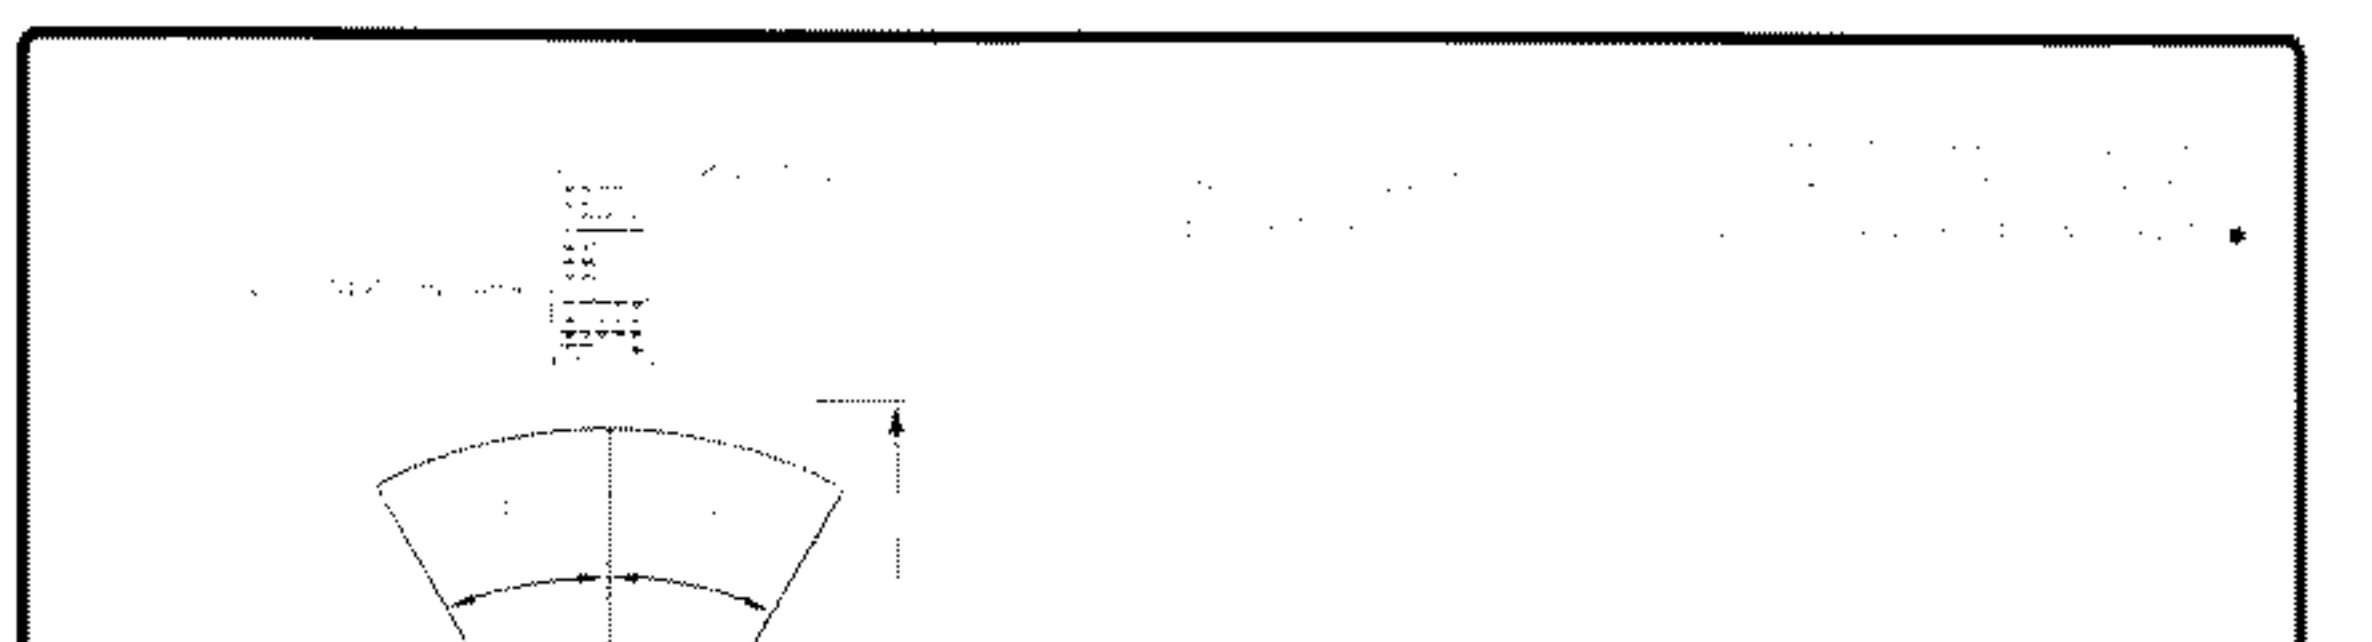


Model: RC-711
 infrared system

A-711/711L

DISASSEMBLY FOR REPAIR


How to remove tuner board and front panel
 1 Turnover & remove screws (1) from the tuner board from the front side.
 2 Turnover the board & unscrew screws (2).
 3 Turnover the board & remove the board.
 4 Turnover the board & remove the board.
 5 Turnover the board & remove the board.
 6 Turnover the board & remove the board.

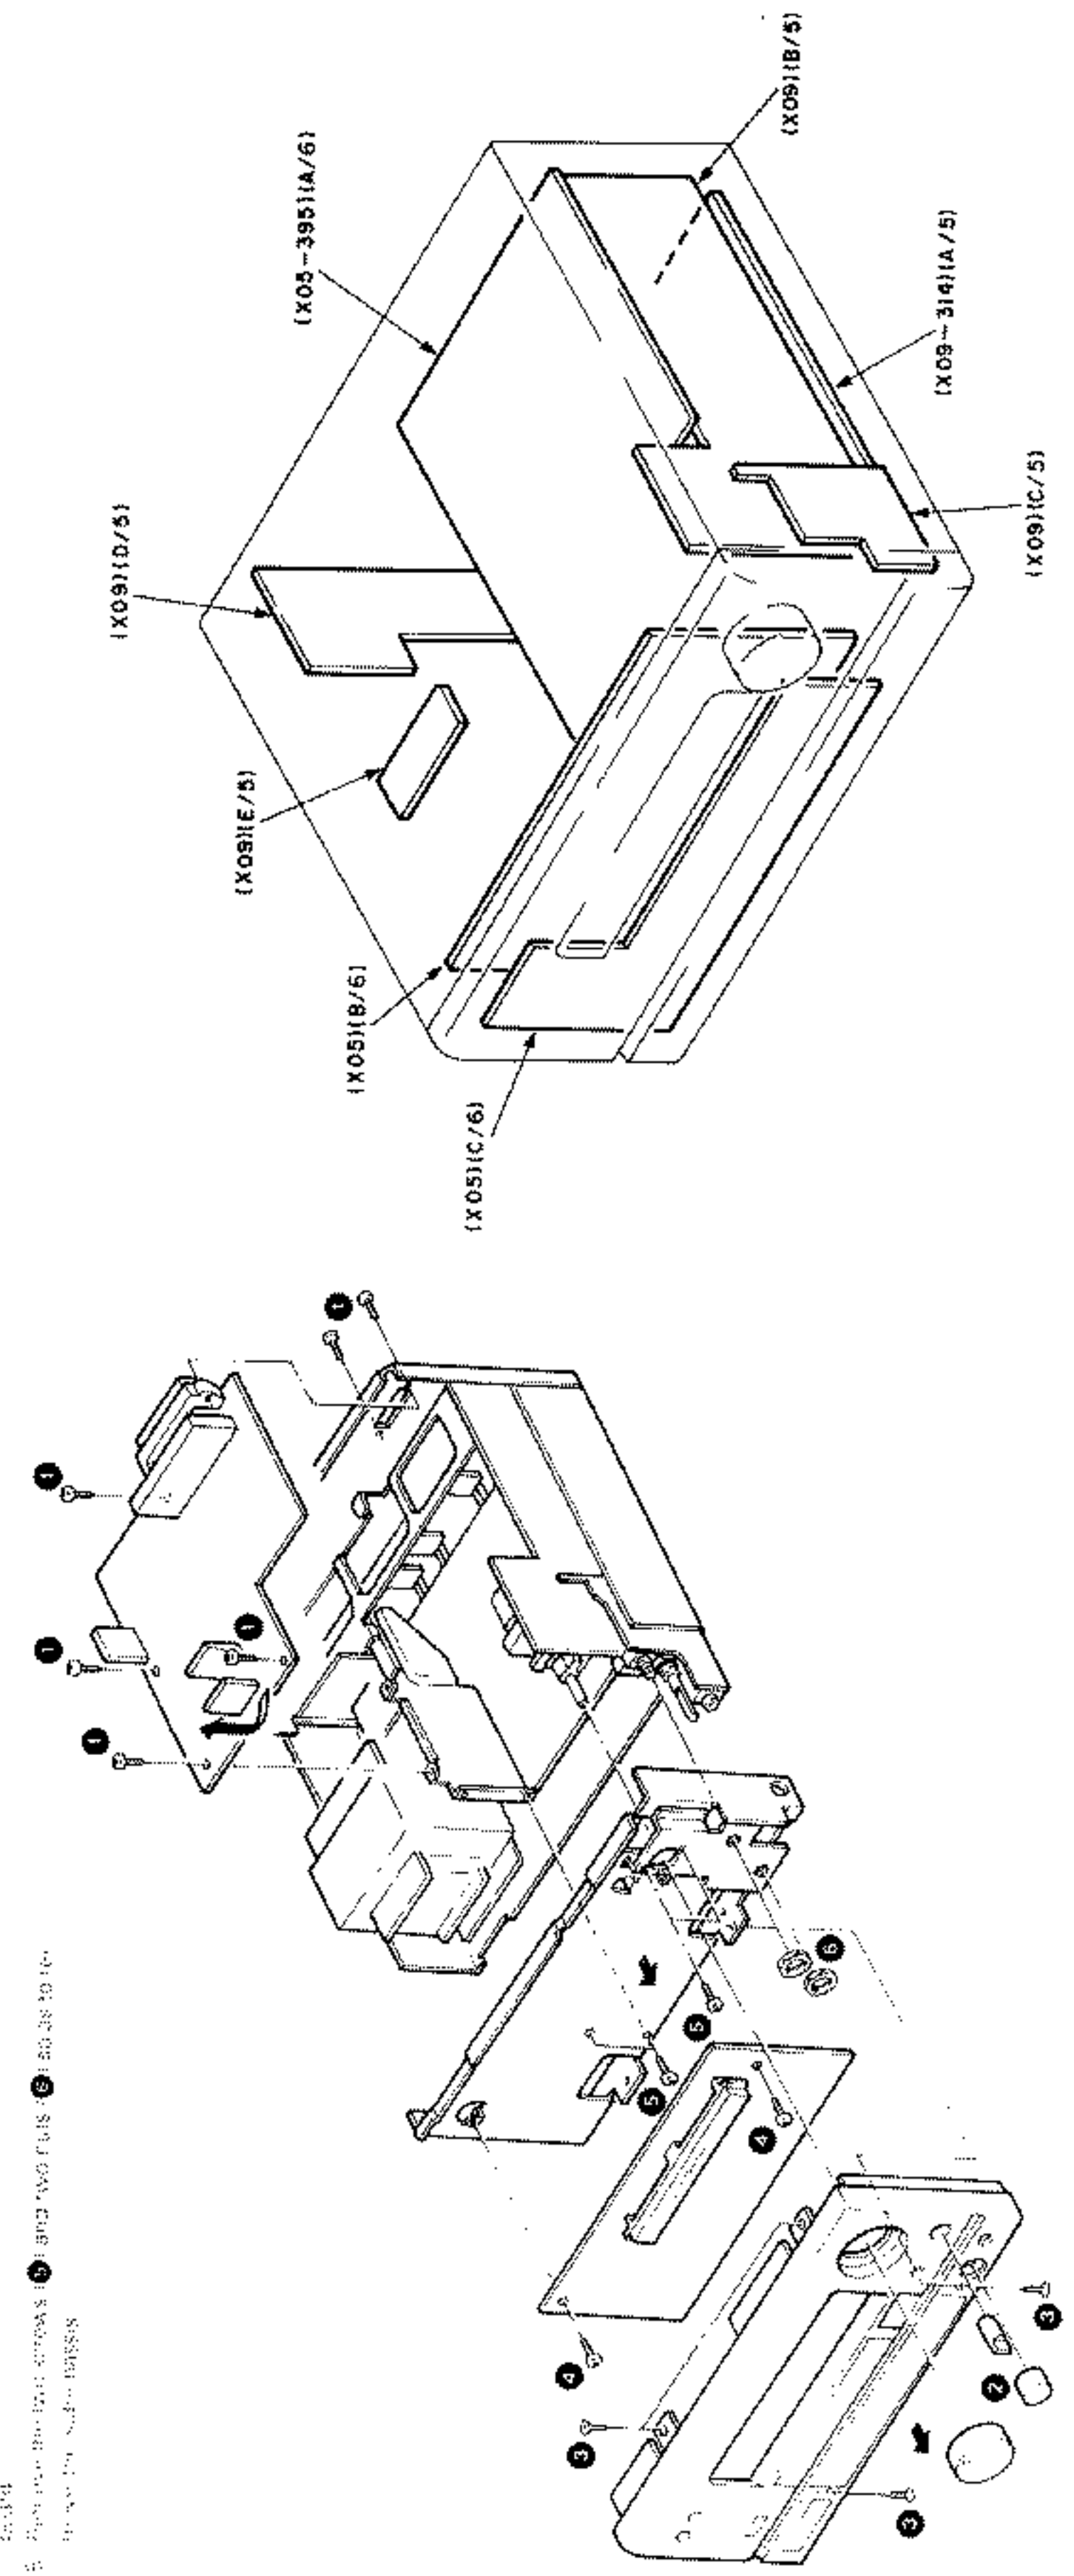


A-711/711L

DISASSEMBLY FOR REPAIR

How to remove tuner board and front panel
 1 Turnover & remove screws (1) from the tuner board from the front side.
 2 Turnover the board & unscrew screws (2).
 3 Turnover the board & remove the board.
 4 Turnover the board & remove the board.
 5 Turnover the board & remove the board.
 6 Turnover the board & remove the board.

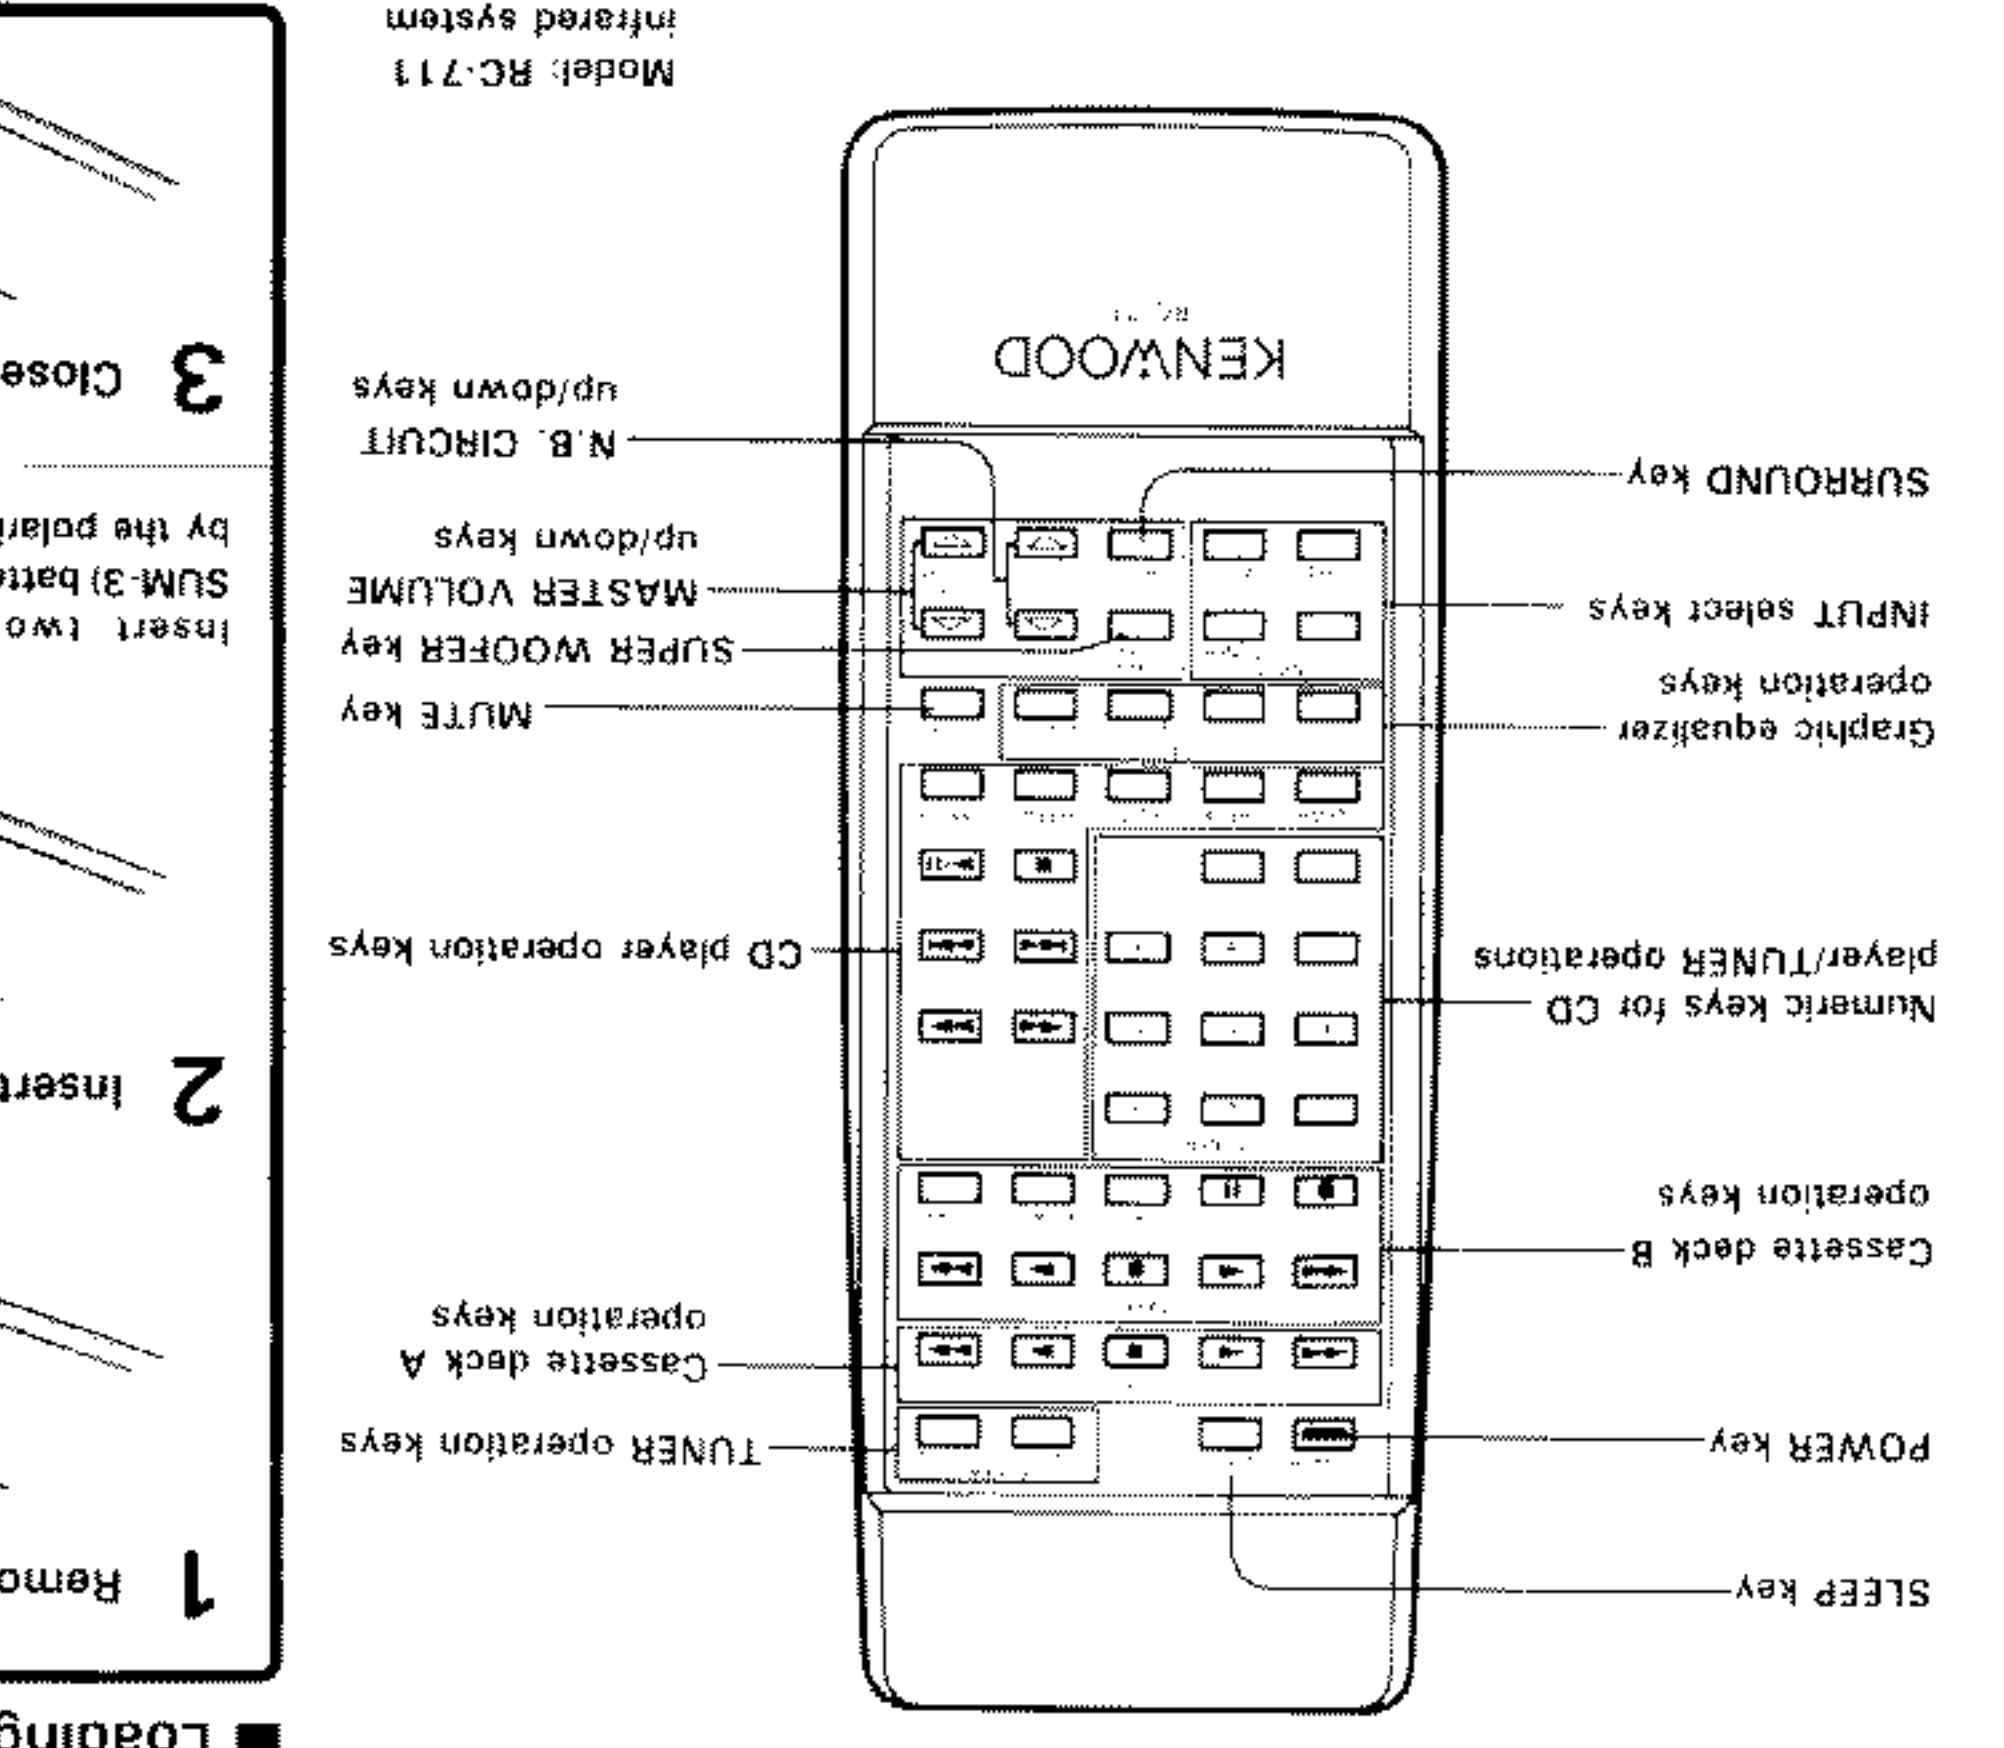

1 Remove the cover.
 2 Insert batteries.
 3 Close the cover.

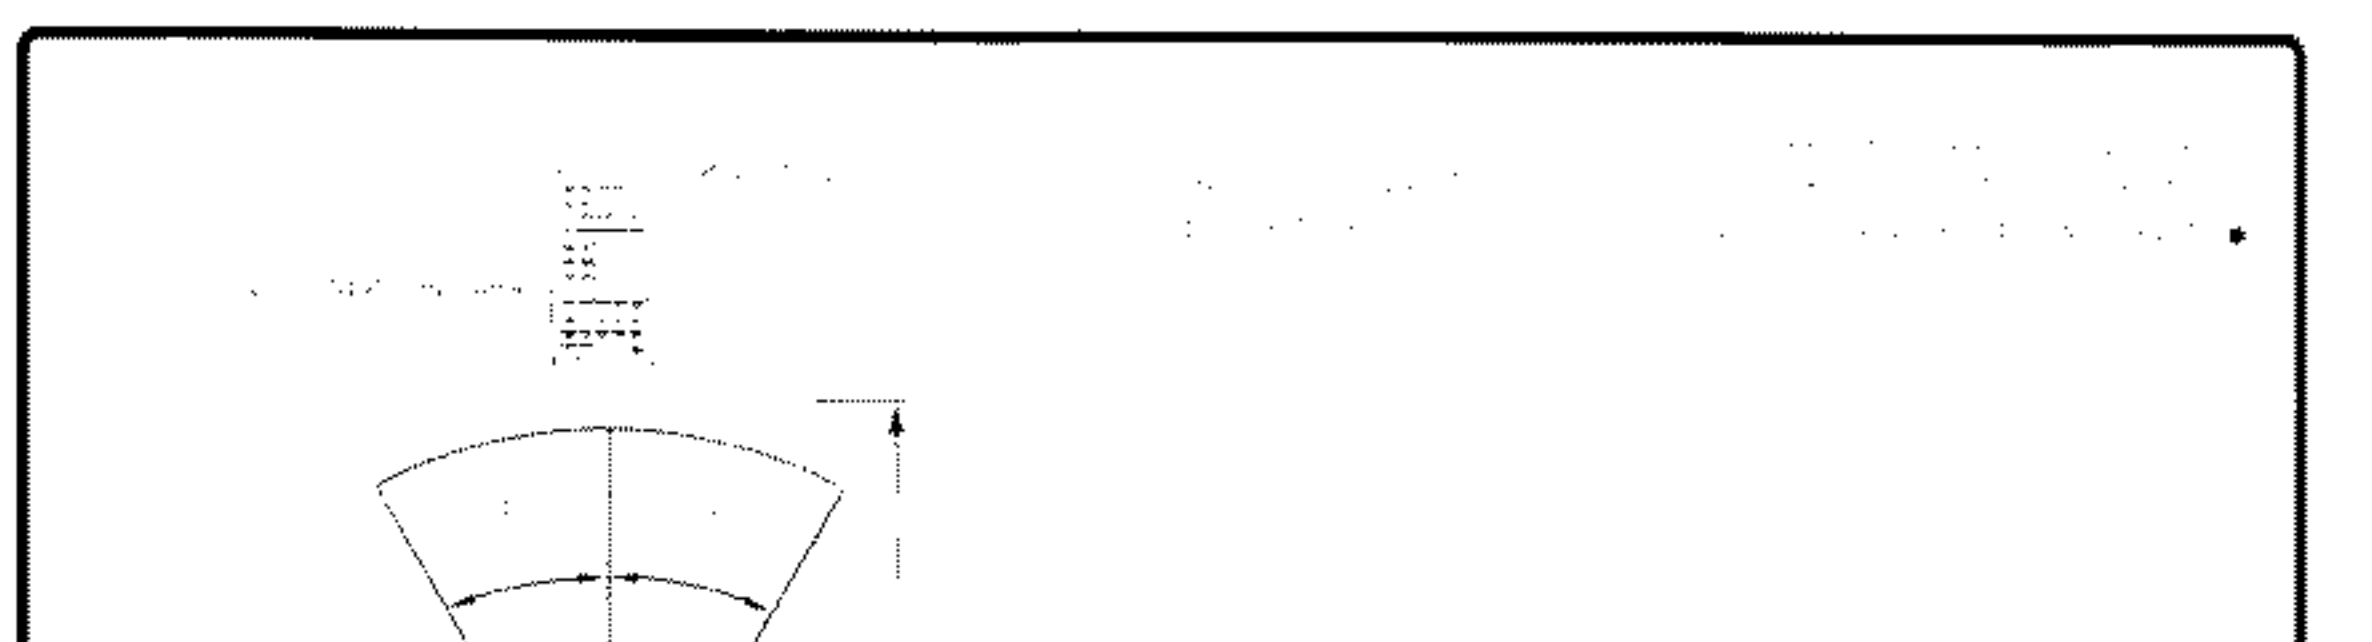

Model: RC-711
 infrared system


CIRCUIT DESCRIPTION

Ref No.	Components	Use/Function	Operation/Condition
IC1	NJM2058D	Surround buffer	Surround buffer
IC2	IC2 1/4 (1/4) headphone amplifier, IC2 1/4 (1/4) super-woofer or buffer, Vh detecting comparator	Headphone amplifier, Super woofer	Headphone amplifier, Super woofer
IC3	TC9215P	Surround selector	Surround selector
IC4	IC1237HA	Protection	Protection
IC5	TAB409S	Main volume drive	Main volume drive
IC6	TAB409S	N.B.C. volume drive	N.B.C. volume drive
IC7	PC7915HF	-15V stabilizing power source	-15V stabilizing power source
IC1-4	2SA921E	For 1st stage A class	For 1st stage A class
IC5-6	2SA921E	For the 2nd stage A class	For the 2nd stage A class
IC7-10	2C1845E	For the 2nd stage A class	For the 2nd stage A class
IC11,12	2SC13719V,W	For temperature compensation	For temperature compensation
IC13,14	2SD2258T*5	Final Tr.	Final Tr.
IC15,16	2SB1493BT*5	For detecting overloading	For detecting overloading
IC17,18	2SC2631R,S	For super woofer muting	For super woofer muting
IC19	2SC2878(B)	It is turned ON by turning on OS2	It is turned ON by turning on OS2
IC20	2SA733A(D,P) or 2SA833S(Q,R)	Super woofer muting drive	Super woofer muting drive
IC21	2SA733A(H,Q,P) or 2SA833S(Q,R)	Triple filter	Triple filter
IC22-24	2SA921E	For protection	For protection
IC25	2C3666	AC relay drive	AC relay drive
IC26	2SC3666	It drives AC relay K1, 2 with the pin No. 14 of IC6 (X05).	It drives AC relay K1, 2 with the pin No. 14 of IC6 (X05).
IC27	2SC1740S(Q,R) or 2SC945A(H,Q,P)	Speaker relay drive	Speaker relay drive
IC28	2SD1266(Q,P)	+15V stabilizing, power source	+15V stabilizing, power source
IC29,30	HSS104 or 1SS133	For A class	For A class
IC31	HSS104A or 1SS131	For protection	For protection
IC32	RBV-602FA	For rectification	For rectification
IC33	HZS155(B) or HD15J5(B)	+15V stabilizing, power source	+15V stabilizing, power source
IC34	HZS155(B) or HD15J5(B)	For +15V stabilizing power source A class	For +15V stabilizing power source A class
IC35	HZS1N(B2) or R051ES1(B2)	For VR detection	For VR detection
IC36	HZS47N(B) or R047ES(B)	For muting	For muting
IC37-22	HSS104 or 1SS133	For protection of static electricity	For protection of static electricity
IC38	HSS104 or 1SS133	For removing headphone snuck noise	For removing headphone snuck noise
IC39	HSS104 or 1SS133	For removing selector snuck noise	For removing selector snuck noise
IC40	HSS104 or 1SS133	For relay	For relay
IC41	HSS104A or 1SS131	For detecting protection AC	For detecting protection AC
IC42	5S566B	For rectifying AC relay power source	For rectifying AC relay power source
IC43	HSS104 or 1SS133	For VR LED	For VR LED
IC44	HSS104 or 1SS133	For protection of static electricity	For protection of static electricity


Function of components Audio unit (X09-3142-71)

CIRCUIT DESCRIPTION

Microprocessor and back-up condenser of this unit

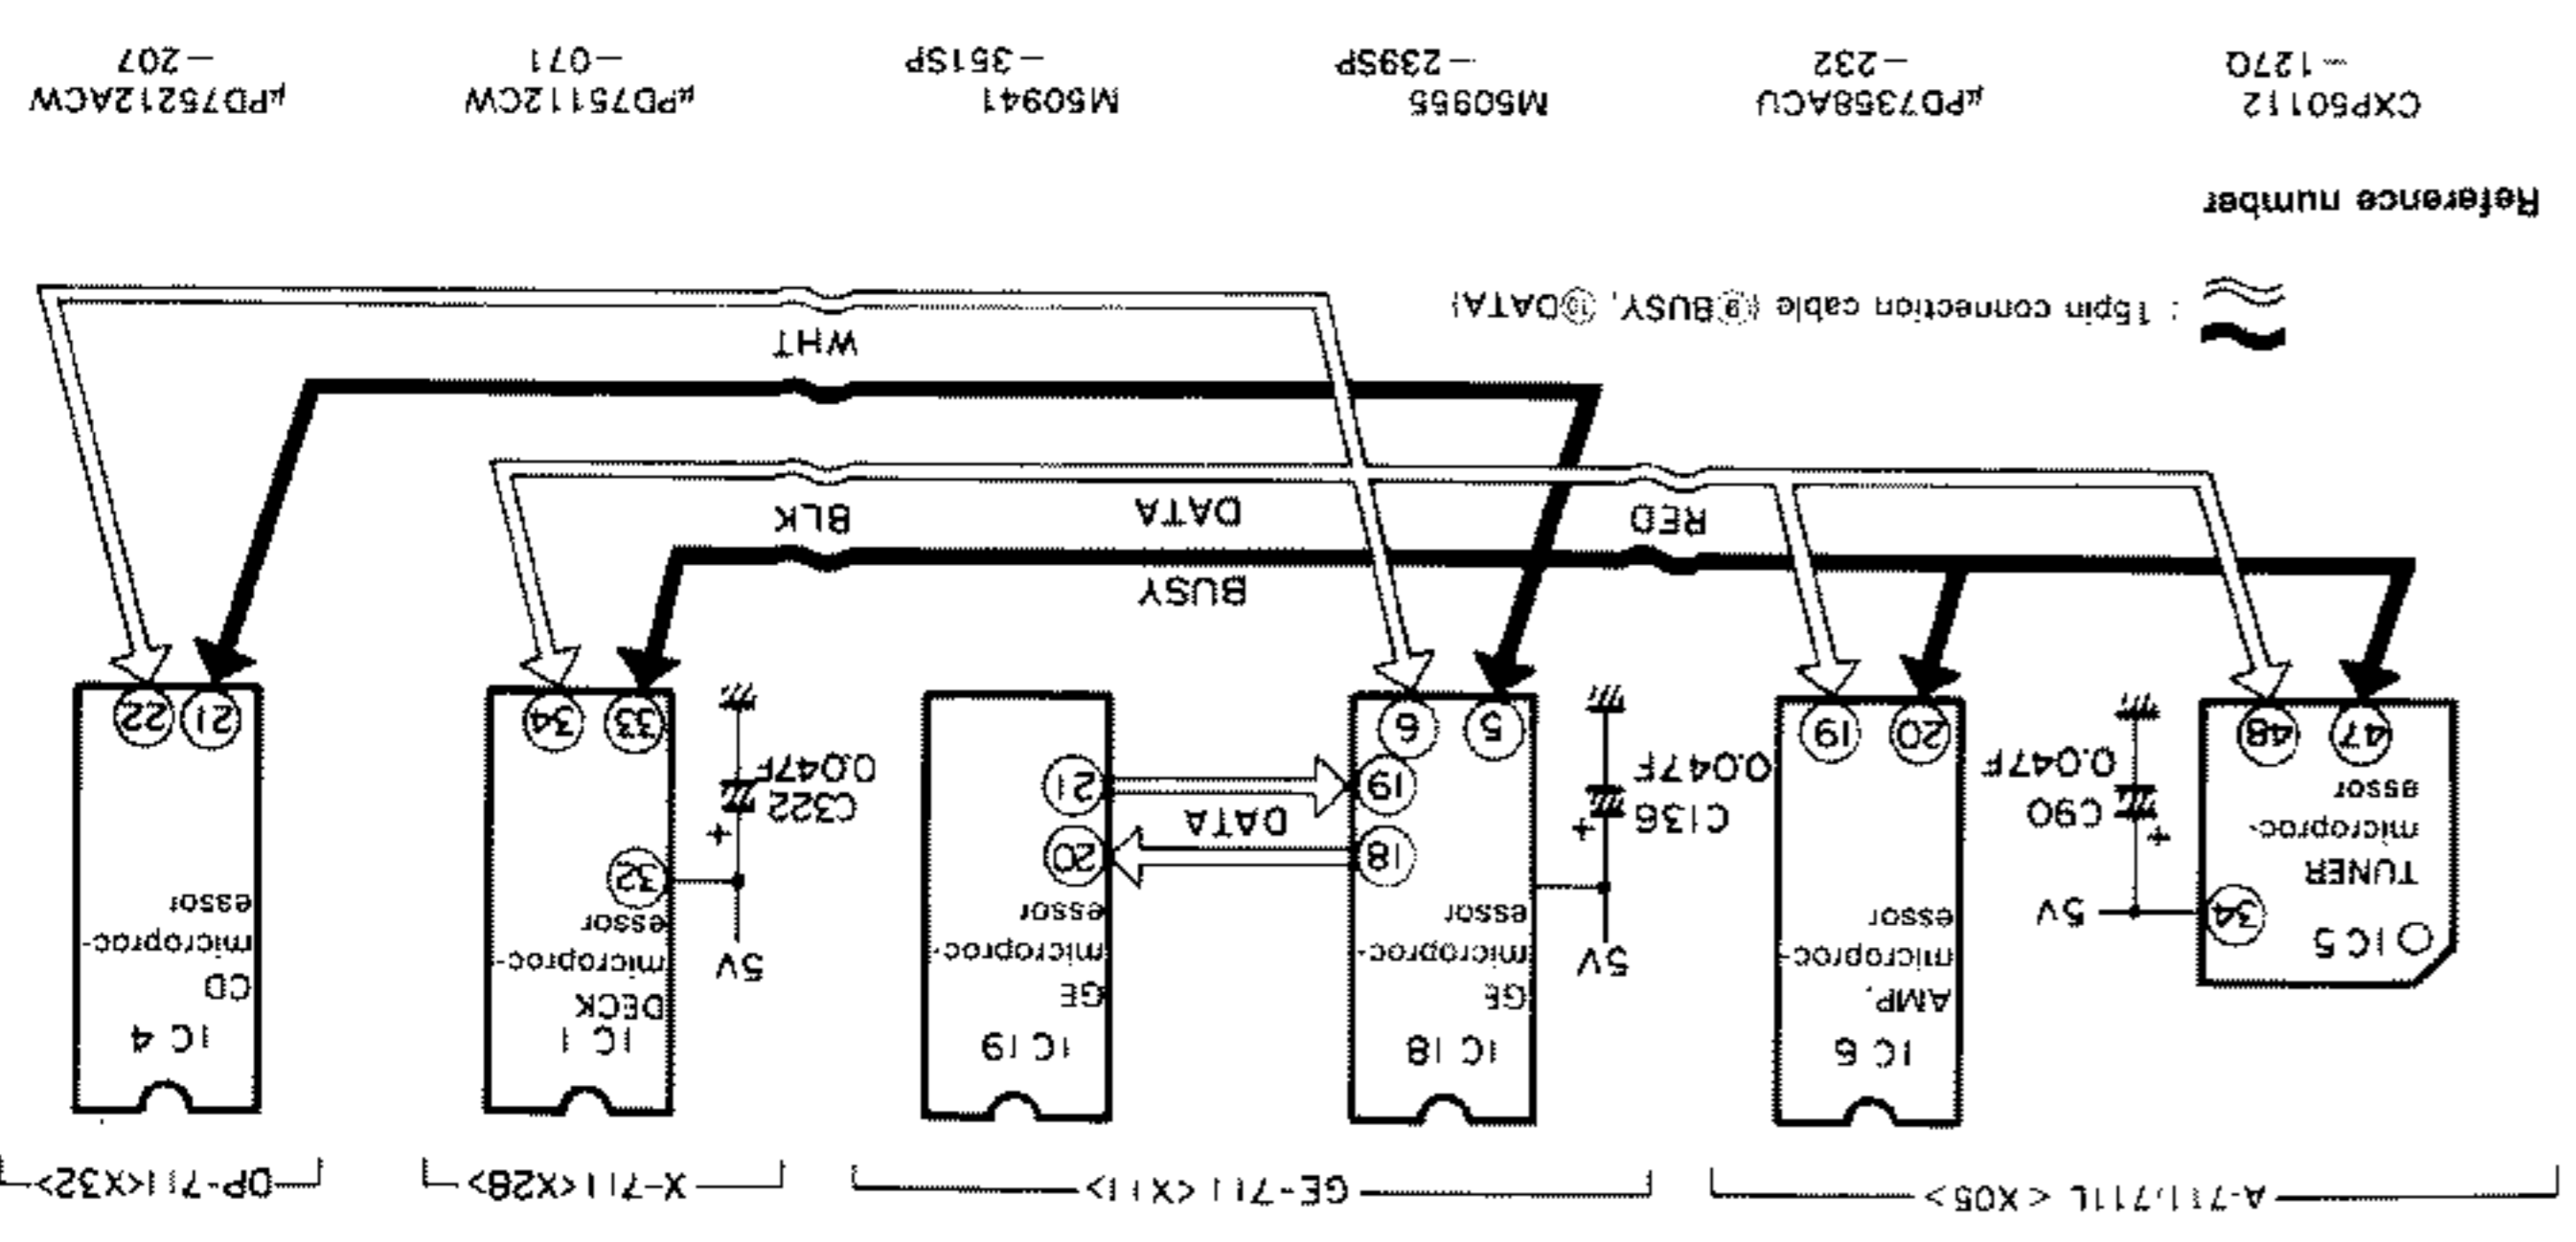

BLOCK DIAGRAM

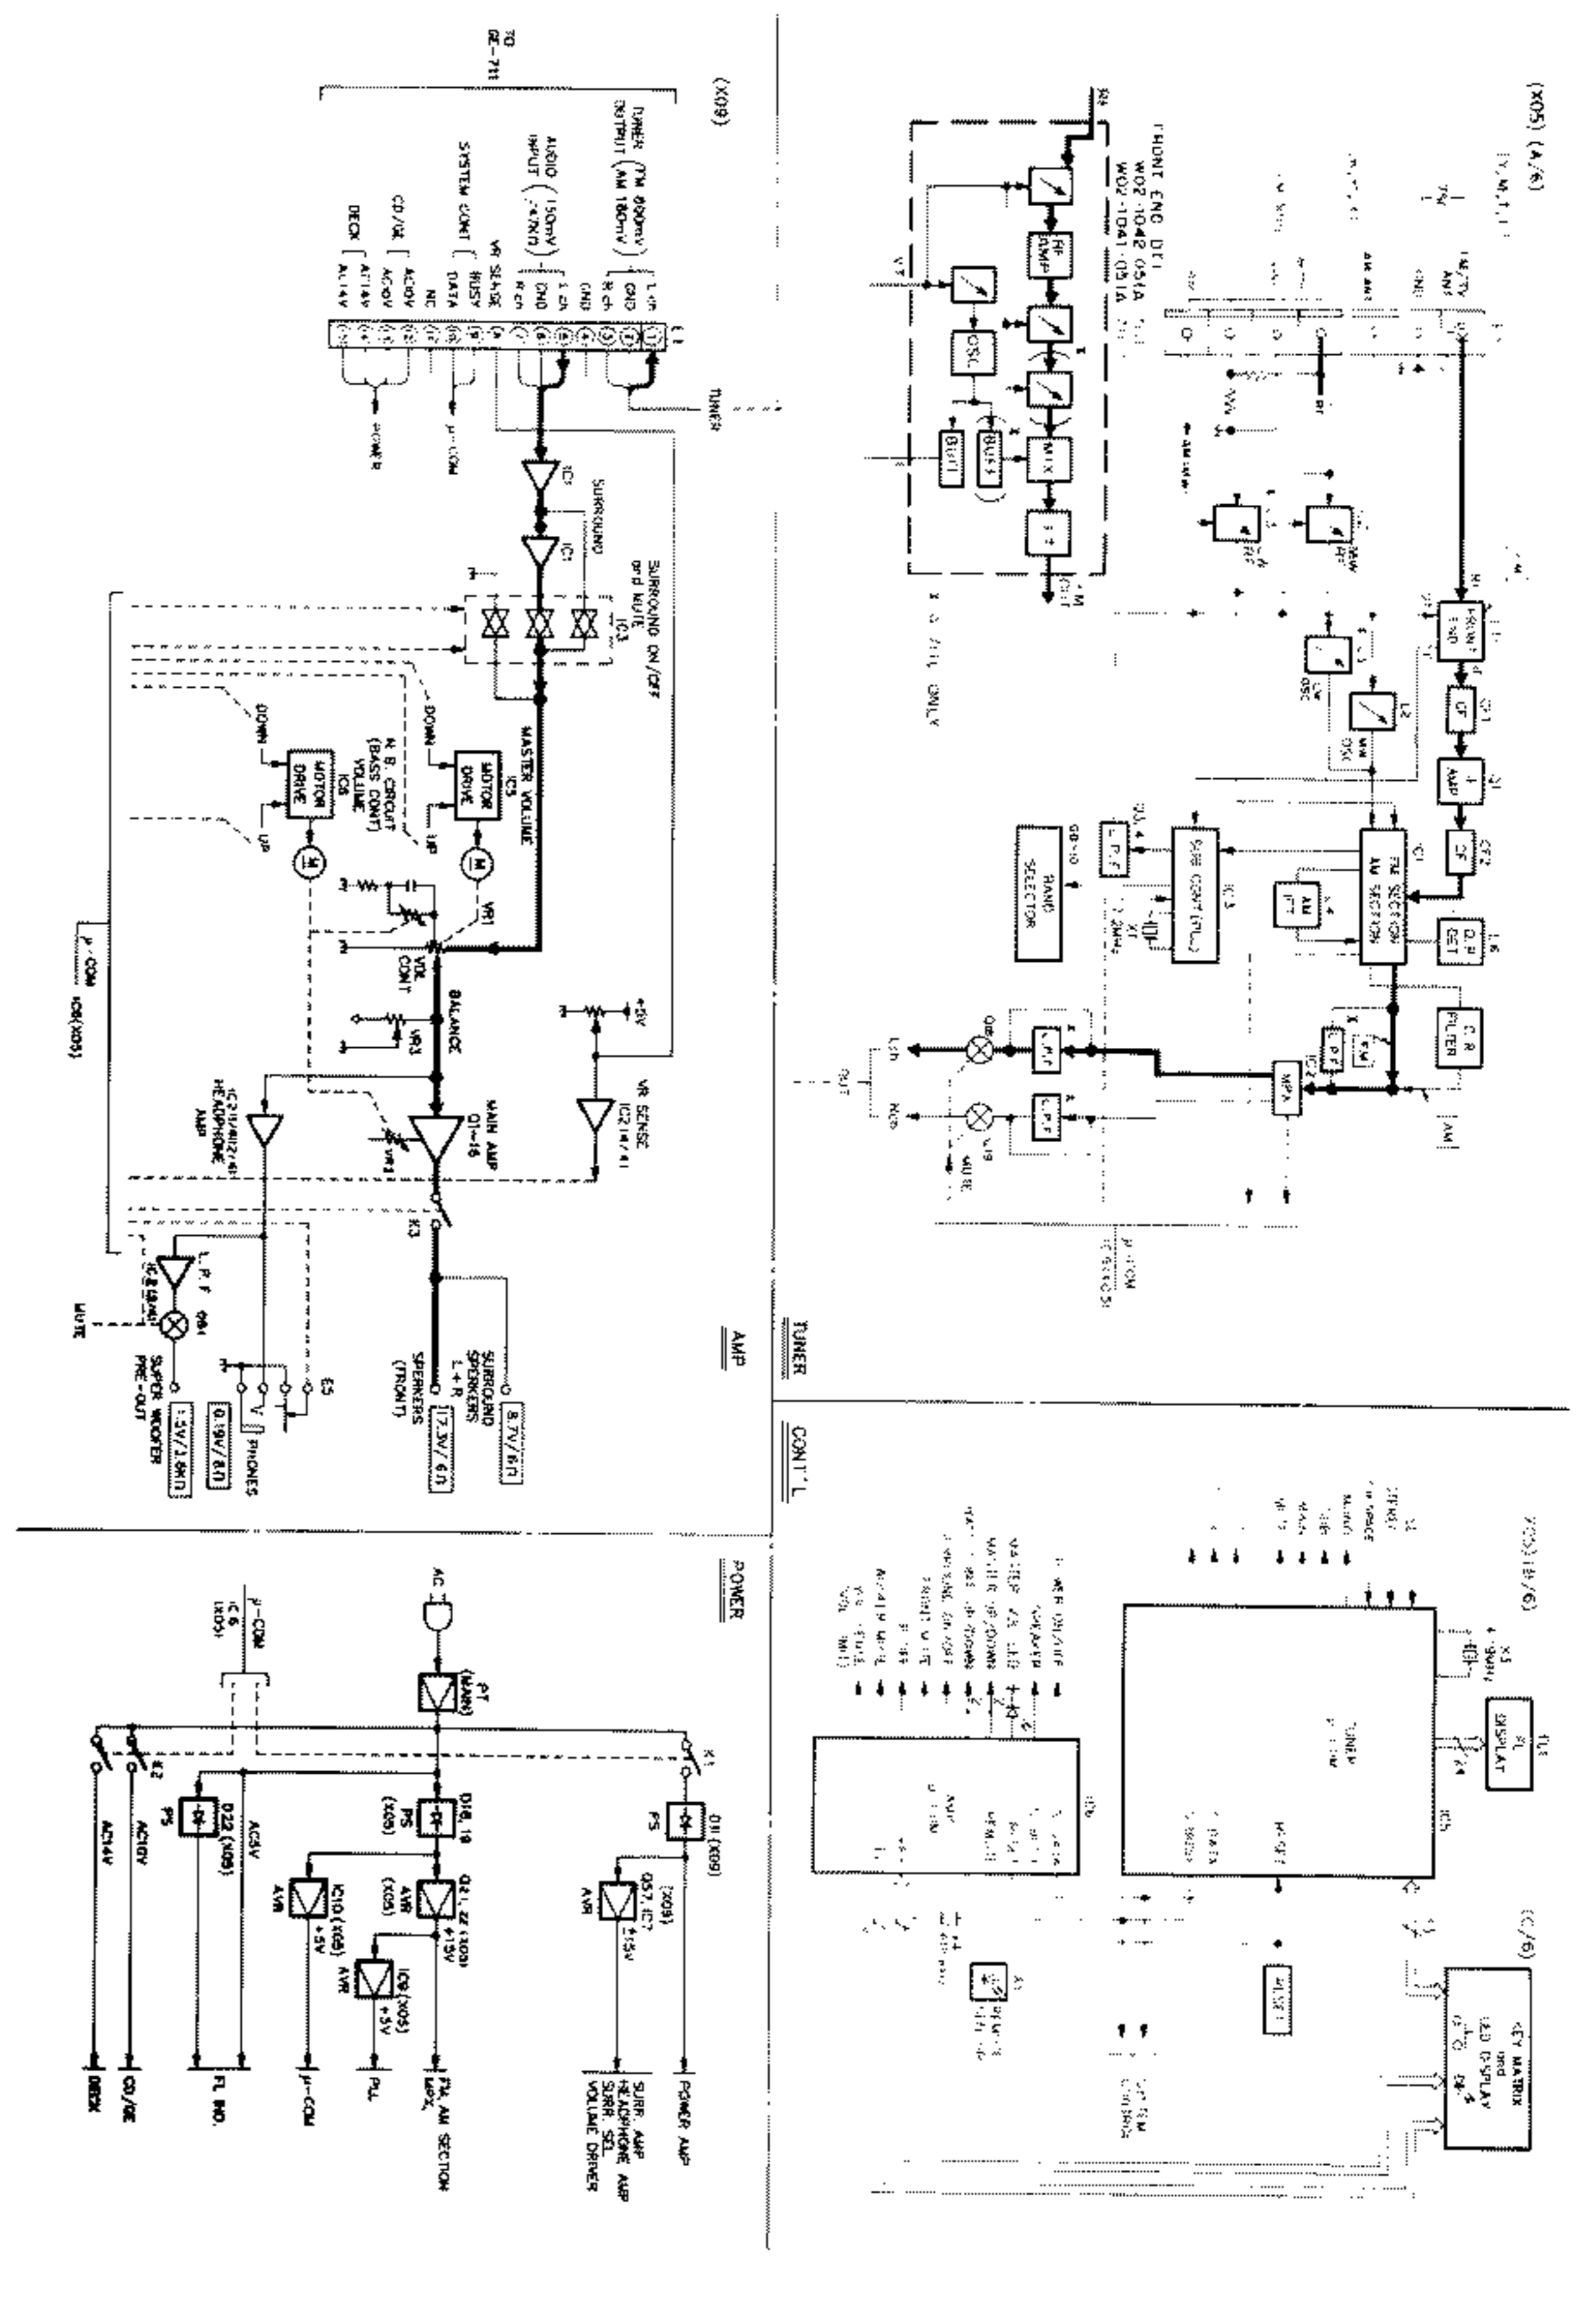

CIRCUIT DESCRIPTION


Function of components Tuner unit (X05-392-71)

Ref No.	Components	Use/Function	Operation/Condition
IC1	LA1265	FM/AM system IC	FM IF amplification, FM detection, AM MIX, AM IF amplification and AM detection
IC2	AN7470	Audio demodulation (AM, FM) PLL IC	FM stereo multiplex
IC3	LM7001	PLL IC	PLL
IC5	XP50112-127Q	Tuner microprocessor	Tuner control, tuner operation and control of others
IC6	PD536ACU-232	Amplifier microprocessor	Amplifier control
IC7	PT529D	Reset IC	Generates the reset power source.
IC9	PC7805HF or AN7805F	+5V 3-terminal regulator	+5V rectification
IC10	PC7805HF or AN7805F	+5V 3-terminal regulator	+5V rectification
IC1	2SC1923R(Q)	IF amplification SW	IF time constant conversion
IC2	2SK163L(M)	SW	At the time of LW reception OFF
IC3	2SC1740S(Q,R) or 2SC1845E(E)	L.P.F.	L.P.F. for PLL (integration type)
IC4	2SC1740S(Q,R) or 2SC1845E(E)	L.P.F.	L.P.F. for PLL (integration type)
IC5	2SC945A(H,Q,P) or 2SC1740S(Q,R)	MW/LW conversion	At the time of MW: ON
IC6	2SC945A(H,Q,P) or 2SC1740S(Q,R)	MW/LW conversion	At the time of LW: ON
IC7	2SC945A(H,Q,P) or 2SC1740S(Q,R)	Buffer	Buffer for FM detecting output (for L.P.F. matching)
IC8	2SA733A(H,Q,P) or 2SA833S(Q,R)	FM + B conversion	At the time of receiving FM: ON
IC9	2SA733A(H,Q,P) or 2SA833S(Q,R)	LW + B conversion	At the time of receiving LW: ON
IC10	2SA733A(H,Q,P) or 2SA833S(Q,R)	MW + B conversion	At the time of receiving MW: ON
IC11	2SC945A(H,Q,P) or 2SC1740S(Q,R)	Deemphasis conversion	Deemphasis conversion
IC12	2SC945A(H,Q,P) or 2SC1740S(Q,R)	Deemphasis conversion	Deemphasis conversion
IC13	2SC945A(H,Q,P) or 2SA1740S(Q,R)	Reversing circuit	Controls reset circuit (Tuner μ-COM)
IC14	2SA733A(H,Q,P) or 2SA833S(Q,R)	Reversing circuit	Controls reset circuit (Lampifier μ-COM)
IC15	2SA733A(H,Q,P) or 2SA833S(Q,R)	Reversing circuit	Reverses the mute signal from the amplifier microprocessor
IC16	2SA733A(H,Q,P) or 2SA833S(Q,R)	Reversing circuit	Reverses the mute signal from the tuner microprocessor
IC17	2SA733A(H,Q,P) or 2SA833S(Q,R)	Destination Conversion SW	Converts deemphasis and channel space
IC18	2SD1302S(T) or 2SA833S(Q,R)	Mute	Mute SW of Lch
IC19	2SC1302S(T) or 2SA833S(Q,R)	Mute	Mute SW of Hch
IC20	2SC1266(Q,P) or 2SC945A(H,Q,P) or 2SC1740S(Q,R)	+14V rectification	Generates the stabilized power source for 14V
IC21	2SC1266(Q,P) or 2SC945A(H,Q,P) or 2SC1740S(Q,R)	+14V rectification	Generates the stabilized power source for 14V
IC22	2SC945A(H,Q,P) or 2SC1740S(Q,R)		
IC23	2SC1740S(Q,R)		

CIRCUIT DESCRIPTION


N.B. CIRCUIT (X09-3142-71 (B/5))
 The N.B. of N.B. CIRCUIT stands for Natural Bass, and it is the circuit to create further natural bass sound.
 It is roughly composed of ① Variable loudness control and ② Main amplifier bass emphasizing circuit showed in the chart.
 The ① Variable loudness control in the chart has become able to vary the level of loudness control by mounting the traditional loudness control variable VR (VR2, 1/4) onto itself.
 The ② main amplifier bass emphasizing circuit can boost up the desired frequency with the fixed number of C.R. parts for input and returning C.R. parts of main amplifier. It has also become able to vary these boost levels by mounting VR2, (3/4) onto it. The fixed number of this A-7111/711L has been set so as to boost up 60 Hz.

The action of this circuit results from the combination of aforementioned ① and ②, which also can vary the boost level of bass sound at the same time.

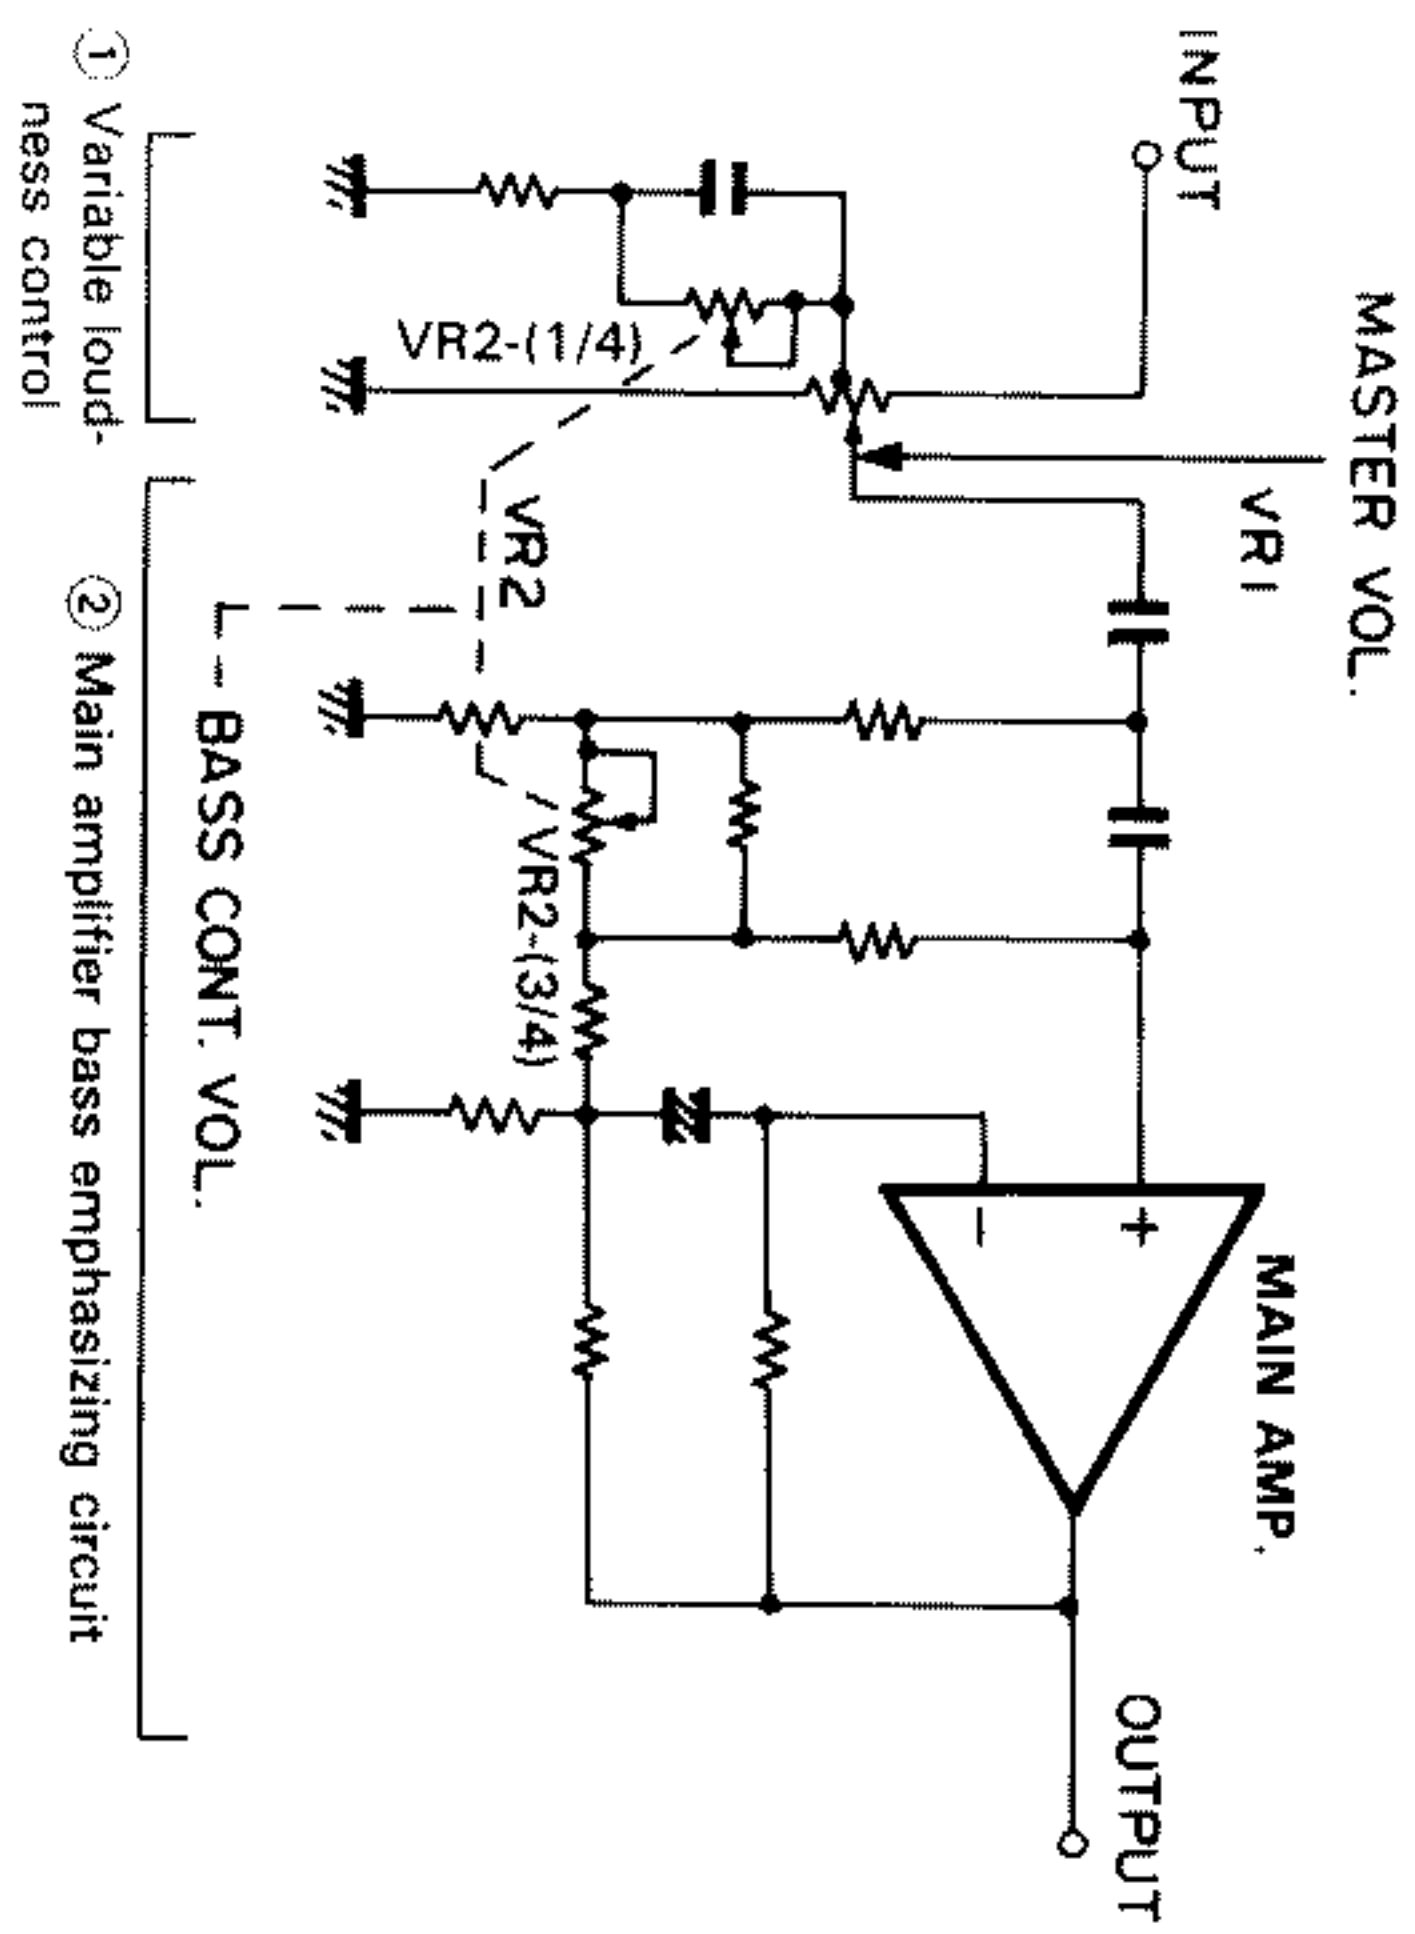


CIRCUIT DESCRIPTION


Pin connections

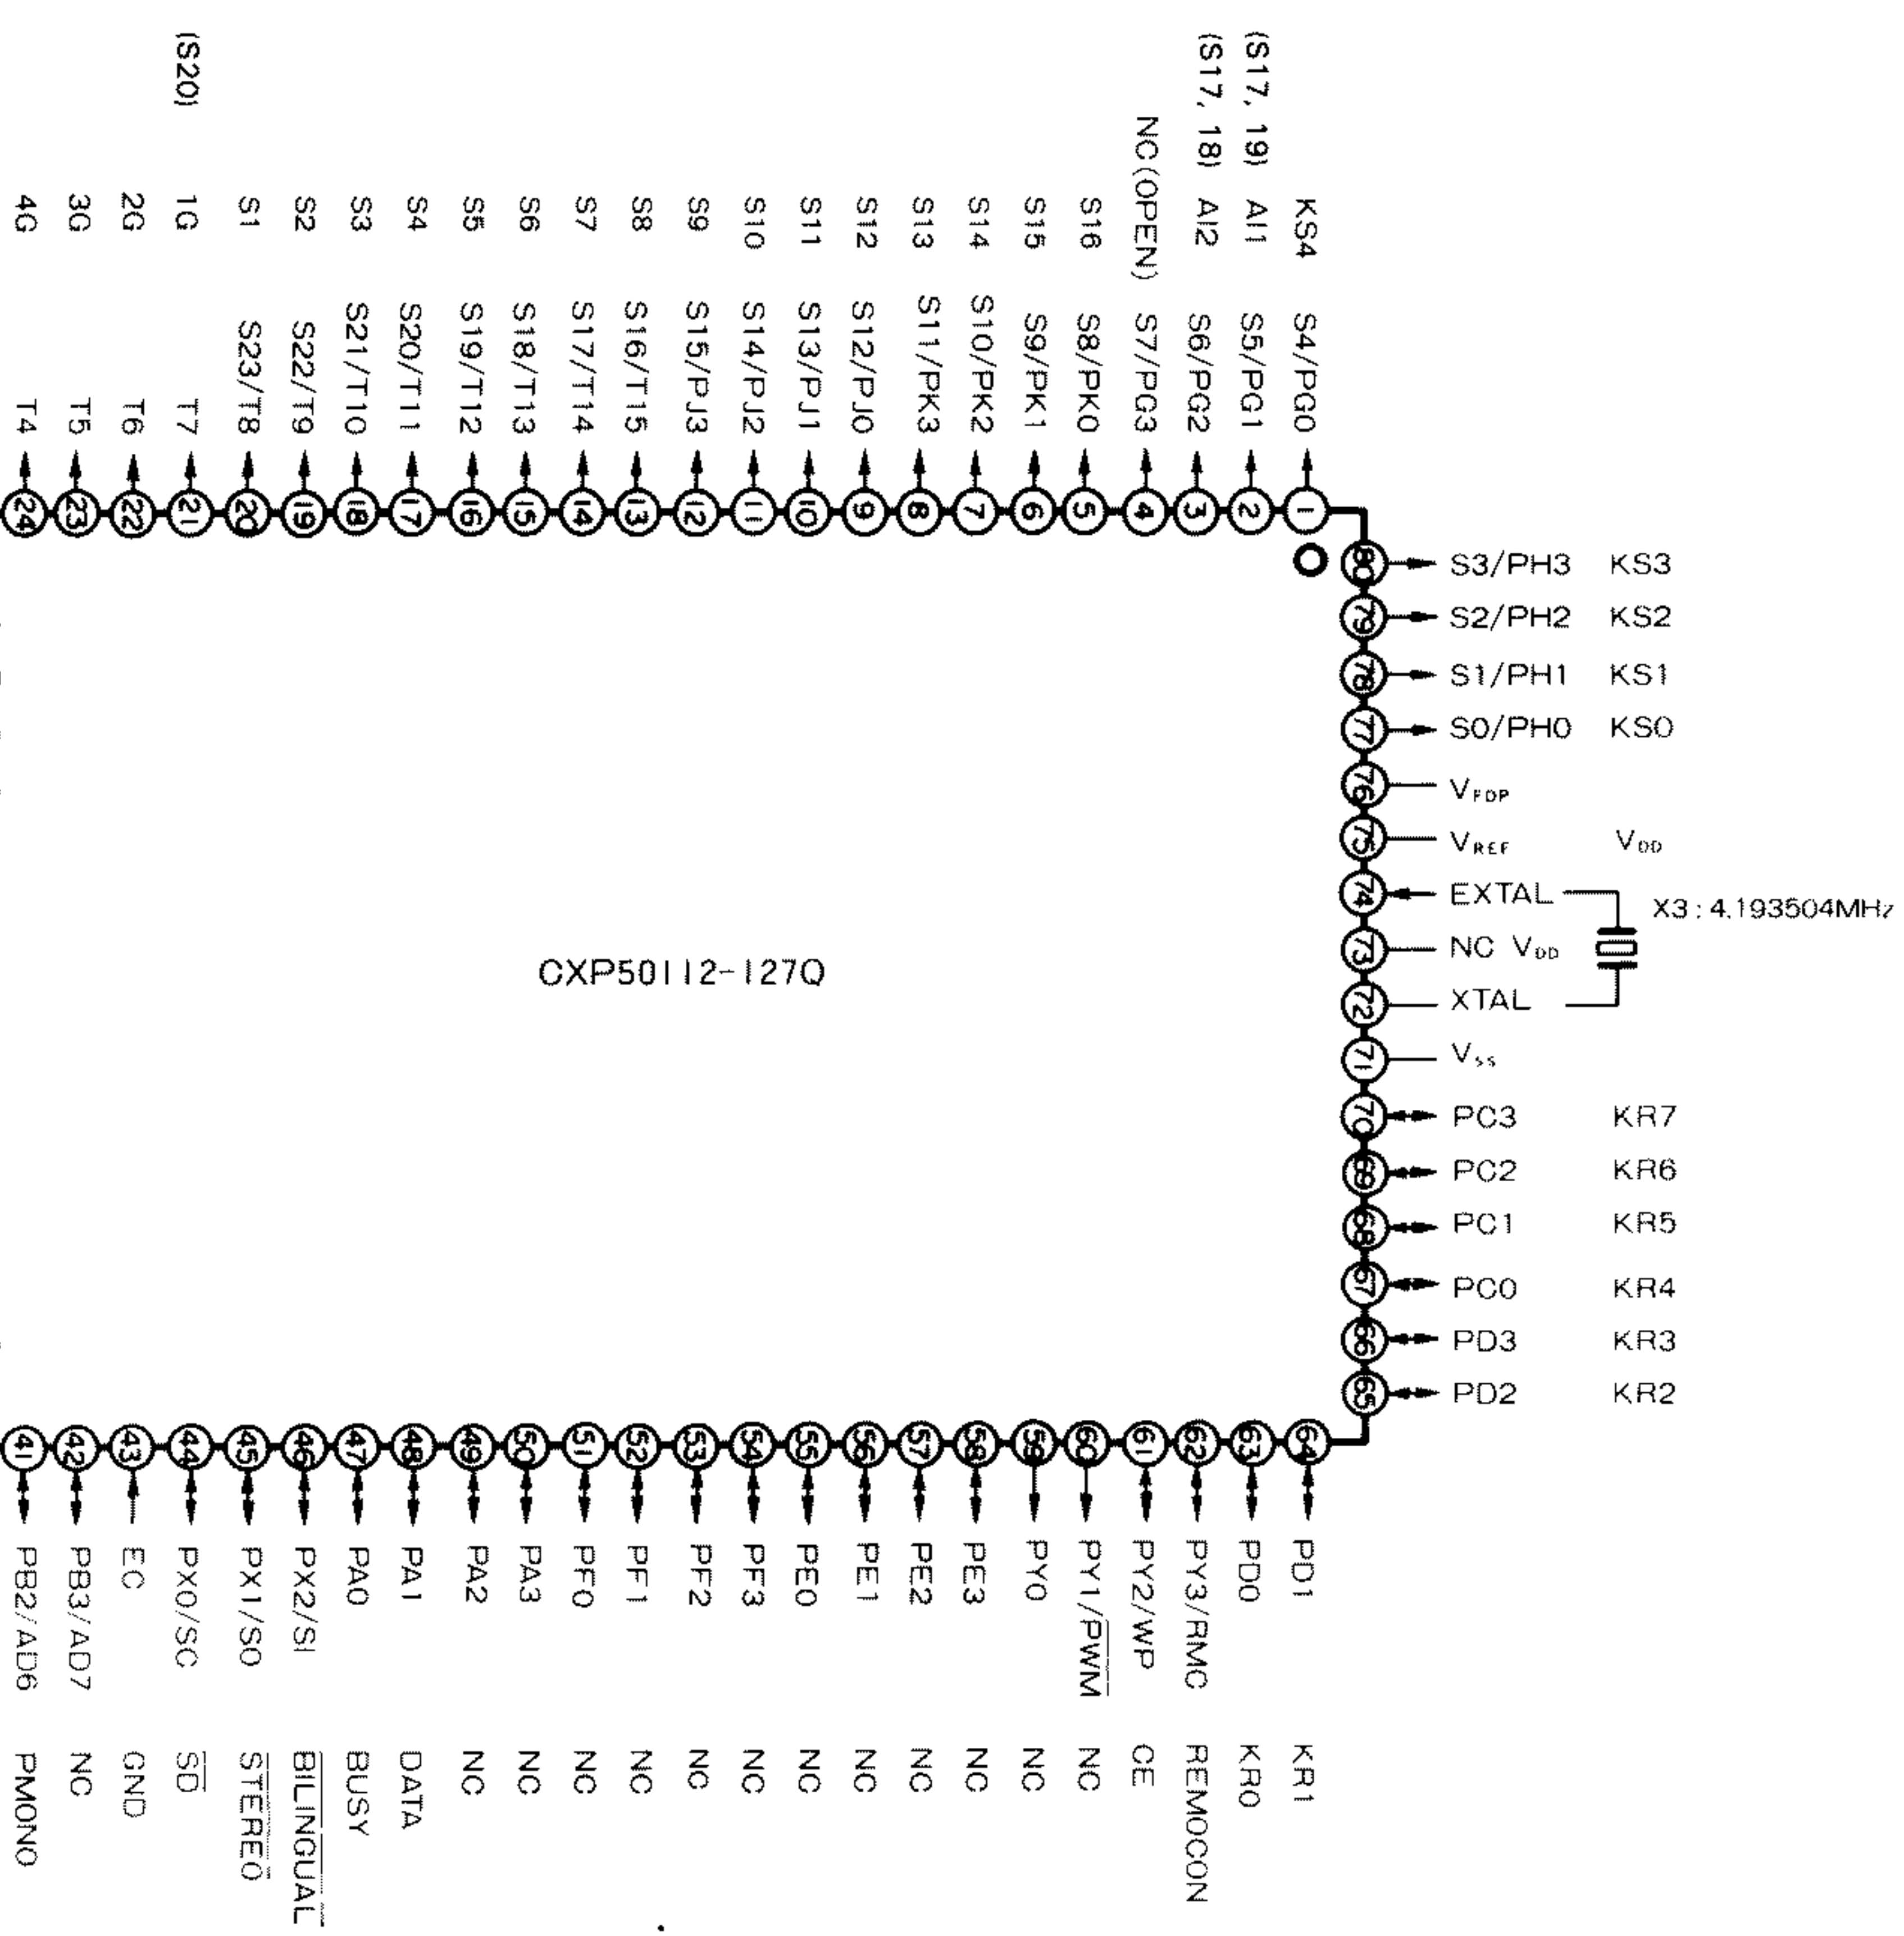

IC5: CXP50112-1270 (X05-3992-71)
 TUNER microprocessor

Terminal connection diagram & key matrix connection

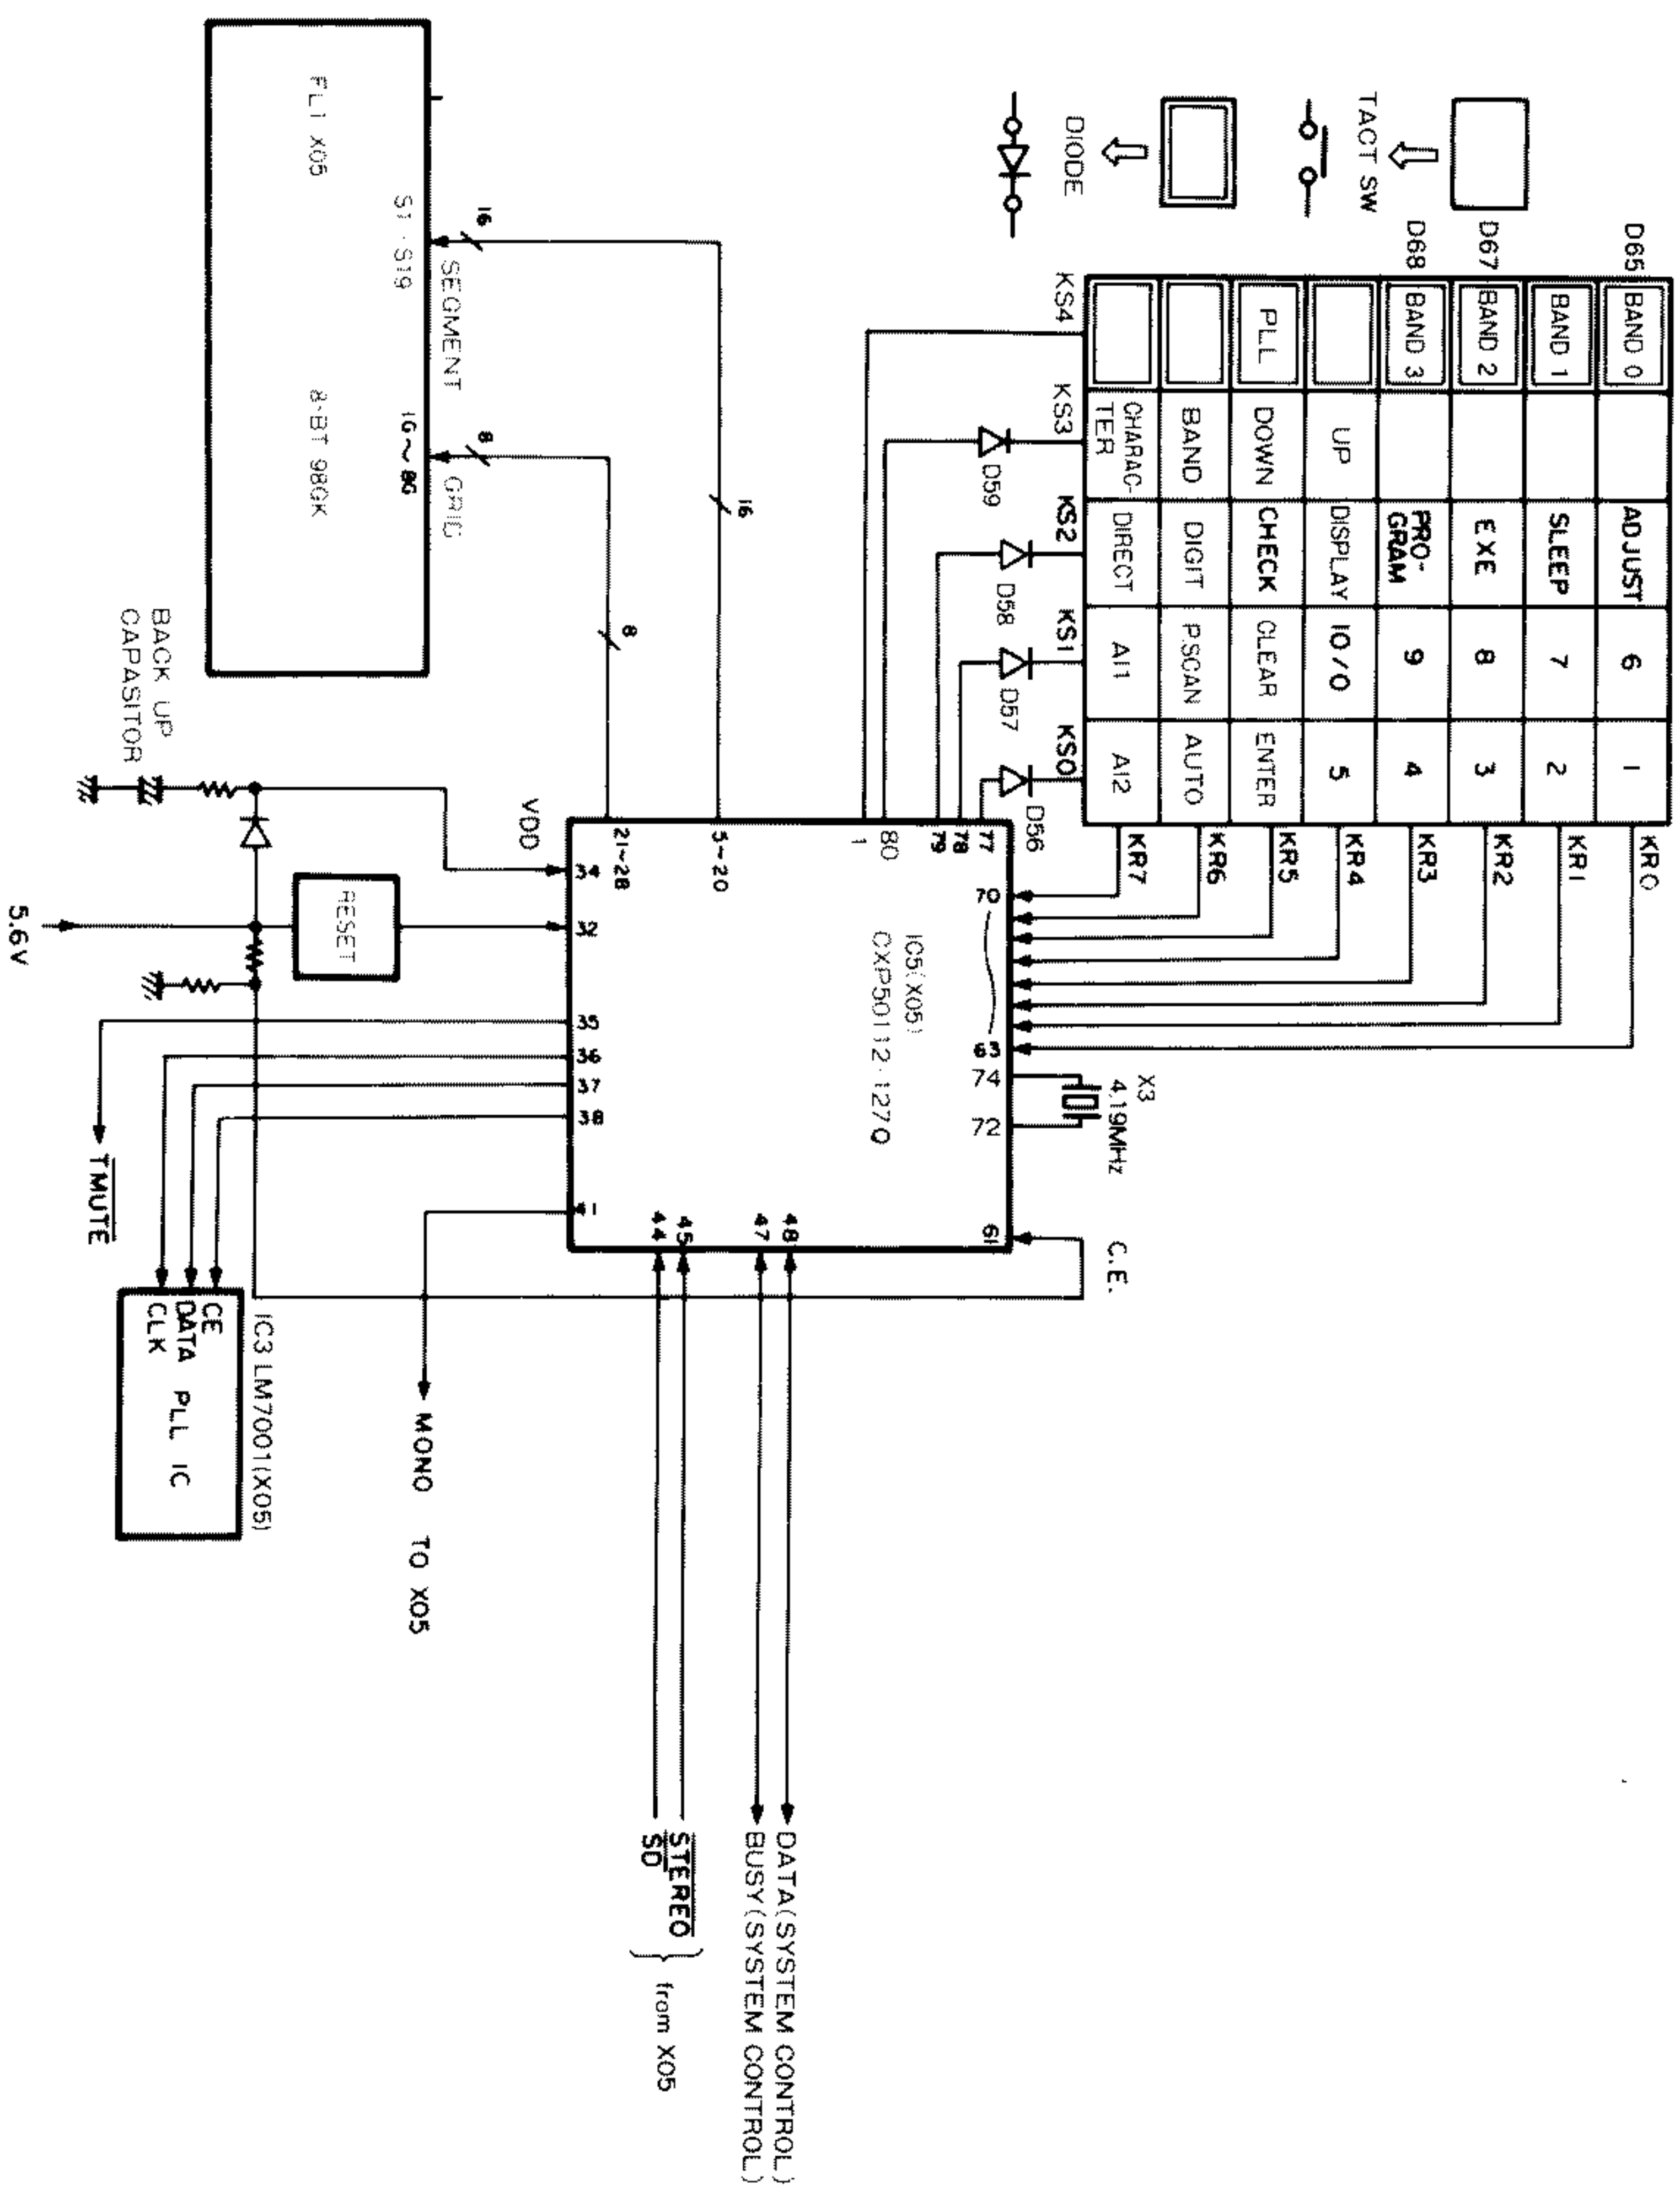

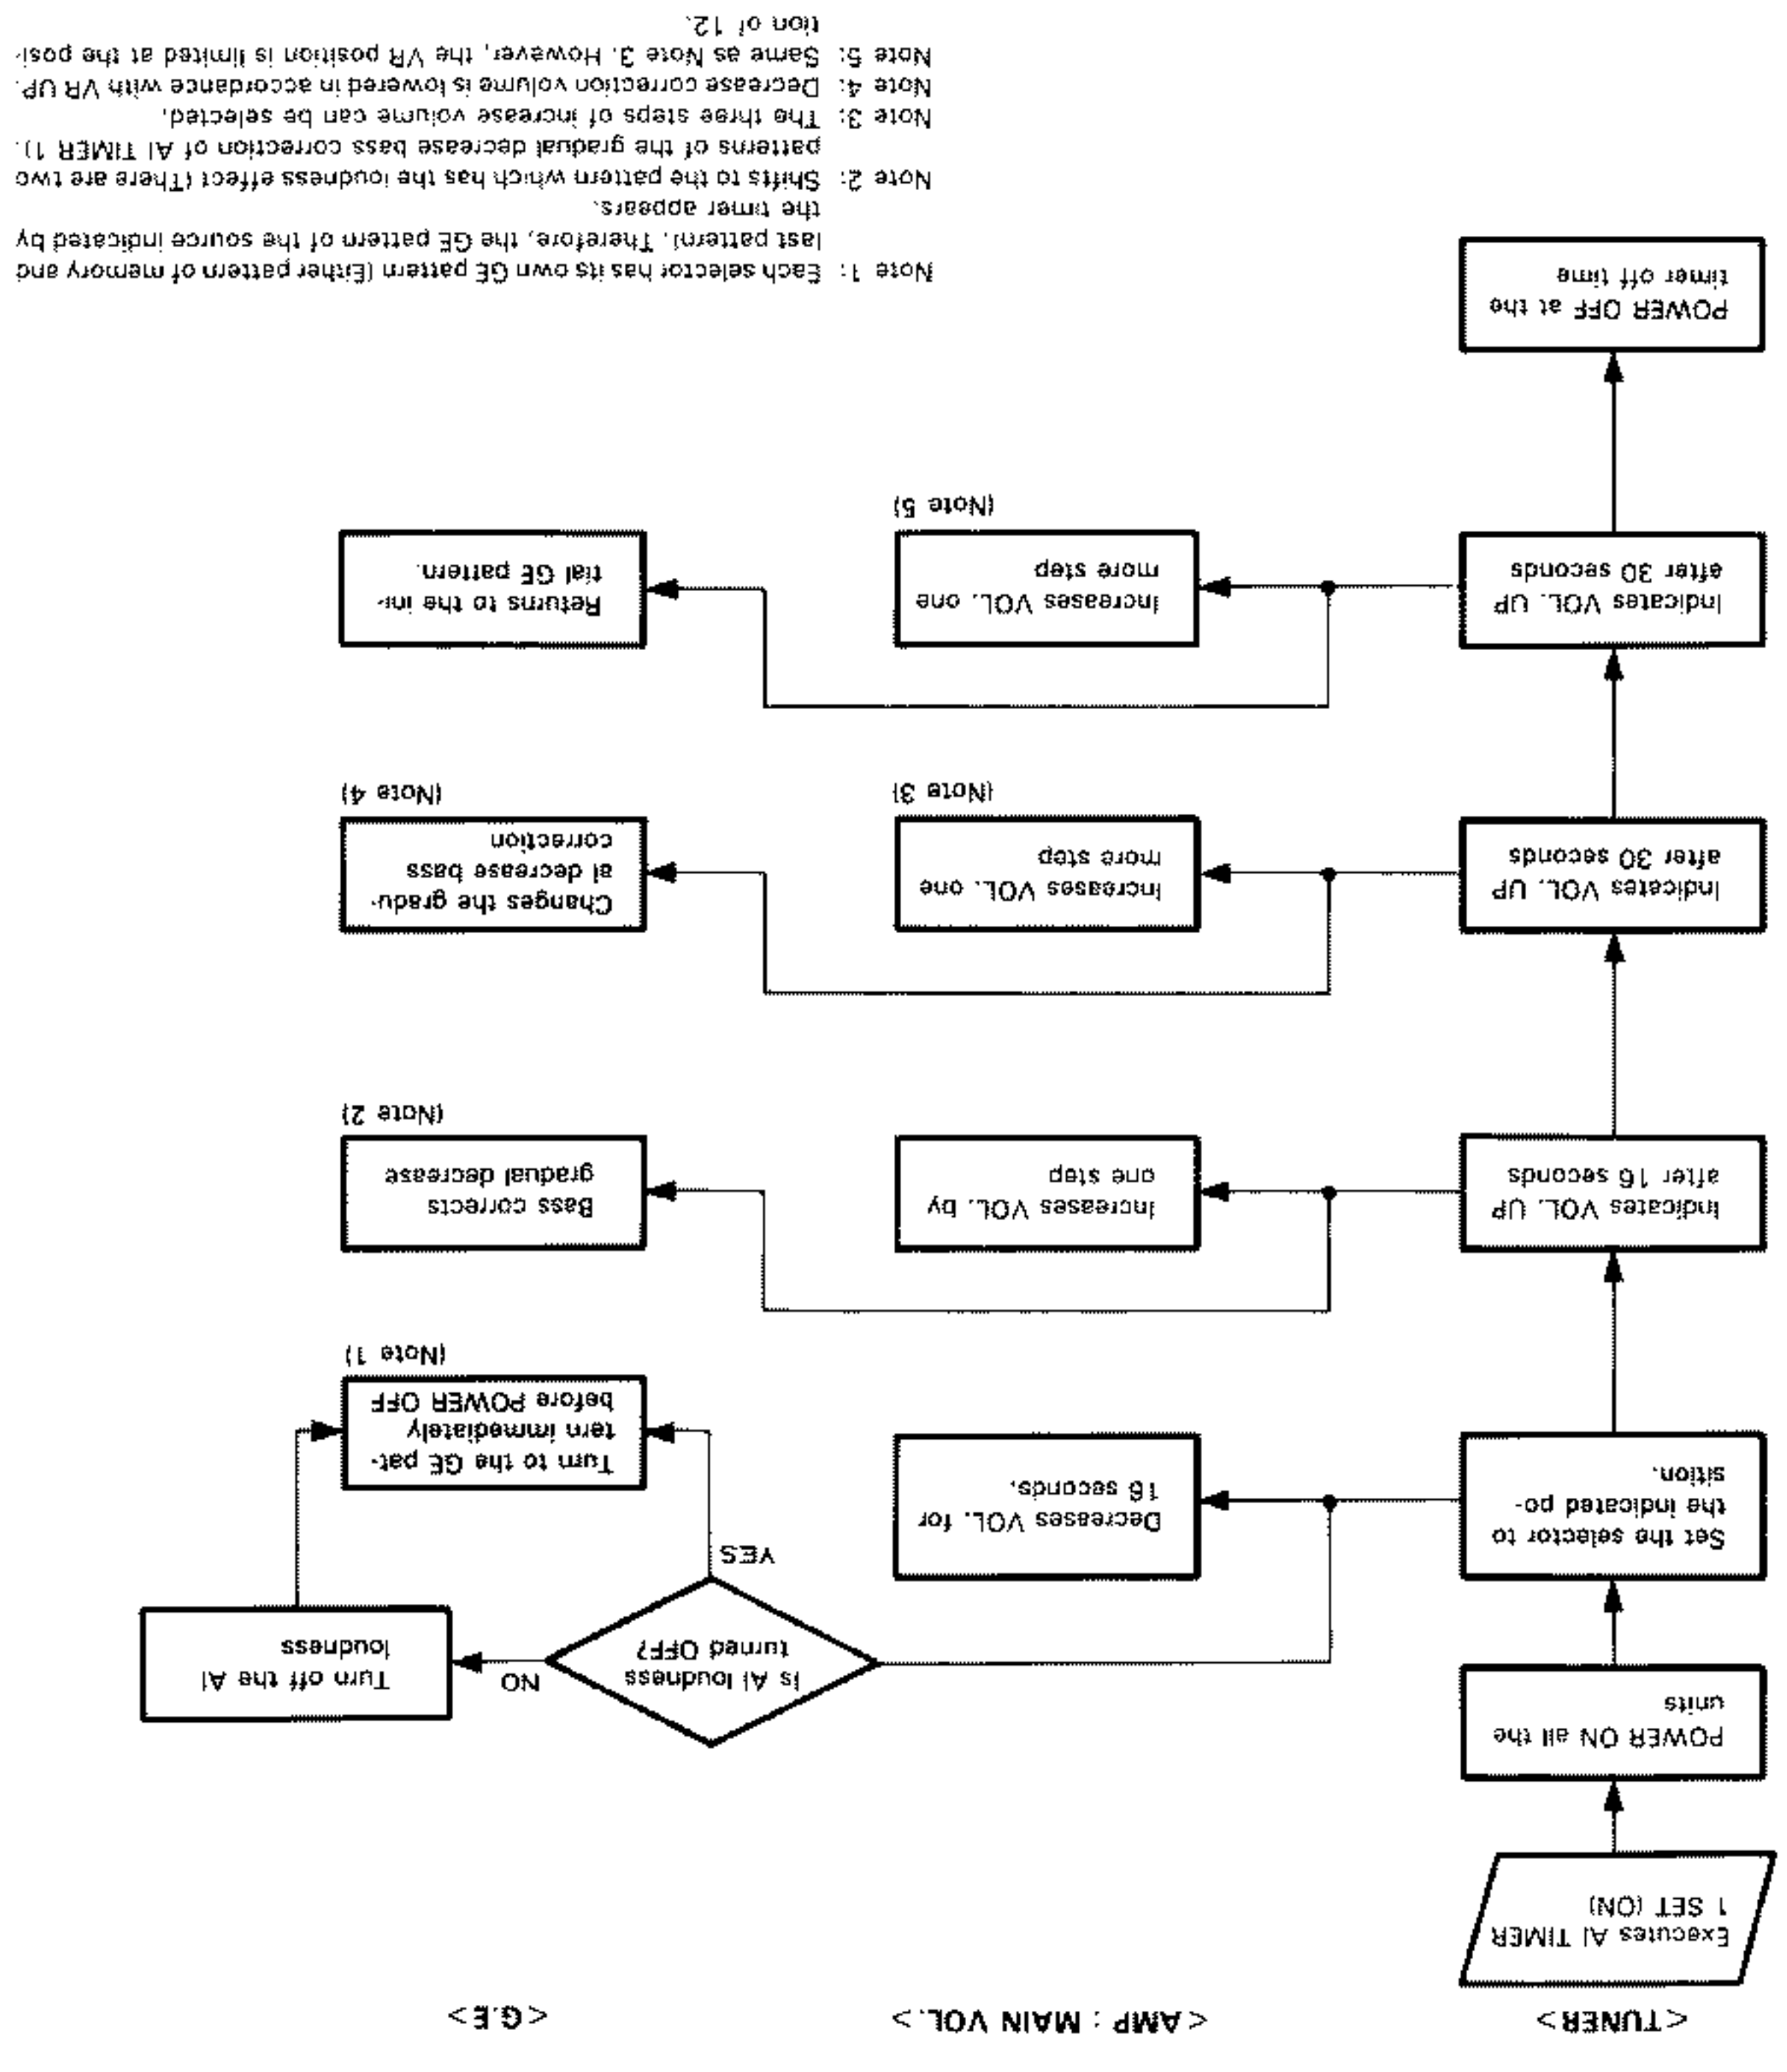


② Indication flow of AI TIMER 1

CIRCUIT DESCRIPTION

Pin No.	Pin name	I/O	Symbol	Description
1	S4/FG0	O	KS4	Key scan output
2	S5/FG1	O	A11	A11 ON/OFF FL segment output (S17, 19)
3	S6/FG2	O	A12	A12 ON/OFF FL segment output (S17, 18)
4	S7/FG3	NC		
5	S8/PK0	O	S8	FL segment output
6	S9/PK1	O	S9	FL segment output
7	S10/PK2	O	S10	FL segment output
8	S11/PK3	O	S11	FL segment output
9	S12/PJ0	O	S12	FL segment output
10	S13/PJ1	O	S13	FL segment output
11	S14/PJ2	O	S14	FL segment output
12	S15/PJ3	O	S15	FL segment output
13	S16/TJ4	O	S16	FL segment output
14	S17/TJ4	O	S17	FL segment output
15	S18/TJ3	O	S18	FL segment output
16	S19/TJ2	O	S19	FL segment output
17	S20/TJ1	O	S20	FL segment output
18	S21/TJ0	O	S21	FL segment output
19	S22/TJ9	O	S22	FL segment output
20	S23/TJ8	O	S23	FL segment output
21	T7	O	T7	FL gnd output
22	T6	O	T6	FL gnd output
23	T5	O	T5	FL gnd output
24	T4	O	T4	FL gnd output
25	T3	O	T3	FL gnd output
26	T2	O	T2	FL gnd output
27	T1	O	T1	FL gnd output
28	T0	O	T0	FL gnd output
29	INT	I	INT	External interrupt pin ... unused
30	TX	O	TX	Timer oscillation pin ... unused
31	TEX	I	TEX	Timer oscillation pin ... unused
32	RST	I	RESET	Reset input
33	NC		NC	
34	VDD			Power supply pin
35	PIO/AD0	O	TMUTE	Mute output
36	PI1/AD1	O	PLCK	Click to PLL or extension IC
37	PI2/AD2	O	PLDT	Data output to PLL or extension IC
38	PI3/AD3	O	PLST	Chip enable output for PLL
39	PB0/AD4	O	PMAIN	TV sound MPX selection output
40	PB1/AD5	O	PSUB	TV sound MPX selection output
41	PB2/AD6	O	PMONO	Stereo/monaural selection
42	PB3/AD7	O	NC	Event counter input ... unused
43	EC	I	EC	Event counter input ... unused
44	PX0/SC	I	SB	Tuning signal input
45	PX1/S0	I	ST	Stereo signal input

CIRCUIT DESCRIPTION

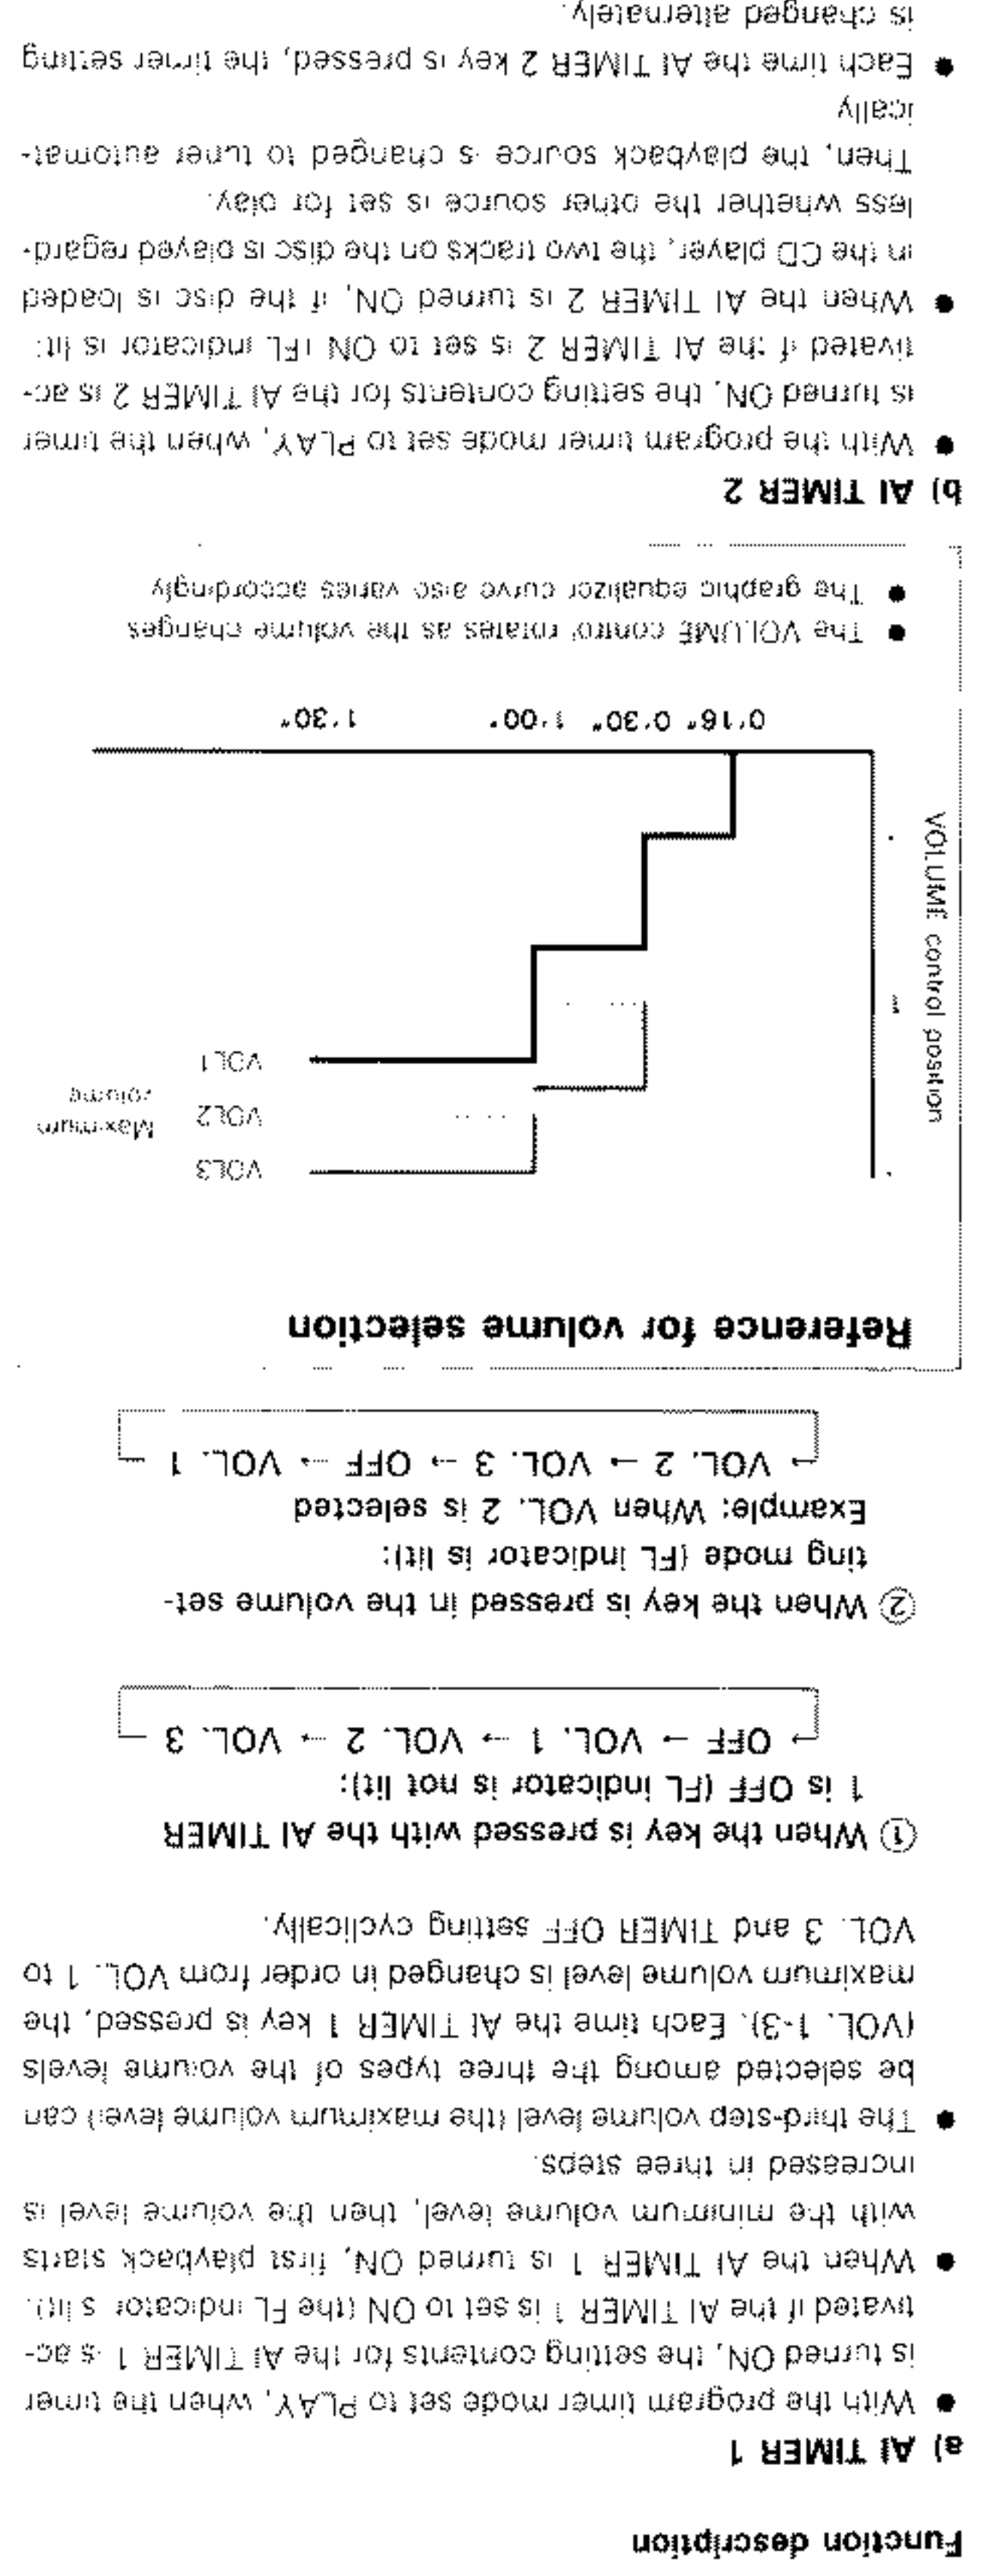


Function description

CIRCUIT DESCRIPTION

Pin No.	Pin name	I/O	Symbol	Description
46	PX2/SI	I	BIL	Bilingual signal input
47	PA0	I/O	BUSY	System control busy
48	PA1	I/O	DATA	System control data
49	PA2	O	NC	
50	PA3	O	NC	
51	PA4	O	NC	
52	PF1	O	NC	
53	PF2	O	NC	
54	PF3	O	NC	
55	PE0	O	NC	
56	PE1	O	NC	
57	PE2	O	NC	
58	PE3	O	NC	
59	PA0	O	NC	
60	PY1/PWM	O	NC	
61	CE	I	CE	AC ON/OFF detection input
62	PY3/RMC	I	RMCN	Remote control input
63	PA0	I	KR0	Key return input
64	PD1	I	KR1	Key return input
65	PD2	I	KR2	Key return input
66	PD3	I	KR3	Key return input
67	PC0	I	KR4	Key return input
68	PC1	I	KR5	Key return input
69	PC2	I	KR6	Key return input
70	PC3	I	KR7	Key return input
71	VSS		XTAL	GND pin
72	XTAL	O	XTAL	For oscillator
73	NC			For oscillator
74	EXTAL	I	EXTAL	For oscillator
75	VHF		VHF	For voltage detection reset... unused
76	VDP		VDP	FL terminal pull-down resistor power supply
77	SO/PH0	O	KS0	Key scan output
78	SI/PH1	O	KS1	Key scan output
79	SZ/PH2	O	KS2	Key scan output
80	S3/PH3	O	KS3	Key scan output

CIRCUIT DESCRIPTION

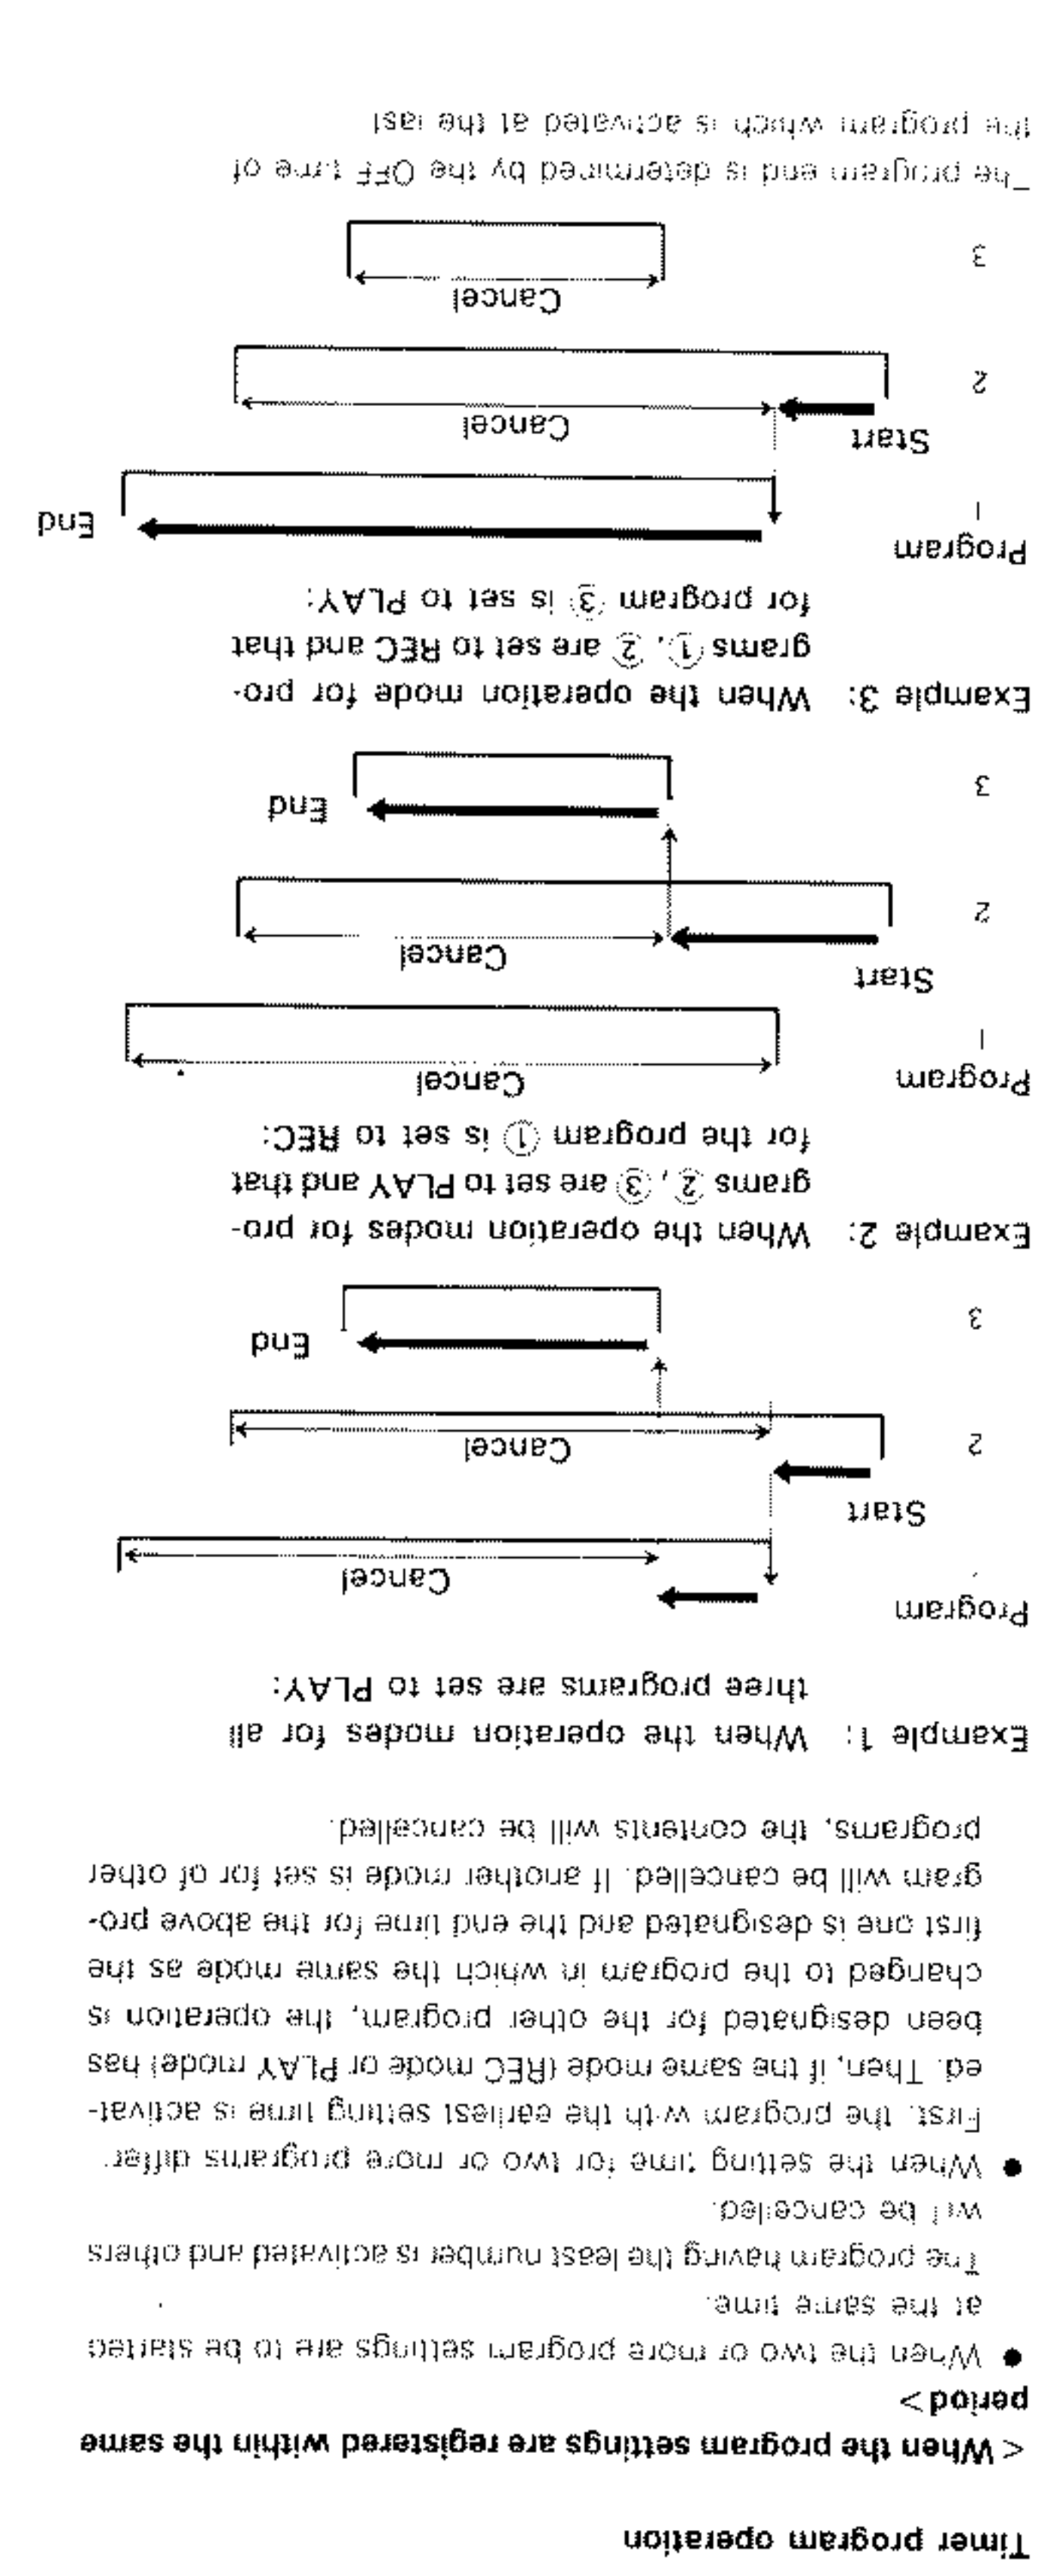

Timer program operation

CIRCUIT DESCRIPTION

Destination type	Destination switches				Band	Receiving frequency range	Intermediate frequency	PLL reference frequency
	B3	B2	B1	B0				
M.V.	1	1 or 0	0	0	FM	87.5 - 108.0 MHz	100 kHz	531 - 1602 kHz
J	0	0	0	0	FM	76.0 - 90.0 MHz	100 kHz	531 - 1602 kHz
					AM	531 - 1602 kHz	9 kHz	531 - 1602 kHz
K.P.	1	0	0	0	FM	87.5 - 108.0 MHz	100 kHz	531 - 1602 kHz
					AM	531 - 1602 kHz	9 kHz	531 - 1602 kHz
X	1	1	0	0	FM	87.5 - 108.0 MHz	50 kHz	531 - 1602 kHz
					AM	531 - 1602 kHz	9 kHz	531 - 1602 kHz
T.E.	1	1	1	0	FM	87.5 - 108.0 MHz	50 kHz	531 - 1602 kHz
					AM	531 - 1602 kHz	9 kHz	531 - 1602 kHz

Conditions by destination

Band	Destination		Receiving frequency range	Intermediate frequency	PLL reference frequency
	J	K.P., M., X			
FM	1	87.5 MHz	76.0 MHz	100.1 MHz	531 kHz
	2	89.1 MHz	78.0 MHz	89.1 MHz	531 kHz
	3	90.0 MHz	80.0 MHz	90.0 MHz	531 kHz
	4	92.0 MHz	82.0 MHz	92.0 MHz	531 kHz
	5	94.0 MHz	84.0 MHz	94.0 MHz	531 kHz
	6	98.0 MHz	88.0 MHz	98.0 MHz	531 kHz
	7	100.1 MHz	86.0 MHz	100.1 MHz	531 kHz
	8	102.0 MHz	88.0 MHz	102.0 MHz	531 kHz
	9	106.0 MHz	90.0 MHz	106.0 MHz	531 kHz
	10	108.0 MHz	90.0 MHz	108.0 MHz	531 kHz
AM	1	153 kHz	153 kHz	153 kHz	1 kHz
	2	162 kHz	162 kHz	162 kHz	1 kHz
	3	216 kHz	216 kHz	216 kHz	1 kHz
	4	270 kHz	270 kHz	270 kHz	1 kHz
	5	324 kHz	324 kHz	324 kHz	1 kHz
	6	378 kHz	378 kHz	378 kHz	1 kHz
	7	432 kHz	432 kHz	432 kHz	1 kHz
	8	486 kHz	486 kHz	486 kHz	1 kHz
	9	540 kHz	540 kHz	540 kHz	1 kHz
	10	594 kHz	594 kHz	594 kHz	1 kHz
TV/LW	1	153 kHz	153 kHz	153 kHz	1 kHz
	2	162 kHz	162 kHz	162 kHz	1 kHz
	3	216 kHz	216 kHz	216 kHz	1 kHz
	4	270 kHz	270 kHz	270 kHz	1 kHz
	5	324 kHz	324 kHz	324 kHz	1 kHz
	6	378 kHz	378 kHz	378 kHz	1 kHz
	7	432 kHz	432 kHz	432 kHz	1 kHz
	8	486 kHz	486 kHz	486 kHz	1 kHz
	9	540 kHz	540 kHz	540 kHz	1 kHz
	10	594 kHz	594 kHz	594 kHz	1 kHz

(Table 1)

(1) Setting method
Insert the AC plug into an outlet and remove your fingers from DOWN key at the same time while pressing DOWN key.

(2) Contents
POWER ON
All the FLS turned on
Test Frequency Setting (Table 1)

(3) Clearing method
All the turned on FLS can be cleared with ten keys, BAND key, UP/DOWN key or POWER key.

(1) Method
Setting of initial conditions (reset)
While pressing ENTER key, turn the AC ON.

(2) Contents
Clears all the memory and returns to the initial conditions.
However, the test frequency is newly memorized in the preset memory at this time. (The same as when the back-up data is NG.)

CIRCUIT DESCRIPTION


A-711/711L

Pin No.	Pin name	I/O	Description
1	RESET	I	Reset input (H: Reset)
2	CL1	I	System clock terminal
3	CL2	I	System clock terminal
4	Vcc	I	No use. (GND)
5	V.Loss	I	No use. (GND)
6	P53	O	Motor volume down drive
7	P52	O	Motor volume up drive
8	P51	O	Volume indicator LED drive
9	P50	O	Super woofer mute
10	P23	O	N.B. circuit volume up drive
11	P22	O	N.B. circuit volume down drive
12	P21/PTOUT	I	No use. (OPEN)
13	P103	O	MUTE
14	P102	O	POWER
15	P101	I	No use. (GND)
16	P100	O	Speaker ON/OFF conversion
17	P113	I	Volume position detection input
18	P112	I	VOL LIMIT IN
19	P111	I/O	DATA
20	P110	I/O	BUSY
21	Vcc	I	Power supply pin
22	P93	O	Super woofer LED drive
23	P92	O	SURROUND
24	P91	I	No use. (OPEN)
25	P90	O	TAPE LED drive
26	P83	O	DATA/LD LED drive
27	P82	O	TUNER LED drive
28	P81	O	CD LED drive
29	P80	I	No use. (OPEN)
30	P43	I	Speaker OFF detection input
31	P42	I	No use. (GND)
32	P41	I	No use. (GND)
33	P40	I	No use. (GND)
34	P33	I	No use. (OPEN)
35	P32	I	No use. (OPEN)
36	P31	O	Key scan output signal 1
37	P30	O	Key scan output signal 0
38	P03/SI	I	Key return input signal 3
39	P02/SO	I	Key return input signal 2
40	P01/SCK	I	Key return input signal 1
41	P00/INTC	I	Key return input signal 0
42	VSS	I	GND pin

Pin functions

CIRCUIT DESCRIPTION

A-711/711L

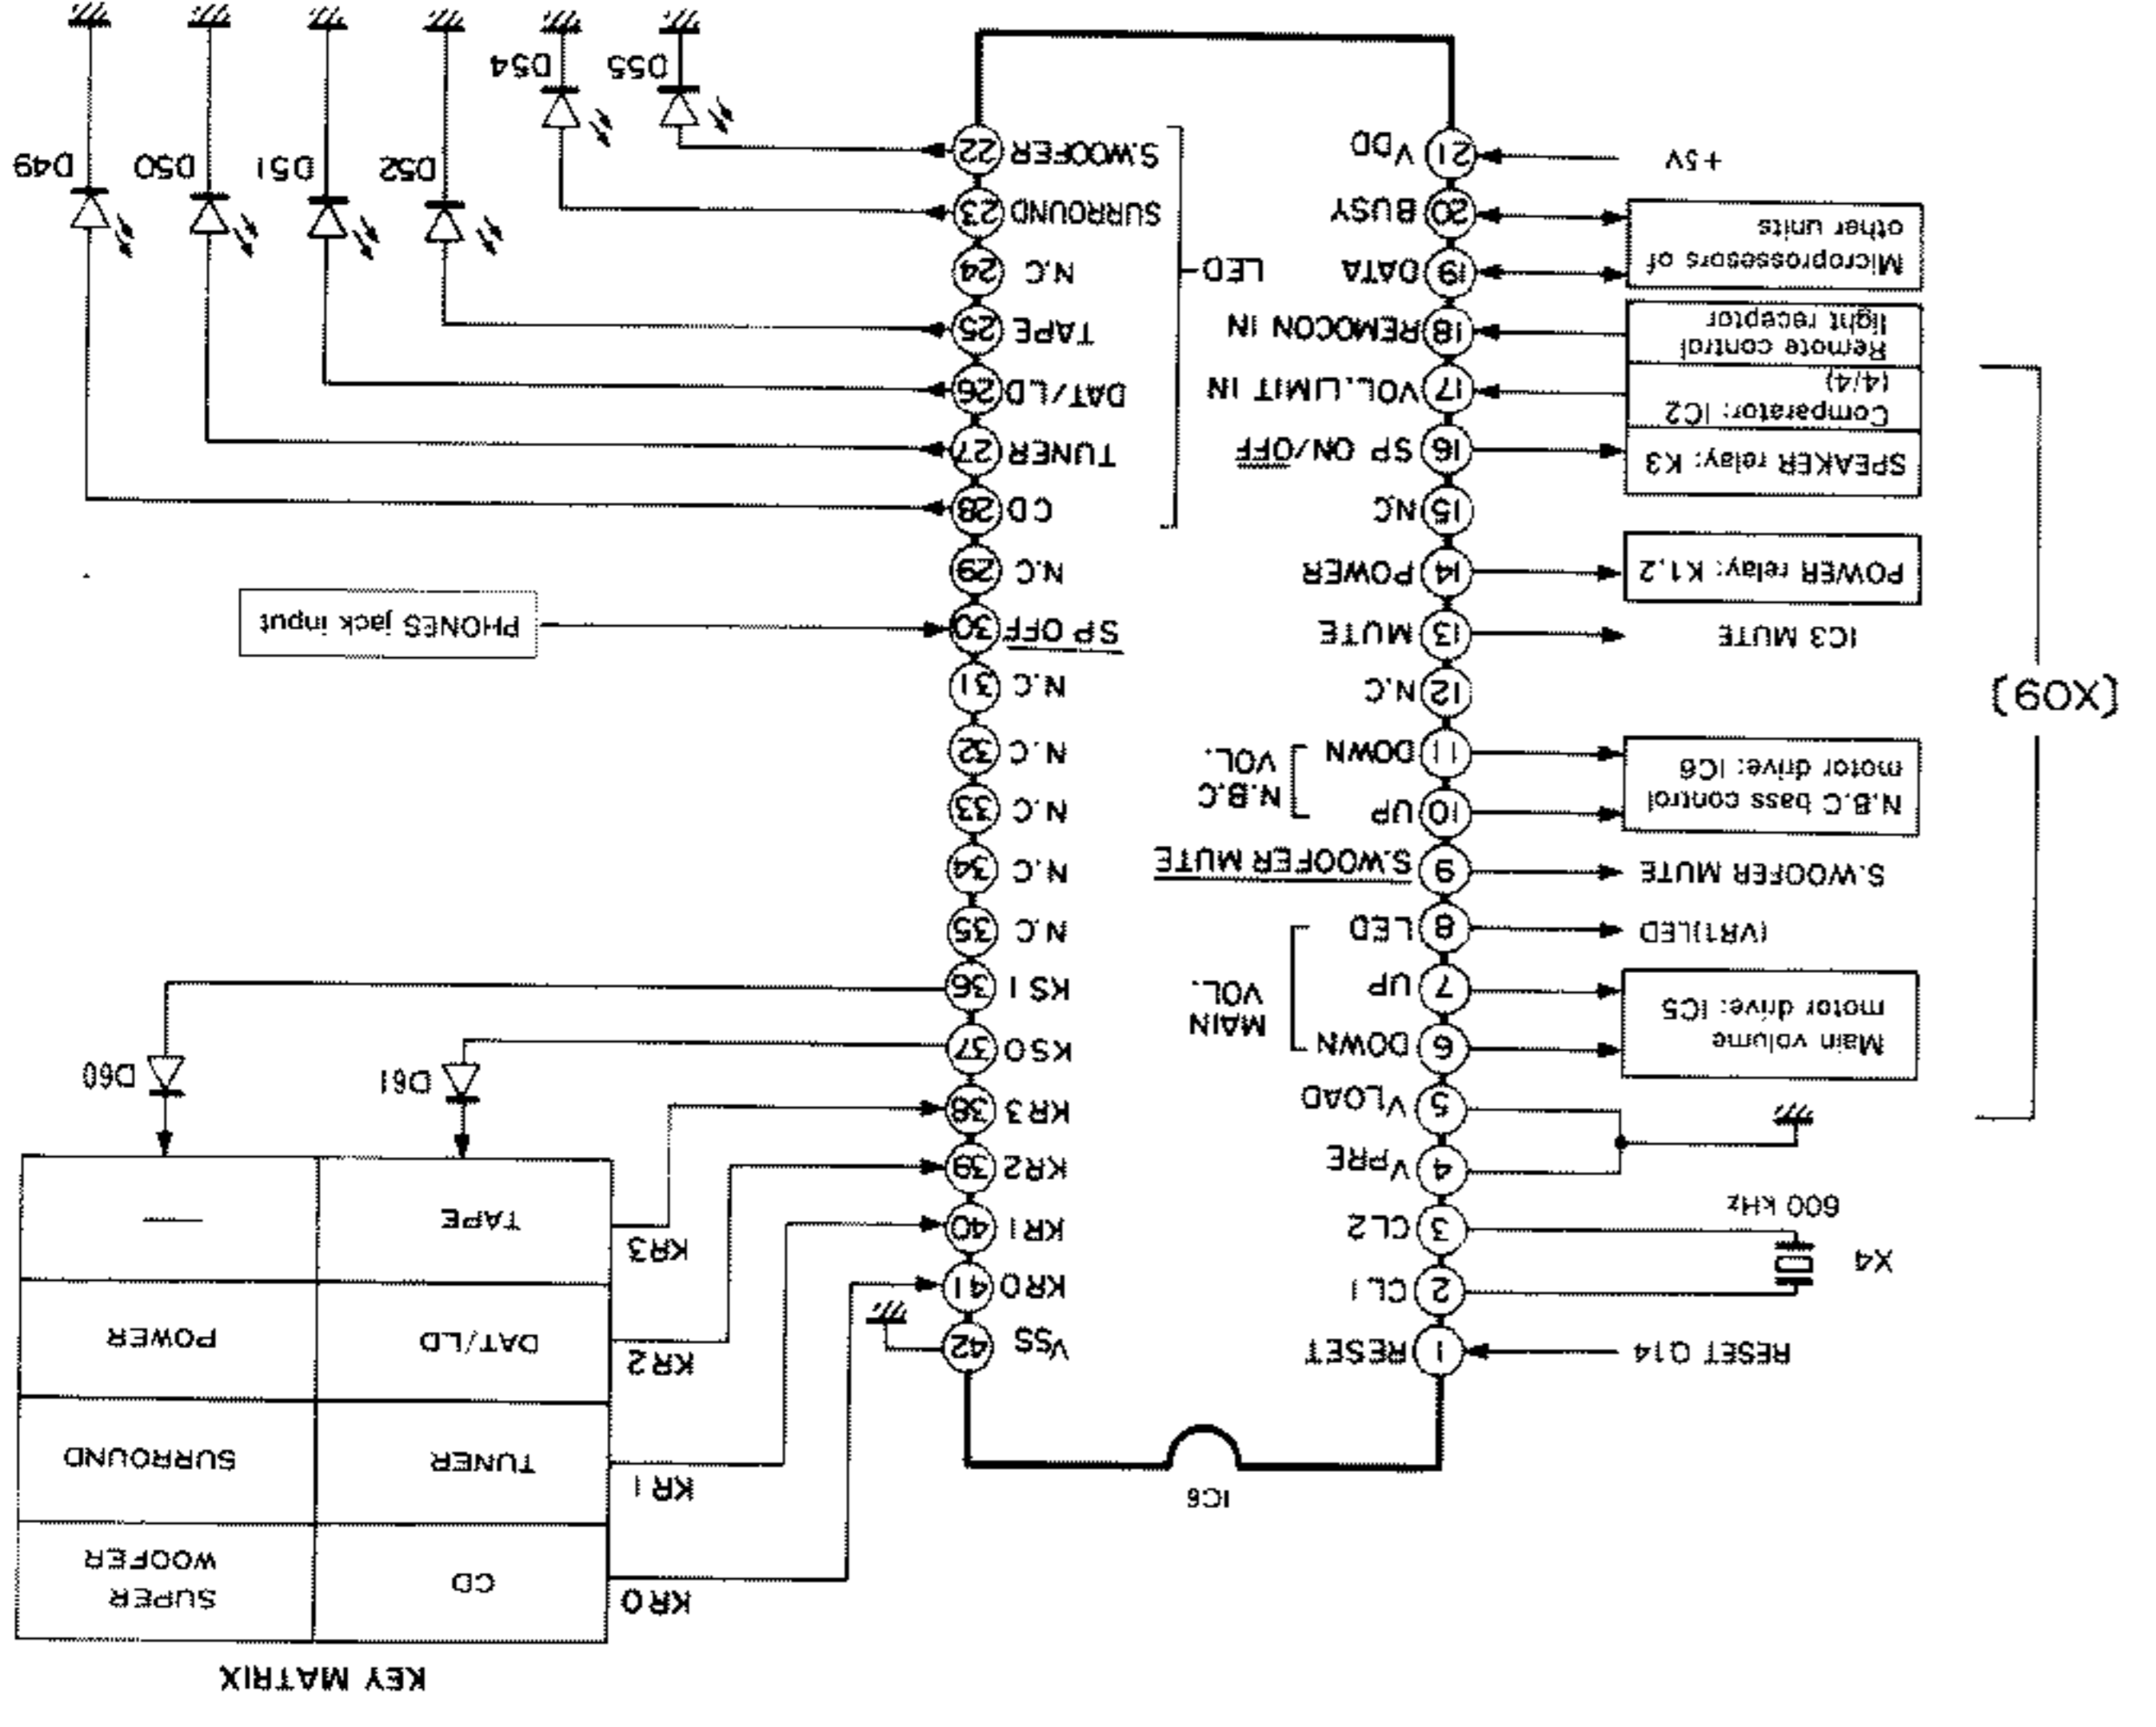


Terminal connection diagram & key matrix connection

IC6: #PD7538ACU-232 (X05-3992-71)
AMP, microprocessor

CIRCUIT DESCRIPTION

A-711/711L

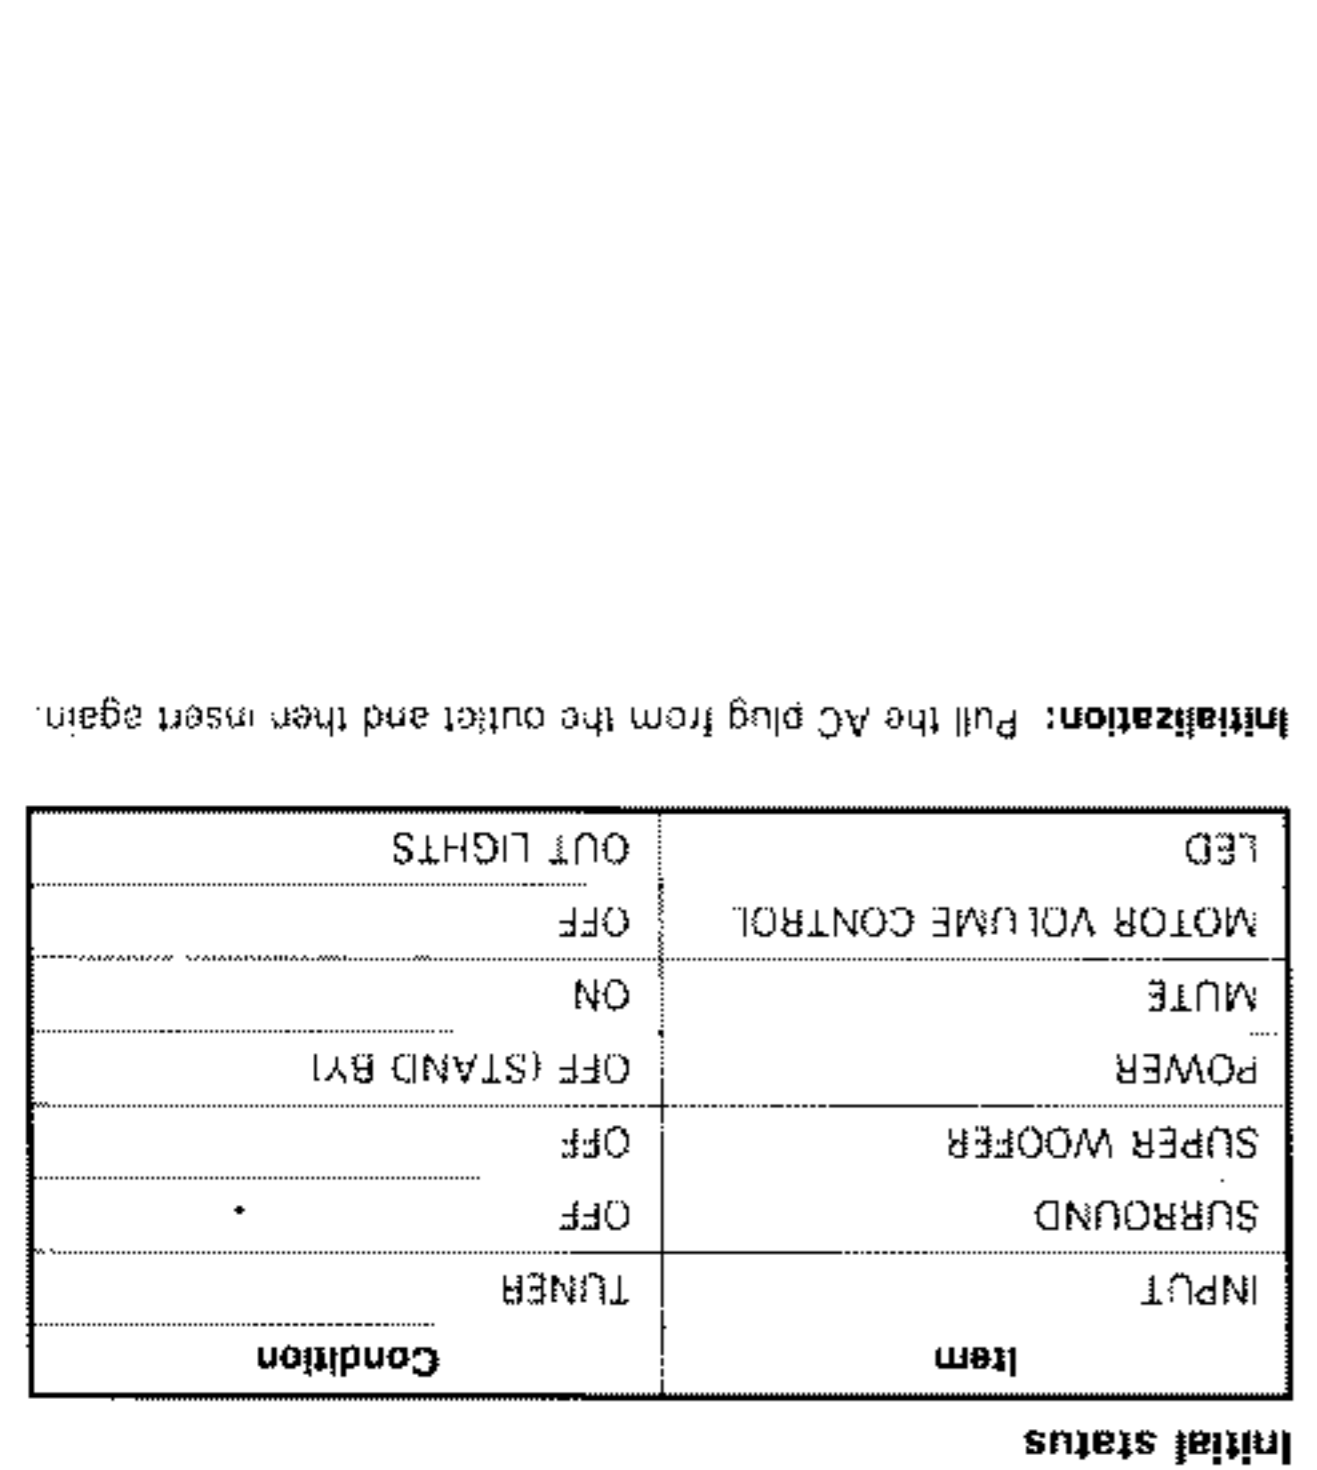

Timing chart

CIRCUIT DESCRIPTION

A-711/711L

(1) POWER KEY ON
When the switching of POWER ON/OFF or selector is executed in the condition of SUPER WOOFER ON, S.WOOFER MUTE will have the same timing as MUTE (the logic is reverse).

(2) SELECTOR, SURROUND, SUPER WOOFER KEY ON
When the switching of POWER ON/OFF or selector is executed in the condition of SUPER WOOFER ON, S.WOOFER MUTE will have the same timing as MUTE (the logic is reverse).

a) Setting method
While pressing the "CD" key and tuning "DOWN" key, insert the AC plug into the outlet and simultaneously enter the TEST MODE. When you wish to enter only the amplifier into the TEST MODE, pull out the AC plug from the outlet in the POWER ON condition and insert the AC plug into the outlet while pressing the "CD" key.

b) Clearing method
In order to simultaneously clear the amplifier and tuner, press either the ten keys, "BAND" key or "UP/DOWN" key, or pull out the AC from the outlet. In order to clear the tuner, refer to the tuner microprocessor (page 22).


c) Contents of operation
① POWER is turned ON and all the LEDs are lit on.
② By pressing "S.WOOFER", both the VOLUME and N.B. CIRCUIT are simultaneously up, and remain to be up for 2 seconds. Then, they go DOWN and STOPS after about 12 seconds.
③ Even if the "CD", "TAPE", "DATA LD", "SURROUND" and "POWER" keys are pressed, they are not accepted.

Initial status

Item	Condition
INPUT	TUNER
SURROUND	OFF
SUPER WOOFER	OFF (STAND BY)
MUTE	ON
POWER	OFF (STAND BY)
MOTOR VOLUME CONTROL	OFF
LED	OUT LIGHTS

IC5, 6: TA8409S (X09-3142-71)
Volume motor drive IC

Block diagram

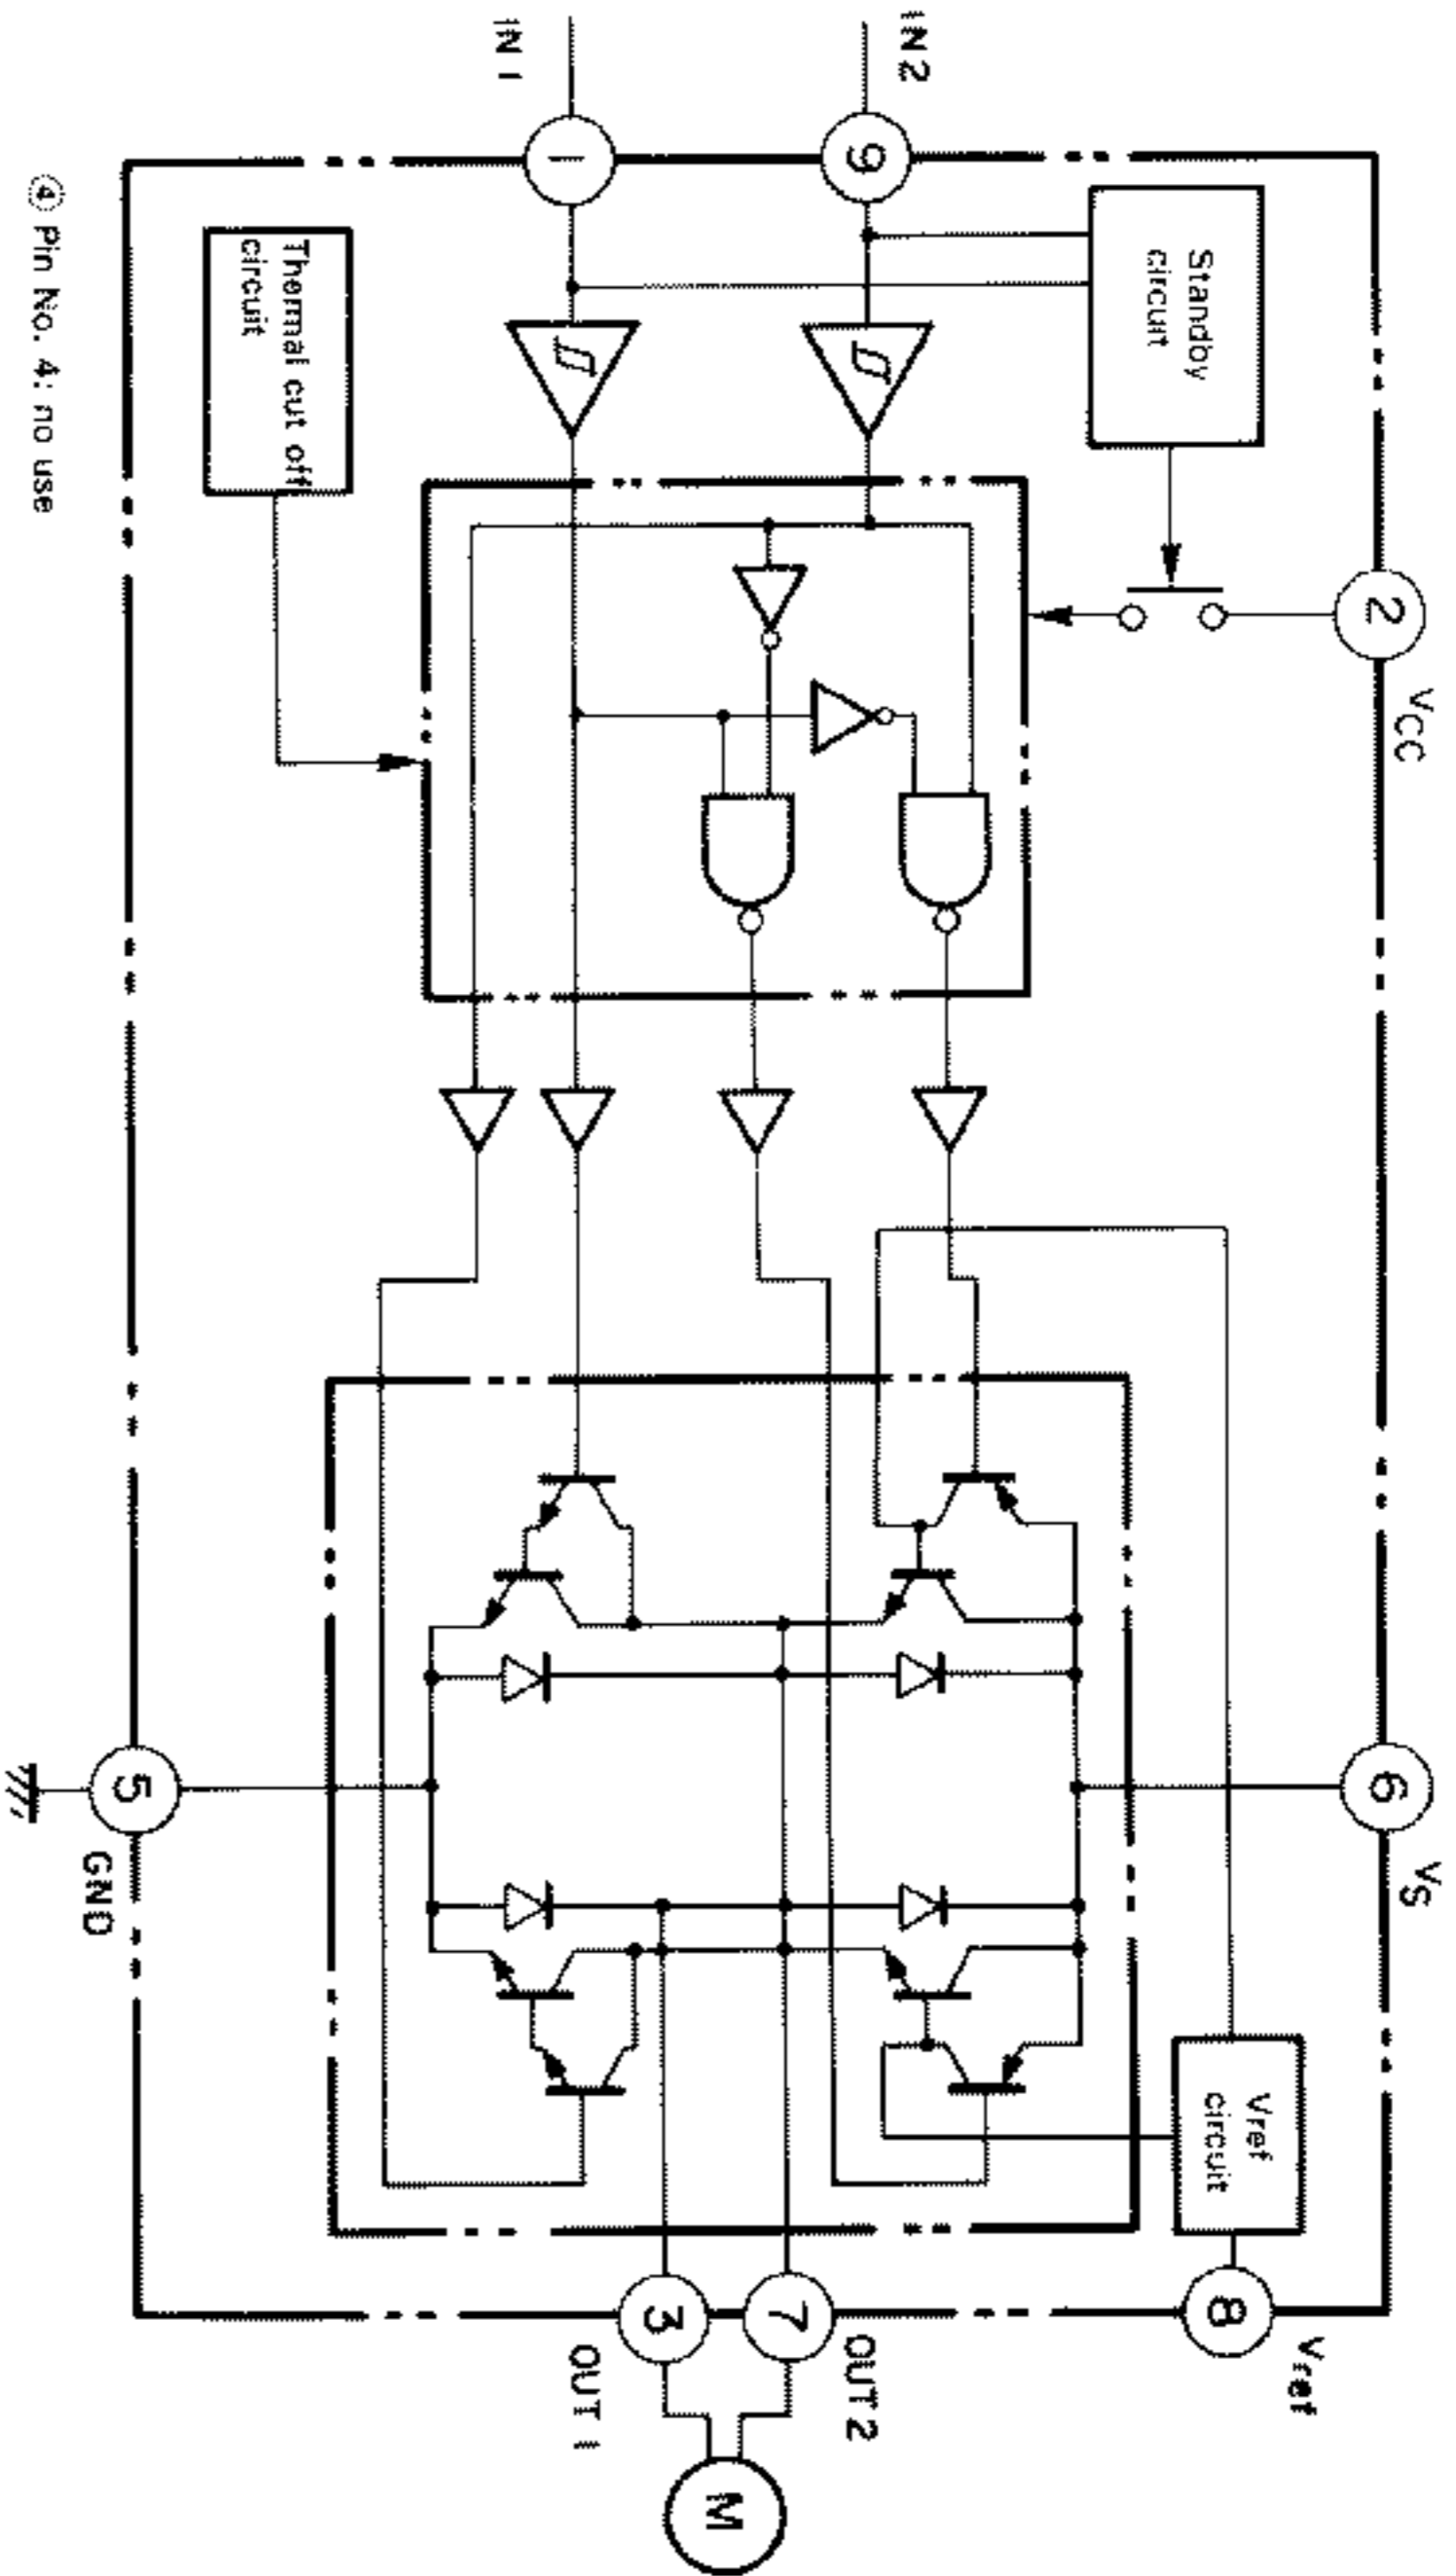

Truth table

INPUT	OUTPUT	MODE
IN 1	OUT 1	Pin No. of IC5, 6
IN 2	OUT 2	Motor mode
0	∞	STOP
0	L	CW
1	L	CCW
1	L	BRAKE


∞: High impedance
Input "H": active

Tuner unit

† If alignment point is "...", confirm the value.
‡ If not, replace the front-end pack and ICA433-PL3

No.	ITEM	SETTING	REF. POINT	ALIGNMENT POINTS	ALIGN. P.N.	FIG.
1	BAND EDGE (1)	-	Connect a DC voltmeter between TP10(VT) and TP13(GND)	RT 3MHz	1.6V	(a)
2	BAND EDGE (2)	-	Connect a DC voltmeter between TP10(VT) and TP13(GND)	105.0MHz	8.0V	(a)
3	DISCRIMINATOR	98.0MHz 1kHz, 75kHz dev 600μA(I) (input)	Connect a DC voltmeter between TP11 and TP12	AUTO or MONO 98.0MHz	0V	(b)
4	VCO	98.0MHz 0 dev 1000μA(I) (input)	Connect a frequency counter between TP5 and GND	AUTO 98MHz (X03)	13.0MHz	(c)
5	DISCRETION (STEREO)	98.0MHz 1kHz, 56.25kHz dev P1:0.28, 75kHz dev S1:0.14μA(I) (input)	(D)	98.0MHz (X07)	Minimum distortion.	
6	SEPARATION (E.J. type only)	98.0MHz Stereo signal 600μA(I) (input)	(D)	AUTO 98.0MHz (X03)	Minimum cross-talk.	
7	TUNING LEVEL	98.0MHz 9 dev 1400μA(I) (input), 750	Keep the AM loop antenna installed.	VRI (X05)	Adjust VRI and stop at the point where B(LITEN) goes on.	
(1)	BAND EDGE (1)	-	Connect a DC voltmeter between TP10(VT) and TP13(GND)	530kHz (S1)1kHz	1.3V	(a)
(2)	BAND EDGE (2)	-	Connect a DC voltmeter between TP10(VT) and TP13(GND)	1810kHz (1602kHz)	1.0V	(a)
(3)	RF ALIGNMENT	990kHz 400Hz, 30% mod 340μA(I) (input)	(D)	990kHz BLACK (X05)	Maximum amplitude and symmetry of the oscilloscope display.	
AM-1, W SELECTOR (E.J. type only) Keep the AM loop antenna installed. SELECTOR: LW						
(4)	BAND EDGE (1)	-	Connect a DC voltmeter between TP10(VT) and TP13(GND)	153kHz	2.3V	(a)
(5)	BAND EDGE (2)	-	Connect a DC voltmeter between TP10(VT) and TP13(GND)	281kHz	1.0V	(a)
Repeat alignments (4) and (5) several times.						
(6)	RF ALIGNMENT	215kHz 100Hz, 50% mod 330μA(I) (input)	(D)	215kHz E3 (X05)	Maximum amplitude and symmetry of the oscilloscope display.	


Connection

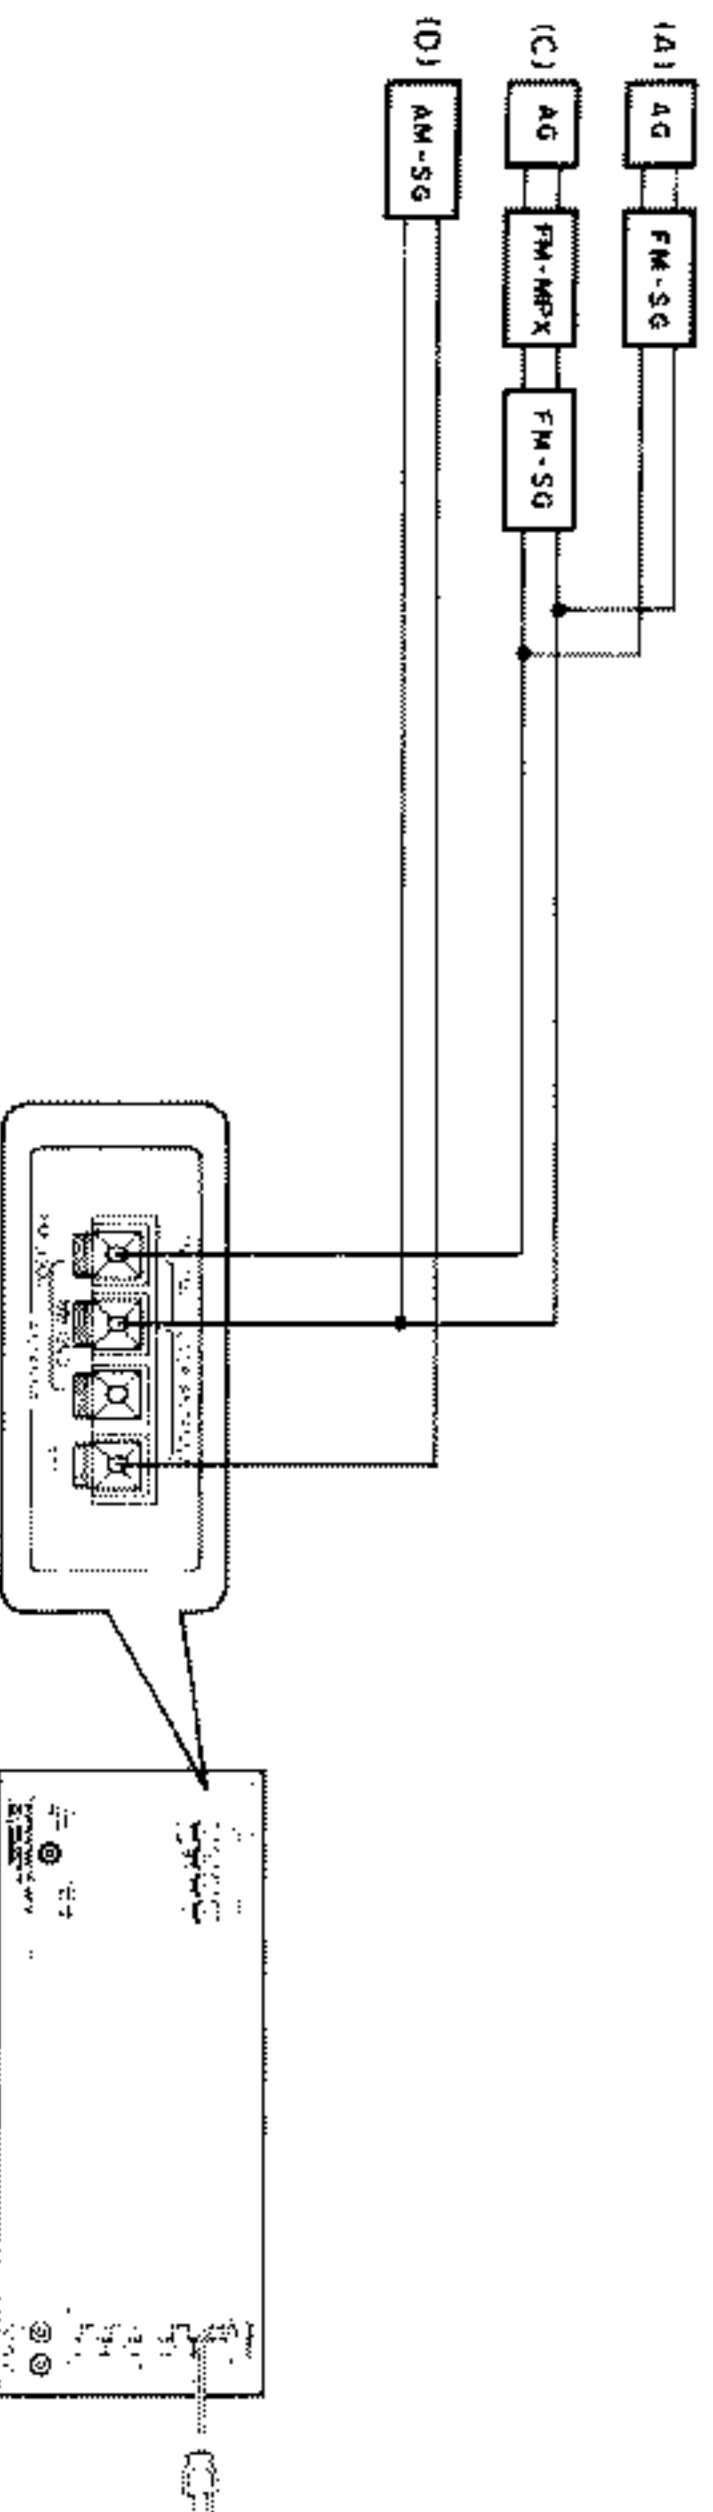

Truth table

MODE	INPUT	OUTPUT
Motor mode	IN 1	OUT 1
	IN 2	OUT 2
STOP	∞	∞
CCW	L	L
CCW	L	L
∞	∞	∞

Pin No. of IC5, 6
 ① IN 1
 ② IN 2
 ③ OUT 1
 ④ OUT 2
 ⑤ High impedance input (H active)

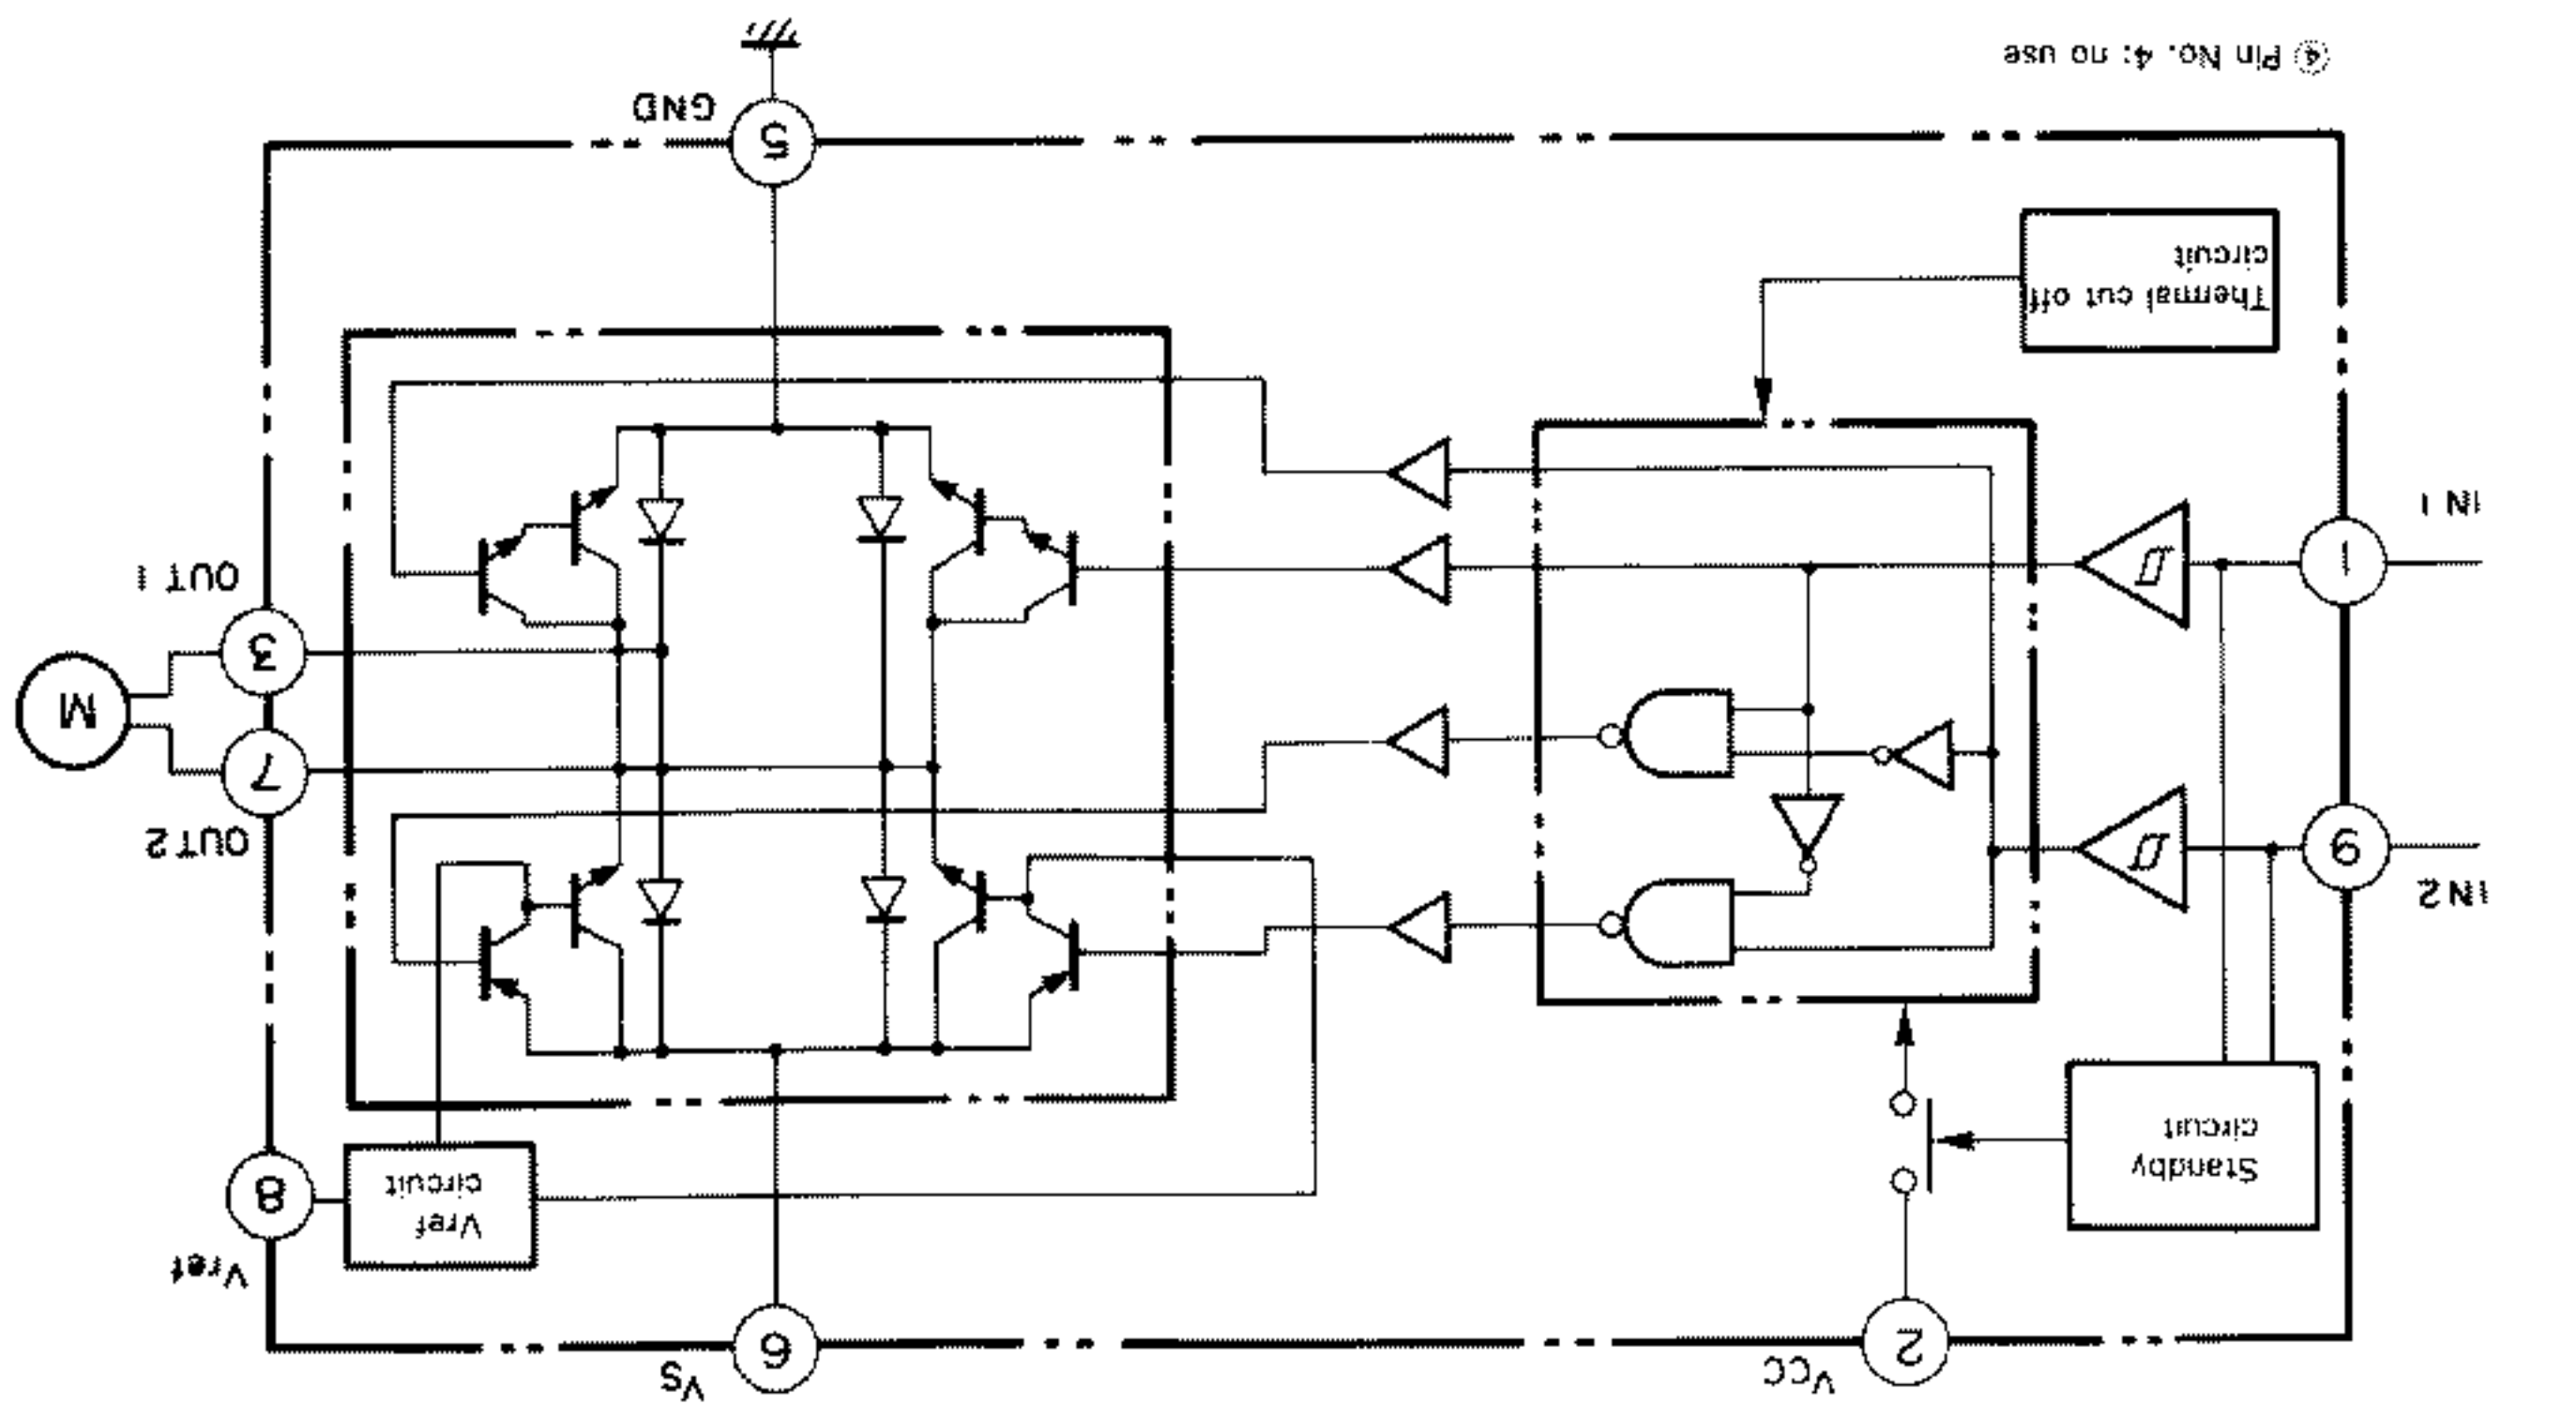

IC5, 6: TA8409S (X09-3142-71)
 Volume motor drive IC

CIRCUIT DESCRIPTION

A-711/711L

Note (a) As regards the positive (+) side of the frequency counter, arrange as short a distance as possible between pin 74 of IC5 and 1P of the input stage of the counter.

Adjustment method: Use a high-impedance buffer to avoid frequency deviation.

Connect a high-accuracy frequency counter to pin 74 by way of the FET probe shown above, and adjust the frequency fully up to the first digit of the X3 reference frequency 4,194,304 Hz. (Connect the negative (-) side of the frequency counter to the GND side of C99.)

(2) Even if within the standard, for further improved accuracy, change the constant of C99 in the crystal oscillator circuit of microprocessor IC5 and add a trimmer.

(3) Monthly error calculation method

For example, when the result of measurement at pin 74 by the frequency counter is $f_x = 4,194,275$ Hz,

Reference frequency $f_0 = 4,194,304$ [Hz]

$$\text{Monthly error [sec]} = \frac{f_0}{f_x - f_0} \times \text{the number of seconds taken for one month}$$

$$= \frac{4,194,304}{4,194,275 - 4,194,304} \times 4,194,304$$

$$= 160 \times 60 \times 24 \times 30$$


* A minus value as the monthly error means a loss.

The timer accuracy is within ± 40 seconds for one month as a standard. For improved timer accuracy, perform the following procedure:

Note (b) Perform the trimmer adjustment after energization of around 10 minutes at normal temperature.

capacitor on the rear.


Note: Disconnect the C99 connected on the X05 board, and add a trimmer. (If necessary, make a hole.) Next, connect a 22 pF titanium capacitor on the rear.

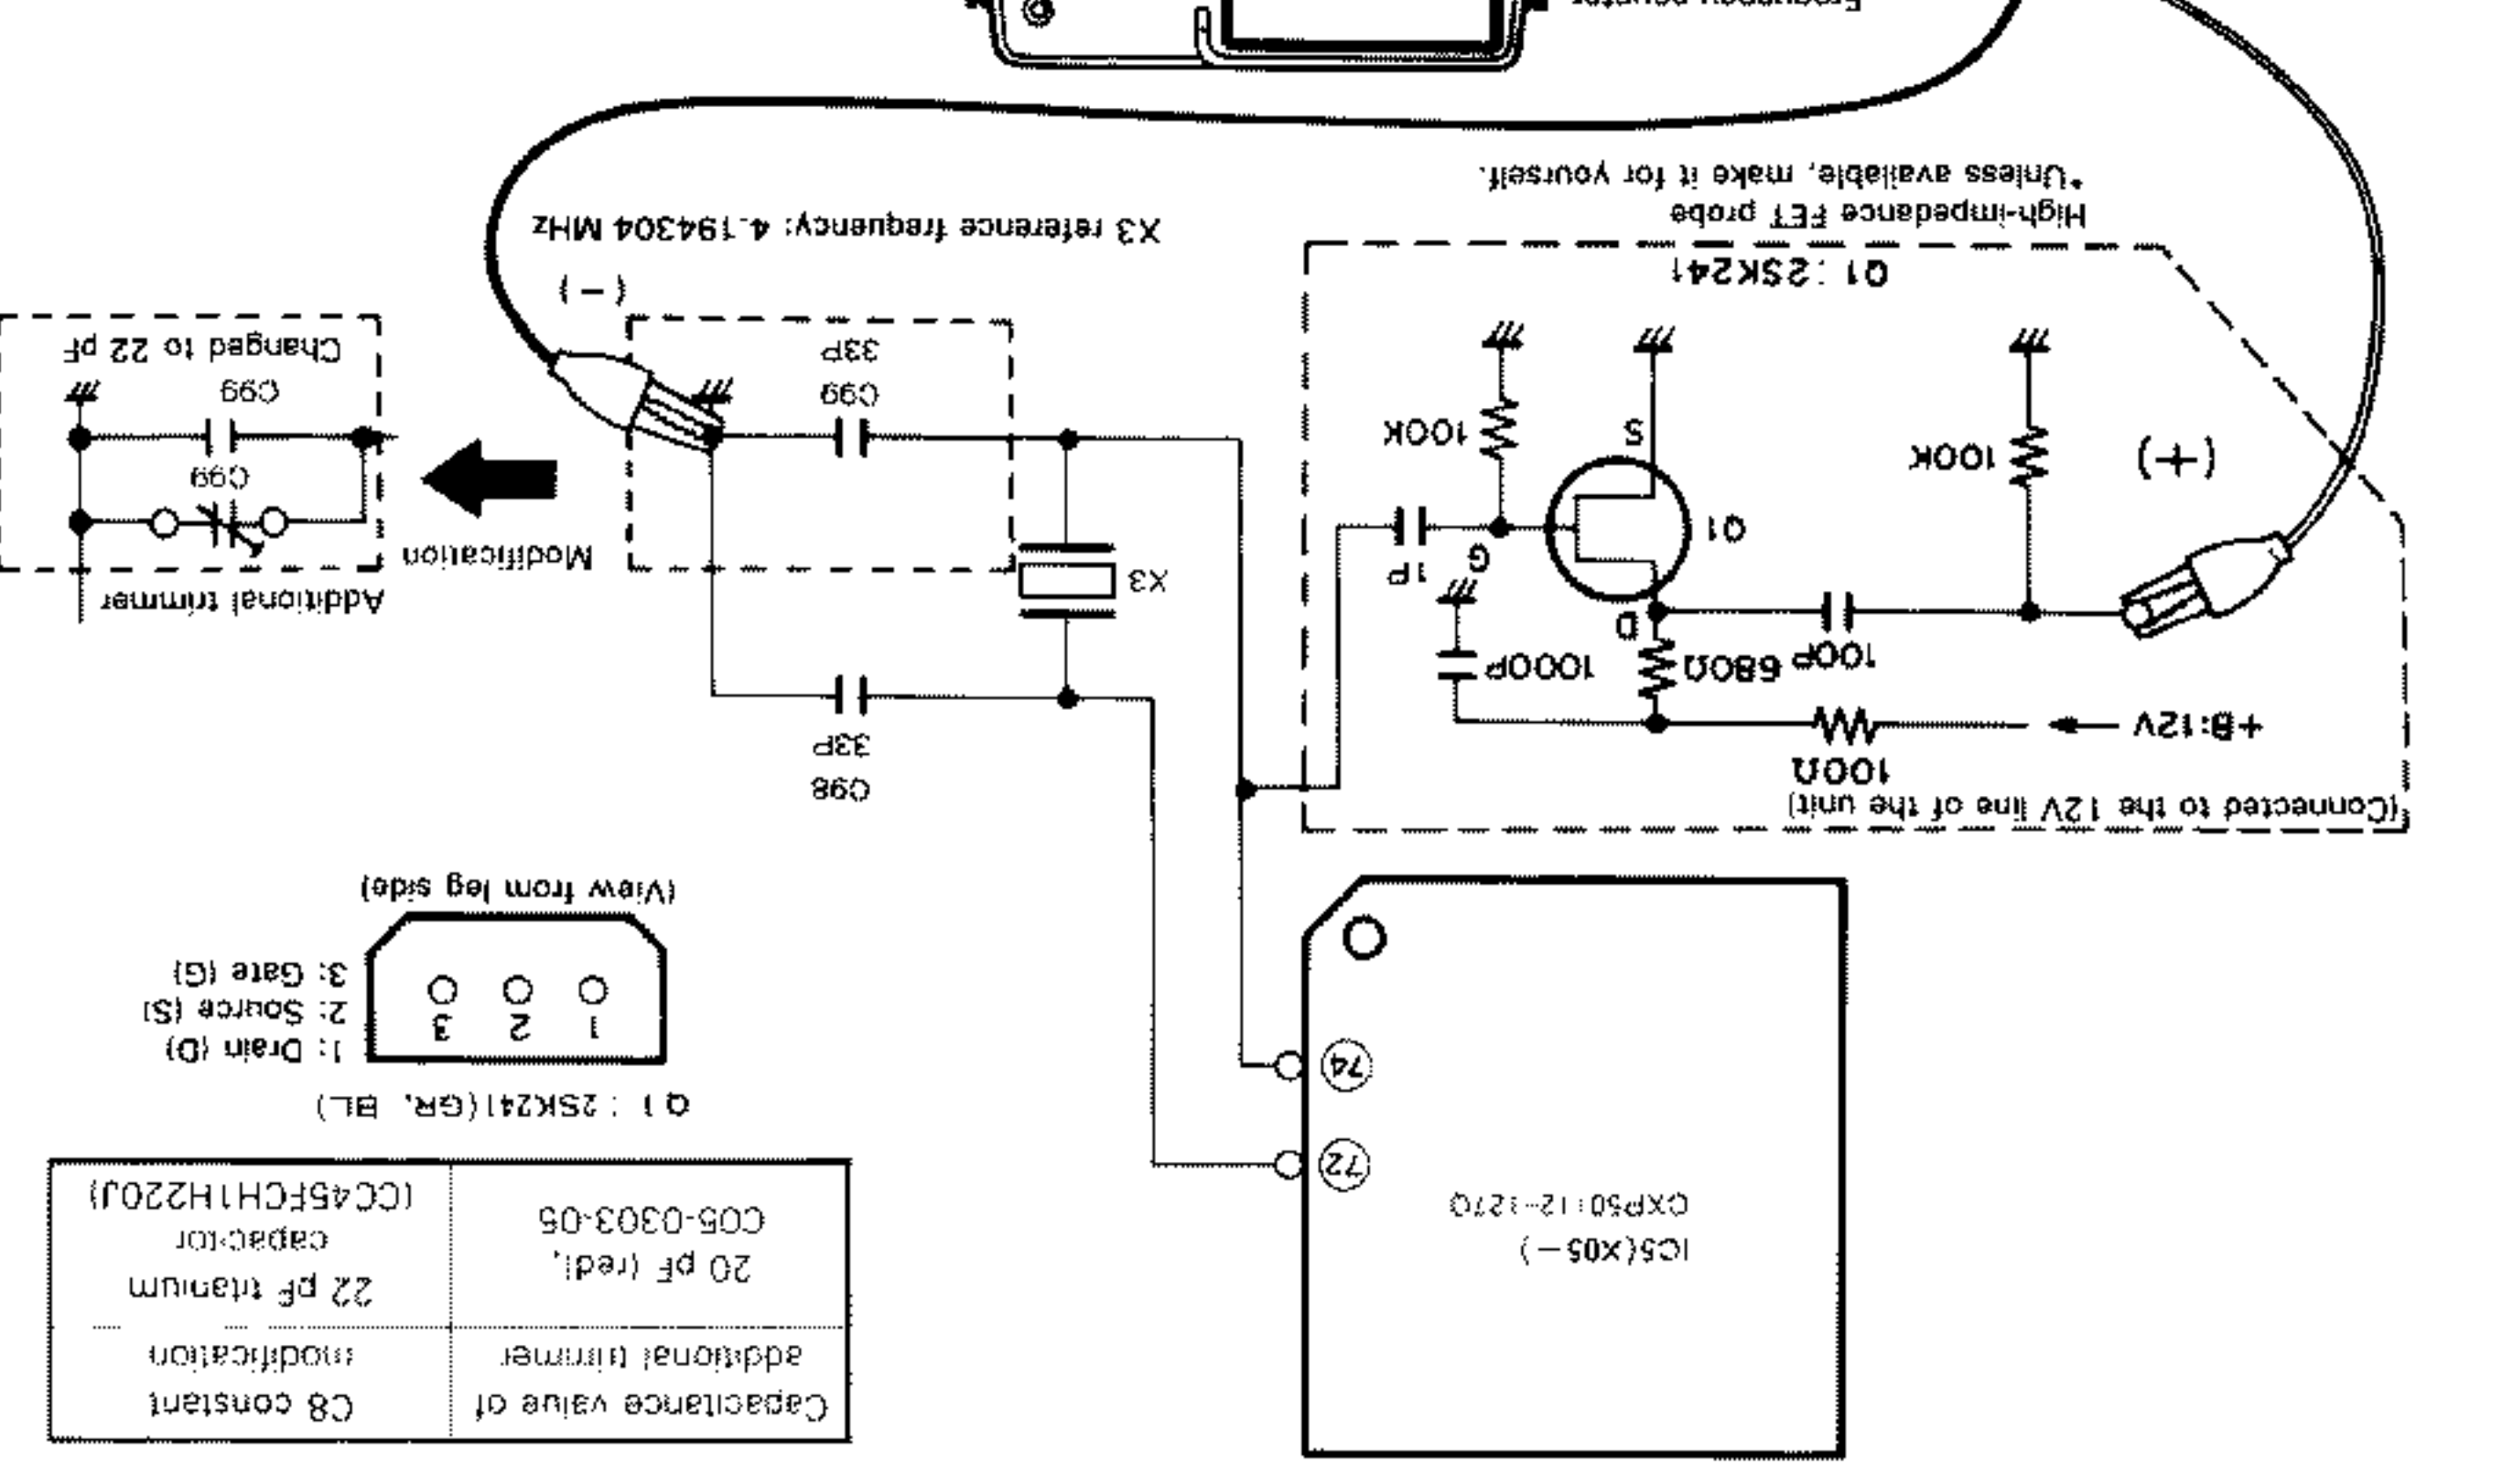

ADJUSTMENT

A-711/711L

Connection

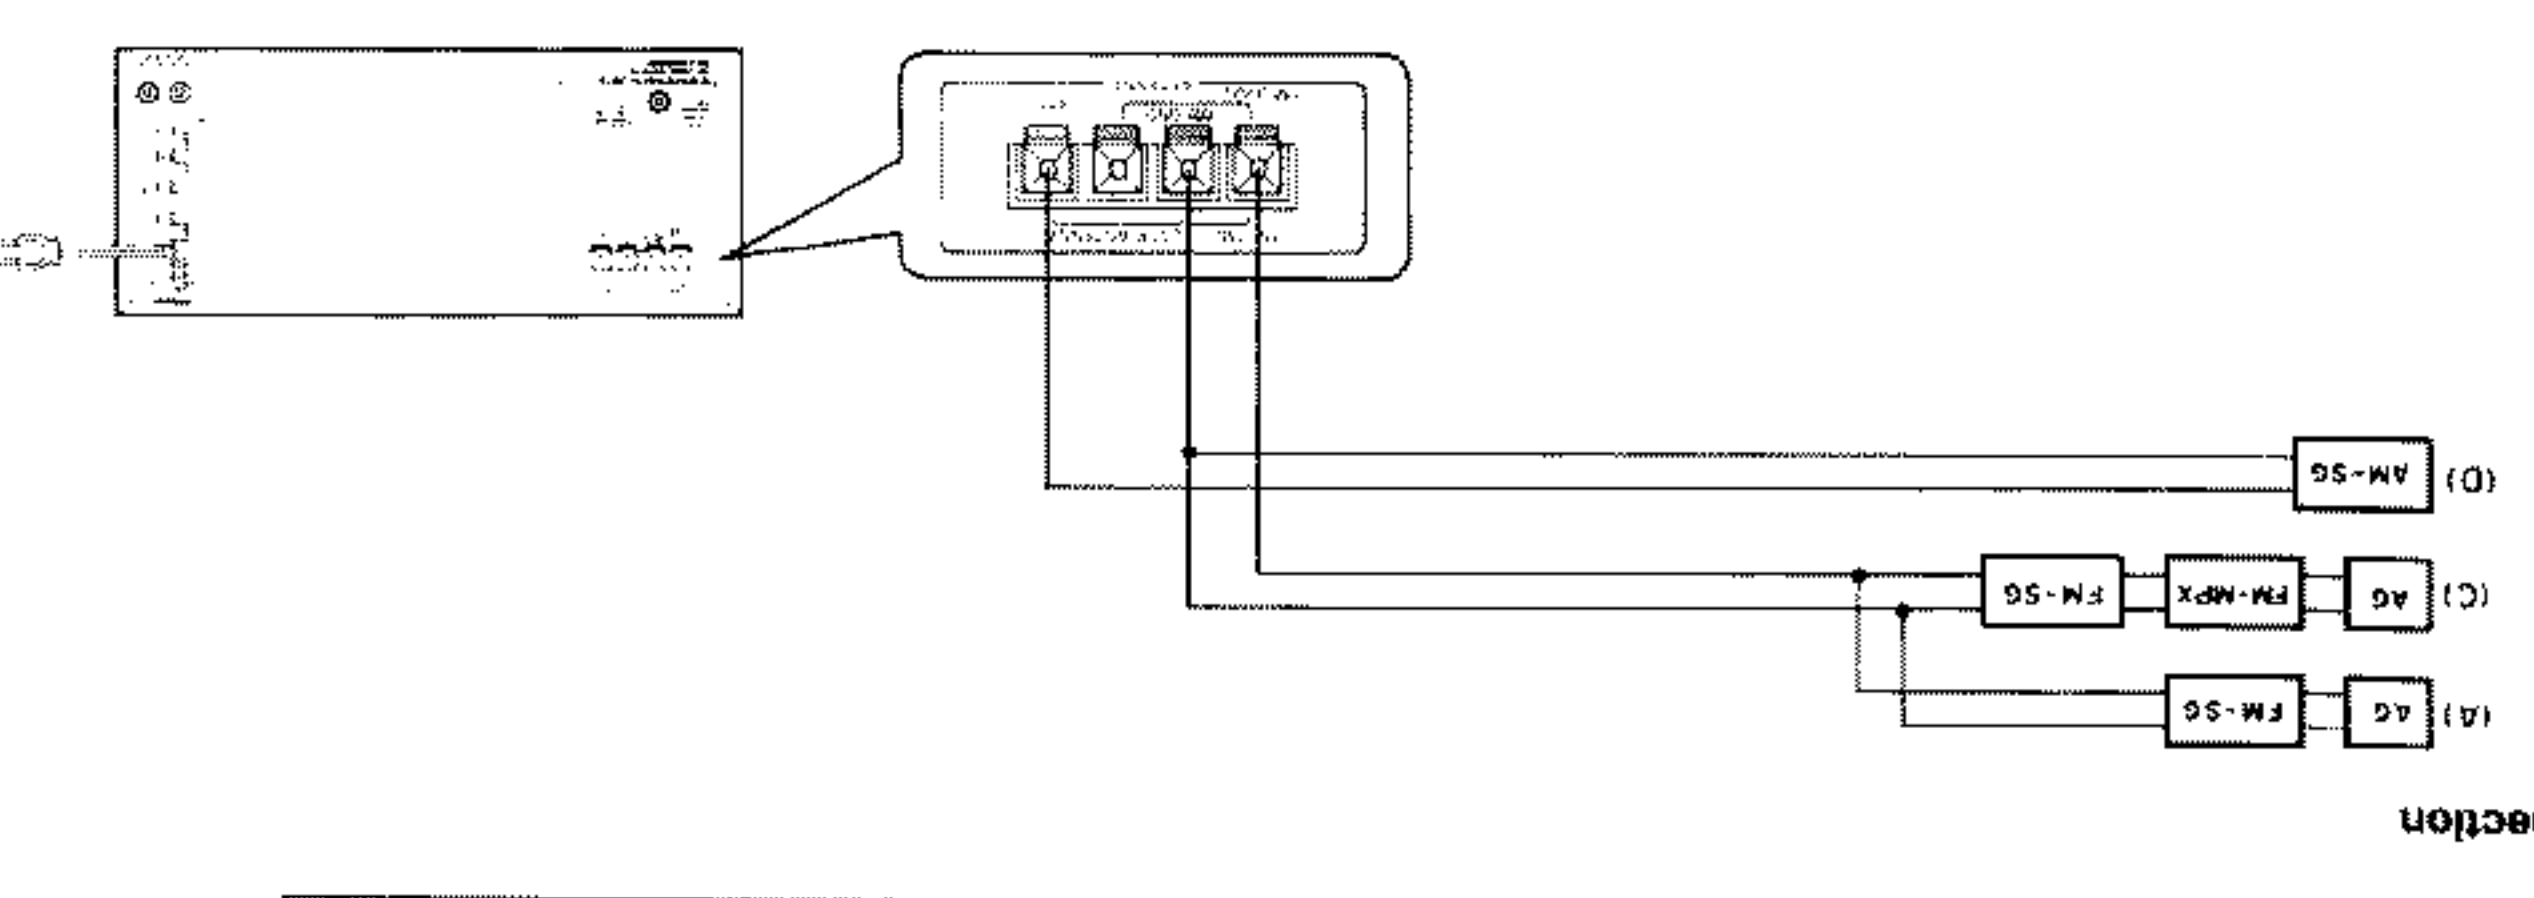

Item	Setting	Value	Notes
(1) BAND EDGE	TP1(C) and TP1(C)B	530Hz	Connect a DC voltmeter between TP1(C) and TP1(C)B.
(2) BAND EDGE	TP1(C) and TP1(C)B	1610Hz	Connect a DC voltmeter between TP1(C) and TP1(C)B.
(3) BAND EDGE	TP1(C) and TP1(C)B	2810Hz	Connect a DC voltmeter between TP1(C) and TP1(C)B.
(4) BAND EDGE	TP1(C) and TP1(C)B	1530Hz	Connect a DC voltmeter between TP1(C) and TP1(C)B.
(5) BAND EDGE	TP1(C) and TP1(C)B	2810Hz	Connect a DC voltmeter between TP1(C) and TP1(C)B.
(6) BAND ALIGNMENT	400Hz, 90% mod	210Hz	Repeat alignments (4) and (5) several times.
(7) TUNING LEVEL	98 OHM	98 OHM	Keep the all loop antenna installed.
(8) SEPARATION	98 OHM	98 OHM	Adjust VBI and stop at the point where IIT(173D) goes on.
(9) DISTORTION	98 OHM	98 OHM	Minimum distortion.
(10) VCO	98 OHM	98 OHM	19.00Hz
(11) DISMINUATOR	98 OHM	98 OHM	0V
(12) BAND EDGE	98 OHM	98 OHM	8.0V
(13) BAND EDGE	98 OHM	98 OHM	1.6V

Tuner unit

ADJUSTMENT


A-711/711L

VOLTAGE TABLES


Item	Setting	Value	Notes
Q1	1.2V	1.2V	
Q2	0.7V	0.7V	
Q3	0.7V	0.7V	
Q4	0.7V	0.7V	
Q5	0.7V	0.7V	
Q6	0.7V	0.7V	
Q7	0.7V	0.7V	
Q8	0.7V	0.7V	
Q9	0.7V	0.7V	
Q10	0.7V	0.7V	
Q11	0.7V	0.7V	
Q12	0.7V	0.7V	
Q13	0.7V	0.7V	
Q14	0.7V	0.7V	
Q15	0.7V	0.7V	
Q16	0.7V	0.7V	
Q17	0.7V	0.7V	
Q18	0.7V	0.7V	
Q19	0.7V	0.7V	
Q20	0.7V	0.7V	
Q21	0.7V	0.7V	
Q22	0.7V	0.7V	
Q23	0.7V	0.7V	
Q24	0.7V	0.7V	
Q25	0.7V	0.7V	
Q26	0.7V	0.7V	
Q27	0.7V	0.7V	
Q28	0.7V	0.7V	
Q29	0.7V	0.7V	
Q30	0.7V	0.7V	
Q31	0.7V	0.7V	
Q32	0.7V	0.7V	
Q33	0.7V	0.7V	
Q34	0.7V	0.7V	
Q35	0.7V	0.7V	
Q36	0.7V	0.7V	
Q37	0.7V	0.7V	
Q38	0.7V	0.7V	
Q39	0.7V	0.7V	
Q40	0.7V	0.7V	
Q41	0.7V	0.7V	
Q42	0.7V	0.7V	
Q43	0.7V	0.7V	
Q44	0.7V	0.7V	
Q45	0.7V	0.7V	
Q46	0.7V	0.7V	
Q47	0.7V	0.7V	
Q48	0.7V	0.7V	
Q49	0.7V	0.7V	
Q50	0.7V	0.7V	
Q51	0.7V	0.7V	
Q52	0.7V	0.7V	
Q53	0.7V	0.7V	
Q54	0.7V	0.7V	
Q55	0.7V	0.7V	
Q56	0.7V	0.7V	
Q57	0.7V	0.7V	
Q58	0.7V	0.7V	
Q59	0.7V	0.7V	
Q60	0.7V	0.7V	
Q61	0.7V	0.7V	
Q62	0.7V	0.7V	
Q63	0.7V	0.7V	
Q64	0.7V	0.7V	
Q65	0.7V	0.7V	
Q66	0.7V	0.7V	
Q67	0.7V	0.7V	
Q68	0.7V	0.7V	
Q69	0.7V	0.7V	
Q70	0.7V	0.7V	
Q71	0.7V	0.7V	
Q72	0.7V	0.7V	
Q73	0.7V	0.7V	
Q74	0.7V	0.7V	
Q75	0.7V	0.7V	
Q76	0.7V	0.7V	
Q77	0.7V	0.7V	
Q78	0.7V	0.7V	
Q79	0.7V	0.7V	
Q80	0.7V	0.7V	
Q81	0.7V	0.7V	
Q82	0.7V	0.7V	
Q83	0.7V	0.7V	
Q84	0.7V	0.7V	
Q85	0.7V	0.7V	
Q86	0.7V	0.7V	
Q87	0.7V	0.7V	
Q88	0.7V	0.7V	
Q89	0.7V	0.7V	
Q90	0.7V	0.7V	
Q91	0.7V	0.7V	
Q92	0.7V	0.7V	
Q93	0.7V	0.7V	
Q94	0.7V	0.7V	
Q95	0.7V	0.7V	
Q96	0.7V	0.7V	
Q97	0.7V	0.7V	
Q98	0.7V	0.7V	
Q99	0.7V	0.7V	
Q100	0.7V	0.7V	

PC BOARD (Component side view)





(Y) TYPE



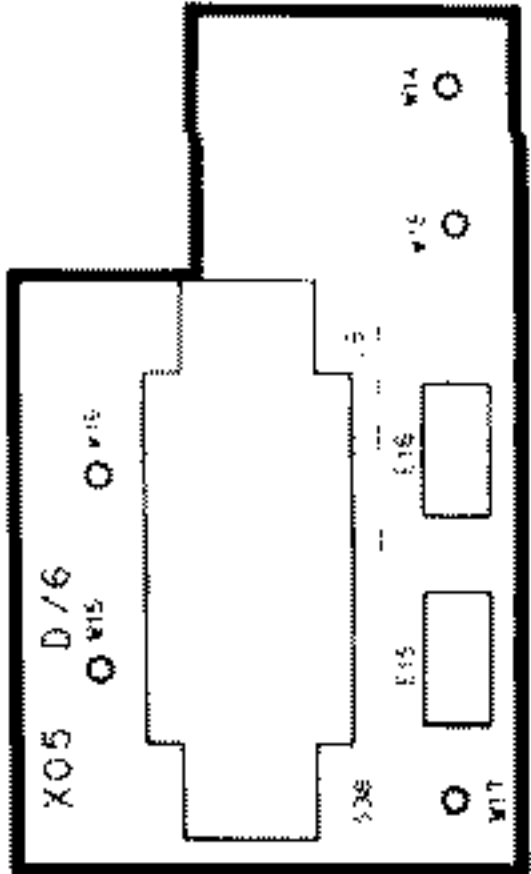


(K, P) TYPE

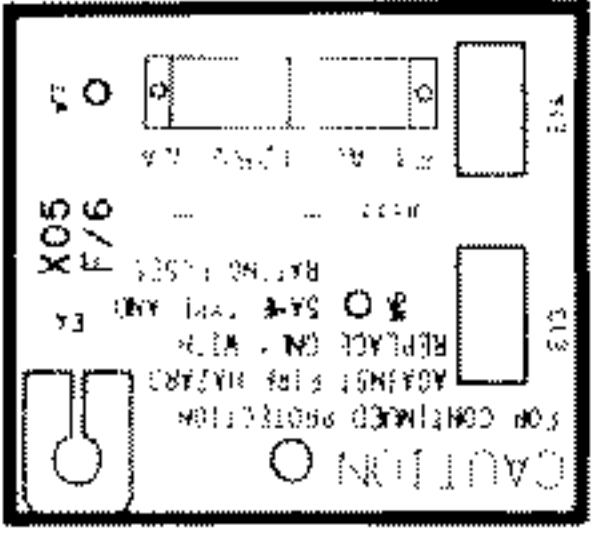

(M) TYPE

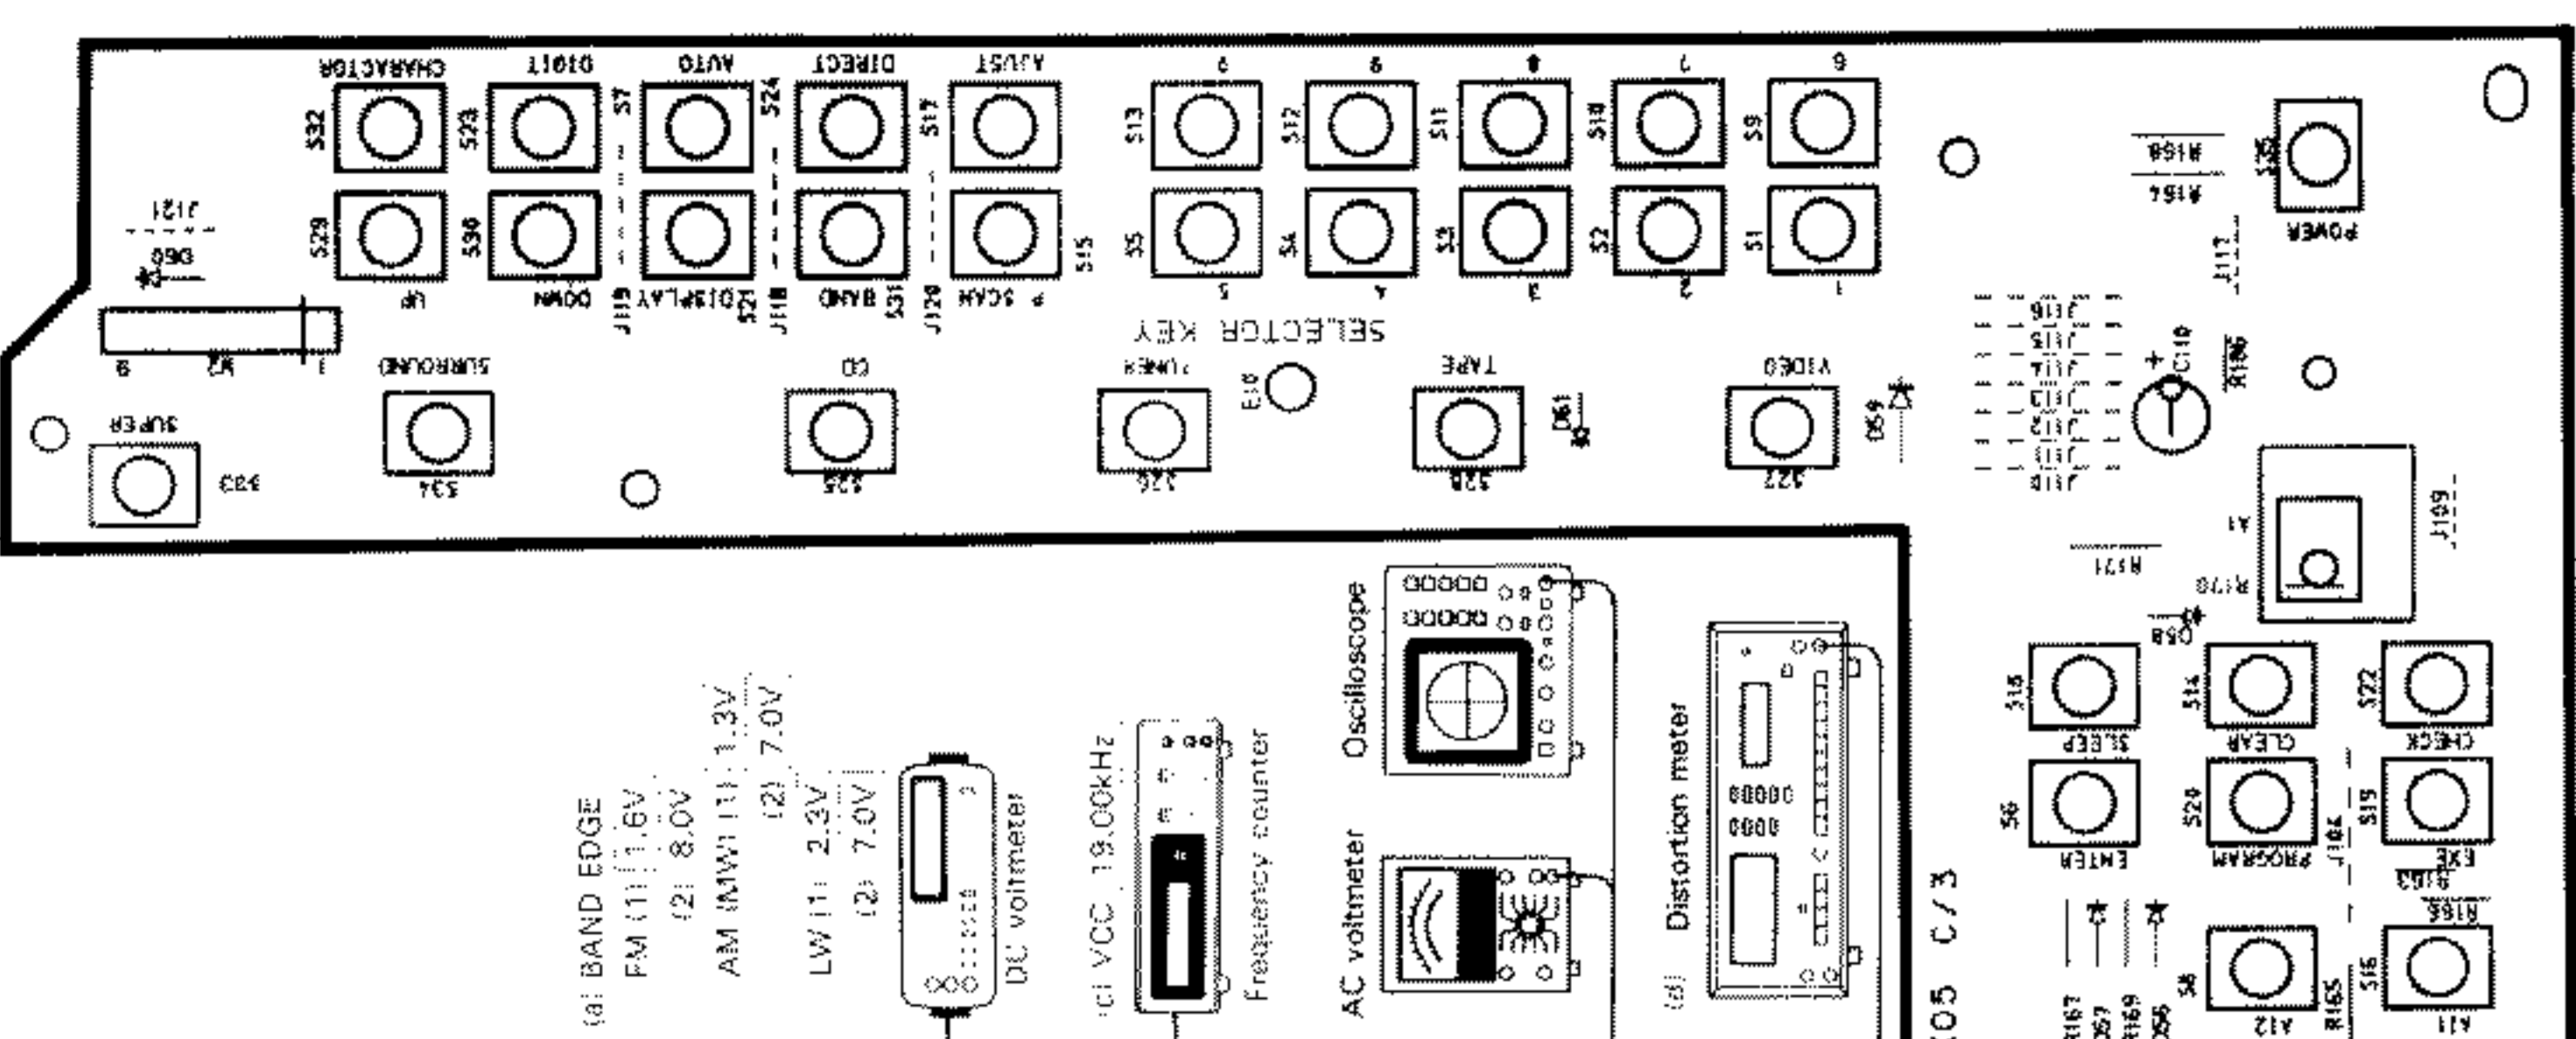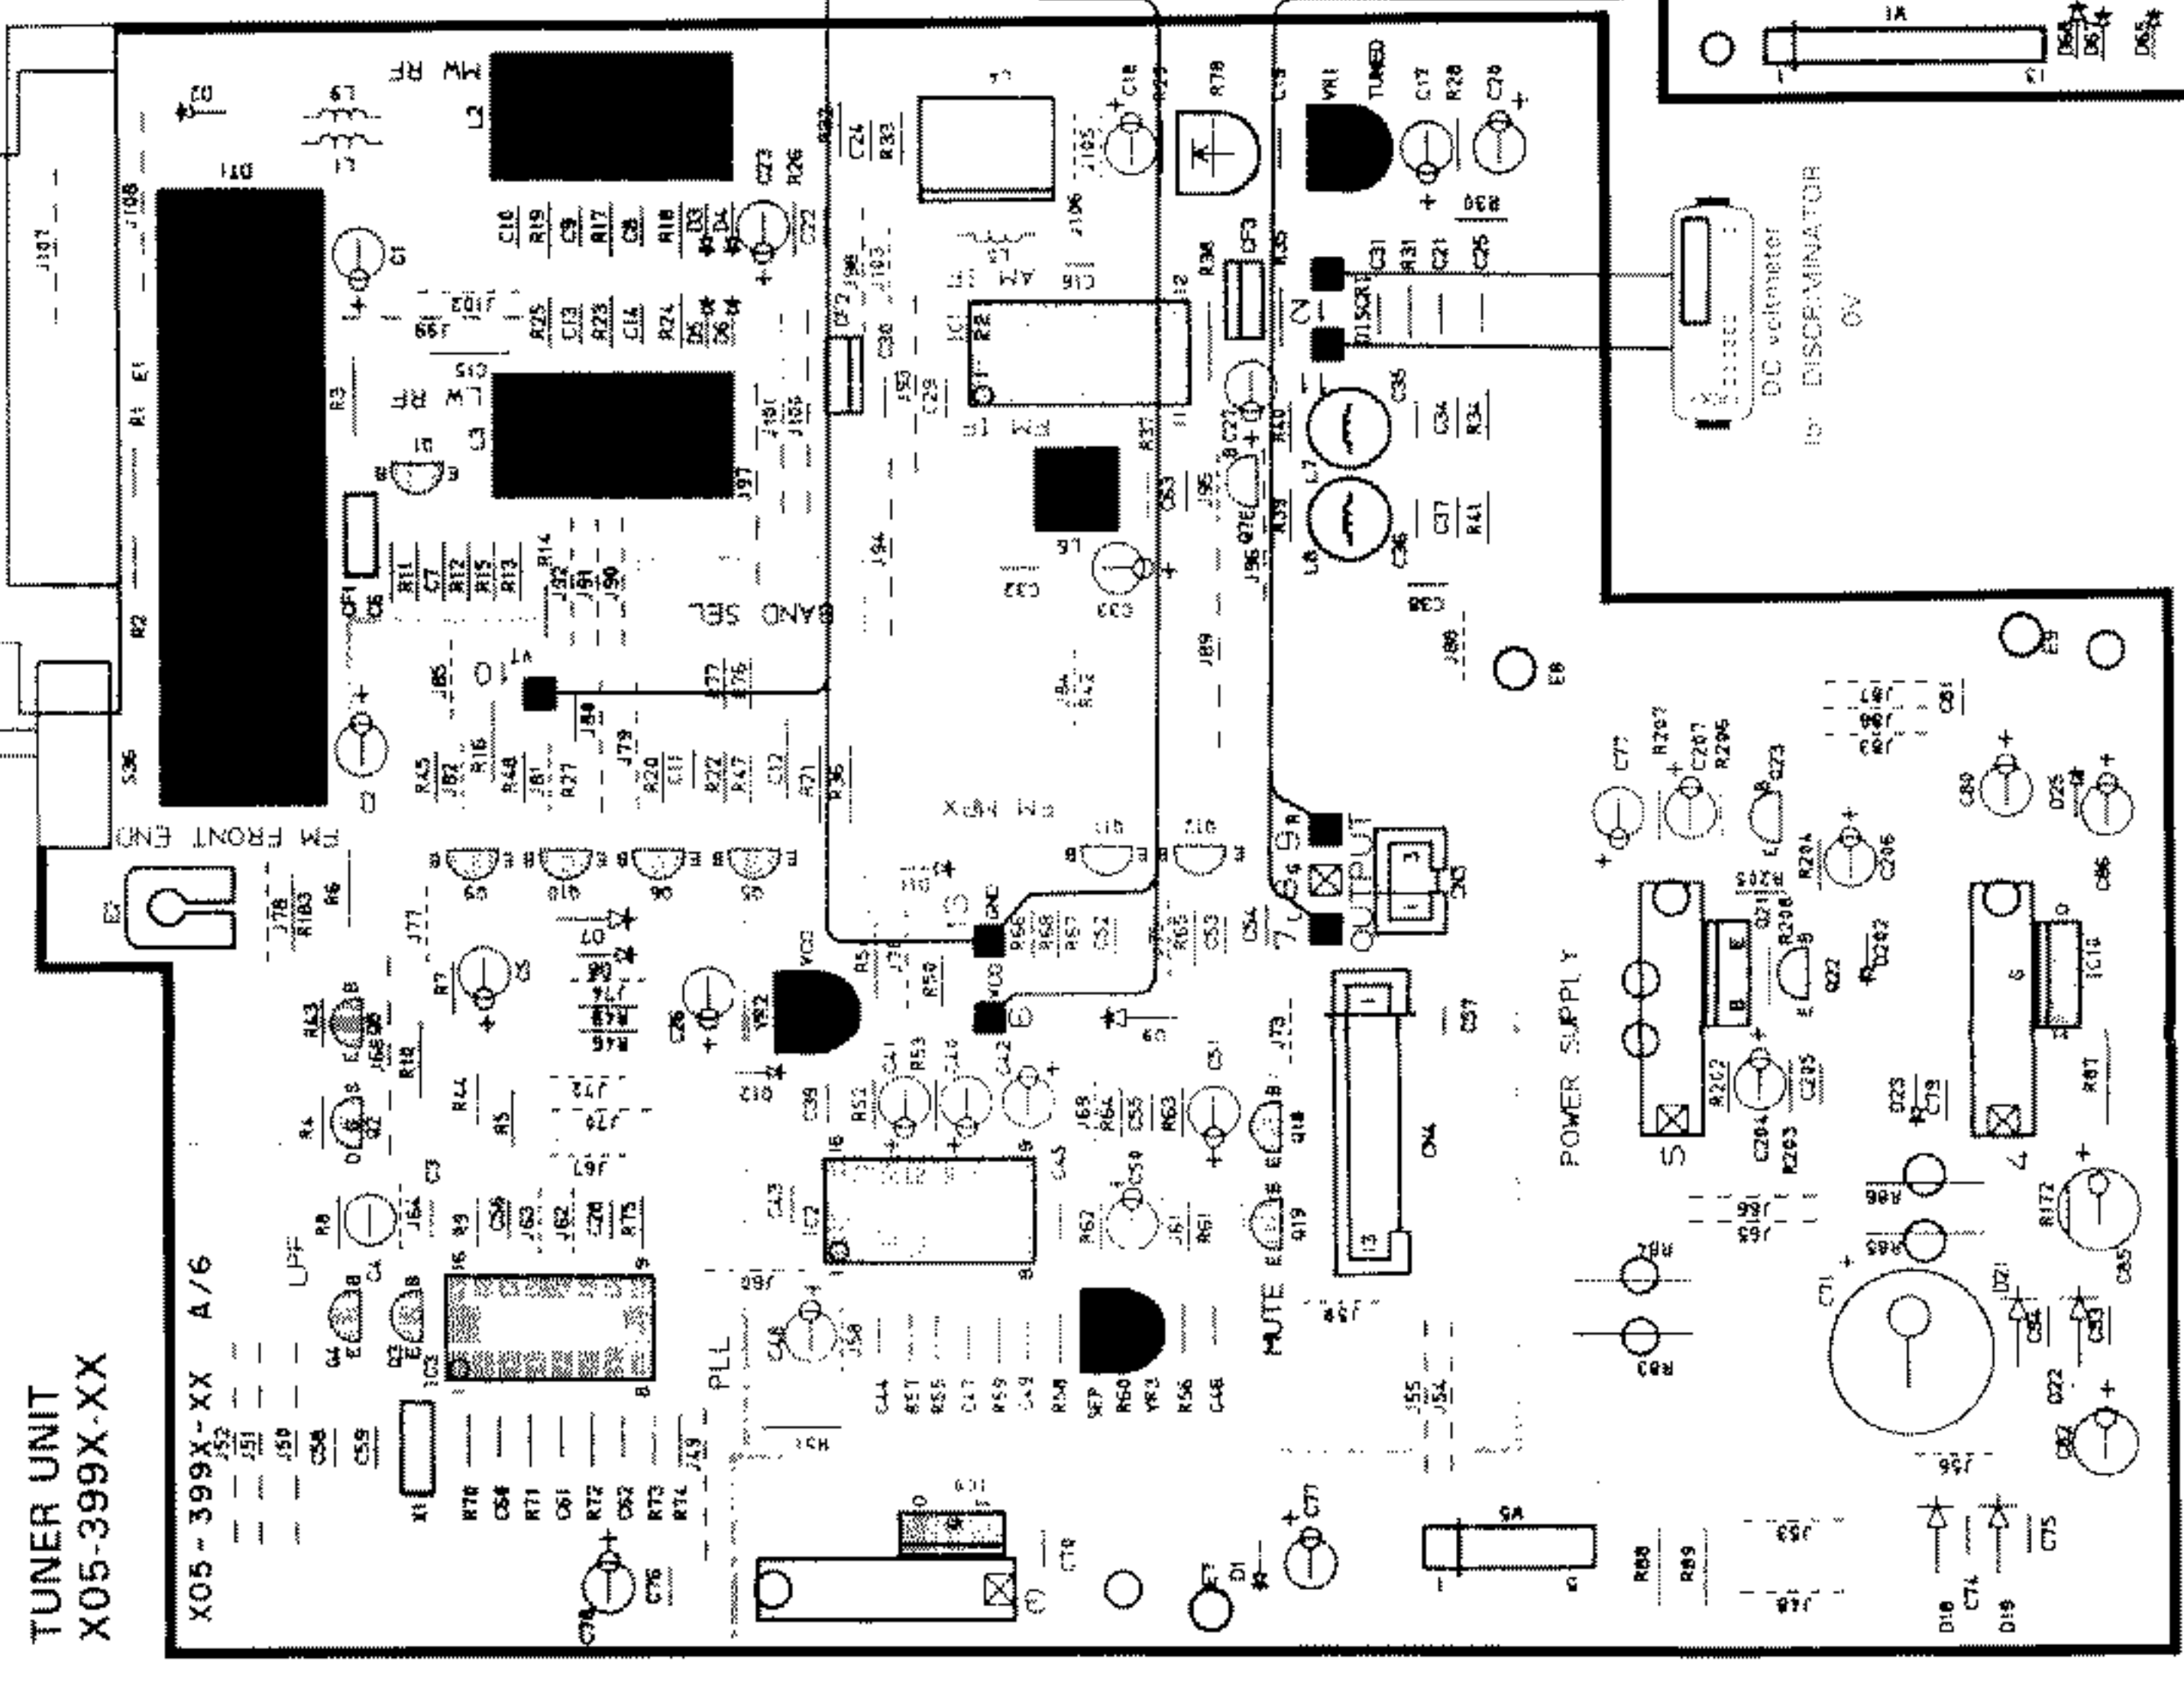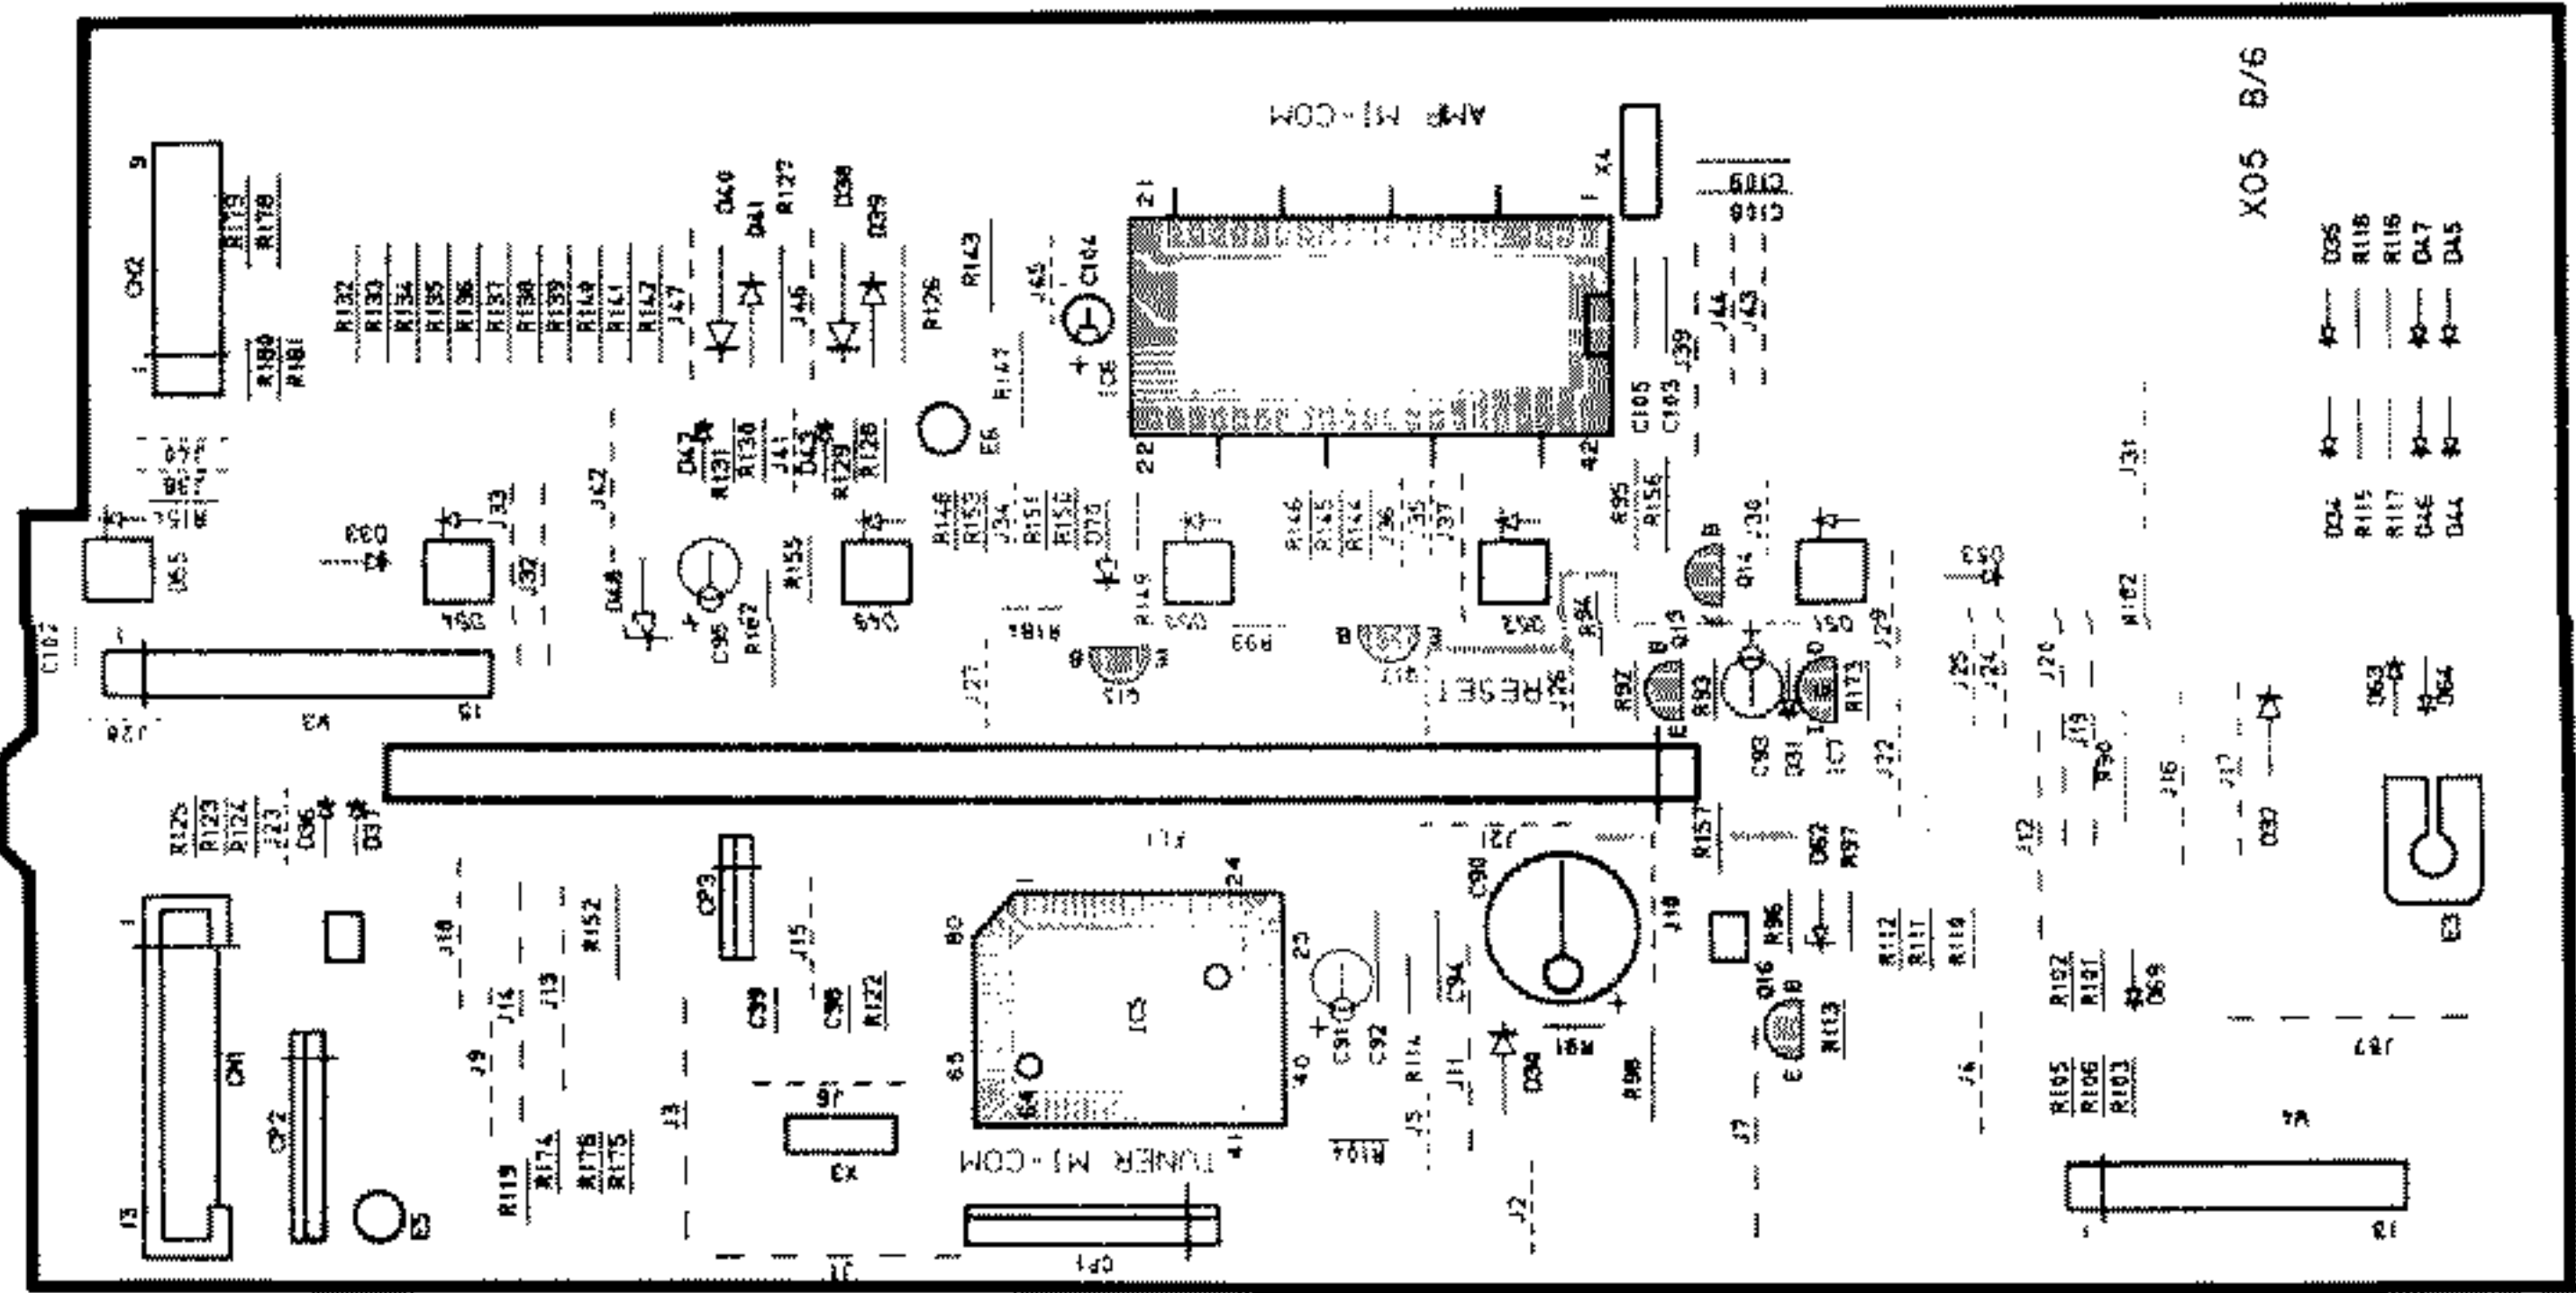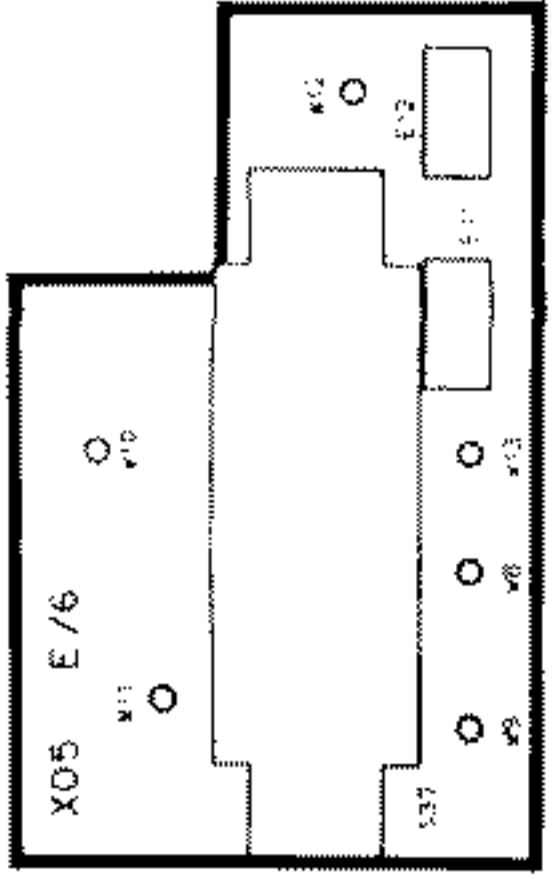

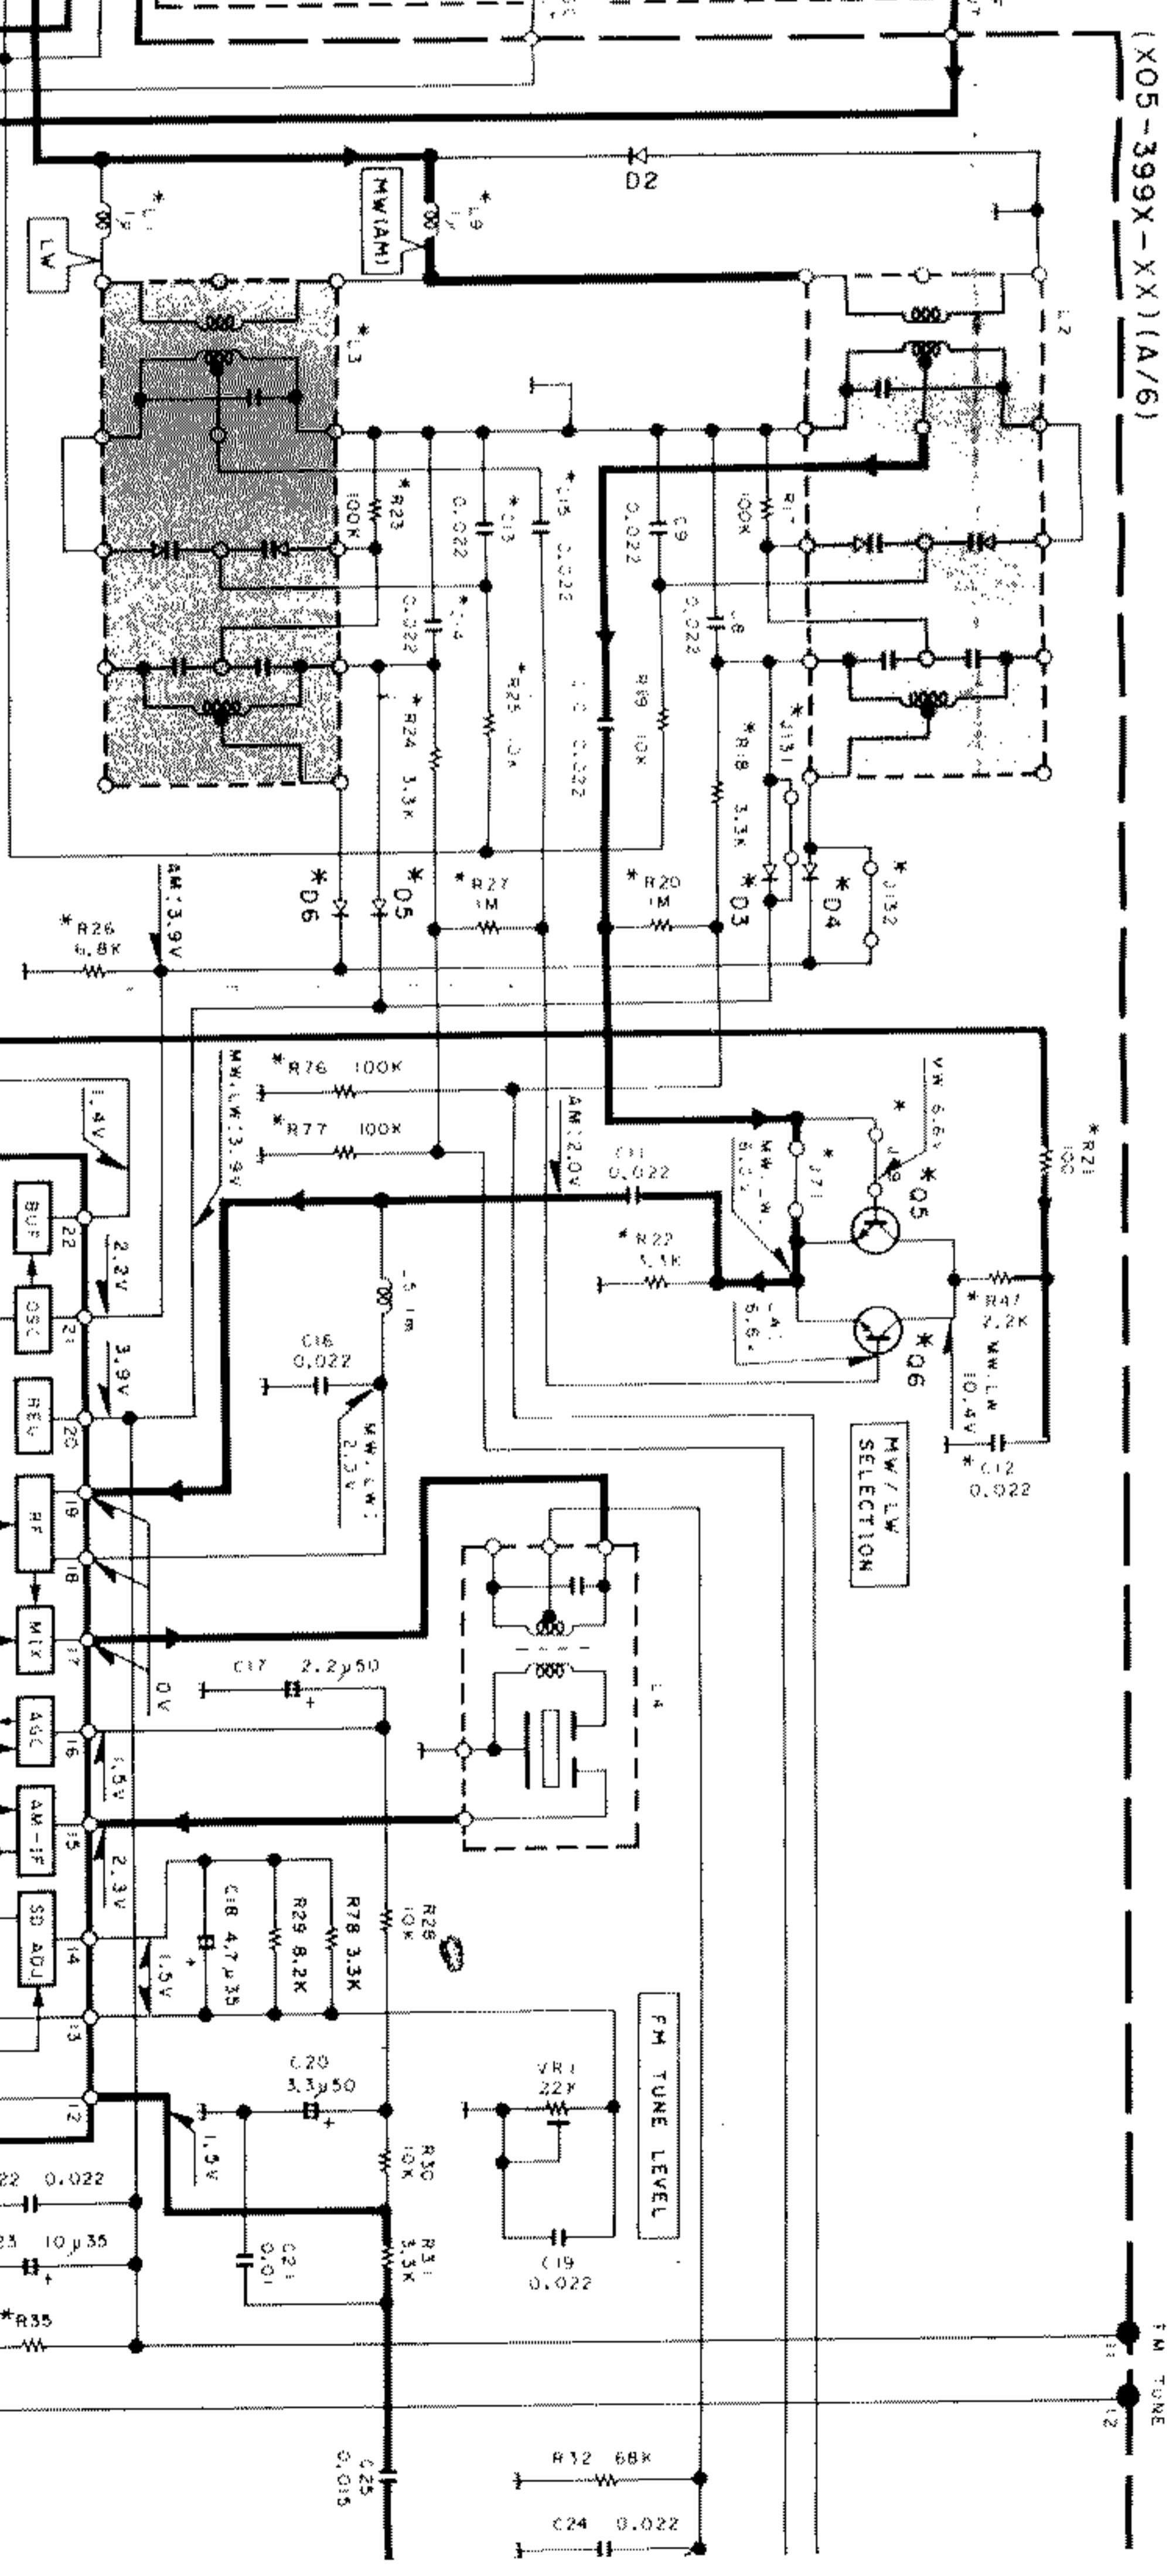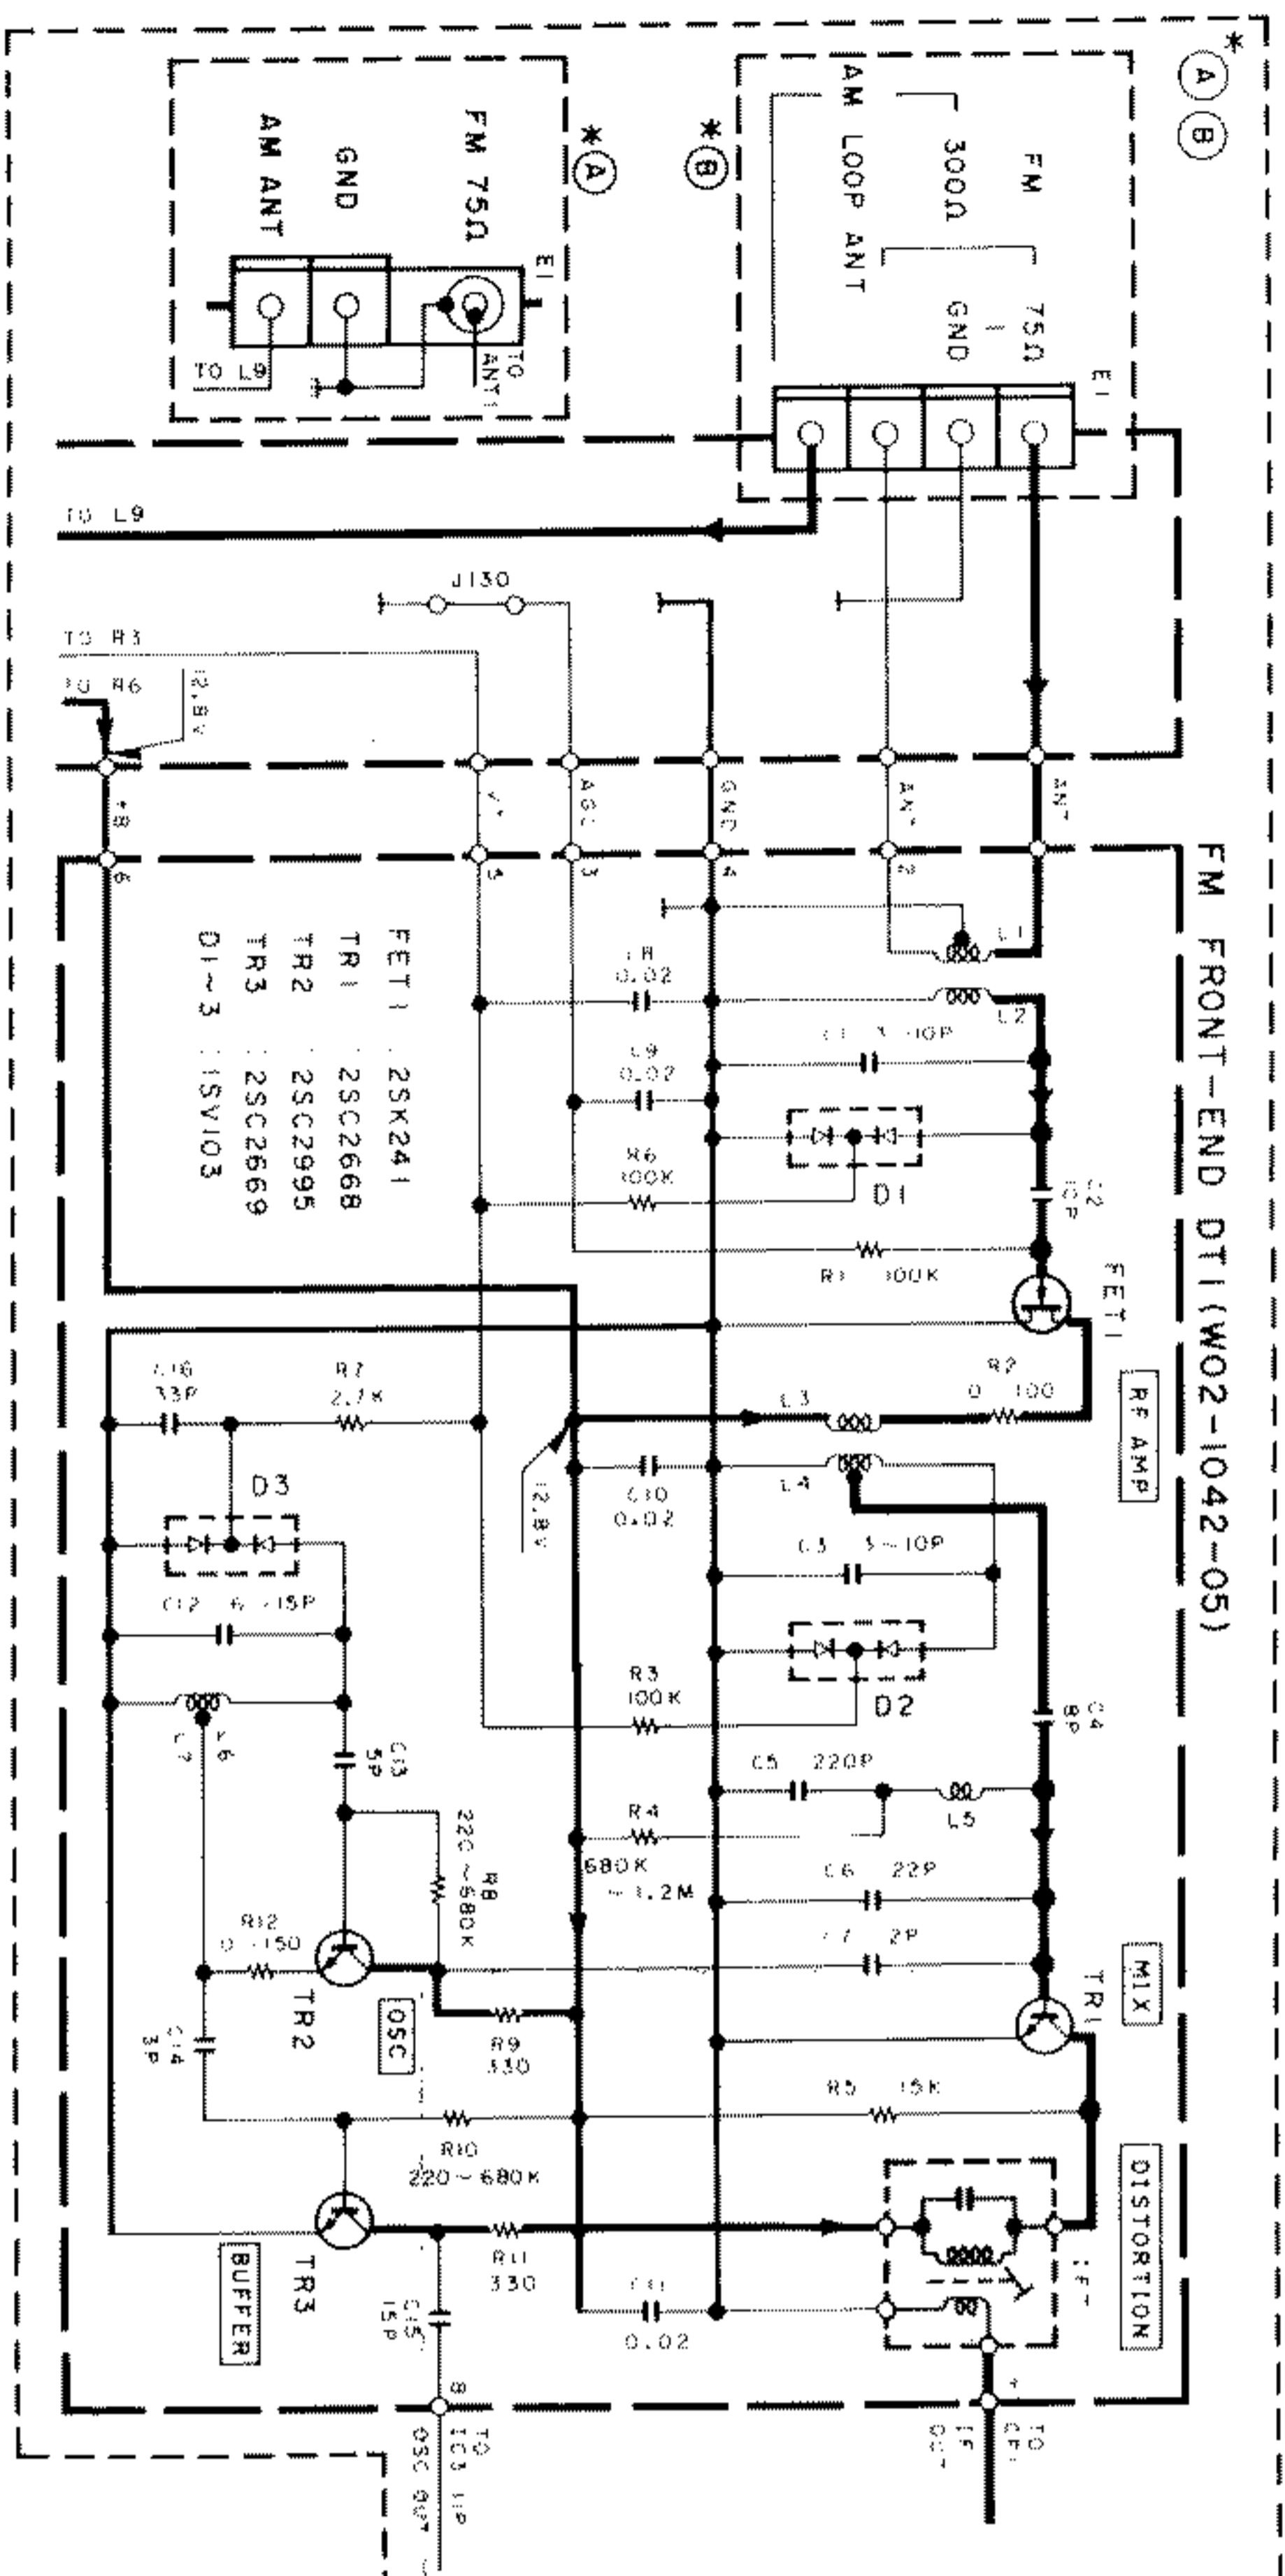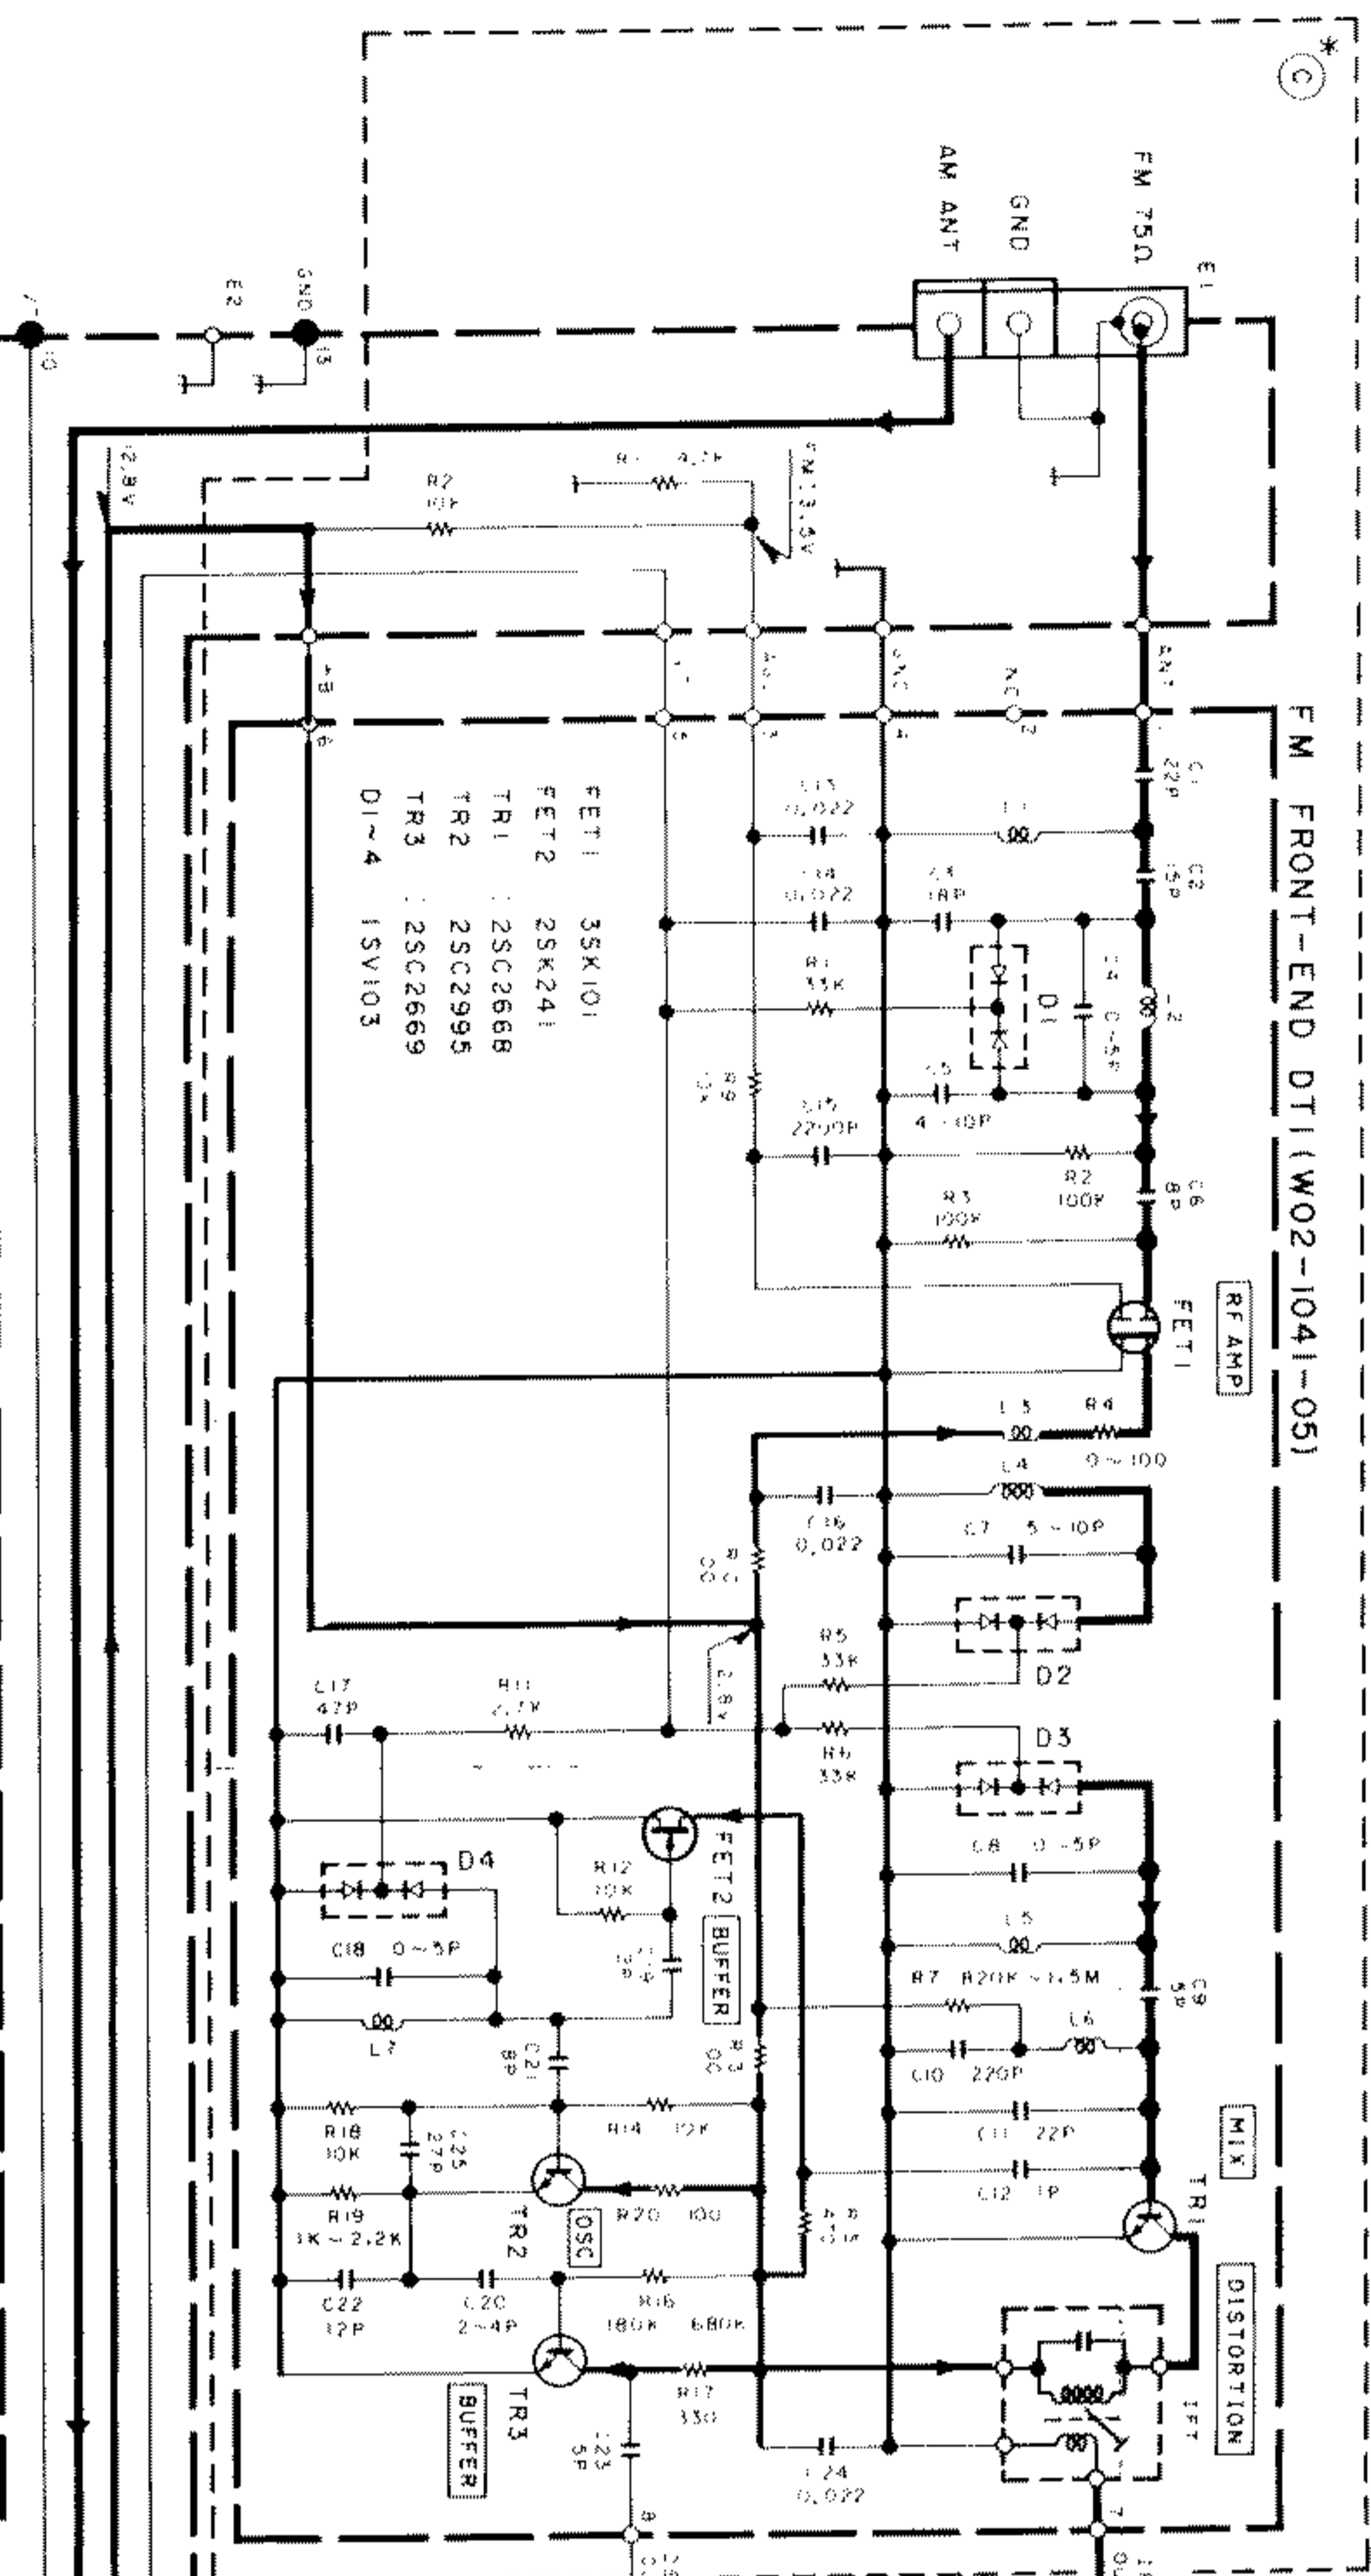


DESTINATION COUNTRY	UNIT NAME	RF	RF	RF	RF	RF	RF	RF	RF	RF	RF	RF	RF	RF	RF	RF	RF	RF			
		701-202,203,204,205,206,207,208,209,210,211,212,213,214,215,216,217,218,219,220,221,222,223,224,225,226,227,228,229,230,231,232,233,234,235,236,237,238,239,240,241,242,243,244,245,246,247,248,249,250,251,252,253,254,255,256,257,258,259,260,261,262,263,264,265,266,267,268,269,270,271,272,273,274,275,276,277,278,279,280,281,282,283,284,285,286,287,288,289,290,291,292,293,294,295,296,297,298,299,300,301,302,303,304,305,306,307,308,309,310,311,312,313,314,315,316,317,318,319,320,321,322,323,324,325,326,327,328,329,330,331,332,333,334,335,336,337,338,339,340,341,342,343,344,345,346,347,348,349,350,351,352,353,354,355,356,357,358,359,360,361,362,363,364,365,366,367,368,369,370,371,372,373,374,375,376,377,378,379,380,381,382,383,384,385,386,387,388,389,390,391,392,393,394,395,396,397,398,399,400,401,402,403,404,405,406,407,408,409,410,411,412,413,414,415,416,417,418,419,420,421,422,423,424,425,426,427,428,429,430,431,432,433,434,435,436,437,438,439,440,441,442,443,444,445,446,447,448,449,450,451,452,453,454,455,456,457,458,459,460,461,462,463,464,465,466,467,468,469,470,471,472,473,474,475,476,477,478,479,480,481,482,483,484,485,486,487,488,489,490,491,492,493,494,495,496,497,498,499,500,501,502,503,504,505,506,507,508,509,510,511,512,513,514,515,516,517,518,519,520,521,522,523,524,525,526,527,528,529,530,531,532,533,534,535,536,537,538,539,540,541,542,543,544,545,546,547,548,549,550,551,552,553,554,555,556,557,558,559,560,561,562,563,564,565,566,567,568,569,570,571,572,573,574,575,576,577,578,579,580,581,582,583,584,585,586,587,588,589,590,591,592,593,594,595,596,597,598,599,600,601,602,603,604,605,606,607,608,609,610,611,612,613,614,615,616,617,618,619,620,621,622,623,624,625,626,627,628,629,630,631,632,633,634,635,636,637,638,639,640,641,642,643,644,645,646,647,648,649,650,651,652,653,654,655,656,657,658,659,660,661,662,663,664,665,666,667,668,669,670,671,672,673,674,675,676,677,678,679,680,681,682,683,684,685,686,687,688,689,690,691,692,693,694,695,696,697,698,699,700,701,702,703,704,705,706,707,708,709,710,711,712,713,714,715,716,717,718,719,720,721,722,723,724,725,726,727,728,729,730,731,732,733,734,735,736,737,738,739,740,741,742,743,744,745,746,747,748,749,750,751,752,753,754,755,756,757,758,759,760,761,762,763,764,765,766,767,768,769,770,771,772,773,774,775,776,777,778,779,780,781,782,783,784,785,786,787,788,789,790,791,792,793,794,795,796,797,798,799,800,801,802,803,804,805,806,807,808,809,810,811,812,813,814,815,816,817,818,819,820,821,822,823,824,825,826,827,828,829,830,831,832,833,834,835,836,837,838,839,840,841,842,843,844,845,846,847,848,849,850,851,852,853,854,855,856,857,858,859,860,861,862,863,864,865,866,867,868,869,870,871,872,873,874,875,876,877,878,879,880,881,882,883,884,885,886,887,888,889,890,891,892,893,894,895,896,897,898,899,900,901,902,903,904,905,906,907,908,909,910,911,912,913,914,915,916,917,918,919,920,921,922,923,924,925,926,927,928,929,930,931,932,933,934,935,936,937,938,939,940,941,942,943,944,945,946,947,948,949,950,951,952,953,954,955,956,957,958,959,960,961,962,963,964,965,966,967,968,969,970,971,972,973,974,975,976,977,978,979,980,981,982,983,984,985,986,987,988,989,990,991,992,993,994,995,996,997,998,999,1000																			
ENGLAND	X05-399X-71	NO	NO	YES	NO	82K	YES	22	3.3K	39K	NO	600	C12-15,	0.01	1.9	0.220	0.3	0.5	0.7	0.8	0.35
EUROPE	X05-399X-71	NO	NO	YES	NO	82K	YES	22	3.3K	39K	NO	600	C12-15,	0.01	1.9	0.220	0.3	0.5	0.7	0.8	0.35
AUS/TAI, IA	X05-399X-71	NO	NO	YES	NO	82K	YES	22	3.3K	39K	NO	600	C12-15,	0.01	1.9	0.220	0.3	0.5	0.7	0.8	0.35
GENERAL MARKET	X05-399X-21	YES	NO	NO	NO	1.0	NO	56	4.7K	33K	YES	NO	0.01	NO	NO	NO	NO	NO	NO	NO	0.5K
PK	X05-399X-21	YES	NO	NO	NO	1.0	NO	56	4.7K	33K	YES	NO	0.01	NO	NO	NO	NO	NO	NO	NO	0.5K
U.S.A.	X05-399X-91	YES	NO	NO	NO	1.0	NO	56	4.7K	33K	YES	NO	0.01	NO	NO	NO	NO	NO	NO	NO	0.5K
CANADA	X05-399X-91	NO	YES	NO	NO	2.39	NO	56	4.7K	33K	YES	NO	0.01	NO	NO	NO	NO	NO	NO	NO	0.5K
701-202	YES	79, 134																			
701-203	NO																				
701-204	NO																				
701-205	NO																				
701-206	NO																				
701-207	NO																				
701-208	NO																				
701-209	NO																				
701-210	NO																				



CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

DC voltages are as measured with a high-impedance voltmeter during reception of the FM broadcast signal with a signal strength of 60 dB at the ANT terminal. Values may vary slightly due to variations between individual instruments of standard units. Values in parentheses are as measured during reception of the AM broadcast signal (with a signal strength of 60 dB at the ANT terminal).

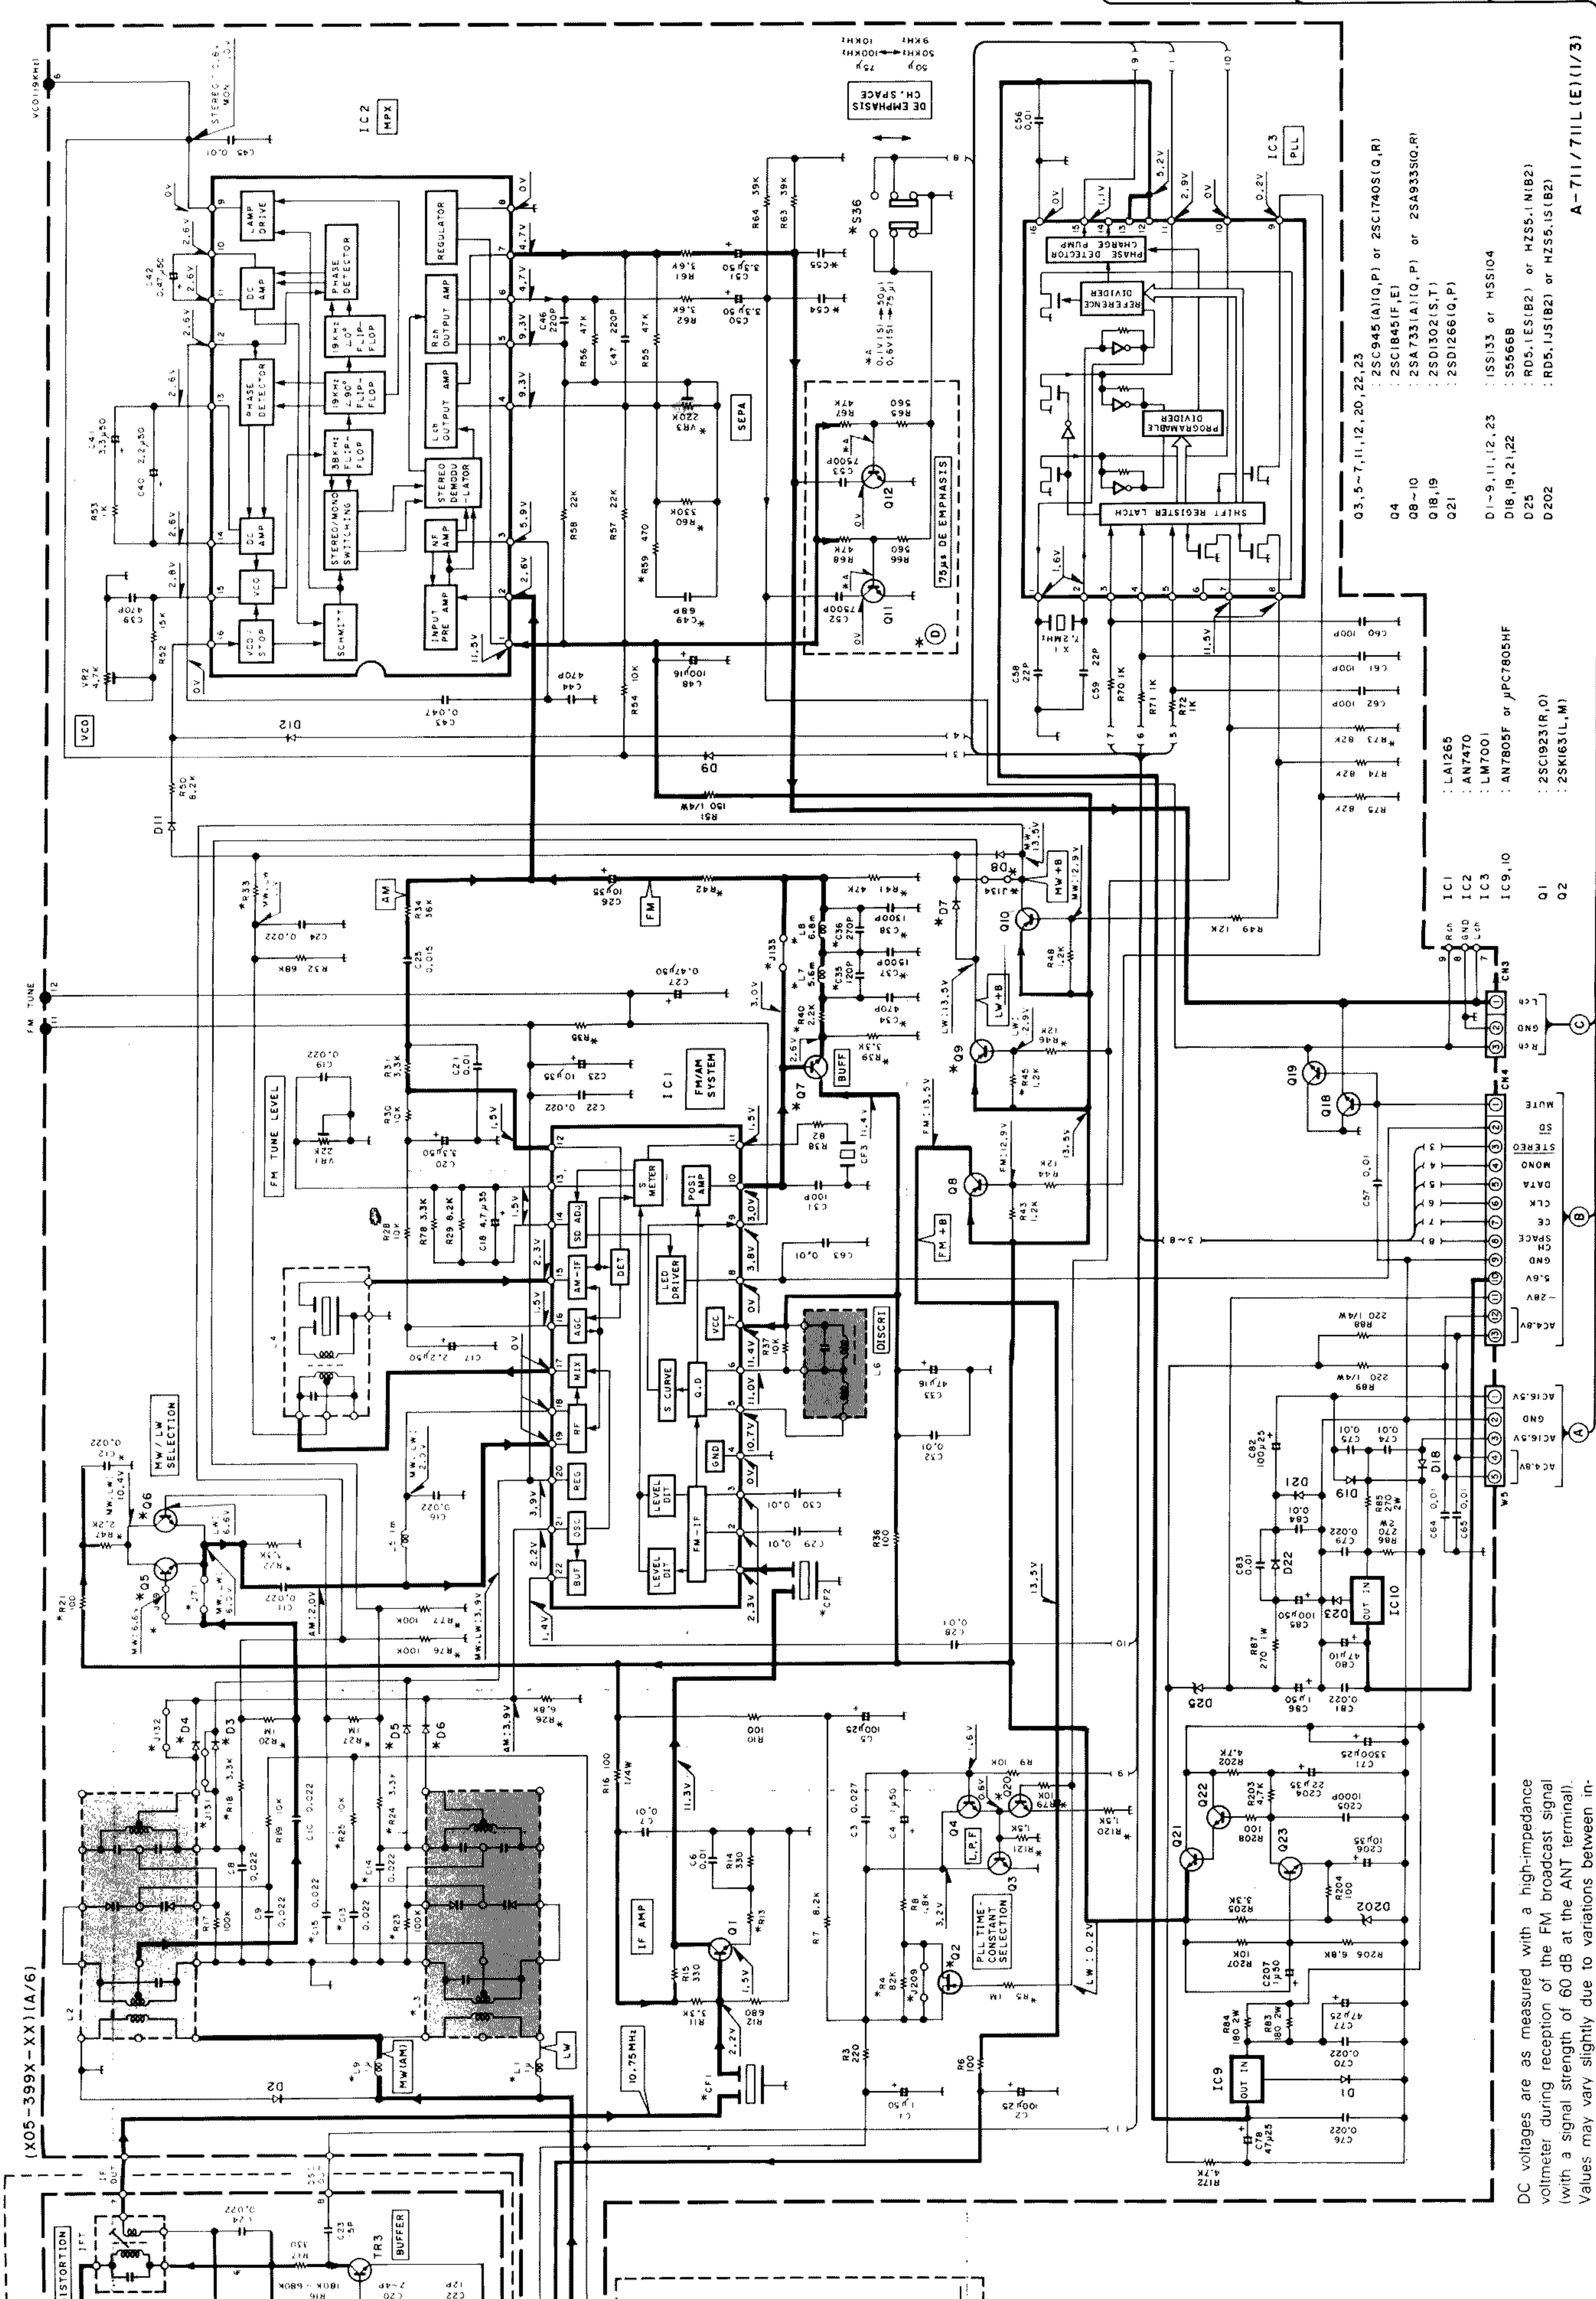

(X05-399X-XX)(A/6)

FM TUNE

VCO (10MHz)

X09-A/5-W1
3/3

(C)

X05-B/6-W4
2/3

(B)

TO TRANSFORMER
3/3

(A)

A-711/711L (1/3)


- Q3, 5-7, 11, 12, 20, 22, 23 : 2SC945(A)(Q,P) or 2SC1740S(Q,R)
- Q4 : 2SC1845(F,E)
- Q8-10 : 2SA733(A)(Q,P) or 2SA933S(Q,R)
- Q18, 19 : 2SD1302(S,T)
- Q21 : 2SD1266(Q,P)
- D1-9, 11, 12, 23 : 1SS133 or HSS104
- D18, 19, 21, 22 : S5566B
- D25 : RD5.1ES(B2) or HZ55.1(N1B2)
- D202 : RD5.1JS(B2) or HZ55.1S(B2)

- IC1 : LA1265
- IC2 : AN7470
- IC3 : LM7001
- IC9, 10 : AN7805F or μ PCT805HF
- Q1 : 2SC1923(R,O)
- Q2 : 2SK163(L,M)

- R1 : 100K
- R2 : 100K
- R3 : 100K
- R4 : 100K
- R5 : 100K
- R6 : 100K
- R7 : 8.2K
- R8 : 100K
- R9 : 100K
- R10 : 100K
- R11 : 100K
- R12 : 100K
- R13 : 100K
- R14 : 100K
- R15 : 100K
- R16 : 100K
- R17 : 100K
- R18 : 100K
- R19 : 100K
- R20 : 100K
- R21 : 100K
- R22 : 100K
- R23 : 100K
- R24 : 100K
- R25 : 100K
- R26 : 100K
- R27 : 100K
- R28 : 100K
- R29 : 100K
- R30 : 100K
- R31 : 100K
- R32 : 100K
- R33 : 100K
- R34 : 100K
- R35 : 100K
- R36 : 100K
- R37 : 100K
- R38 : 100K
- R39 : 100K
- R40 : 100K
- R41 : 100K
- R42 : 100K
- R43 : 100K
- R44 : 100K
- R45 : 100K
- R46 : 100K
- R47 : 100K
- R48 : 100K
- R49 : 100K
- R50 : 100K
- R51 : 100K
- R52 : 100K
- R53 : 100K
- R54 : 100K
- R55 : 100K
- R56 : 100K
- R57 : 100K
- R58 : 100K
- R59 : 100K
- R60 : 100K
- R61 : 100K
- R62 : 100K
- R63 : 100K
- R64 : 100K
- R65 : 100K
- R66 : 100K
- R67 : 100K
- R68 : 100K
- R69 : 100K
- R70 : 100K
- R71 : 100K
- R72 : 100K
- R73 : 100K
- R74 : 100K
- R75 : 100K
- R76 : 100K
- R77 : 100K
- R78 : 100K
- R79 : 100K
- R80 : 100K
- R81 : 100K
- R82 : 100K
- R83 : 100K
- R84 : 100K
- R85 : 100K
- R86 : 100K
- R87 : 100K
- R88 : 100K
- R89 : 100K
- R90 : 100K
- R91 : 100K
- R92 : 100K
- R93 : 100K
- R94 : 100K
- R95 : 100K
- R96 : 100K
- R97 : 100K
- R98 : 100K
- R99 : 100K
- R100 : 100K

- C1 : 100nF
- C2 : 100nF
- C3 : 0.027
- C4 : 100nF
- C5 : 100nF
- C6 : 100nF
- C7 : 100nF
- C8 : 100nF
- C9 : 100nF
- C10 : 100nF
- C11 : 100nF
- C12 : 100nF
- C13 : 100nF
- C14 : 100nF
- C15 : 100nF
- C16 : 100nF
- C17 : 100nF
- C18 : 100nF
- C19 : 100nF
- C20 : 100nF
- C21 : 100nF
- C22 : 100nF
- C23 : 100nF
- C24 : 100nF
- C25 : 100nF
- C26 : 100nF
- C27 : 100nF
- C28 : 100nF
- C29 : 100nF
- C30 : 100nF
- C31 : 100nF
- C32 : 100nF
- C33 : 100nF
- C34 : 100nF
- C35 : 100nF
- C36 : 100nF
- C37 : 100nF
- C38 : 100nF
- C39 : 100nF
- C40 : 100nF
- C41 : 100nF
- C42 : 100nF
- C43 : 100nF
- C44 : 100nF
- C45 : 100nF
- C46 : 100nF
- C47 : 100nF
- C48 : 100nF
- C49 : 100nF
- C50 : 100nF
- C51 : 100nF
- C52 : 100nF
- C53 : 100nF
- C54 : 100nF
- C55 : 100nF
- C56 : 100nF
- C57 : 100nF
- C58 : 100nF
- C59 : 100nF
- C60 : 100nF
- C61 : 100nF
- C62 : 100nF
- C63 : 100nF
- C64 : 100nF
- C65 : 100nF
- C66 : 100nF
- C67 : 100nF
- C68 : 100nF
- C69 : 100nF
- C70 : 100nF
- C71 : 100nF
- C72 : 100nF
- C73 : 100nF
- C74 : 100nF
- C75 : 100nF
- C76 : 100nF
- C77 : 100nF
- C78 : 100nF
- C79 : 100nF
- C80 : 100nF
- C81 : 100nF
- C82 : 100nF
- C83 : 100nF
- C84 : 100nF
- C85 : 100nF
- C86 : 100nF
- C87 : 100nF
- C88 : 100nF
- C89 : 100nF
- C90 : 100nF
- C91 : 100nF
- C92 : 100nF
- C93 : 100nF
- C94 : 100nF
- C95 : 100nF
- C96 : 100nF
- C97 : 100nF
- C98 : 100nF
- C99 : 100nF
- C100 : 100nF

DC voltages are as measured with a high-impedance voltmeter during reception of the FM broadcast signal (with a signal strength of 60 dB at the ANT terminal). Values may vary slightly due to variations between individual instruments or/and units. Values in parentheses are as measured during reception of the AM broadcast signal (with a signal strength of 60 dB at the ANT terminal).

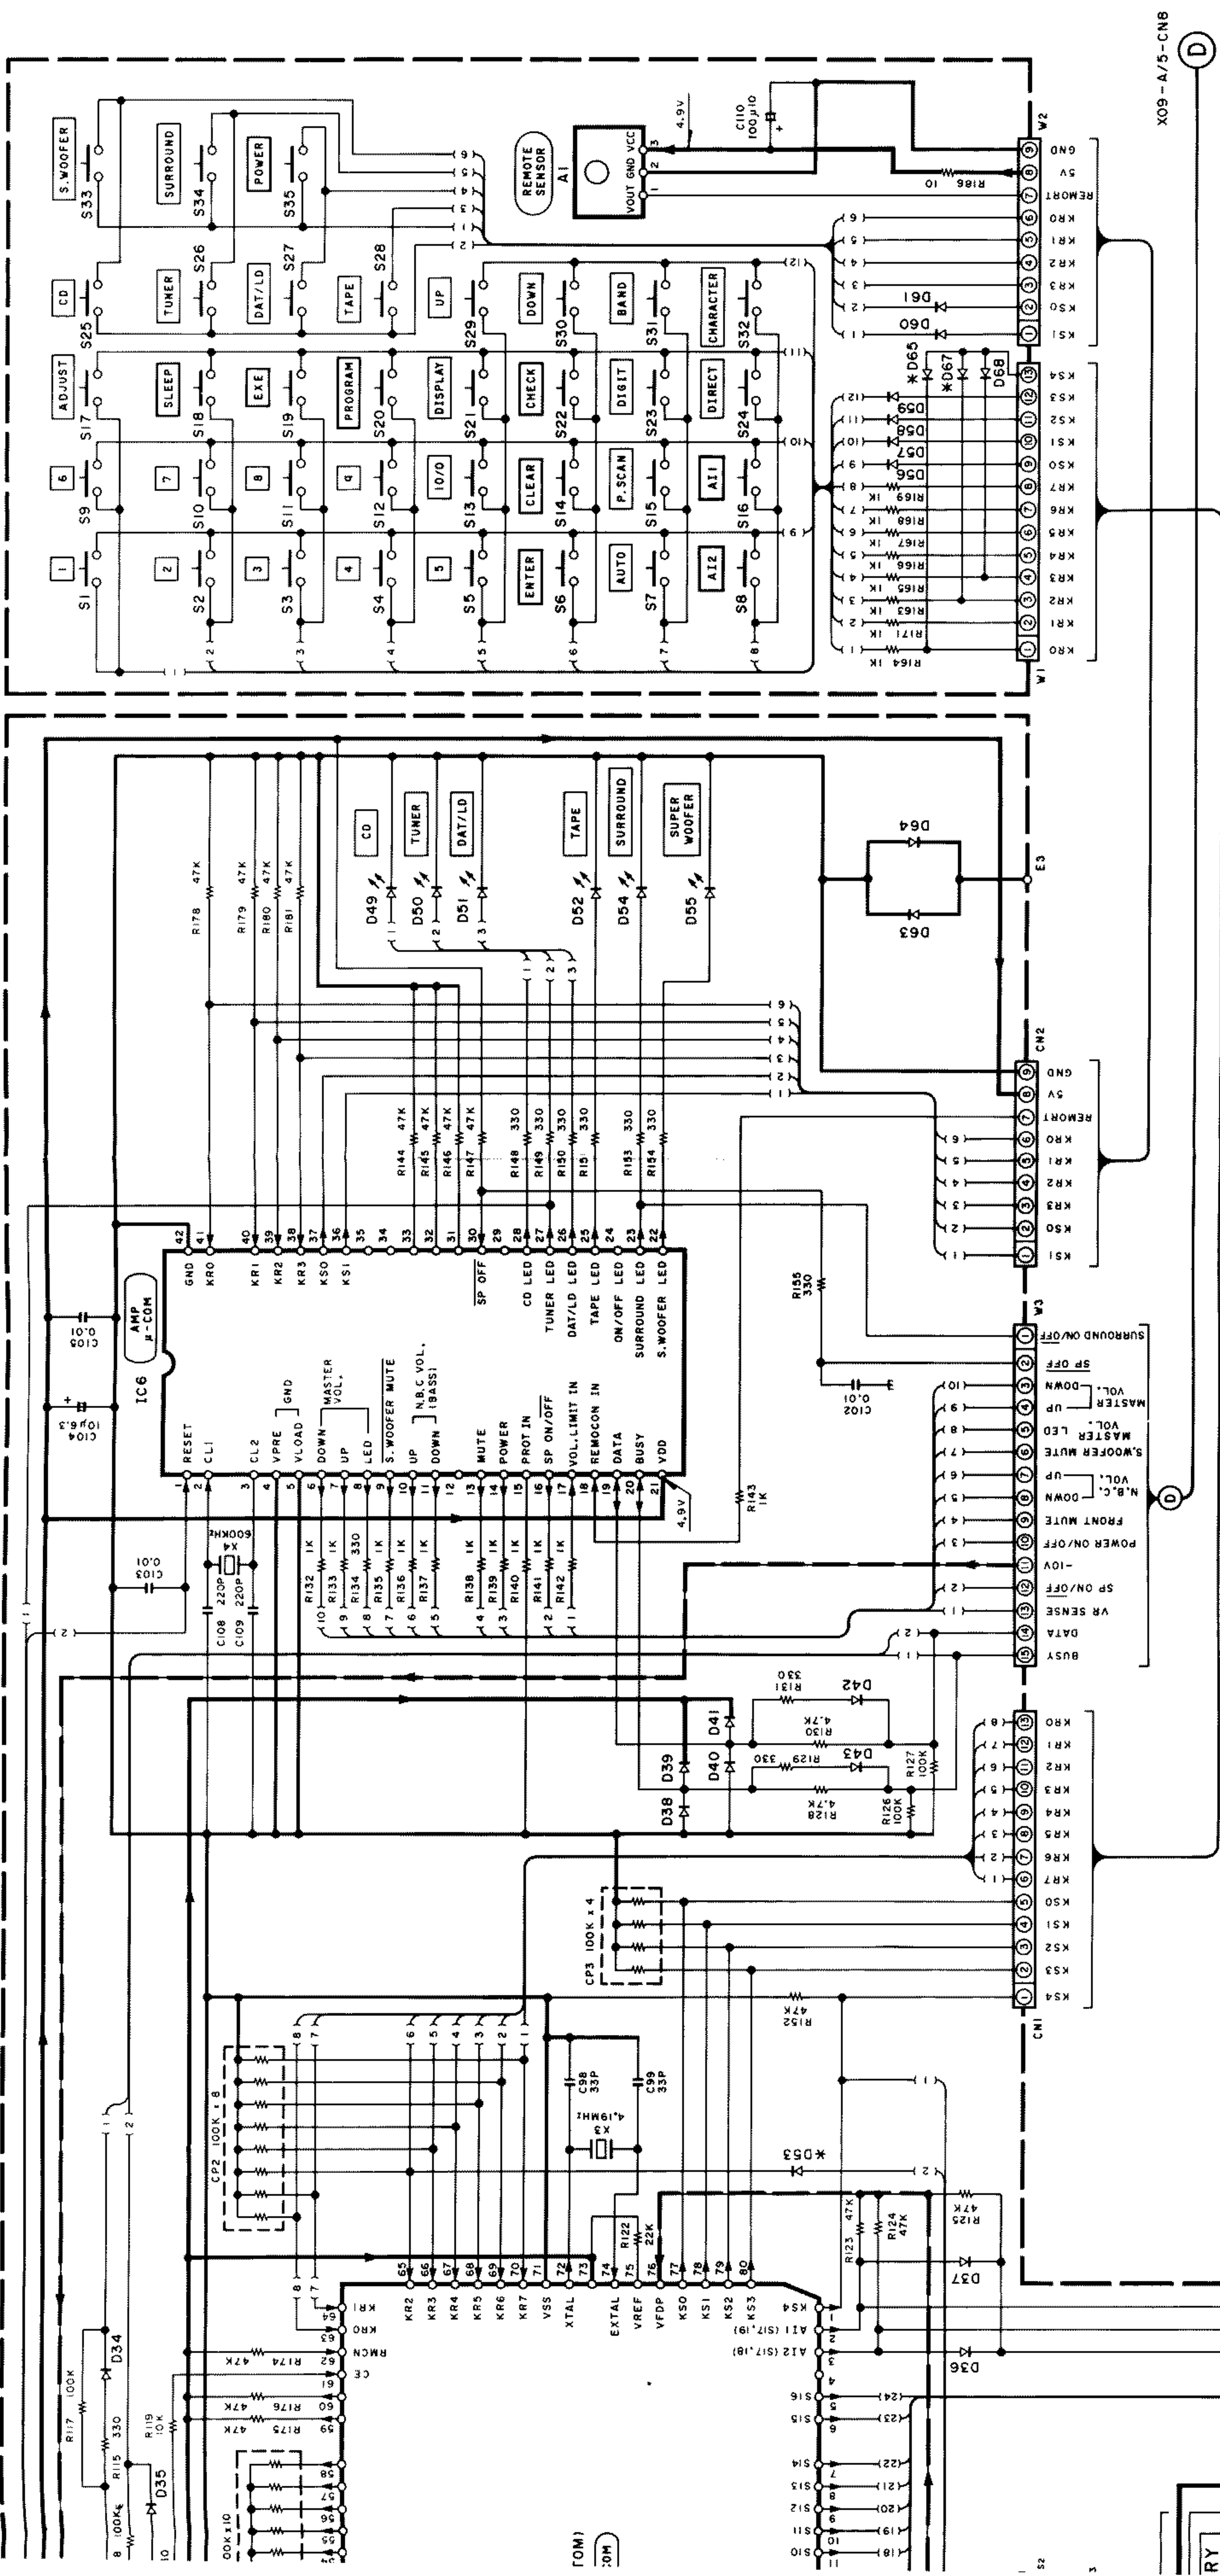


DESTINATION COUNTRY	ABB.	UNIT NAME	R182	D53	D65	D67	Q17
ENGLAND	T	X05-3992-71	NO	NO	YES	YES	NO
EUROPE	E	X05-3992-71	NO	NO	YES	YES	NO
AUSTRALIA	X	X05-3990-71	NO	NO	NO	NO	NO
GENERAL MARKET	M	X05-3990-21	YES	NO	NO	NO	YES
PX	Y	X05-3992-91	YES	YES	NO	NO	YES
U.S.A	K	X05-3990-10	NO	NO	NO	NO	NO
CANADA	P	X05-3990-10	NO	NO	NO	NO	NO

- IC5 : CXP50112-1270
- IC6 : μPD7538ACU-232
- IC7 : PST529D
- Q14~16,17 : 2SA733(A)(Q,P) or 2SA933S(O,R)
- Q13 : 2SC945(A)(Q,P) or 2SC1740S(Q,R)
- D30~47,56~61,63~65,67~70 : ISS133 or HSS104
- D48 : RD10ES(B) or HZS10N(B)
- D49~52,54,55 : B30-1012-05
- D62 : RD3.3ES(B2) or HZS3.3N(B2)
- A1 : W02-1049-05 or W02-1048-05
- F.L1 : B-BT-986K



DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). **⚠** Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

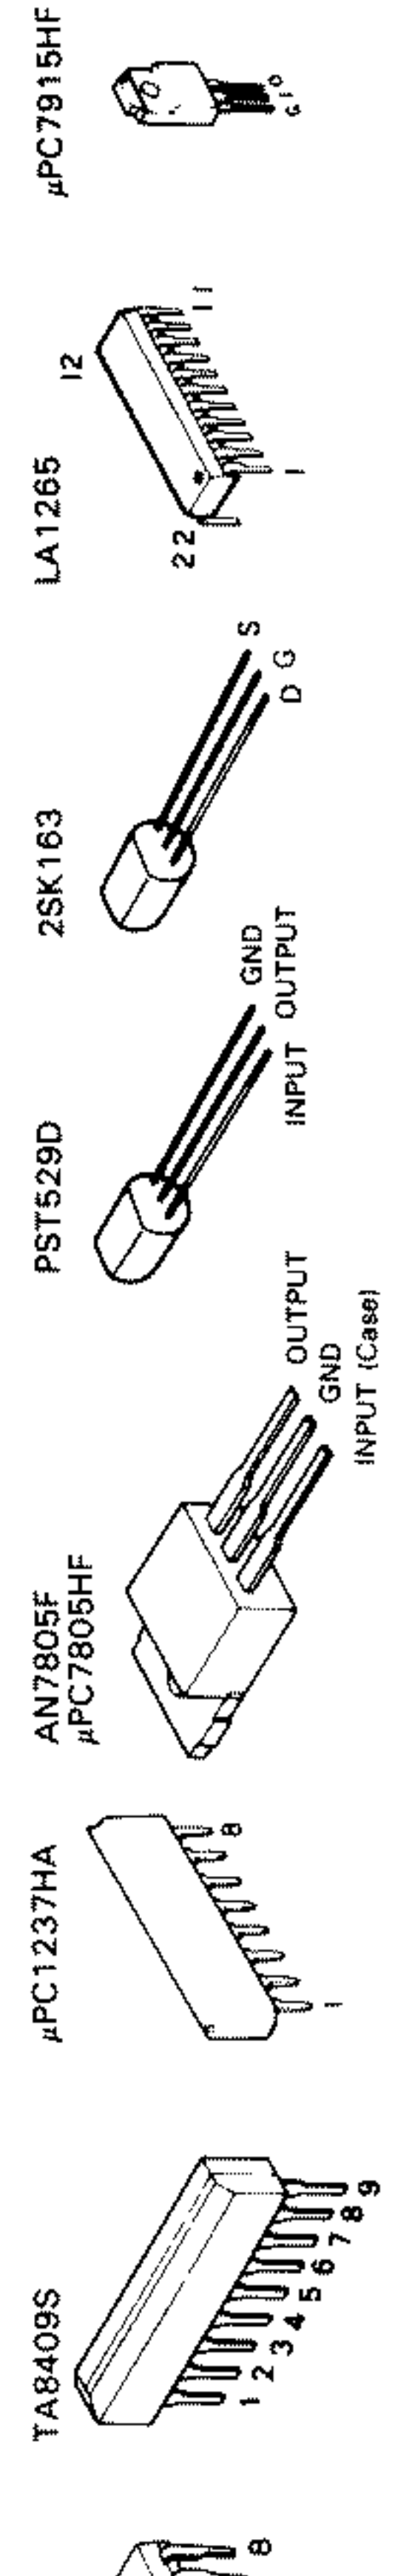

X09-A/5-CN8













3/3

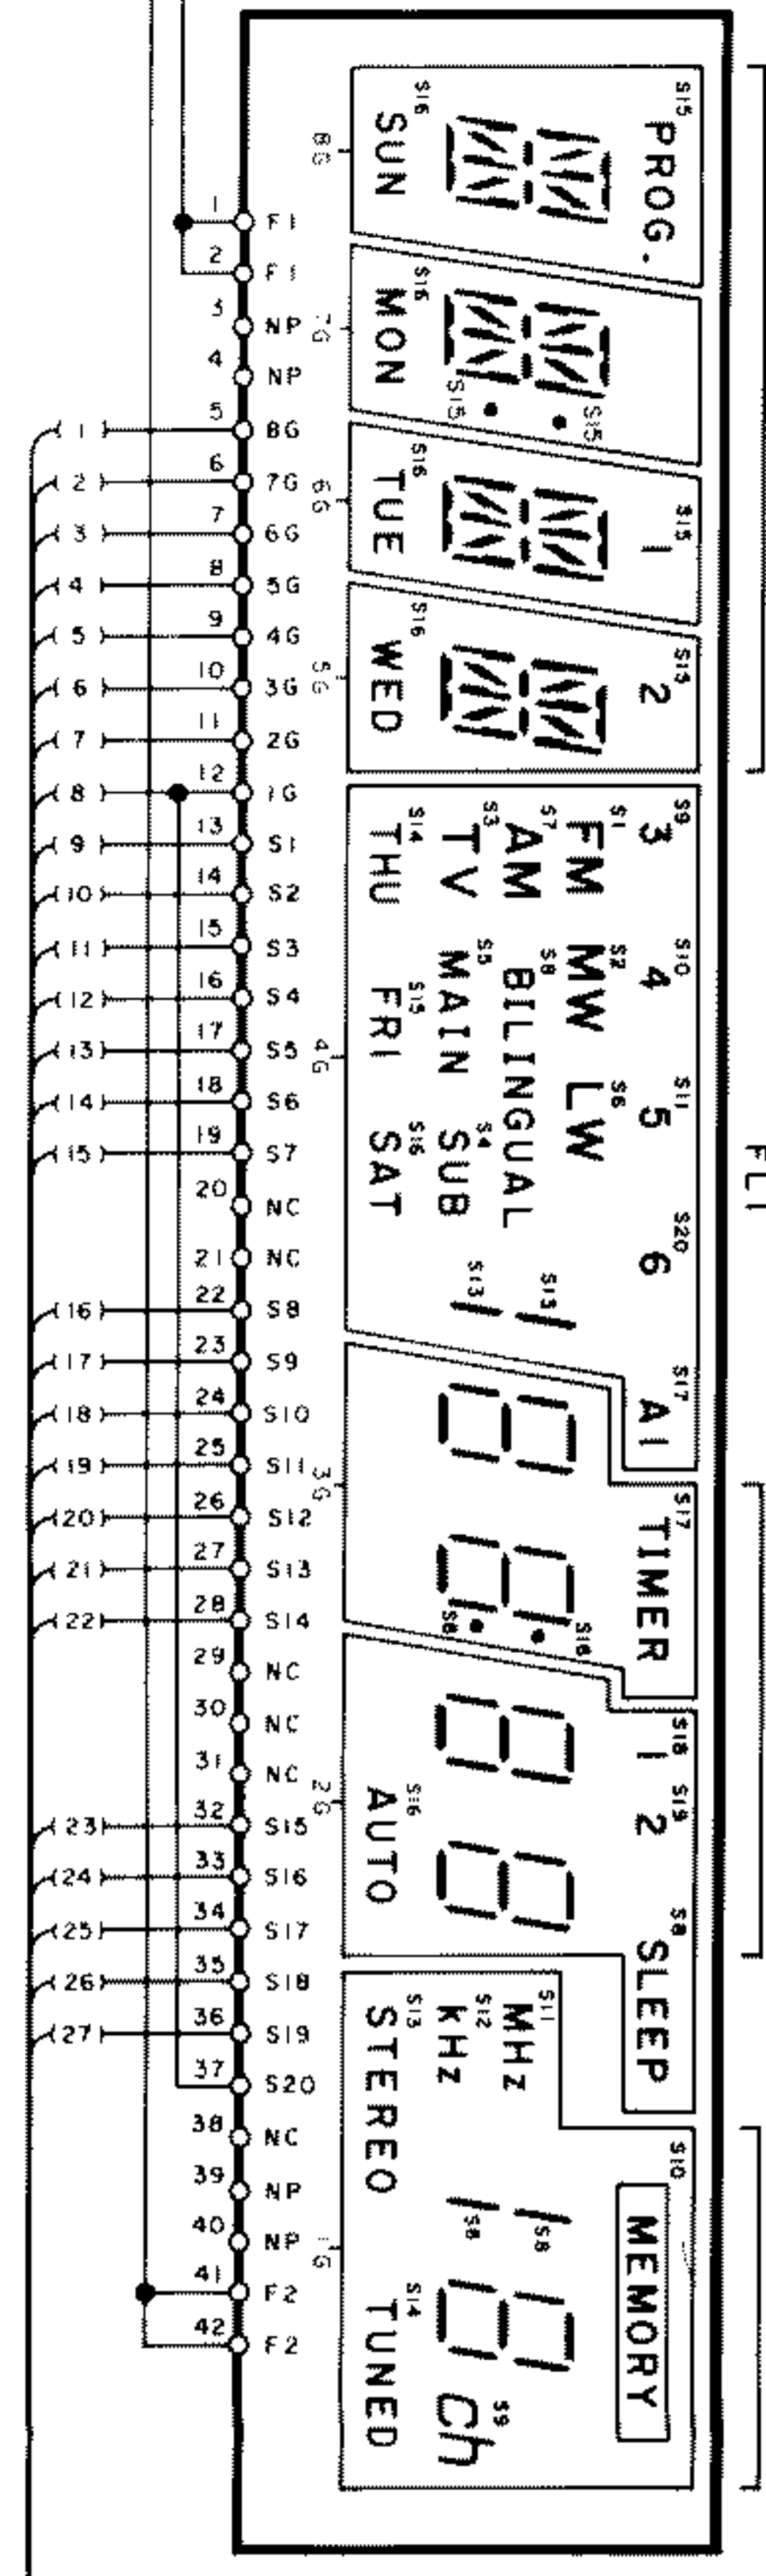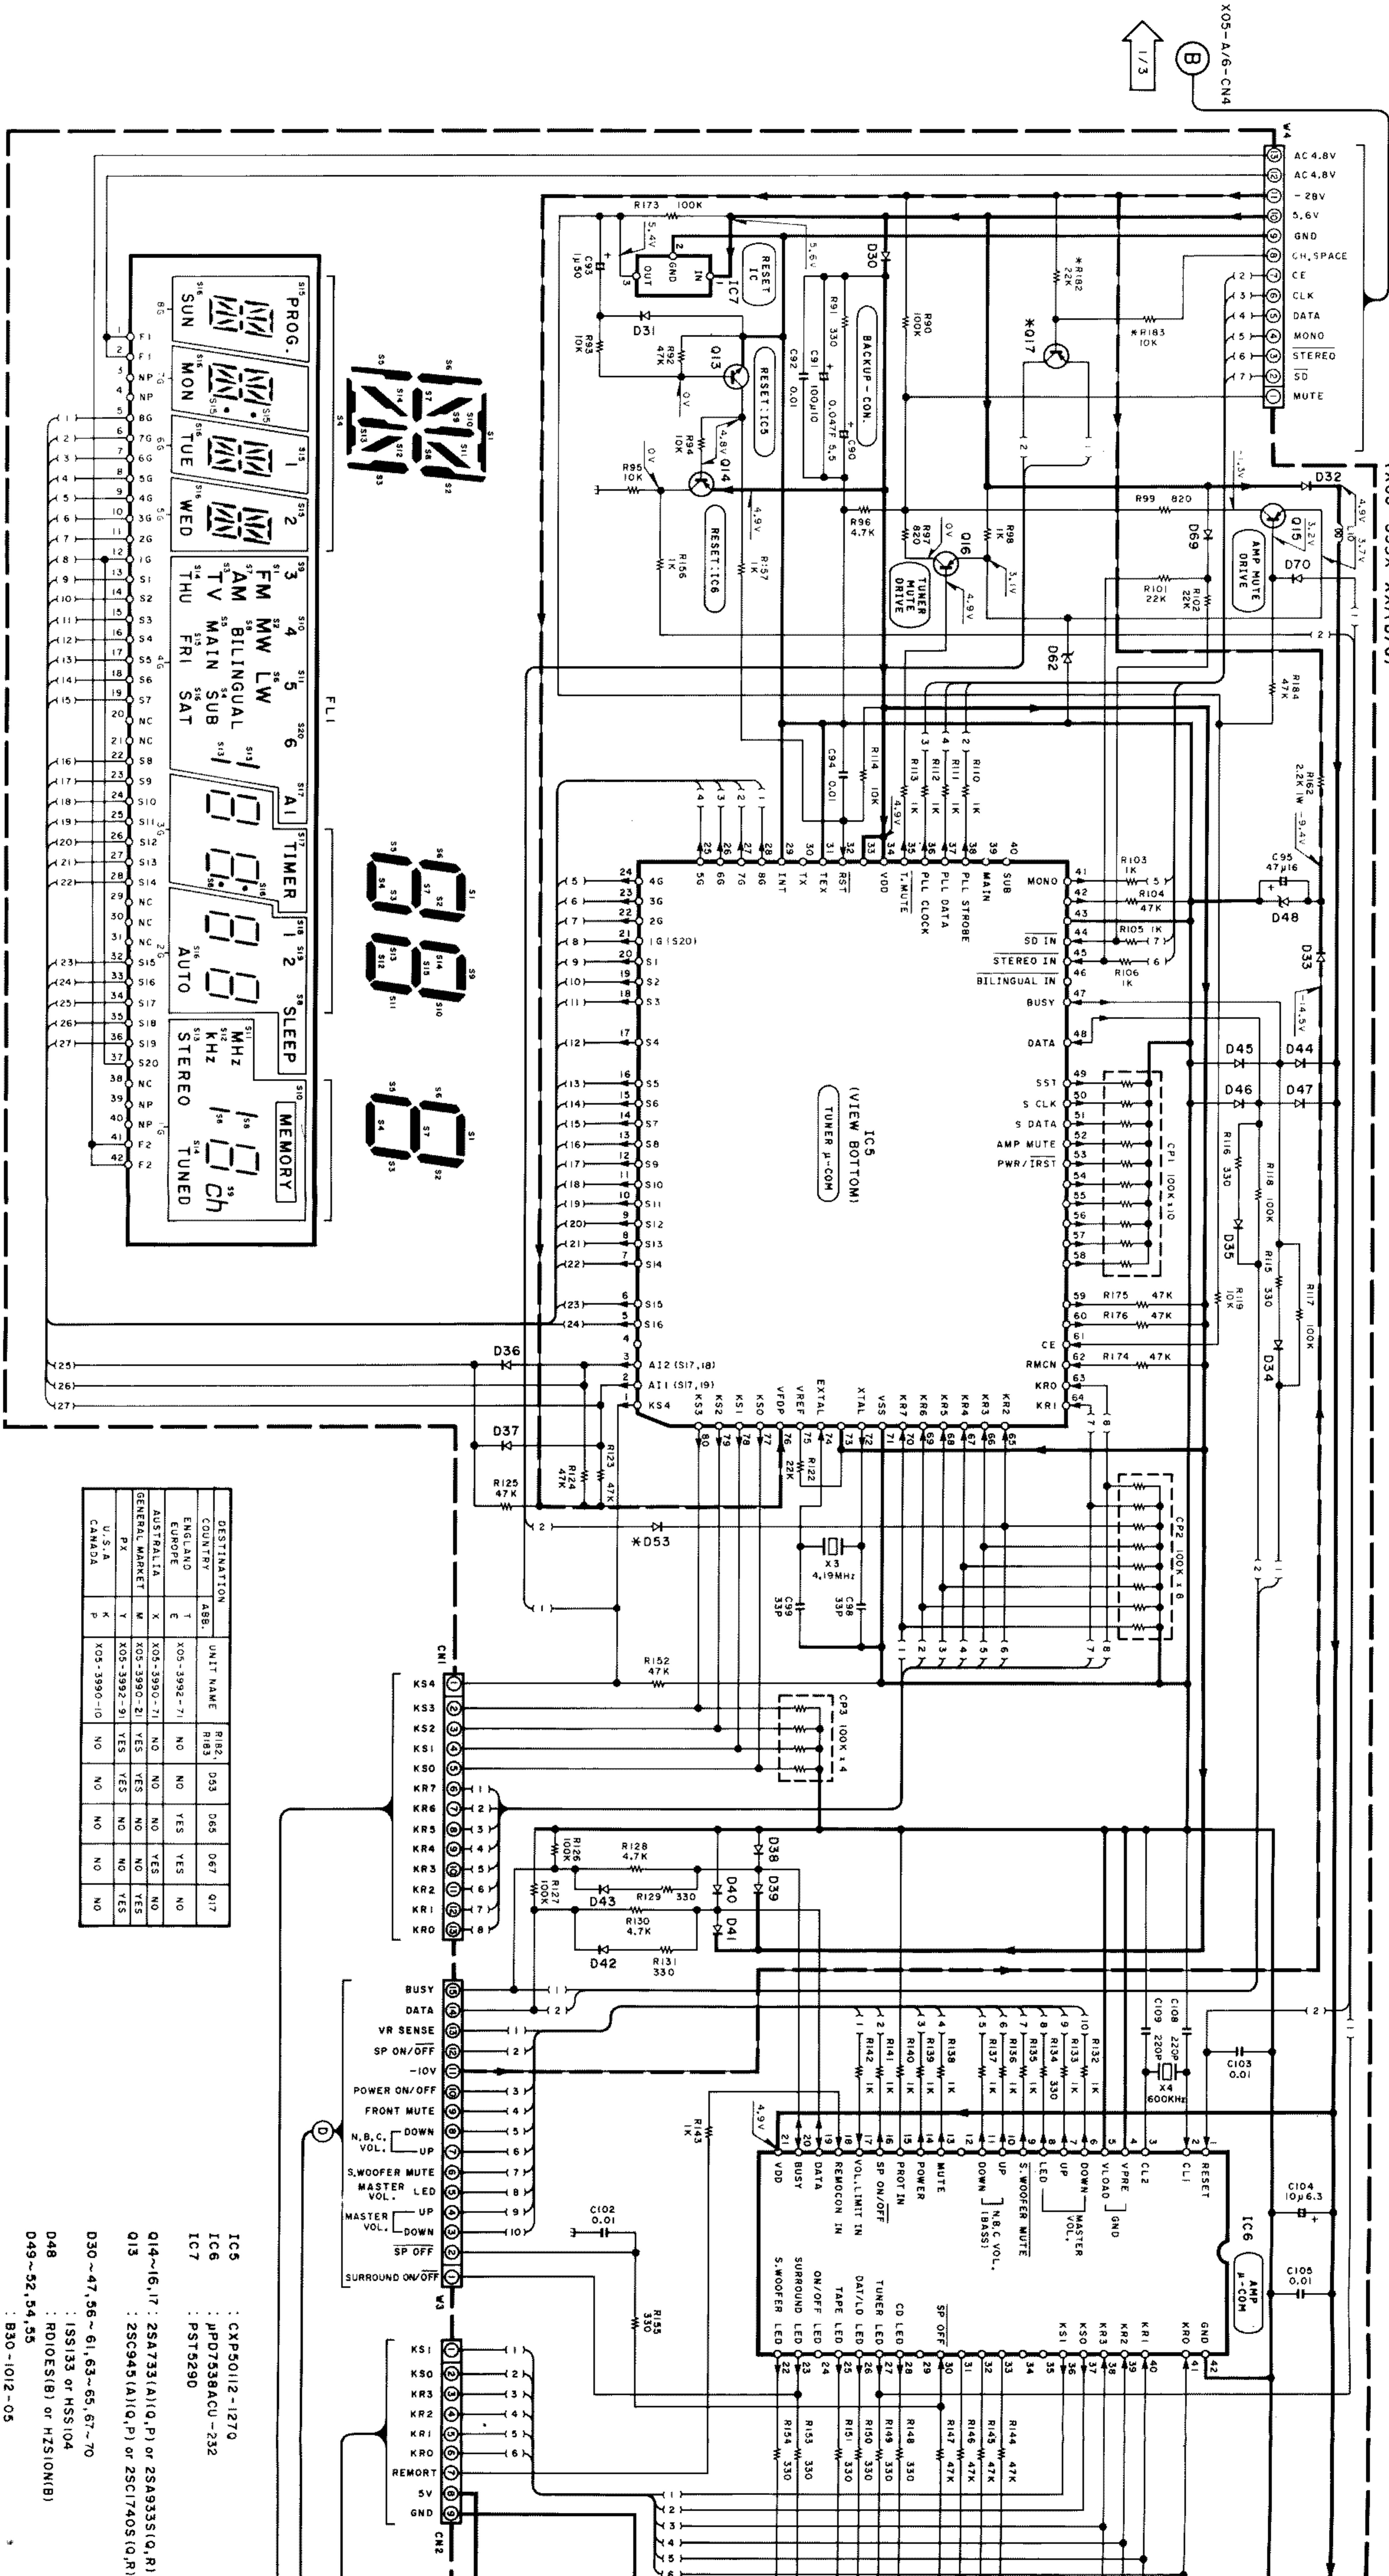


DESTINATION	UNIT NAME	R182	D43	D65	D67	Q17
ENGLAND	T X05-3992-71	NO	NO	YES	YES	NO
AUSTRALIA	X X05-3990-71	NO	NO	NO	YES	NO
GENERAL MARKET	M X05-3990-21	YES	YES	NO	NO	YES
U.S.A	Y X05-3992-91	YES	YES	NO	NO	YES
CANADA	K X05-3990-10	NO	NO	NO	NO	NO


- IC5 : CXPS0112-1270
- IC6 : MPD7538ACU-232
- IC7 : PST5290
- Q14~16, I7 : 2SA733(A)(Q,P) or 2SA933(S)(Q,R)
- Q13 : 2SC945(A)(Q,P) or 2SC17405(Q,R)
- D30~47, 56~61, 63~65, 67~70 : ISS133 or HSS104
- D48 : RD10ES(B) or HZ10N(B)
- D49~52, 54, 55 : B30-1012-05
- D62 : RD3,3ES(B2) or HZS3,3N(B2)
- AI : W02-1049-05 or W02-1048-05
- FL1 : 8-BT-986K

- 2SA733(A)
- 2SA992
- 2SC1845
- 2SC1923
- 2SC2631
- 2SC2878
- 2SC945(A)
- 2SD1302
- 2SD1266
- 2SC3866
- 2SA933S
- 2SC1740S
- NJM2058D
- LM7001
- AN7470
- TC9215P
- TAB409S
- μPC1237HA
- AN7805F
- μPC7805HF
- PST5290
- 2SK183
- LA1265
- μPC7915HF

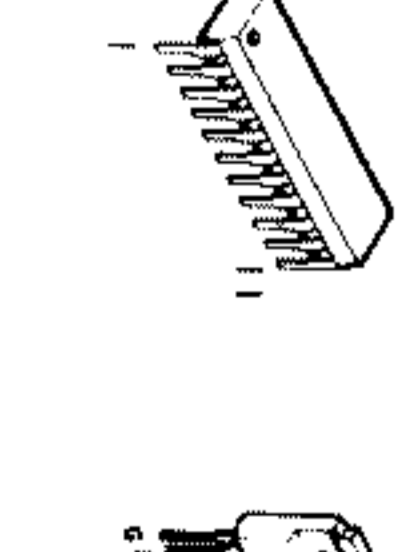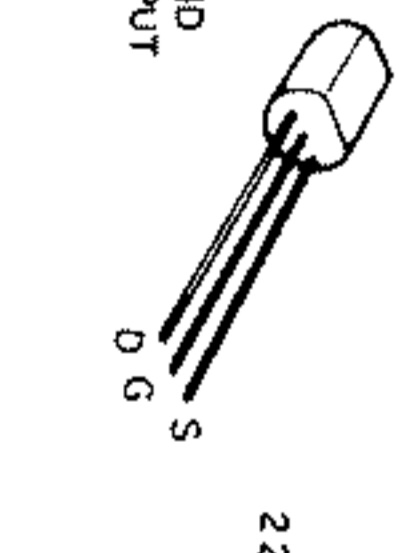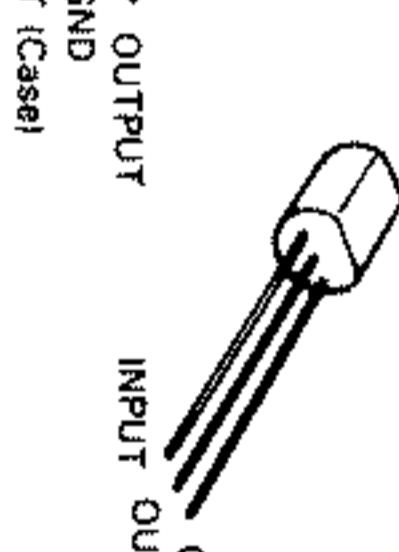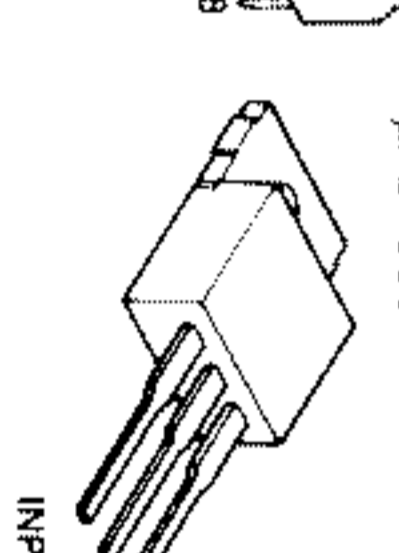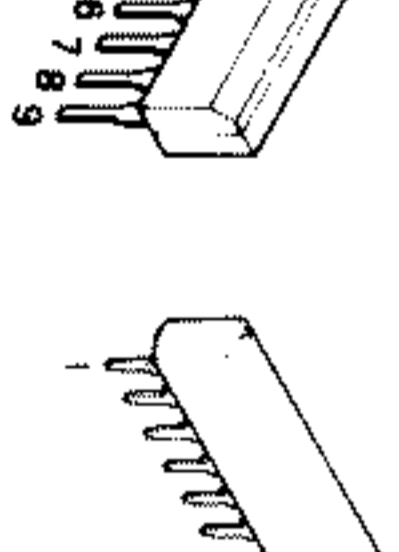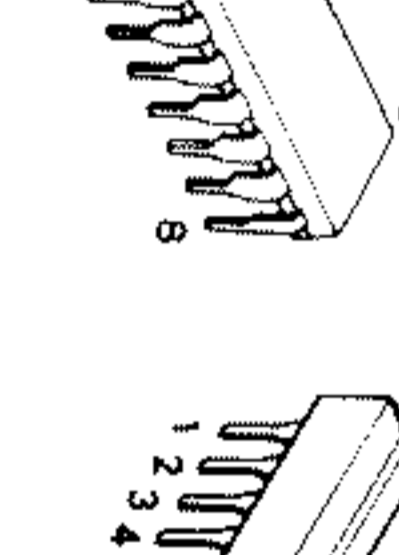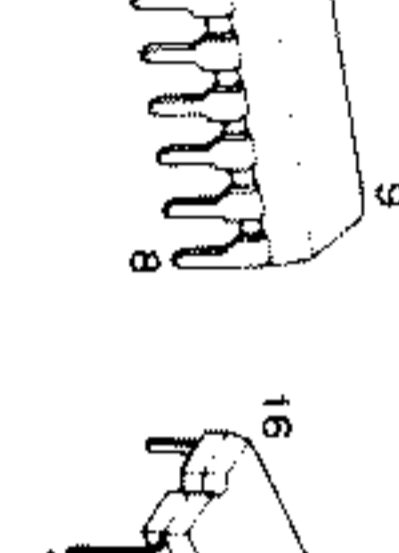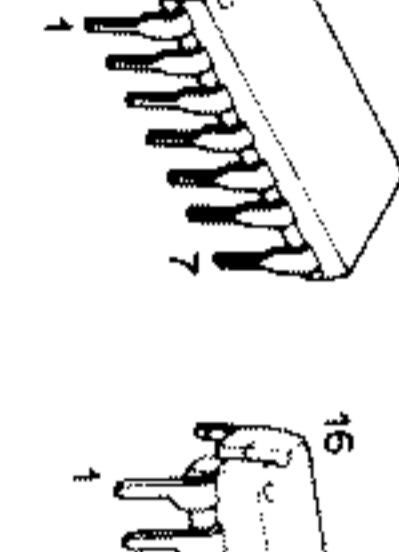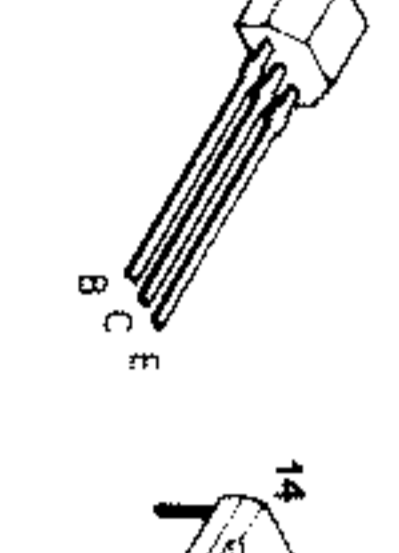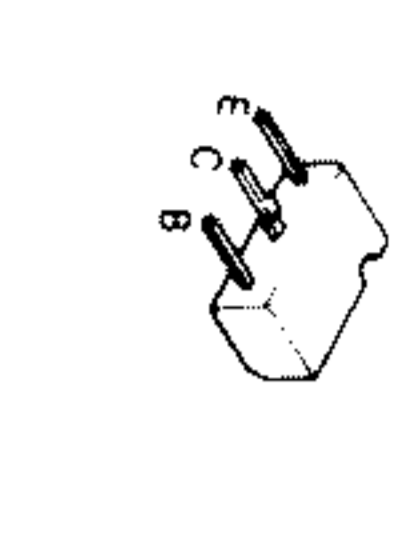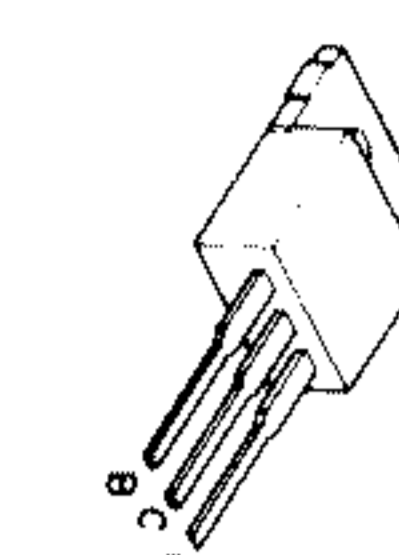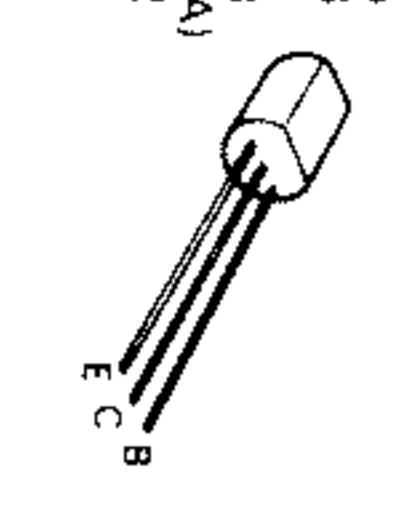

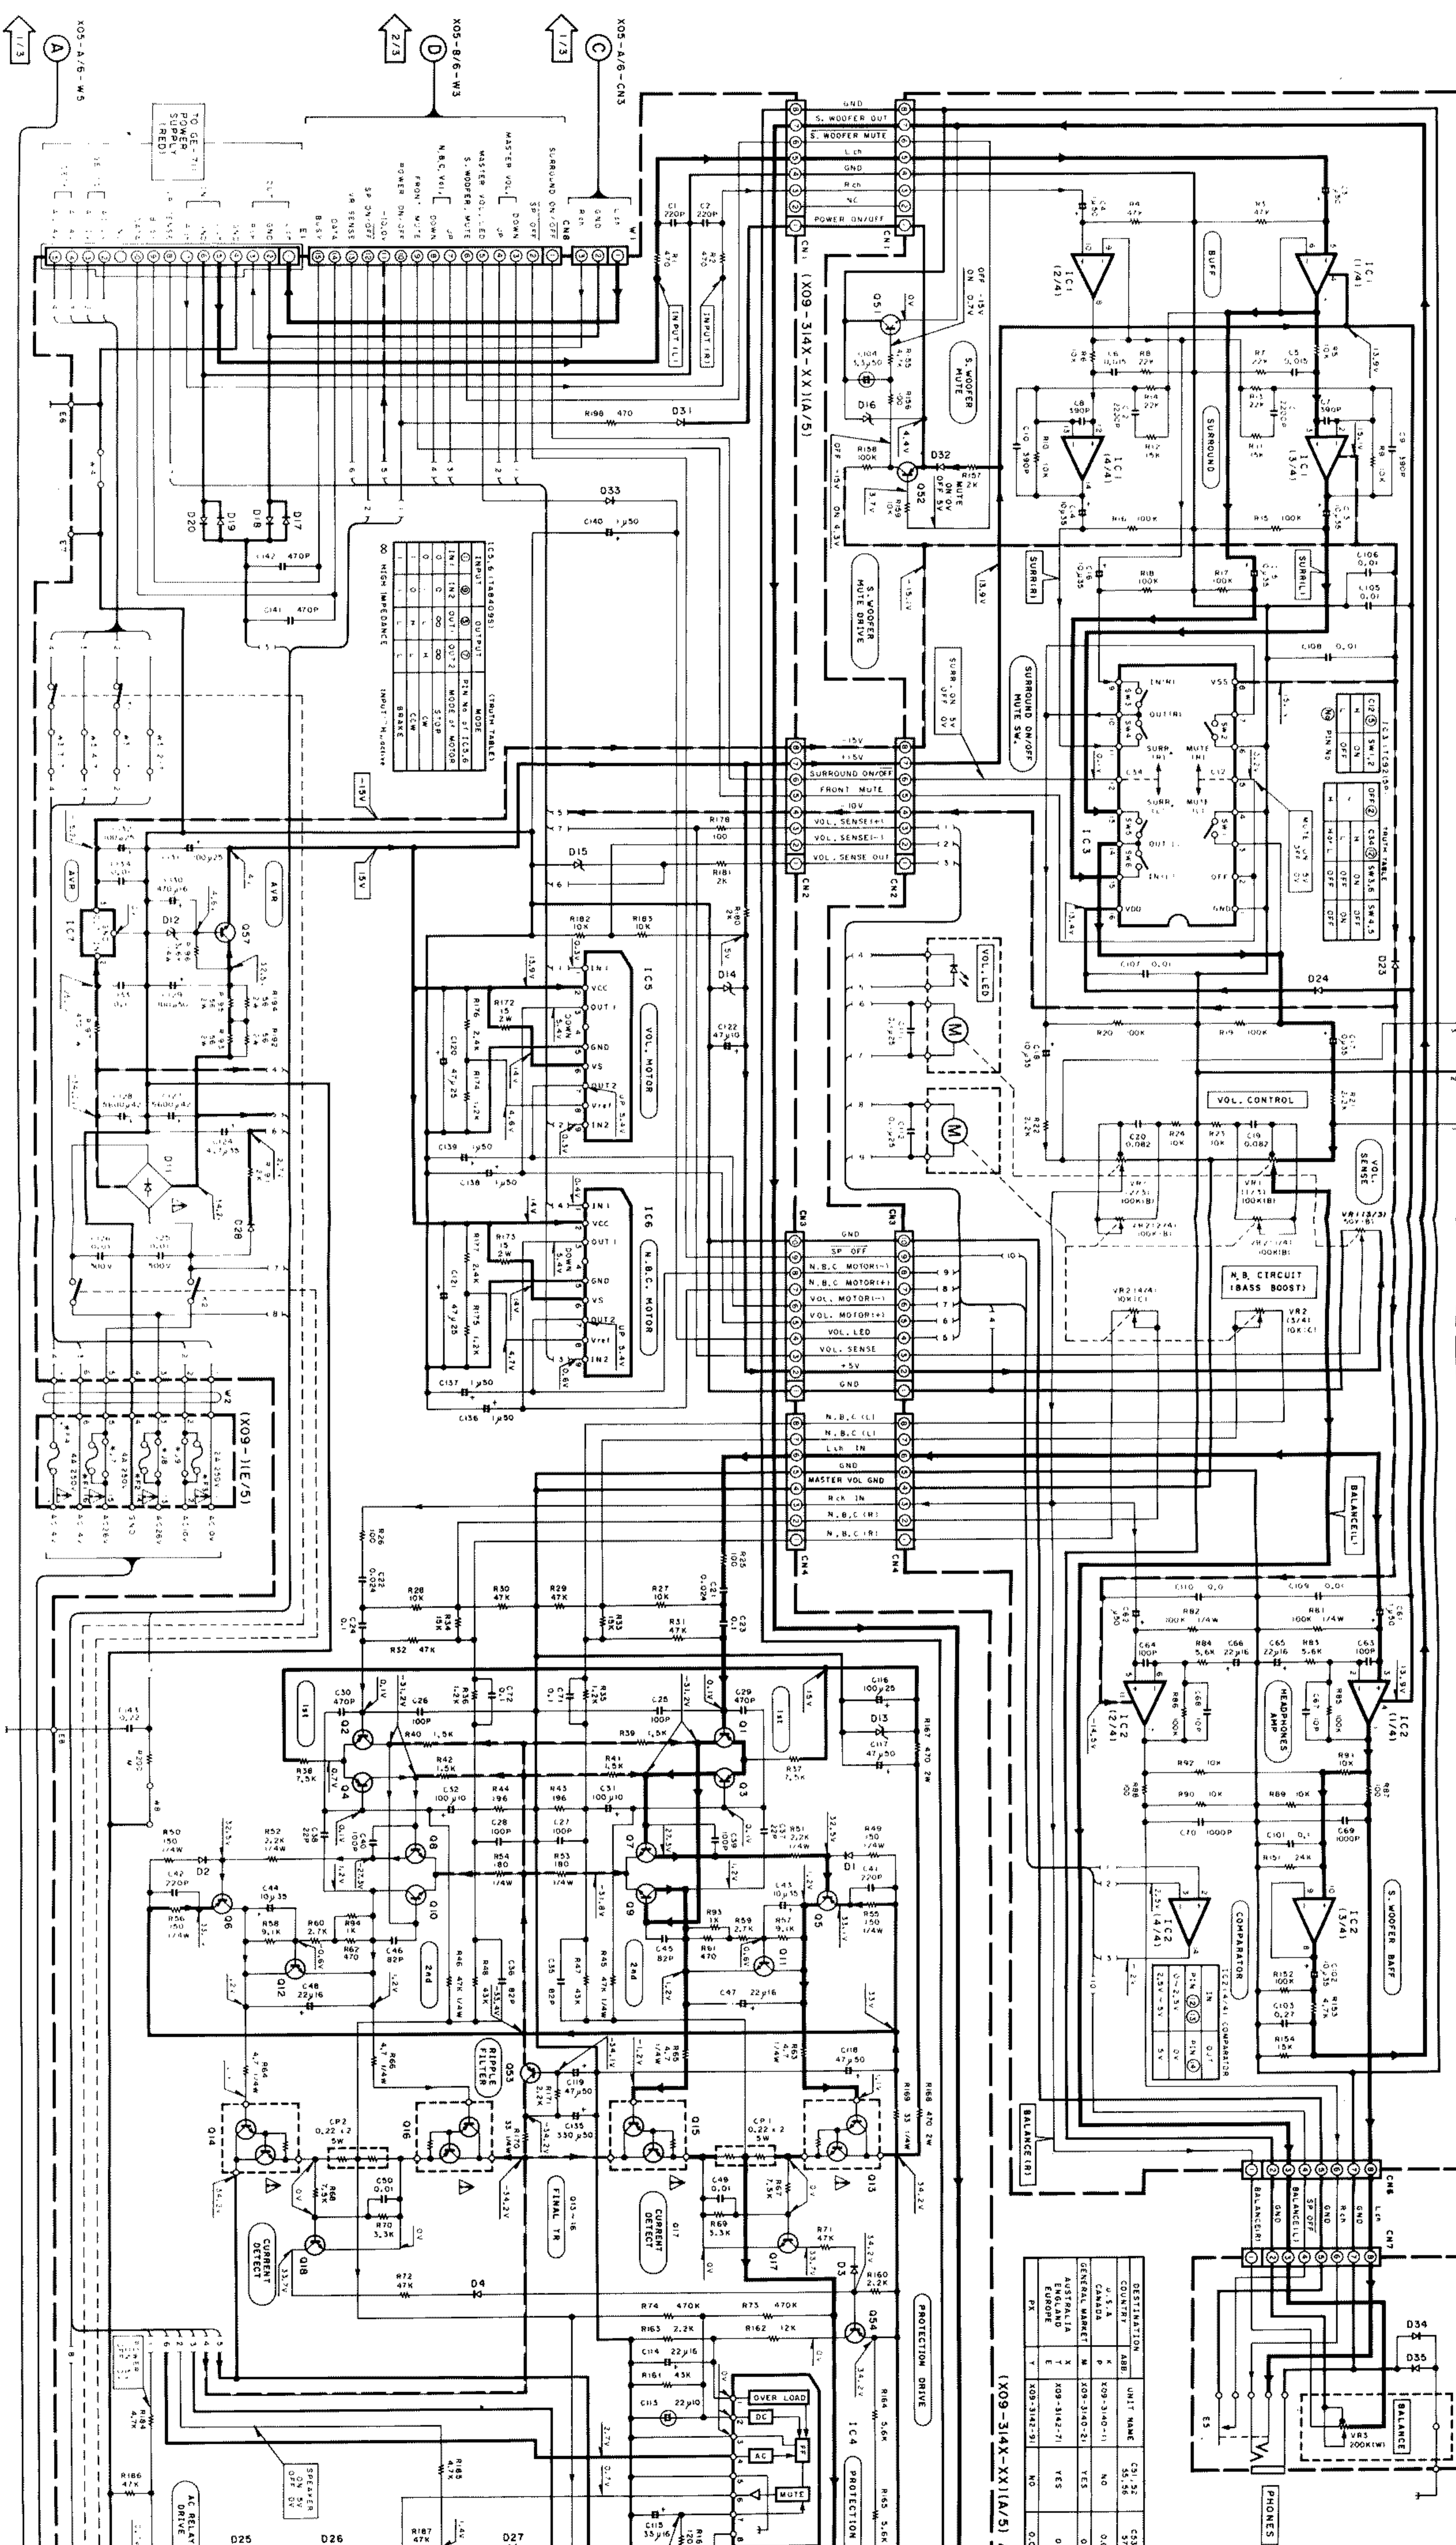

DESTINATION	UNIT NAME	C1, 21	C2, 24
U.S.A.	K 609-3140-11	NO	0.047
GENERAL MARKET	M 609-3140-21	YES	0.1
FRANCE	T 609-3142-71	YES	0.1
EUROPE	Y 609-3142-91	NO	0.047



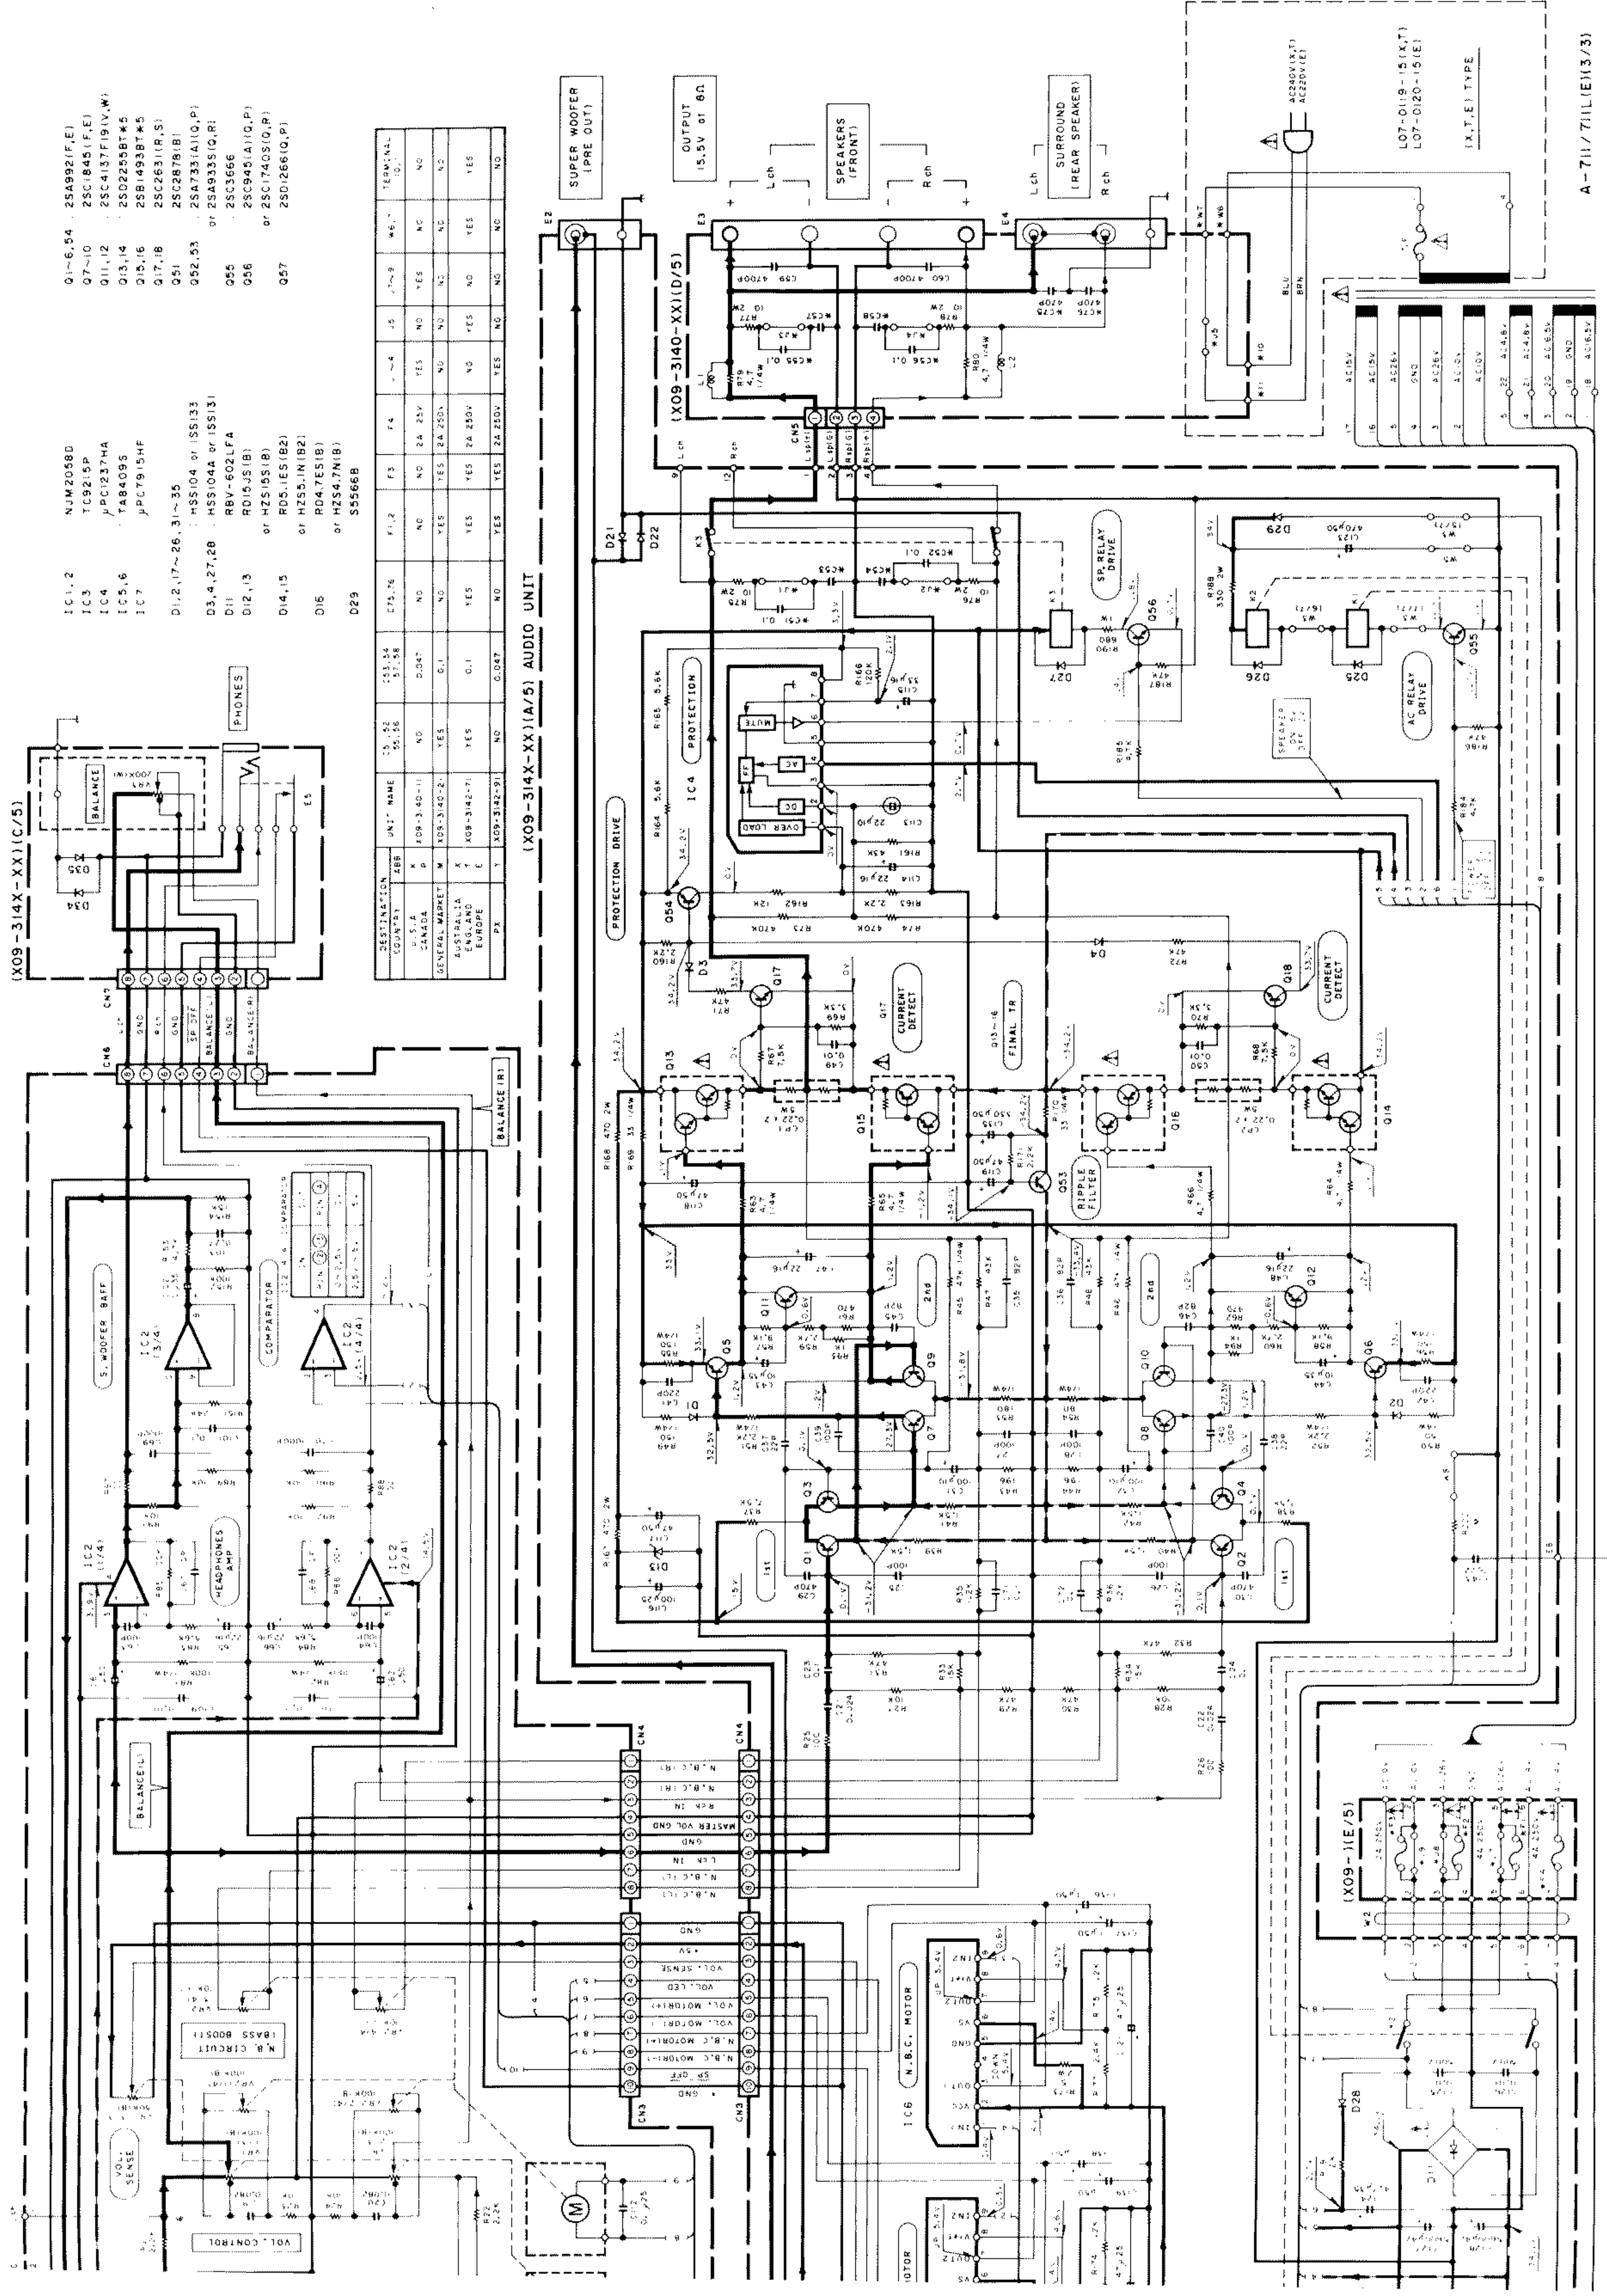


(X09-314X-XX)(I/C/5)

- IC1,2 NJM2058D
- IC3 TC9215P
- IC4 JFC1237HA
- IC5,6 TAB4095
- IC7 JFC7915HF
- D1,2,17~26,31~35 H5S104 or H5S133
- D3,4,27,28 H5S104A or H5S131
- D11 RBV-602LF4
- D12,13 H2S155(B)
- D14,15 RD511ES(B2)
- D16 RD47ES(B)
- D29 S5566B
- Q1~6,54, 25A992(F,E)
- Q7~10 25C1845(F,E)
- Q11,12 25C137(F19V,W)
- Q13,14 25D255(BT,K,S)
- Q15,16 28B1493(BT,K,S)
- Q17,18 25C263(H,R,S)
- Q51 25C287(B)
- Q52,53 25A733(A10,P)
- Q54 25A935(G,R)
- Q55 25C366
- Q56 25C1740(S,Q,P)
- Q57 25D266(Q,P)

DESTINATION	UNIT NAME	F1,2	F3	F4	F5	F6	TERM. NO.
U.S.A.	K 40P-340-11	NO	D.047	NO	NO	2A 25V	NO
CANADA	P 40P-340-11	NO	D.047	NO	NO	2A 25V	NO
GENERAL MARKET	W 40P-340-2	YES	G.1	YES	2A 25V	NO	NO
SAAS, CAN.	T 40P-340-7	YES	G.1	YES	2A 25V	NO	YES
EUROPE	E 40P-340-9	NO	D.047	NO	2A 25V	YES	NO
PX	T 40P-340-9	NO	D.047	NO	2A 25V	YES	NO

(X09-314X-XX)(I/A/5) AUDIO UNIT

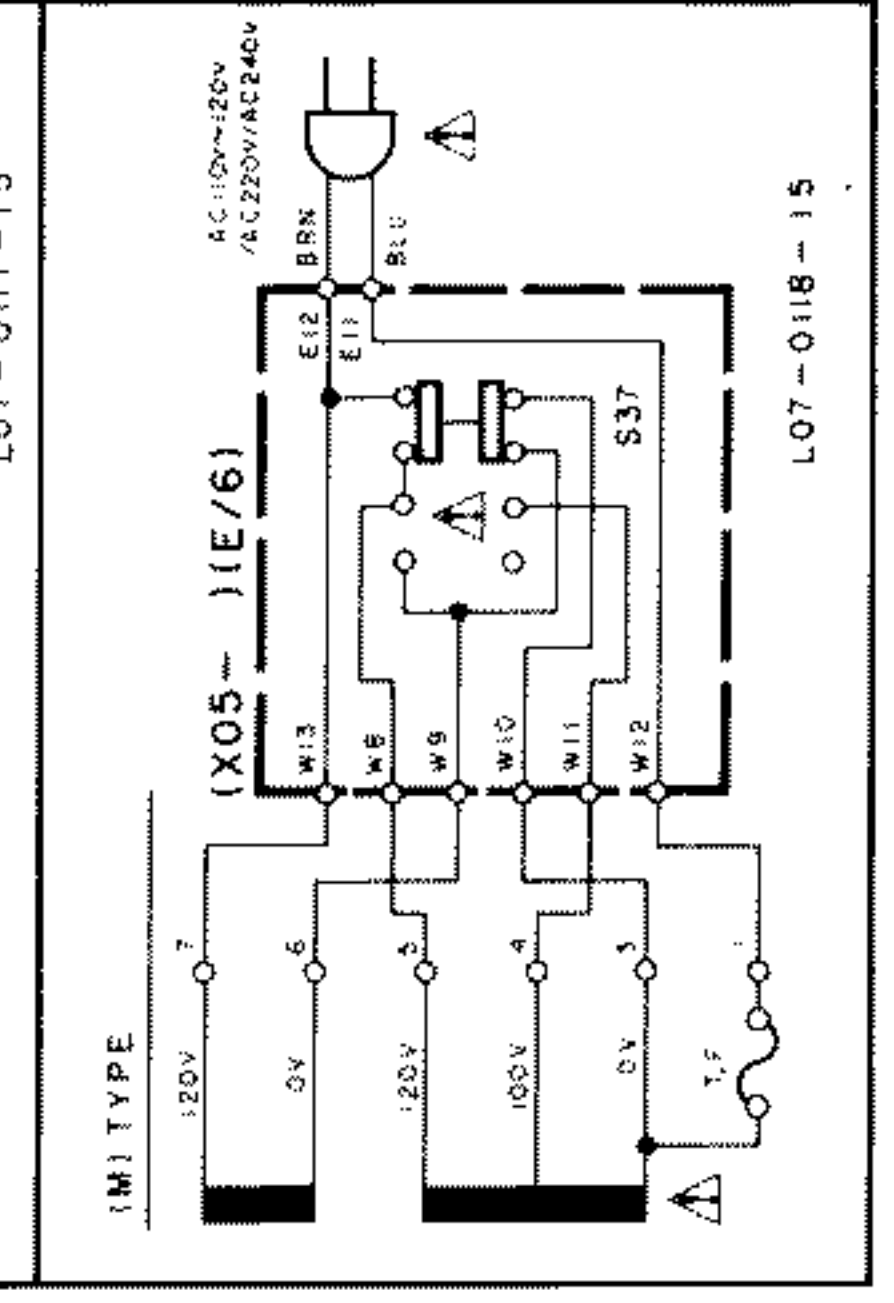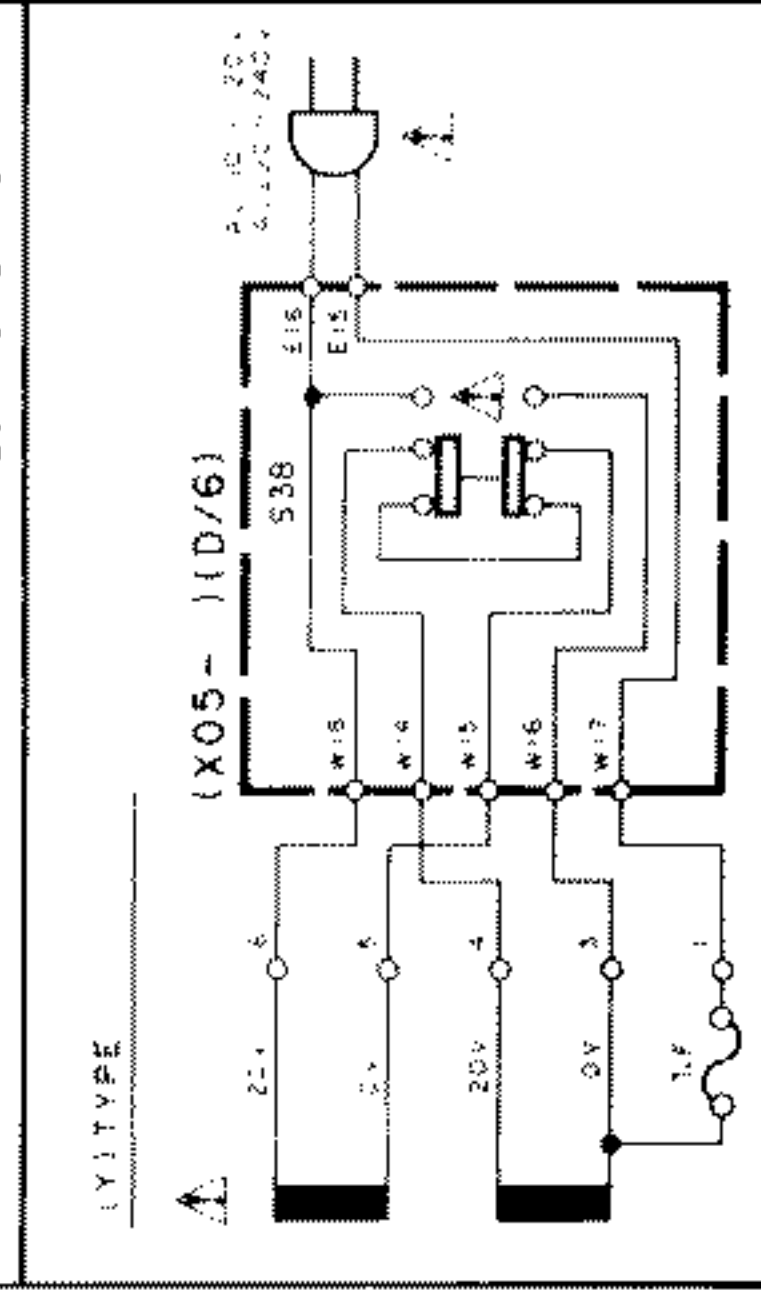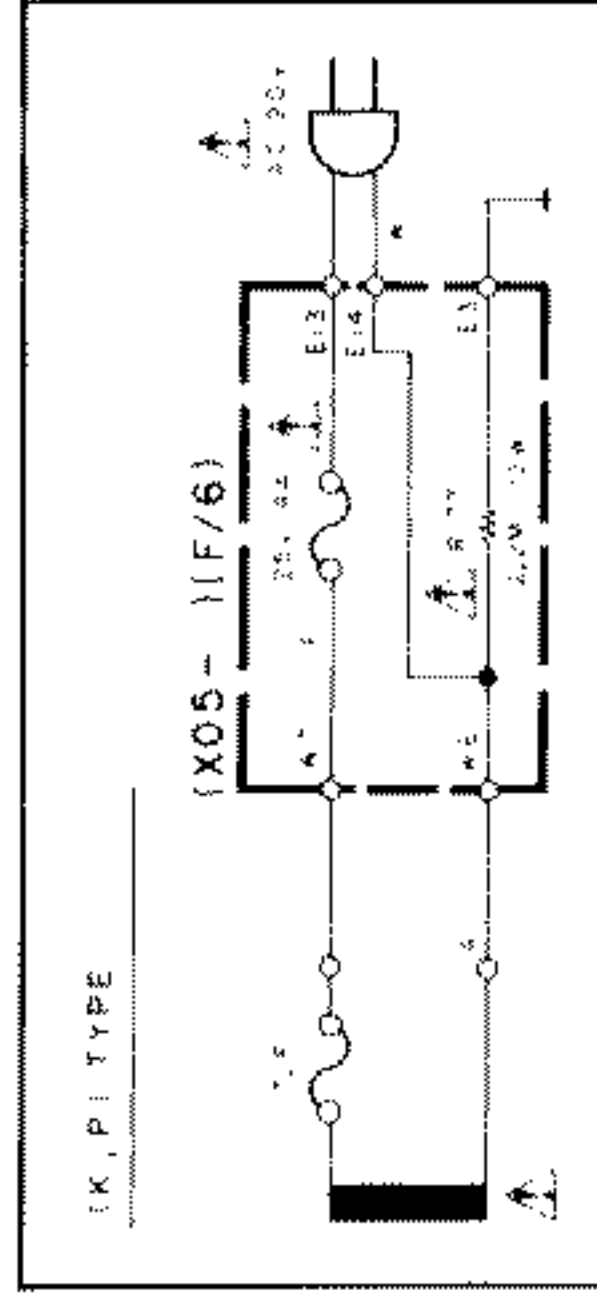

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

- SIGNAL LINE
- GND LINE
- +B LINE
- B LINE

A-711/711L(E13/3)

DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or/and units.

PARTS LIST

* New Parts
 Parts without Parts No. are not supplied.
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.
 Teile ohne Parts No. werden nicht geliefert.

Ref. No.	Address	New Parts	Parts No.	Description	Desti- nation	Re- marks
A-7117711L						
601	1A	*	A01-1866-01	METALLIC CABINET		
602	1B	*	A09-0106-08	BATTERY COVER		
604	2A	*	A20-6100-02	PANEL ASSY(A-711L)		
604	2A	*	A20-6107-02	PANEL ASSY(A-711)		
608	1B	*	A70-0367-05	REMOTE CONTROLLER ASSY	TE KPYMX	
613	3A	*	B10-1093-04	FRONT GLASS	K	
-	-	*	B46-0092-03	WARRANTY CARD	Y	
-	-	*	B46-0094-03	WARRANTY CARD	Y	
-	-	*	B46-0095-03	WARRANTY CARD	X	
-	-	*	B46-0096-13	WARRANTY CARD	X	
-	-	*	B46-0121-03	WARRANTY CARD	P	
-	-	*	B46-0122-13	WARRANTY CARD	E	
-	-	*	B46-0143-13	WARRANTY CARD	T	
-	-	*	B58-0513-04	CAUTION CARD	C4	
-	-	*	B58-0803-13	CAUTION CARD (PRESET220-240)	Y	
-	-	*	B60-0155-00	INSTRUCTION MANUAL(ENGLISH)	E	
-	-	*	B60-0156-00	INSTRUCTION MANUAL(FRENCH)	PE	
-	-	*	B60-0157-00	INSTRUCTION MANUAL(GERMAN)	E	
-	-	*	B60-0159-00	INSTRUCTION MANUAL(DUTCH)	E	
-	-	*	B60-0159-00	INSTRUCTION MANUAL(ITALIAN)	E	
-	-	*	B60-0160-00	INSTRUCTION MANUAL(CHINESE)	M	
-	-	*	B60-0161-00	INSTRUCTION MANUAL(SPANISH)	M	
615	1B	*	E03-0115-05	AC PLUG ADAPTER	M	
620	1D	*	E30-0459-05	AC POWER CORD	ME	
620	1D	*	E30-0812-05	AC POWER CORD	Y	
620	1D	*	E30-0974-05	AC POWER CORD	KP	
620	1D	*	E30-1341-05	AC POWER CORD	X	
620	1D	*	E30-1416-05	AC POWER CORD	T	
628	3B, 3D	*	G11-2017-04	CUSHION		
-	-	*	H01-8845-04	ITEM CARTON CASE(A-711)	KPYMX	
-	-	*	H01-8846-04	ITEM CARTON CASE(A-711L)	TE	
-	-	*	H09-0105-04	INNER PACKAGE		
-	-	*	H10-5023-12	POLYSTYRENE FOAMED FIXTURE		
-	-	*	H10-5024-12	POLYSTYRENE FOAMED FIXTURE		
-	-	*	H20-0566-04	PROTECTION COVER		
-	-	*	H25-0397-04	PROTECTION BAG	M KPYXTE	
-	-	*	H25-0631-04	PROTECTION BAG		
633	2B	*	J19-2815-04	ANTENNA HOLDER		
634	3C	*	J19-3300-05	UNIT HOLDER		
635	1C	*	J42-0083-05	POWER CORD BUSHING		
-	-	*	J11-0167-05	WIRE CLAMPER		
-	-	*	J61-0307-05	WIRE BAND		
644	3A	*	K29-3959-04	KNØB(N.B.CIRCUIT)		
645	3A	*	K29-3960-04	KNØB(BALANCE)		
647	3A	*	K29-3997-04	KNØB ASSY(VOLUME)		
652	3C	*	L07-0116-15	POWER TRANSFORMER	KP	
652	3C	*	L07-0117-15	POWER TRANSFORMER	Y	
652	3C	*	L07-0118-15	POWER TRANSFORMER	M	
652	3C	*	L07-0119-15	POWER TRANSFORMER	XT	
652	3C	*	L07-0120-15	POWER TRANSFORMER	E	

E: Scandinavia & Europe K: USA P: Canada W: Europe
 Y: P(X) Far East, Hawaii T: England M: Other Areas
 V: AAFES(Europe) X: Australia

▲ indicates safety critical components.

PARTS LIST

* New Parts
 Parts without Parts No. are not supplied.
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.
 Teile ohne Parts No. werden nicht geliefert.

Ref. No.	Address	New Parts	Parts No.	Description	Desti- nation	Re- marks
TUNER UNIT (X05-399X-XX, 0-10; K, P type, 0-71; X type, 2-71; T, E type, 2-91; Y type)						
649	-52		B30-1012-05	LED(SLP-961C-50)		
654	.55		B30-1012-05	LED(SLP-961C-50)		
C1			CE04KW1H010M	ELECTRØ		
C2			CE04KW1E101M	ELECTRØ		
C3			CE92FV1H273J	MF		
C4			CE04KW1H010M	ELECTRØ		
C5			CE04KW1E101M	ELECTRØ		
C6	.7		C91-0769-05	CERAMIC	K	
C8	.11		CK45FF1H223Z	CERAMIC	Z	
C12			C91-0085-05	CERAMIC	N	
C13	.14		CK45FF1H223Z	CERAMIC	Z	
C15			C91-0085-05	CERAMIC	N	
C16			CK45FF1H223Z	CERAMIC	Z	
C17			CE04KW1H2R2M	ELECTRØ		
C18			CE04KW1V4R7M	ELECTRØ		
C19			CK45FF1H223Z	CERAMIC	Z	
C20			CE04KW1H3R3M	ELECTRØ		
C21			CK45FF1H103Z	CERAMIC	Z	
C22			CK45FF1H223Z	CERAMIC	Z	
C23			CE04KW1V100M	ELECTRØ		
C24			CK45FF1H223Z	CERAMIC	Z	
C25			CF92FV1H153J	MF		
C26			CE04KW1V100M	ELECTRØ		
C27			CE04KW1H47M	ELECTRØ		
C28	-30		CK45FF1H103Z	CERAMIC	Z	
C31			CC45FSL1H101J	CERAMIC	J	
C32			CK45FF1H103Z	CERAMIC	Z	
C33			CE04KW1C470M	ELECTRØ		
C34			CK45FB1H471K	CERAMIC	K	
C35			CC45FSL1H121J	CERAMIC	J	
C36			CC45FSL1H271J	CERAMIC	J	
C37			CF92FV1H152J	MF		
C38			CF92FV1H132J	MF		
C39			CK45FB1H471K	CERAMIC	K	
C40			CE04KW1H2R2M	ELECTRØ		
C41			CE04KW1H3R3M	ELECTRØ		
C42			CE04KW1H47M	ELECTRØ		
C43			CF92FV1H473J	MF		
C44			CC93FCH1H471J	CERAMIC	J	
C45			CK45FF1H103Z	CERAMIC	Z	
C46	.47		CC45FSL1H221J	CERAMIC	J	
C48			CE04KW1C101M	ELECTRØ		
C49			CC45FSL1H680J	CERAMIC	J	
C50	.51		CE04KW1H3R3M	ELECTRØ		
C52	.53		CF92FV1H752J	MF		

E: Scandinavia & Europe K: USA P: Canada W: Europe
 Y: P(X) Far East, Hawaii T: England M: Other Areas
 V: AAFES(Europe) X: Australia

▲ indicates safety critical components.

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Table with columns: Ref. No., Address, Parts No., Description, Destination marks. Contains parts like DIODE, RESONATOR, SCREW, SWITCH, etc.

E: Scandinavia & Europe K: USA P: Canada W: Europe
Y: PK(Far East, Hawaii) T: England M: Other Areas
Y: AA(FES(Europe)) X: Australia

Δ indicates safety critical components.

PARTS LIST

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

Table with columns: Ref. No., Address, Parts No., Description, Destination marks. Contains parts like DIODE, ZENER DIODE, TRANSISTOR, REGULATOR, etc.

E: Scandinavia & Europe K: USA P: Canada W: Europe
Y: PK(Far East, Hawaii) T: England M: Other Areas
Y: AA(FES(Europe)) X: Australia

Δ indicates safety critical components.

PARTS LIST

* New Parts
 Parts without Parts No. are not supplied.
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.
 Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新部品番号	Parts No. 部品番号	Description 部品名/規格	Desti- nation 向	Re- marks 備考
F4		*	F53-0006-05	FUSE(125V 2A)	KP	
L1 ,2			L39-0085-05	PHASE-COMPENSATION COIL		
C	2C		N89-3008-45	BINDING HEAD TAPITTE SCREW		
G	2C		N09-0333-05	TAPPING SCREW (3X12)		
H	2C		N35-3008-46	BINDING HEAD MACHINE SCREW		
CPI ,2			R90-0187-05	MULTI-COMP		
R43 ,44			RN14BK2C1960F	RN		
R49 ,50			R014AB2E151JTS	FL-PROOF RD 150		
R51 ,52			R014AB2E222JTS	FL-PROOF RD 2.2K		
R53 ,54			R014AB2E181JTS	FL-PROOF RD 180		
R55 ,56			R014AB2E151JTS	FL-PROOF RD 150		
R63 -66			R014AB2E4R7JTS	FL-PROOF RD 4.7		
R75 -78			RS140B3D100JTE	FL-PROOF RS 10		
R79 ,80			R014AB2E4R7JTS	FL-PROOF RD 4.7		
R167,168			RS140B3D471JTE	FL-PROOF RS 470		
R169,170			R014AB2E330JTS	FL-PROOF RD 33		
R171			R014AB2E222JTS	FL-PROOF RD 2.2K		
R172,173			RS140B3D150J	FL-PROOF RS 15		
R188			RS140B3D331J	FL-PROOF RS 330		
R190			RS140B3A681J	FL-PROOF RS 680		
R192-195		*	RS140B3D560JTE	FL-PROOF RS 56		
R196			R014AB2E362JTS	FL-PROOF RD 3.6K		
R197			RS140B3A471JTE	FL-PROOF RS 470		
VR1	2C	*	R29-5042-05	POTENTIOMETER(VOLUME CONTROL)		
VR2	2C	*	R29-5043-05	POTENTIOMETER(N.B.CIRCUIT)		
VR3	2D	*	R05-3015-05	POTENTIOMETER(BALANCE)		
K1 ,2		*	SS1-2094-05	MAGNETIC RELAY(AC ON/OFF)		
K3			SS1-2092-05	MAGNETIC RELAY(SPEAKER ON/OFF)		
D1 ,2			HSS104	DIODE		
D1 ,2			HSS133	DIODE		
D3 ,4			HSS104A	DIODE		
D3 ,4			ISS131	DIODE		
D11			RBV-602LFA	DIODE		
D12 ,13			HZS1SS(B)	ZENER DIODE		
D12 ,13			R01SJS(B)	ZENER DIODE		
D14 ,15			HZSS.1N(B2)	ZENER DIODE		
D14 ,15			R05.1ES(B2)	ZENER DIODE		
D16			HZS4.7N(B)	ZENER DIODE		
D16			R04.7ES(B)	ZENER DIODE		
D17 -26			HSS104	DIODE		
D17 -26			ISS133	DIODE		
D27 ,28			HSS104A	DIODE		
D27 ,28			ISS131	DIODE		
D29			S5566B	DIODE		
D31 -35			HSS104	DIODE		
D31 -35			ISS133	DIODE		
IC1 ,2			NJM2058D	IC(OP AMP X4)		
IC3			TC921SP	IC(ANALOG SWITCH X 6)		
IC4			UPC1237HA	IC(POWER AMP)		
IC5 ,6			TA8409S	IC(MOTOR CONTROL)		
IC7			UPC7915HF	IC(VOLTAGE REGULATOR/ -15V)		
Q1			ZSA992(F,E)	TRANSISTOR		

E: Scandinavia & Europe K: USA P: Canada W: Europe
 Y: PY(Far East Hawaii) T: England M: Other Areas
 X: Australia

△ indicates safety critical components.

PARTS LIST

* New Parts
 Parts without Parts No. are not supplied.
 Les articles non mentionnés dans le Parts No. ne sont pas fournis.
 Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新部品番号	Parts No. 部品番号	Description 部品名/規格	Desti- nation 向	Re- marks 備考
Q7 -10			2SC1845(F,E)	TRANSISTOR		
Q11 ,12			2SC4137F19(V,W)	TRANSISTOR		
Q13 ,14		*	2SD2255B1*5	TRANSISTOR		
Q15 ,16		*	2SB1493B1*5	TRANSISTOR		
Q17 ,18			2SC2631(R,S)	TRANSISTOR		
Q51			2SC2878(B)	TRANSISTOR		
Q52 ,53			2SA733(A)(Q,P)	TRANSISTOR		
Q54			2SA933S(Q,R)	TRANSISTOR		
Q55			2SA992(F,E)	TRANSISTOR		
Q56			2SC3666	TRANSISTOR		
Q57			2SC1740S(Q,R)	TRANSISTOR		
			2SC945(A)(Q,P)	TRANSISTOR		
			2SD1266(Q,P)	TRANSISTOR		

E: Scandinavia & Europe K: USA P: Canada W: Europe
 Y: PY(Far East Hawaii) T: England M: Other Areas
 X: Australia

△ indicates safety critical components.