

CD RECEIVER

KDC-MP922 KDC-X869 SERVICE MANUAL

KENWOOD


© 2003-2 PRINTED IN JAPAN
B53-0032-00 (N) 1459

CD mechanism operation description is not in this service manual.

Please, refer to service manual X92-4030-0x (B51-7867-00).

CD mechanism extension cord : W05-0935-00


Panel assy
(A64-2976-01): KDC-X869

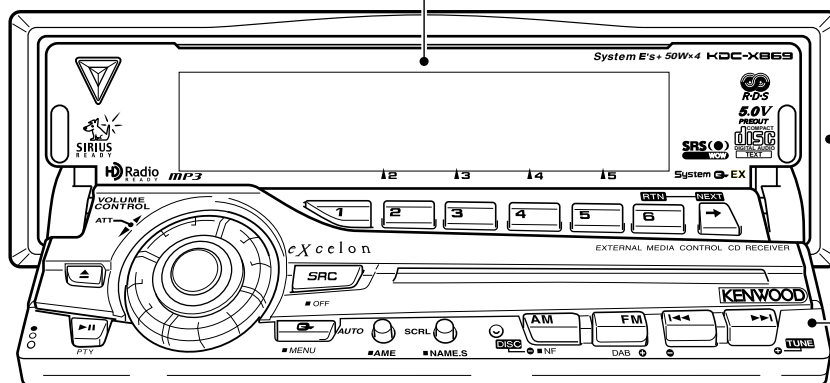

Escutcheon
(B07-3079-01):
KDC-X869

Panel assy
(A64-2993-02):
KDC-X869


Panel assy
(A64-2977-01): KDC-MP922

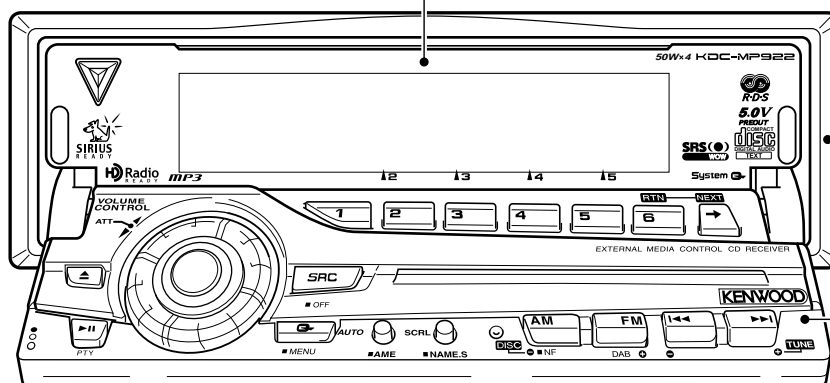


Escutcheon
(B07-3078-01):
KDC-MP922

Panel assy
(A64-2994-02):
KDC-MP922


Escutcheon
(B07-3078-01) : KDC-MP922
(B07-3079-01) : KDC-X869




Mounting hardware assy
(J21-9823-03)




Plastic cabinet assy
(A02-2731-03)




DC cord
(E30-6062-05) : KDC-X869
(E30-6106-05) : KDC-MP922




Remote controller assy
(RC-505)
(A70-2040-05)




Lever
(D10-4674-04) x 2




Size AA battery
(Not supplied)



Screw set
(N99-1723-05)



Screw set
(N99-1734-05)




HOW TO THE PANEL MECHANISM ASSEMBLY

1. Fixed the position of operation side

(Fixed the horizontal position when the panel opened)


- ① The mounting hardware (281) of operation side is rotation (A) into the stop position with close side.
- ② As figure (B) line is just above and the gear (230) attached to pin.

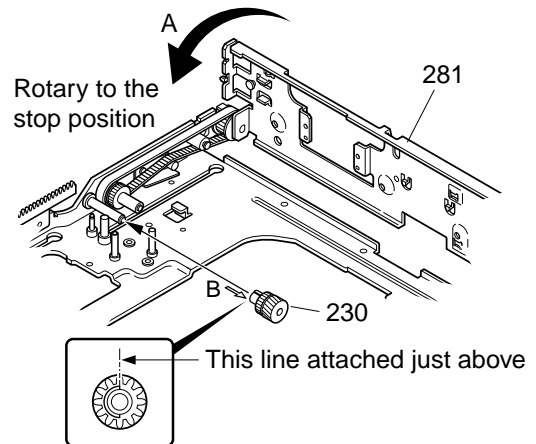


(This figure from look at B arrow)

2. The slider assembly insert to bottom chassis

- ① The bracket for display panel (284) is leave down, insert to the chassis (702). (C)

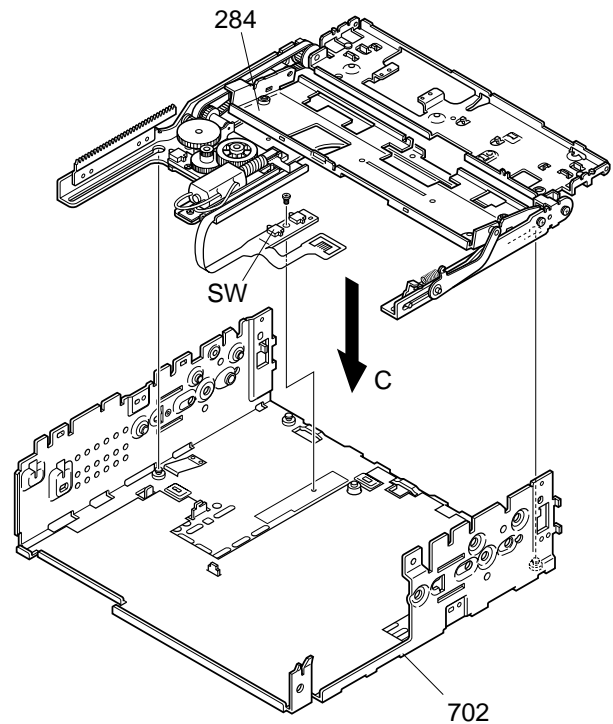


- ② The slider assembly insert to the chassis (702) after that shift (D) direction.
- ③ The bracket for display panel (284) is raised (E) direction.
- ④ Keep the raising conditions, the slider assembly is shift (F) direction.
(Note) Do not bend the knob of chassis detection switch when the slider assembly insert.

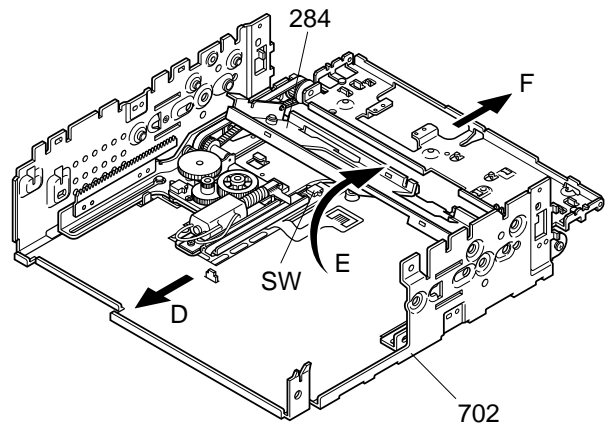

BLOCK DIAGRAM

(X25-964)

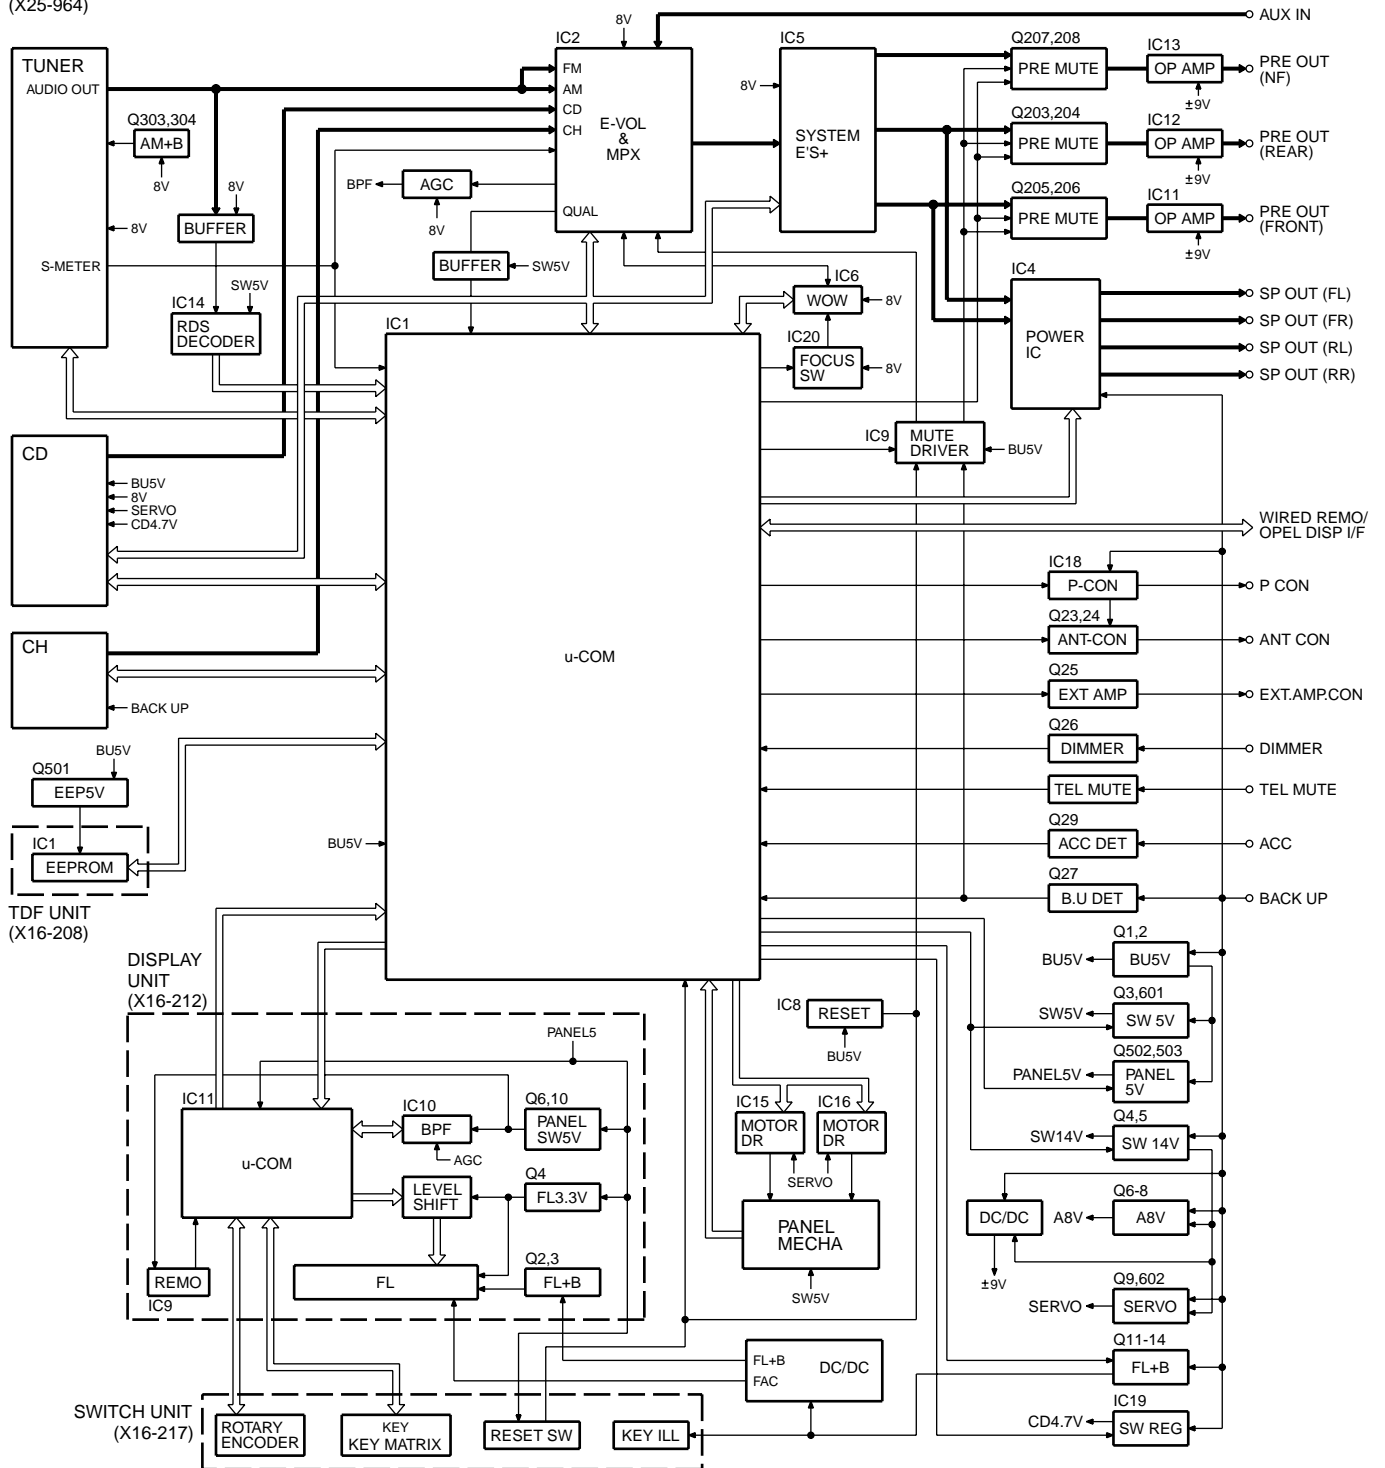

COMPONENTS DESCRIPTION

● SUB-CIRCUIT UNIT (X16-2080-10)

Ref. No.	Application/Function	Operation/Condition/Compatibility
IC1	E2PROM	For security

● SUB-CIRCUIT UNIT (X16-2120-10)

Ref. No.	Application/Function	Operation/Condition/Compatibility
IC1	3.3V regulator	The power supply of IC and VFD (Logic) which are driven by 3.3V
IC2	Buffer IC	It is change into 3.3V from 5V
IC3	Remote control IC	
IC4	Spectrum analyzer IC	
IC5	Panel μ -com	
Q1, 2	FL+B SW	FL+B (VDD2) is turned on when Q2's base level goes "H"
Q3	REMO ON SW	The power supply of IC2 and IC3 is turned on when Q3's base level goes "L"
Q4	FL BLK SW	VFD is turned on when Q4's base level goes "H"
Q5	Blue LED SW	Blue LED is turned on when Q5's base level goes "H"

● SWITCH UNIT (X16-2170-10)

Ref. No.	Application/Function	Operation/Condition/Compatibility
Q1	DSI (Disabled System Indicator)	DSI blinks when the base goes "H/L"
Q2	KEY illumination SW (GREEN)	ON (KEY illumination green) when the base goes "H"
Q3	KEY illumination SW (RED)	ON (KEY illumination red) when the base goes "H"

● ELECTRIC UNIT (X25-9640-1x)

Ref. No.	Application/Function	Operation/Condition/Compatibility
IC1	System μ -com	
IC2	E-vol & N.C. & MPX	
IC3	Regulator IC for A8V	
IC4	Power IC	
IC5	System E's IC	
IC6	Audio IC (WOW)	
IC7	-9V AVR (DC/DC IC) for 4.5V Pre-out	
IC8	Reset IC	
IC9	Logic IC for muting	
IC10	Buffer for S.A	
IC11~13	AMP for 4.5V Pre-out	
IC14	RDS decoder IC	
IC15, 16	Motor driver IC for panel mechanism	
IC17	ROM IC	For ROM correction.

COMPONENTS DESCRIPTION

Ref. No.	Application/Function	Operation/Condition/Compatibility
IC18	P-CON IC	
IC19	Swiching regulator IC for CD4.7V	
IC20	Analog SW for swiching IC6'focus	
Q1, 2	B.U.5V AVR	While BU is applied, BU5V AVR outputs +5V.
Q3, 601	SW5V	When Q601'base goes Hi, SW5V outputs +5V.
Q4, 5	SW14V	When Q5'base goes Hi, SW14V outputs 14V.
Q6~8	AUDIO 8V AVR	When Q6'base goes Hi, A8V AVR outputs 8.3V.
Q9, 602	SERVO+B AVR	When Q602'base goes Hi, S+B AVR outputs 7.5V.
Q11~14	ILL&DC/DC+B AVR	When Q11'base goes Hi, AVR outputs 9.2V.
Q15, 16	AUDIO 10.5V AVR	When Q16'base goes Hi, AVR outputs 10.5V.
Q17~19	Pre-Amp -9V AVR	Q18 and 19 works as a differential amplifier, Q17 works as a driver and -9.1V is supplied to OP amp for Pre-out.
Q20~22	Pre-Amp +9V AVR	Q20 and 22 works as a differential amplifier, Q21 works as a driver and +9.4V is supplied to OP amp for Pre-out.
Q23, 24	P-ANT SW	When Q23'base goes Hi, P-ANT SW outputs 14V.
Q25	Ex amp control buffer	
Q26	Small lamp det SW	When Q26'base goes Hi, Q26 is turned on.
Q27	BU det	When Q27'base gose Hi, Q27 is turned on.
Q29	ACC det	When Q29'base gose Hi, Q29 is turned on.
Q30, 31	Mute driver	When a base gose Lo, mute driver is turned on.
Q201	Noise buffer	
Q202	E-vol mute SW	When a base gose Hi, mute SW is turned on.
Q203~208	Pre-out mute SW	When a base gose Hi, Pre-out is muted.
Q210	AGC for SA	
Q303, 304	AM+B SW	When Q303'base gose Hi, AM+B is out.
Q305	Composite signal buffer for RDS	
Q501	E2P 5V SW	When Q501'base gose Lo, E2P 5V is out.
Q502, 503	PANEL 5V SW	When Q503'base gose Hi, PANEL 5V is out.
Q603	SW for IC20	When Q603'base gose Hi, Q603 is turned on.

MICROCOMPUTER'S TERMINAL DESCRIPTION

● SYSTEM MICROCOMPUTER : 703033BGC020 (X25-964 : IC1)

Pin No.	Pin Name	I/O	Module	Purpose / Description	Truth table	Processing Operation
1	PLL_DATA	I/O	Tuner	Data output/input with F/E.		
2	AM+B	I/O	Power supply	AM+B.		AM operation : H
3	(FM+B)	O	Power supply	FM+B (S01 F/E only).		FM operation : H, Last FM : H (With RDS, RBDS model)
4	V_ILL PAN_E2P DATA	I/O	To panel	V-ILL D/A converter (V-ILL, LCD), E2PROM data.		
5	V_ILL PAN_E2P CLK	I/O	To panel	V-ILL D/A converter (V-ILL, LCD), E2PROM clock.		
6	EVDD	-				
7	EVSS	-				
8	AFS	O	Tuner	Noise detection time constant switching.		FM seek, AF search : L, Receiving : H, Auto 0 : L
9	BEEP	O	Audio	Beep output.		
10	REMO	I	Extra	Remote control input (Panel, External display).		
11	P_MUTE	O	Audio	Power IC MUTE output.		Power OFF : L, All OFF : L, TEL mute : L
12	(SVR)	O	Audio	Power IC SVR discharge circuit control.		Power OFF momentary power dropped : H (5 second) and then L
13	IC2_SDA	I/O	CD	CD mechanism data line.		
			Audio	IC2, IC5 data line.		
			Extra	ROM correction data line.		
14	IC2_CLK	I/O	CD	CD mechanism clock line.		
			Audio	IC2, IC5 clock line.		
			Extra	ROM correction clock line.		
15	P_STBY	O	Audio	Power IC STBY output.		Power IC ON : H, Power IC OFF : L, All OFF : H
16	P_CON	I/O	Extra	Power control.		Power ON : H, Power OFF : Hi-Z, All OFF : Hi-Z
17	WOW_MODE2	O	Audio	WOW control.	①	
18	TEST	-				Connect to GND.
19	DIAG	I	Extra	P_CONIC over voltage, over current detection.		Usually : H, Unusually : L
20	MUTE	O	Audio	Mute output.		ON : OPEN, OFF : L
21	PRE_MUTER	O	Audio	PREOUT (R ch) mute.		M MUTE L is L : L (CD), Momentary power dropped : L, 2 zone, NAVI interrupt : Fixed H
22	PRE_MUTEL	O	Audio	PREOUT (L ch) mute.		M MUTE R is L : L (CD), Momentary power dropped : L, 2 zone, NAVI interrupt : Fixed H
23	BU_DET	I	Extra	Momentary power dropped detection.		Backup : L, No backup, momentary power dropped : H
24	ACC_DET	I	Extra	ACC detection.		With ACC : L, Without ACC : H
25	FOCUS	I/O	Audio	WOW focus control.		Focus HI : H, Focus LOW : Hi-Z
26	EXT_AMP_CONT	O	Extra	External amplifier control.		Refer to external amplifier control.
	NC	O		NC (Without EXT_AMP_CONT model)		Output : L
27	DIMMER	I	Extra	Small lamp detection.		ON : L, OFF : H
28	ANT_CON	O	Extra	Antenna control.	②	Tuner ON : H, Other source With RDS last FM : H, Other source with RBDS TI ON last FM : H
	TYPE2	I	Extra	Destination select.	②	K,J type (With ANT_CON model) : L, E type (Without ANT_CON model) : H
29	P_ON	I/O	Power supply	SW 14V, SW 5V control, AD reference voltage control output.		Power ON : H, Power OFF : Hi-Z
30	ILL_ON	I/O	Power supply	FL, illumination output.		ON : H, OFF : Hi-Z
31	RESET	-				
32	XT1	-		Sub clock.		32.768kHz

MICROCOMPUTER'S TERMINAL DESCRIPTION

Pin No.	Pin Name	I/O	Module	Purpose / Description	Truth table	Processing Operation
33	XT2	-		Sub clock.		32.768kHz
34	REGC	-				Connect to 1 μ F capacitor.
35	X2	-		Main clock.		20MHz
36	X1	-		Main clock.		20MHz
37	VSS	-				
38	VDD	-				
39	CLKOUT	-				
40	LX_REQ_M	O	LX	Communication request to external slave.		Request : L
41	LX_MUTE	I	LX	Mute request from external slave.		Mute ON : H
42	LX_CON	O	LX	External slave select.		ON : H, OFF : L
43	LX_RST	O	LX	Reset output to external slave μ -com		Normally : L, After system reset : H (400ms or more) and then L
44	CD_MECHA+B	O	Power supply	CD 4.7V output.		CD source : H, Except CD source : L, ON : Fast 50ms than M_STOP, OFF : Slow 50ms than M_STOP
45	TYPE0	I	Extra	Destination select.	②	
46	TYPE1	I	Extra	Destination select.	②	
47	IC2_TYPE0	I	Extra	IC2 destination.	②	
48	IC2_TYPE1	I	Extra	IC2 destination.	②	
49	PAN5V	I/O	Power supply	Panel 5V control.		ON : H, Momentary power dropped : Hi-Z
50	E2P5V	I/O	Power supply	E2PROM, DA converter power supply control.		ON : L, OFF : Hi-Z
51	DSI	I/O	To panel	DSI control.		ON : L, OFF : Hi-Z
52	MC_REQ	O	To panel	Communication request to panel μ -com.		
53	PAN_RST	O	To panel	Reset output to panel μ -com.		Normally : H, Reset, momentary power dropped : L
54	WOW_MODE3	O	Audio	WOW control.	①	
55	BVDD	-				
56	BVSS	-				
57	SC_CON	O	To panel	Panel μ -com control.		Power OFF, ACC OFF : L
58	M_RST	O	CD	Reset output to CD mechanism.		Normally : H, Reset : L (Per mechanism control)
59	M_STOP	O	CD	Stop request to CD mechanism.		Stop : L, CD : H
60	CD_SW3	I	CD	DC down switch detection.		Chucking : H
61	LO/EJ	I/O	CD	CD mechanism loading/eject switch.		Stop, brake : Hi-Z, Loading : L, Eject : H
62	MOSW	O	CD	CD mechanism motor driver switch.		Loading, eject, brake : H
63	FPM MOTOR B	O	P-mecha	FPM mechanism (Slider) control.	③	
64	FPM MOTOR F	O	P-mecha	FPM mechanism (Slider) control.	③	
65	FPM MOTOR O	O	P-mecha	FPM mechanism (Angle) control.	③	
66	FPM MOTOR C	O	P-mecha	FPM mechanism (Angle) control.	③	
67	NC	O		NC (Without external display model)		Output : L
68	NC	O		NC (Without external display model)		Output : L
69	NC	O		NC (Without external display model)		Output : L
70	M_MUTER	I	CD	Mute request form CD mechanism. (R ch).		ON : L (CD)
71	AVDD	-				
72	AVSS	-				
73	AVREF	-		Connect to P_ON (29 pin).		
74	M_MUTEL	I	CD	Mute request form CD mechanism. (L ch).		ON : L (CD)
75	PAN_DET	I	To panel	Panel E2PROM detection.		With : L, Without : H
76	NC	I		NC (Without TEL-MUTE model)		Connect to GND.

MICROCOMPUTER'S TERMINAL DESCRIPTION

Pin No.	Pin Name	I/O	Module	Purpose / Description	Truth table	Processing Operation
77	FPM SW4	I	P-mecha	FPM mechanism position detection, mechanism detection.	③	3.75V or more : No mechanism, 1.25V or more : H, Less than 1.25V : L
78	FPM SW1	I	P-mecha	FPM mechanism position detection.	③	
79	FPM SW2	I	P-mecha	FPM mechanism position detection.	③	
80	FPM SW3	I	P-mecha	FPM mechanism position detection.	③	
81	FPM PHOUT	I	P-mecha	FPM mechanism position detection.	③	H : 2.2V or more
82	S_METER	I	Tuner	S-meter detection.		Refer to S03 F/E control.
83	NOISE	I	Tuner	FM noise detection.		Refer to S03 F/E control.
84	IFC_OUT	I	Tuner	F/E IFC OUT input.		With station : 2.5V or more, refer to S03 F/E control.
85	NC (POWER_DET)	I	Extra	Power IC DC offset detection.		03 model not used. Connect to GND.
86	NC	O		NC (Except J type)		Output : L
87	R_CLK	I	Tuner	RDS decoder clock input.		
88	LX_REQ_S	I	LX	Receive request from external slave.		Request : L
89	SC_REQ	I	To panel	Communication request from panel μ -com		
90	CD_SW1	I	CD	Loading switch detection.		Loading start power off : L
91	CD_SW2	I	CD	12cm disc detection switch.		12cm disc power off : L
92	R_QUAL	I	Tuner	RDS decoder QUAL input.		
93	R_DATA	I	Tuner	RDS decoder data input.		
94	LX_DATA_S	I	LX	Data input from external slave.		
95	LX_DATA_M	O	LX	Data output to external slave.		
96	LX_CLK	I/O	LX	Clock input/output with external slave.		
97	PAN_RX	I	To panel	Data input from panel μ -com		
98	PAN_TX	O	To panel	Data output to panel μ -com		
99	WOW_MODE1	O	Audio	WOW control.	①	
100	PLL_CLK	I/O	Tuner	Clock input/output with F/E.		

Truth table

① WOW MODE changover operation

MODE	WOW_MODE1	WOW_MODE2	WOW_MODE3	FOCUS
BYPASS	L	L	L	Don't care
TruBass	L	H	L	Don't care
3D-STEREO	L	L	H	Don't care
FOCUS LOW	H	L	L	L (Hi-z)
FOCUS HI	H	L	L	H
WOW LOW	H	H	H	L (Hi-z)
WOW HI	H	H	H	H

② Destination port

MODEL	Destination	DISPLAY	TYPE2	TYPE1	TYPE0
KDC-X969	K	FL	0	0	0
KDC-MP922	K	FL	0	0	1
FX-9000	J	FL	0	1	0
KDC-PSW9524	E	FL	1	0	0
KDC-9023R	M (E)	FL	1	0	1
KDC-X869	K	FL	0	1	1

MICROCOMPUTER'S TERMINAL DESCRIPTION

MODEL	Destination	DISPLAY	TYPE2	TYPE1	TYPE0
KDC-8024	E	FL	-	-	-
KDC-MP822	K	LCD	-	0	0
KDC-M7024	E	LCD	-	0	1
FX-5000	J	LCD	-	1	0
KDC-V7022	K	LCD	0	0	0
KDC-X769	K	LCD	0	0	1
KDC-722	K	LCD	0	1	0
KDC-7024	E	LCD	0	1	1
KDC-7024Y					
KDC-8023	M (K)	LCD	1	0	0

Note : When FL model using TYPE2, K & J type (with ANT_CON model) : L, E type (without ANT_CON model) : H

Destination(IC2)

	TYPE0	TYPE1
Market model	L	L
Market model CRSC modification	L	H
OEM model CRSC modification	H	L
OEM model CRSC and de-emphasis modification	H	H

③ FPM MOTOR

Slide		FPM mechanism operation
FPM MOTOR B	FPM MOTOR F	
0	0	Standby
1	0	Backward operation
0	1	Forward operation
1	1	Brake

Angle		FPM mechanism operation
FPM MOTOR O	FPM MOTOR C	
0	0	Standby
1	0	Angle open direction
0	1	Angle close direction
1	1	Brake

● PANEL MICROCOMPUTER 703032BGFA01 (X16-212 : IC5)

Pin No.	Pin Name	I/O	Purpose / Description	Processing Operation
1	FL DATA1	O	Data output to FL driver.	
2	FL CLK	O	Clock output to FL driver.	Communication speed : 2.5MHz
3	NC	O		Output : L
4	FL DATA2	O	Data output to FL driver.	
5	CLK IN	I	Serial clock input.	Connect to 2 pin (Reset, low current consumption mode : FL CLK output "L").
6	SYSTX	I	Data input from system μ -com.	(Reset, low current consumption mode : System μ -com output "L")

KDC-MP922/X869

MICROCOMPUTER'S TERMINAL DESCRIPTION

Pin No.	Pin Name	I/O	Purpose / Description	Processing Operation
7	SYS RX	O	Data output to system μ -com.	Communication speed : 1.25Mbps
8	NC	O		Output : L
9	Evdd	-	PAN 5V	
10	Evss	-	Vss	
11~13	NC	O		Output : L
14	FL LATCH	O	Latch output to FL driver.	
15	FL GCP	O	Bright control.	
16~19	NC	O		Output : L
20	FL BLK	O	Display switching signal output to FL driver.	H : Display ON, L : Display OFF
21	TEST	I		Connect to GND.
22~25	NC	O		Output : L
26~29	KS1~KS4	I/O	Key scan.	Key scan (Hi-Z/L)
30	REMO ON	I/O	Remote control IC power on/off.	Hi-Z : OFF, L : ON (Time constant check, 500 μ s)
31	BLUE LED	O	Blue LED ON/OFF.	H : ON, L : OFF
32	RED LED	O	Illumination red changeover.	H : ON, L : OFF
33	GREEN LED	O	Illumination green changeover.	H : ON, L : OFF
34	RESET	I	Reset.	L : Reset, H : Reset cancel
35	TX1	-		
36	TX2	-		
37	REGC	-		Connect to 1 μ F capacitor.
38	X1	-	Main clock.	20MHz
39	X2	-	Main clock.	20MHz
40	Vss	-	Vss	
41	VDD	-	Vdd	
42	CLKOUT	-		
43~47	NC	O		Output : L
48	FL+3.3V	O	FL3.3V ON/OFF.	Hi-Z : OFF, L : ON (Time constant check, 1ms)
49	FL+B	I/O	FL+B ON/OFF.	Hi-Z : OFF, L : ON (Time constant check, 35 μ s)
50~57	NC	O		Output : L
58	Vdd	-	Vdd	
59	Vss	-	Vss	
60~69	NC	O		Output : L
70	VOLUME B	I	VOL input.	
71	VOLUME A	I	VOL input.	
72	SA RST	O	Spectrum analyzer IC reset.	H : reset, L : Normally
73	AV CONT	O	VREF control.	Operation : H
74	Avdd	-	Vdd	
75	Avss	-	Vss	
76	Avref	-		Connect to 73 pin.
77	F01	I	BPF (63Hz)	
78	F02	I	BPF (150Hz)	
79	F03	I	BPF (330Hz)	
80	F04	I	BPF (1kHz)	
81	F05	I	BPF (3.3kHz)	
82	F06	I	BPF (10kHz)	
83	WAVE IN	I	Audio input.	

MICROCOMPUTER'S TERMINAL DESCRIPTION

Pin No.	Pin Name	I/O	Purpose / Description	Processing Operation
84~88	KR5~KR1	I	Key return.	
89	SC REQ	O	Communication request to system μ -com.	H : Request
90	NC(FAC IN)	O		Output : L
91	SC CON	I	Panel μ -com control.	H : Operation
92	OPEN KEY	I	OPEN key input.	H : OFF, L : ON
93	SRC KEY	I	SRC key input.	H : OFF, L : ON
94	NC	O		Output : L
95	MC REQ	I	Communication request from system μ -com.	H : Request (Reset, low current consumption mode : System μ -com output "L")
96	NC	O		Output : L
97~99	NC	O		Output : L (Flash μ -com writing port)
100	NC	O		Output : L

● MECHANISM MICROCOMPUTER : 703033BYGC-J02 (X32-541 : IC7)

Pin No.	Pin Name	I/O	Use	Processing Operation	STBY Processing
1	NC	O	Not used.	Fixed Low	Low
2	E2P_SCL	O	ROM correction E2P IC2 clock.		Hi-Z
3~5	NC	O	Not used.	Fixed Low	Low
6	VDD	-	5V		
7	GND	-	GND		
8, 9	NC	O	Not used.	Fixed Low	Low
10	PON	O	Power ON/OFF control.	H : ON, L : OFF	Low
11	/PON	O	Power ON/OFF control.	H : OFF, L : ON	High
12	LOE/LIM_SW	I	Down limit switch detection.	L : Most Inner position detection	Hi-Z
13	8EjE_SW	I	Not used.	Fixed Low	Hi-Z
14	LOS_SW	I	Not used.	Fixed Low	Hi-Z
15	12EjE_SW	I	Not used.	Fixed Low	Hi-Z
16, 17	NC	O	Not used.	Fixed Low	Low
18	IC/Vpp	-	Write voltage (Flash).		-
19	MUTE_L	O	L ch audio mute control.	L : Mute ON, H : Mute OFF	Low
20	MUTE_R	O	R ch audio mute control.	L : Mute ON, H : Mute OFF	Low
21~25	NC	O	Not used.	Fixed Low	Low
26	EFLG	I	WMA error detection.	H : Error, L : No error	Hi-Z
27	WAIT	I	Wait control signal detection.		Hi-Z
28	FOK	I	Focus condition detection.	H : Focus OK, L : Focus NG	Hi-Z
29, 30	NC	O	Not used.	Fixed Low	Low
31	RESET	I	Reset detection.	H : Normal, L : Reset	Hi-Z
32	XT1	I	Not used.		Hi-Z
33	XT2	-	Not used.		-
34	REGC	-			
35	X2	-			
36	X1	I			Hi-Z
37	Vss	-	GND		

MICROCOMPUTER'S TERMINAL DESCRIPTION

Pin No.	Pin Name	I/O	Use	Processing Operation	STBY Processing
38	VDD	-	5V		
39	NC	O	NC	Output stop.	Low
40	WRL	O	Multiplex WRITE signal.	_LBEN : 61002 (Not used), _WRL : 63760	Out-Low
41	NC	O	Not used.	Fixed Low	Low
42	R/W	O	Multiplex _R/W signal	_R/W : 61002, _WRH : 63760 (Not used)	Out-Low
43	DSTB,RD	O	Multiplex DSTB or RD signal	_DSTB : 61002, _RD : 63760	Out-Low
44	ASTB	O	Multiplex ASTB signal		Out-Low
45, 46	NC	O	Not used.	Fixed Low	Low
47~54	AD0~AD7	I/O	Multiplex address/data		Out-Low
55	BVdd	-	Bus interface power supply.		
56	BVss	-	Bus interface GND.		
57~64	AD8~AD15	I/O	Multiplex data/address		Out-Low
65	/HCSB	O	Chip select control.	H : OFF, L : ON	Low
66	/CS	O	Chip select control.	H : OFF, L : ON	Low
67	DSP RESET	O	DSP reset control.	H : Normal. L : Reset	Low
68	REQ	I	Data transfer request input.		Hi-Z
69	DBBWRDY0	I	DBB00 register write permission input.		Hi-Z
70	DBBRRDY0	I	DBB00 register read permission input.		Hi-Z
71	Avdd	-			
72	Avss	-			
73	Avref	I	A/D port reference voltage input.		
74	WTS	I	WMA table select.	H : WMA8 table, L : WMA9 table	Hi-Z
75	MDL_SEL	I	Model port changeover.	H : 03 model, L : 02 model	Hi-Z
76, 77	NC	I	Not used.	Fixed Low	Hi-Z
78	HOT	I	Temperature rise detection.	Detection voltage : 4V, Reset voltage 3.9V	Hi-Z
79	NC	I	Not used.	Fixed Low	Hi-Z
80	WMA	I	WMA correspond changeover.	H : DXM6500 (With WMA), L : DXM6400 (Without WMA)	Hi-Z
81	NC	I	Not used.		Hi-Z
82	ASEL	I	Audio output pole changeover.	H : Invert output, L : Normal output	Hi-Z
83	DASC	I	Shock proof changeover.	H : Shock proof OFF, L : Shock proof ON	Hi-Z
84	E2P_WR	I	E2PROM write changeover.	H : E2PROM write, L : Normal	Hi-Z
85	PIC_SEL	I	PICK UP changeover.	H : KPC6C, L : KSS710	Hi-Z
86	NC	O	Not used.	Fixed Low	Low
87	MSTOP	I	Standby restart interrupt.	H : Standby, L : Stop	Hi-Z (Low input)
88	INTSV	I	Servo IC interrupt.	H : Interrupt	Hi-Z
89	FOGUP	I	Focus gain up interrupt.	H : Focus gain up, L : Normal	Hi-Z
90	ZMUTE_R	I	0 bit mute detection.	H : Mute ON, L : Mute OFF	Hi-Z
91	ZMUTE_L	I	0 bit mute detection.	H : Mute ON, L : Mute OFF	Hi-Z
92	NC	O	Not used.	Fixed Low	Low
93	D-MUTE	O	Driver mute.	H : OFF, L : ON	Low
94	SYS_SDA	I/O	System μ -com I2C data.		Hi-Z
95	NC	O	Not used.	Fixed Low	Low
96	SYS_SCL	I/O	System μ -com I2C clock.		Hi-Z
97~99	NC	O	Not used.	Fixed Low	Low
100	E2P_SDA	O	ROM correction E2P I2C data.		Hi-Z

TEST MODE

● How to enter the test mode

While pressing and holding the Preset 1 and Preset 3 keys, reset the unit.

● How to exit from the test mode

While holding the Preset 6 key, reset the unit.

(Note) The test mode cannot be terminated by reset the unit, ACC OFF, power OFF and Panel detached, momentary power down.

● Initial status in the test mode

- Sources : ALL OFF
- Display : All segments are lit.
- Volume : -10 dB (displayed as "30")
- Loudness : OFF
- CRSC : OFF regardless of the presence of switching function.
- SYSTEM Q : Flat
- WOW : All OFF
- BEEP : When pressing any keys, the buzzer generates a beep at any time.
- AUX : ON
- MENU SYSTEM Q : OFF
- Variable model : Default is white
- Multifunction : Source dependency (Preset, SCAN, etc.)

● Special display in Tuner mode

When any of the following messages is displayed in Tuner mode, the F/E may be abnormal.

- "TNE2P NG" : The EEPROM is set to the default (unstable values) because the F/E was shipped without passing through the adjustment process, etc.
- "TNCON NG" : Communication with the F/E is not possible.

● Forced switching of K3I

Each press of the Preset 6 key in Tuner mode should switch K3I from AUTO → Forced Wide → Forced Middle → Forced Narrow → AUTO.

The initial status is AUTO and the display shows these modes as follows.

- AUTO : FMA
- Forced Wide : FMW
- Forced Middle : FMM
- Forced Narrow : FMN

● Test mode specifications of the CD receiver

- Forced ejection is inhibited in the reset start operation. When the unit is reset while a CD is loaded in it, the CD is not recognized by resetting.
- Each press of the Track Up key jumps to the following track numbers:
No. 9 → No. 15 → No. 10 → No. 11 → No. 12 → No. 13 → No. 22 → No. 14 → No. 9 (The cycle restarts from here.)
- Each press of the Track Down key jumps to the previous track number to the track being played.
- When the number of total tracks of the MP3 disc or the WMA disc is less than 9, 1st track is played.
- When the disc media is CD, A short press of the Preset 1 key jumps to the track number 28.
- When the model is equipped the CD mechanism assembly adapted for MP3 or MP3/WMA disc, the mechanism name and version number are displayed during the FL model is lower stand and Display mode of LCD model is DNPS.

● Audio-related specifications

- Pressing the * key on the remote initiates the audio adjustment mode.
- BL/F key on the Fader initials.
- Continuous holding of a remote control key is inhibited, and workings are short press of any keys.
- Bass, Middle and Treble are adjusted in 3 steps of -8 / 0 / +8 with the Track Up/Down keys (Default value at 0).
- Balance is adjusted in 3 steps of L15 / 0 / R15 with the Track Up/Down keys (Default value at 0).
- Fader is adjusted in 3 steps of R15 / 0 / F15 with the Track Up/Down keys (Default value at 0).
- HPF is adjusted in 2 steps of OFF / 170Hz (or 220Hz) with the Track Up/Down keys (Default value at OFF).
- LPF is adjusted in 2 steps of OFF / 120Hz with the Track Up/Down keys (Default value at OFF).
- Bass f, Bass Q, Bass EXT, Middle f, Middle Q and Treble f are not dealt with by the audio adjust.
- The WOW key pass during the audio adjustment as following steps.

Order	Mod.			Display
	TruBass	FOCUS	SRS	
①	OFF	OFF	OFF	SRS WOW OFF
②	ON	OFF	OFF	SRS TruBass ON
③	OFF	LOW	OFF	FOCUS LOW
④	OFF	HIGH	OFF	FOCUS HIGH
⑤	OFF	OFF	ON	SRS ON
⑥	ON	HIGH	ON	SRS WOW HIGH

TEST MODE

● Menu-related specifications

- A short press of the Q key initiates the menu mode.
- Pressing the DNPP key on the remote initiates the Menu mode.
- Continuous holding of a remote control key is inhibited, and workings are short press of any keys.
- Contrast is adjusted in 3 steps of 0 / 5 / 10 with the Track Up/Down keys (Default value at 5).

● Backup current measurement

When the unit is reset while ACC is OFF (i.e. by turning Backup ON), the MUTE terminal goes OFF in 2 seconds in place of 15 second. (The CD mechanism is not activated at this time.)

● Special display when the display is all on

Pressing the Preset keys while the power is ALL OFF displays the following information.

[PRESET 1]	Version display (8 digits, Month/Day/Hour/Minute) (Display) SYS xxxxxxxx : System microcomputer PAN xxxxxxxx : FL model only MEM xxxxxxxx : 4 contrasts FL model only
[PRESET 2]	Serial number display (8 digits) (Display) SNo xxxxxxxx
[PRESET 3]	Short press : View power ON time. (The All OFF period is not counted.) 2 seconds long press/hold : Clear power ON time at the power ON time displaying. (Display) PonTim xxxxx Max. 60000 (hours)
[PRESET 4]	Short press : Display CD operation time. 2 seconds long press/hold : Clear CD operation time at the CD operation time displaying. (Display) CDTim xxxxx Max. 60000 (hours)
[PRESET 5]	Short press : Display CD ejection count. 2 seconds long press/hold : Clear CD ejection count at the CD ejection count displaying. (Display) EjeCnt xxxxx Max. 60000 (times)
[PRESET 6]	Short press : Display Panel open/close count. 2 seconds long press/hold : Clear Panel open/close count at the Panel open/close count. (Display) PnCnt xxxxx Max. 600000 (times)
FM key	Display ROM collection version. (Display) ROM R xxx Invalid : "R --"
AM key	Display panel E2PROM condition. (Display) P-ROM OK (Registered code) P-ROM NG (Code is write in error) P-ROM WAIT (Unregistered code) P-ROM NON (Panel security nonfunctional)

● Panel mechanism

- Auto-panel close inhibition when set-in the CD.
- The panel operation inhibition at power ON/OFF and ACC ON/OFF.
- The panel position changing Eject ↔ Last with a short press of the PLAY/PAUSE keys.

● Other specifications

- No displays such as "CODE OFF/ON" during Power-ON.
- The LINE MUTE inhibition time is one second from 10 seconds when start-up the test mode.
- Do not write the security code with the security jig on the test mode.
- Do not write the serial with the serial writing jig on the test mode.
- OEM display output is not stop if OEM display not connection on the test mode.

● Switching the frequency span (K/M type)

While holding the Preset 1 key and Preset 5 key, reset the unit.

● Response to OEM setting

(Destination of electronic volume setting)

S03F/E models are response to OEM models option at put in μ -com 2 pin.

Its setting are following steps.

IC2TYPE0 (47 pin)	IC2TYPE1 (48 pin)	Description
Low	Low	① Trade model (Initial quantify)
Low	High	② Trade model (CRSC change)
High	Low	③ OEM model-ready CRSC change
High	High	④ OEM model-ready CRSC & de-emphasis change

● Security-related information

1. Forced Power ON mode (All models)

Even when the security (Cord) is approved, resetting the unit while holding the Q and Preset 4 keys makes it possible to turn the power ON for 30 minutes.

After 30 minutes have elapsed, it is not possible to return to the previous condition unless the unit is reset again. (Security code is do not clear at this mode. Put the power on fill-in.)

TEST MODE

2. Method of registration of the security code after EEPROM (F/E) replacement (Code security model)

- 1) Enter the test mode. (See How to enter the test mode)
- 2) Press the MENU key to enter the Menu mode.
- 3) When the message "Security" is displayed, press and hold the Track Up/Down key for 1 second to enter the security registration mode.
- 4) Enter the code using the FM/AM/Track Up/Track Down keys.
 FM key : Number up
 AM key : Number down
 Track Up key : Cursor right shift
 Track Down key : Cursor left shift
- 5) Hold down the Track Up key for at least 3 seconds and the message, "RE-ENTER" appears, so once again enter the code according to Step 4 above.
- 6) Press and hold the Track Up key for 3 seconds until "AP-PROVED" is displayed.
- 7) Exit from the test mode. (See 2. How to exit from the test mode)
 (Note 1) All Clear is not applicable to the security code of this model.
 (Note 2) When the F/E changed, need re-inscription because the panel security is clear.

3. Simple way to clear the security code (K type only)

- 1) During code request mode, press the Track UP key for at least 3 seconds while holding down the AUTO key. (--- will disappear)
- 2) Enter, "KCAR" with the remote controller as described below.
 - Press the remote controller 5 key twice, and press the Track Up key. (Enters a "K")
 - Press the remote controller 2 key three times, and press the Track Up key. (Enters a "C")
 - Press the remote controller 2 key once, and press the Track Up key. (Enters an "A")
 - Press the remote controller 7 key twice, and press the Track Up key. (Enters an "R")
- 3) Security function is canceled and unit sets to All-Off mode.
- 4) Code request mode appears if a mistake was made in entering the numbers.

4. How to inscription the panel security code

- 1) Enter the test mode.
- 2) Pressing the AM key on all lighting, check the "P-ROM WAIT" display.
- 3) The NEXT key is long press 2 seconds, writing the code.
- 4) Display is "P-ROM OK".
- 5) Exit from the test mode.
 (Note) E2PROM connection is NG when display is "P-ROM NG", so detach the panel and rewrite after the display is "P-ROM WAIT". This code can not clear.

● Check the SRAM

Output (Hi) to the SRAM_CHECK terminal on 101 pin when SRAM is function properly on the panel of 4 gradation FL models.


● Check the Flash ROM

- 1) Display to the following effect at ALL OFF by assortment system computer and panel for cover the customization model attach the panel with no Flash ROM.
 - Customization system computer + Flash ROM panel : All lighting
 - Non customization system computer + Non Flash ROM panel : All lighting
 - Customization system computer + Non Flash ROM panel : Panel NG
 - Non customization system computer + Flash ROM panel : Panel NG
- 2) Output (Hi) to the FLASHROM_CHECK terminal on 102 pin when Flash ROM is function properly.
- 3) Flash ROM data is initialized when pressing the AM key long hold at all lighting.
 Display is "Data Erase" in data erasing mode. Do not touch anything this mode. When the data erase completed, display is "Erase OK!!".
 If display is "Erase NG!!!!!!", Flash ROM data unable erase for some kind or another factors.
 When same effect as pressing the AM key long hold and data erase once again, Flash ROM is defective.

KDC-MP922/X869

PC BOARD (COMPONENT SIDE VIEW)


ELECTRIC UNIT X25-9640-1x (J74-1473-12)

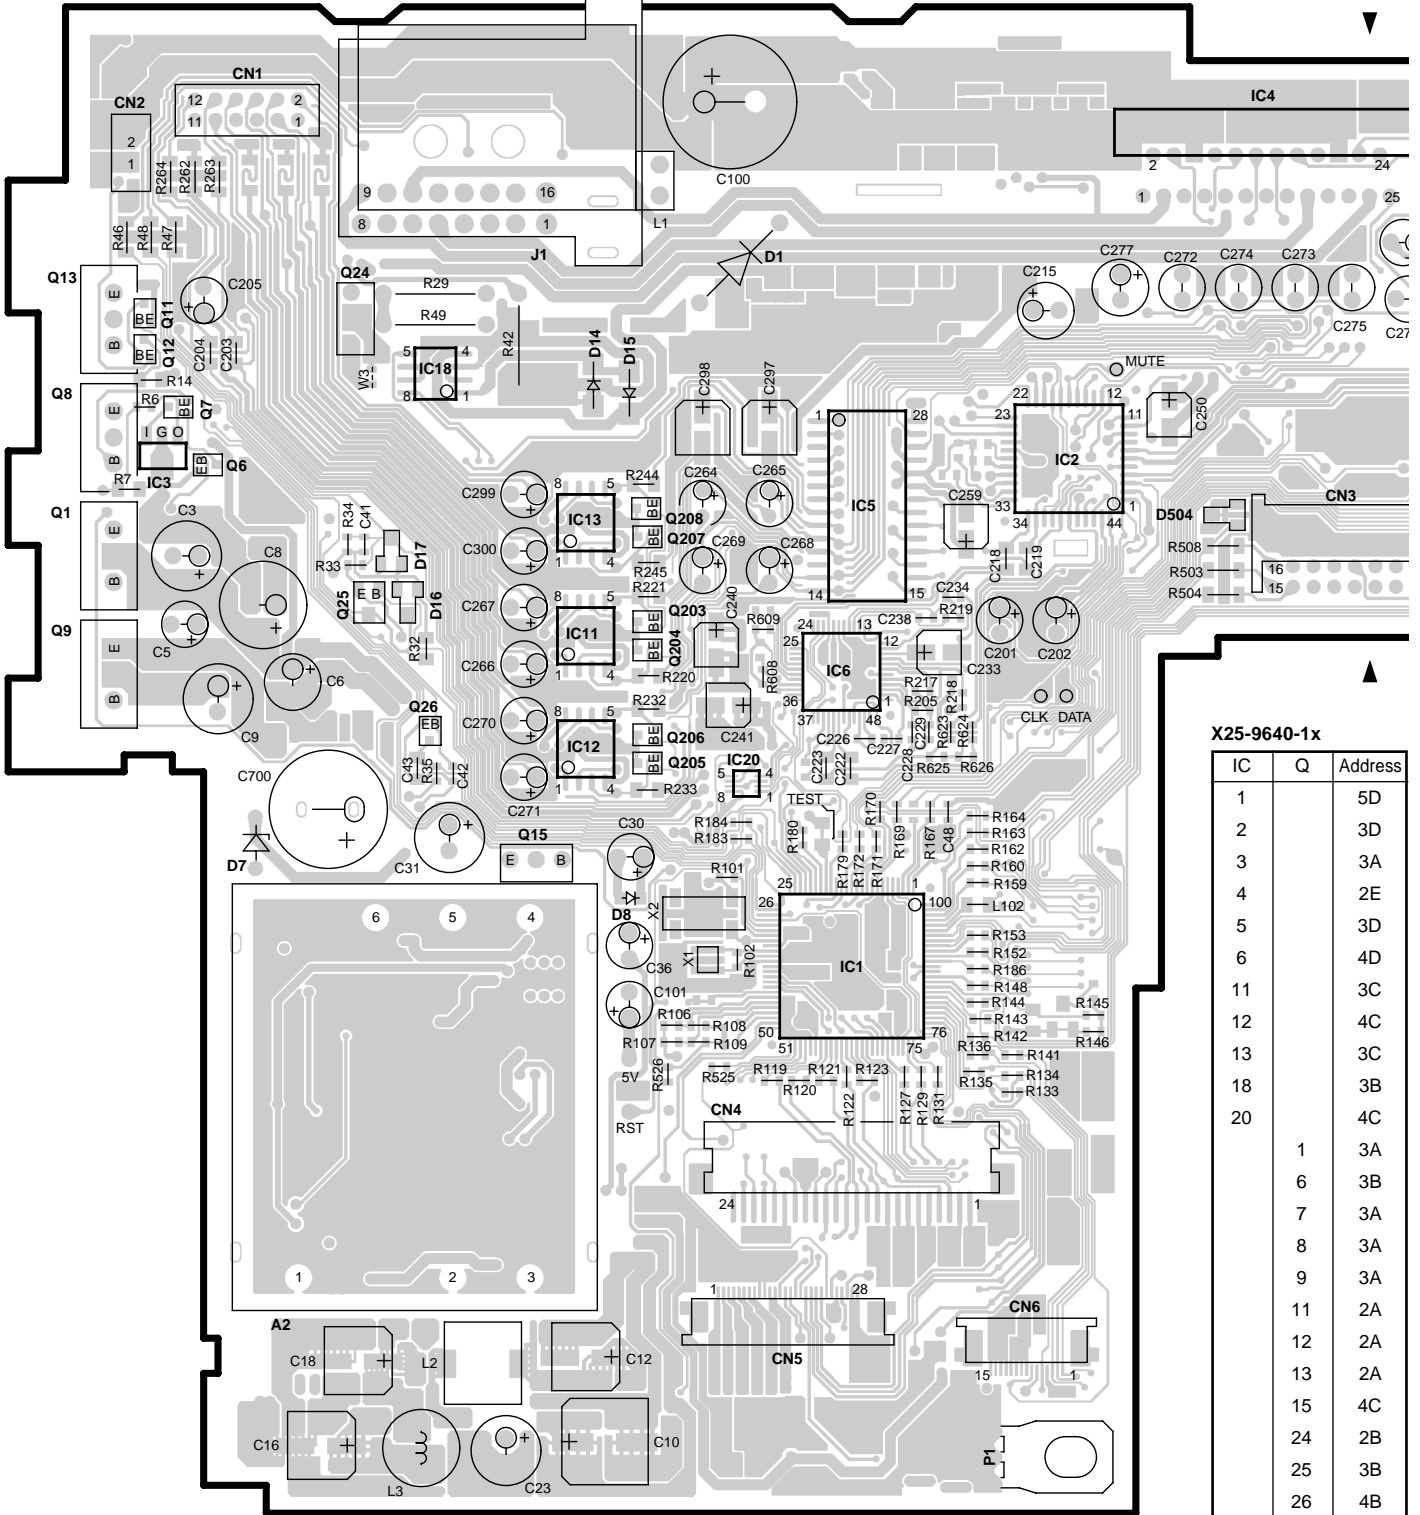


X25-9640-1x

IC	Q	Address
1		5D
2		3D
3		3A
4		2E
5		3D
6		4D
11		3C
12		4C
13		3C
18		3B
20		4C
	1	3A
	6	3B
	7	3A
	8	3A
	9	3A
	11	2A
	12	2A
	13	2A
	15	4C
	24	2B
	25	3B
	26	4B
	203	3C
	204	3C
	205	4C
	206	4C
	207	3C
	208	3C
	305	4F

Refer to the schematic diagram for the values of resistors and capacitors.

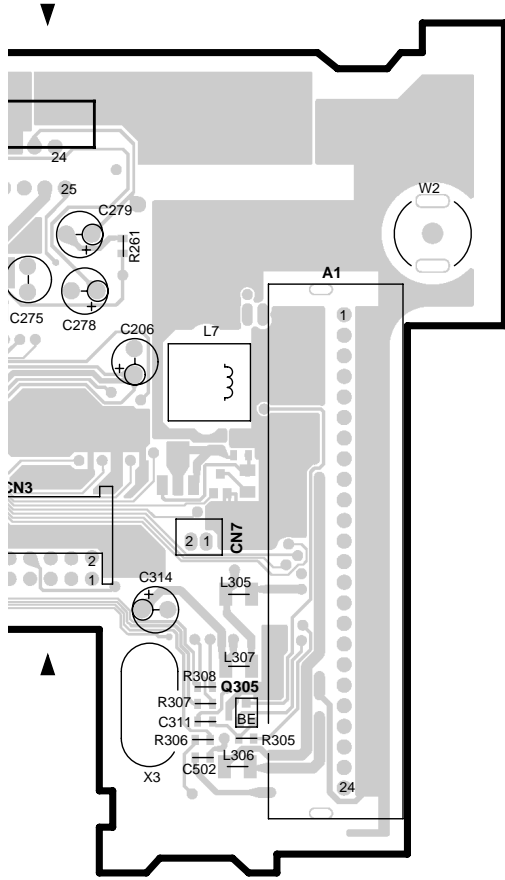


SUB-CIRCUIT UNIT
X16-2120-10 (J74-1478-12)

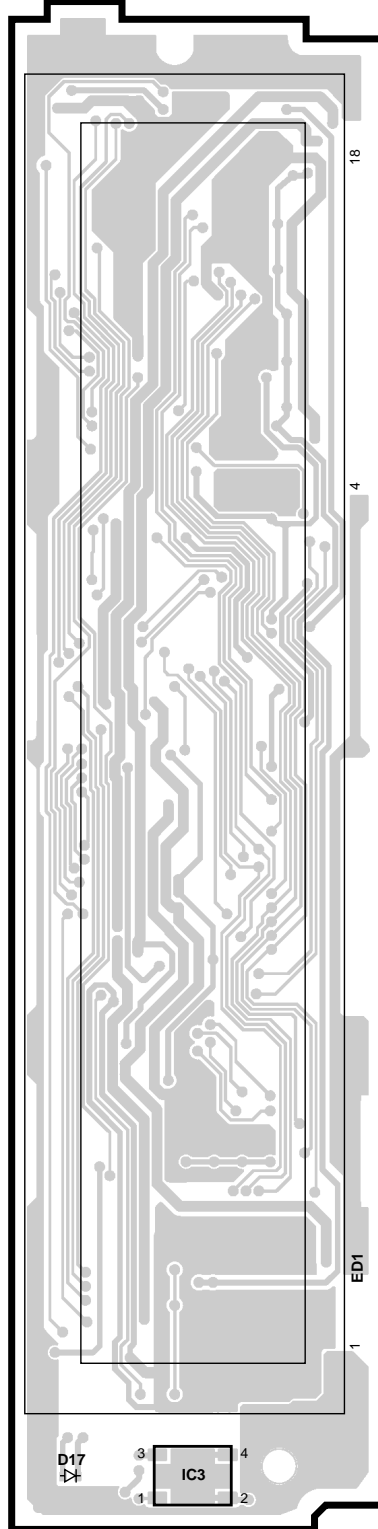

X16-2120-10

IC	Address
3	6H

SWITCH UNIT
X16-2170-10 (J74-1482-12)

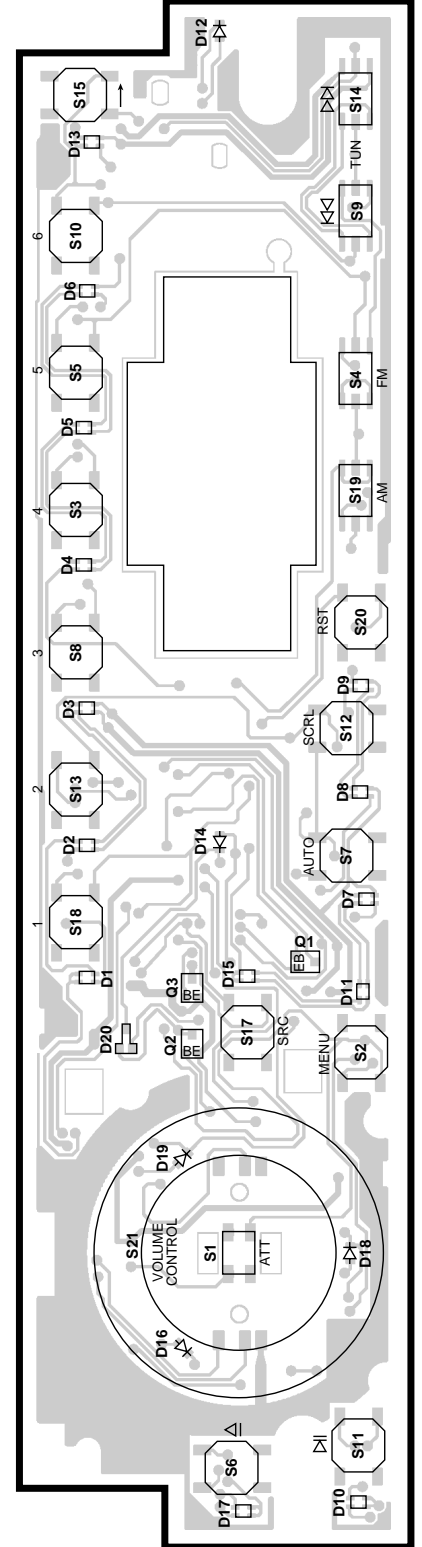


X16-2170-10

Q	Address
1	5J
2	5I
3	5I


KDC-MP922/X869

PC BOARD (FOIL SIDE VIEW)

ELECTRIC UNIT X25-9640-1x (J74-1473-12)

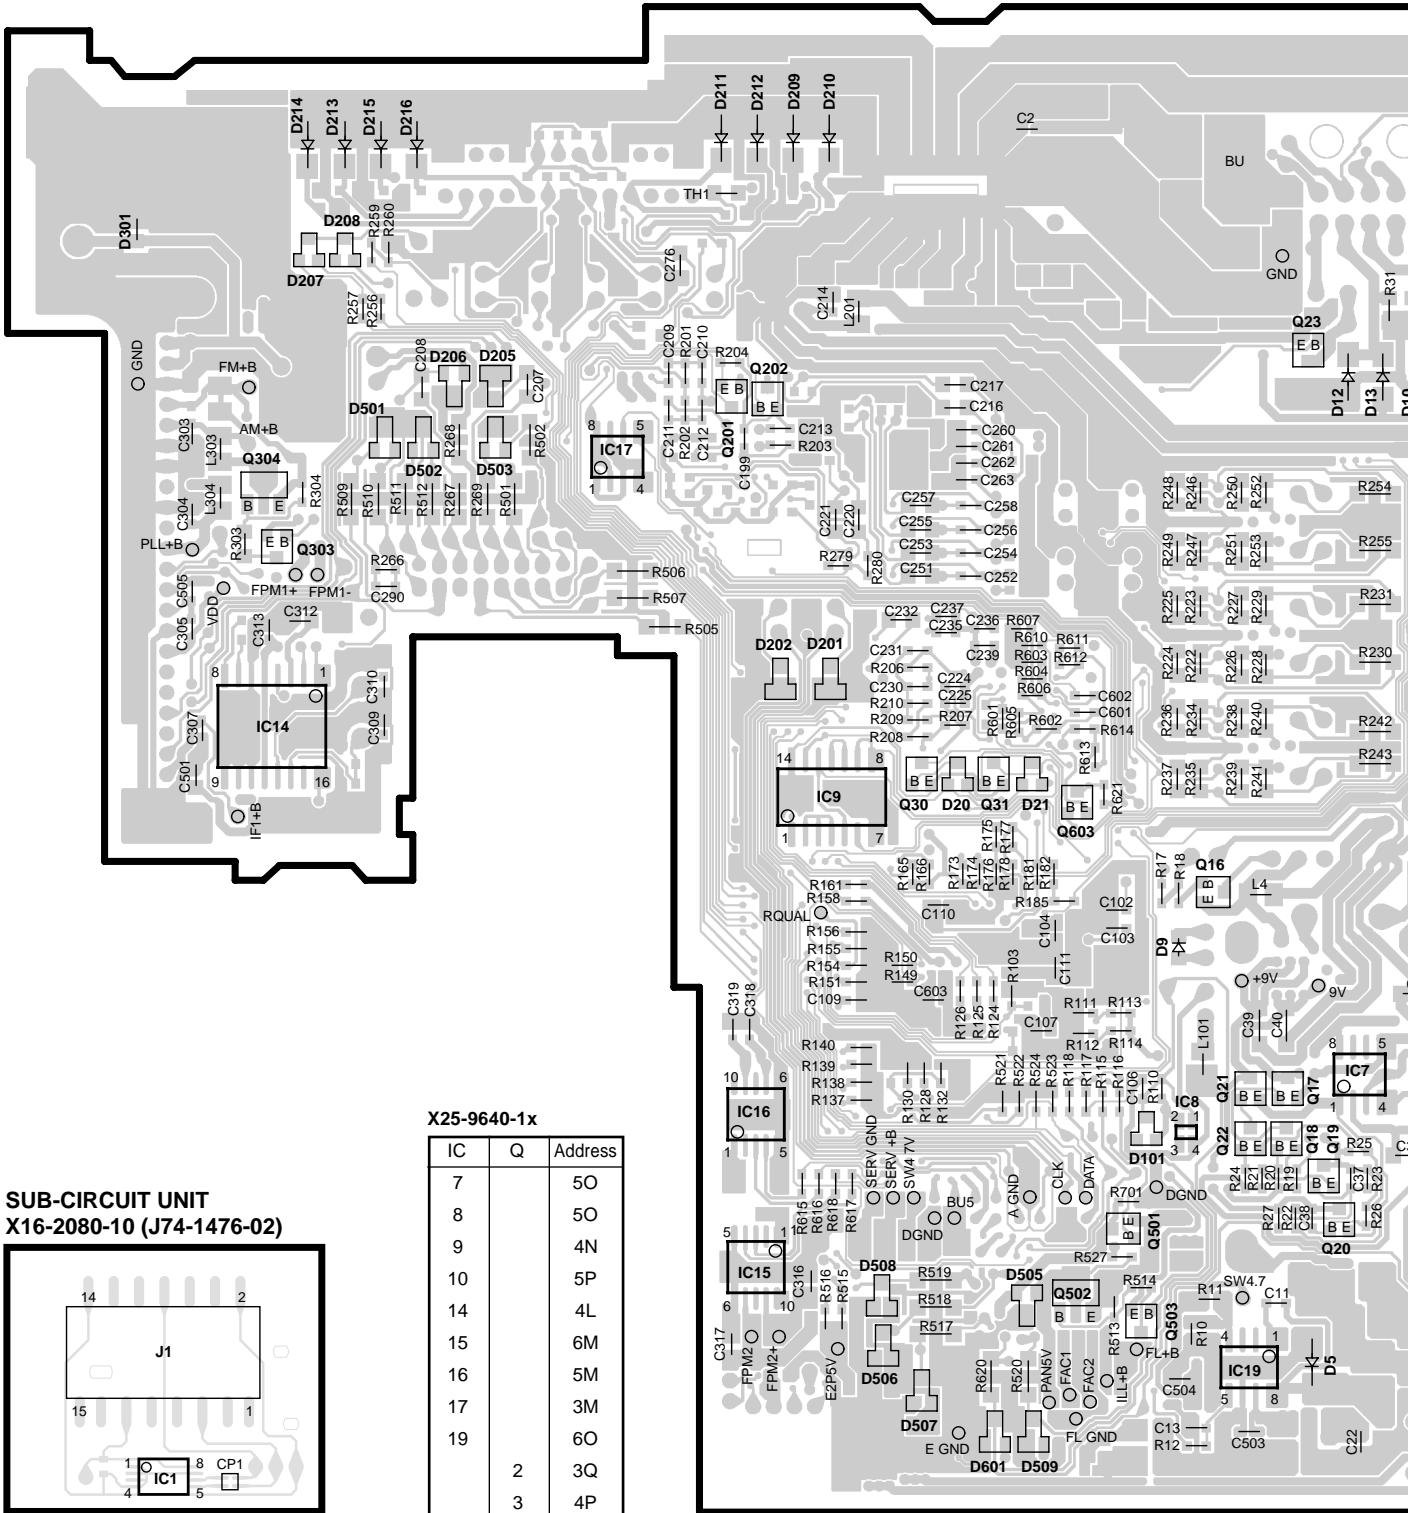

SUB-CIRCUIT UNIT X16-2080-10 (J74-1476-02)




X16-2080-10

IC	Address
1	6K

X25-9640-1x

IC	Q	Address
7		5O
8		5O
9		4N
10		5P
14		4L
15		6M
16		5M
17		3M
19		6O
2	3Q	
3	4P	
4	3Q	
5	3Q	
14	3Q	
16	4O	
17	5O	
18	5O	
19	5O	
20	5O	


IC	Q	Address	IC	Q	Address	IC	Q	Address
	21	5O		31	4N		501	5O
	22	5O		201	3M		502	6N
	23	2O		202	3M		503	6O
	27	3P		210	5P		601	3P
	29	3P		303	3L		602	4Q
	30	4N		304	3L		603	4N

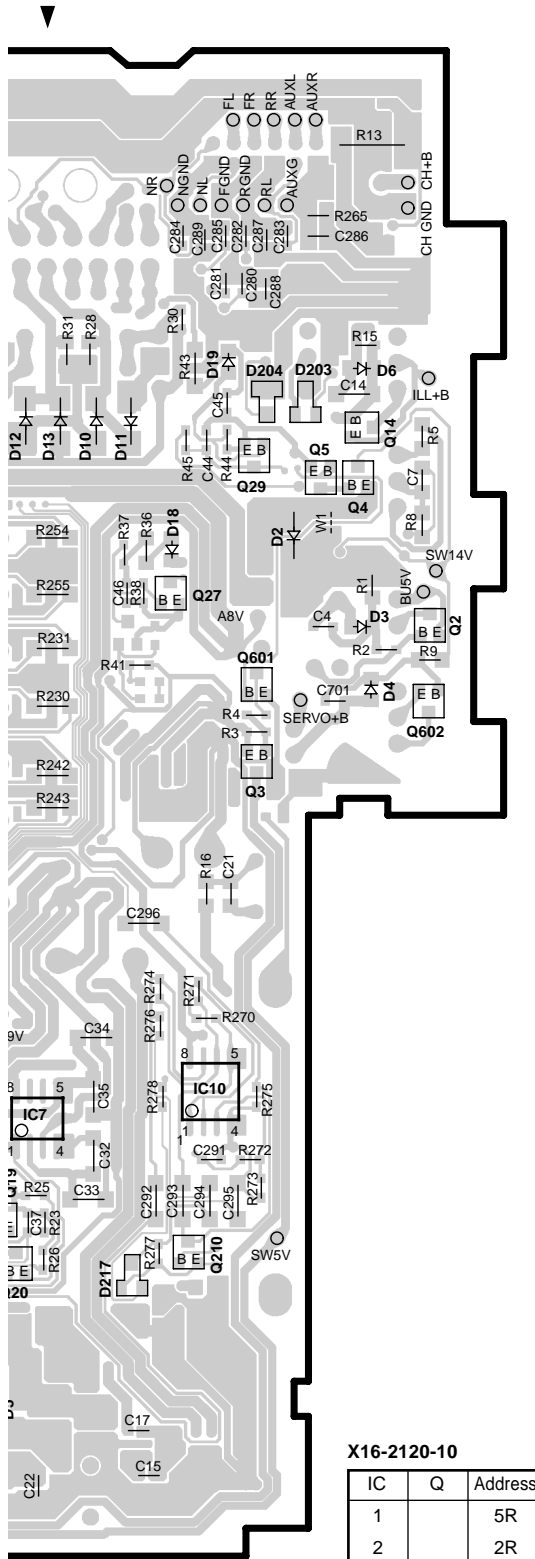


X16-2120-10

IC	Q	Address
1		5R
2		2R
4		6R
5		3R
	1	4R
	2	4R
	3	3R
	4	2R
	5	6R

SUB-CIRCUIT UNIT
X16-2120-10 (J74-1478-12)

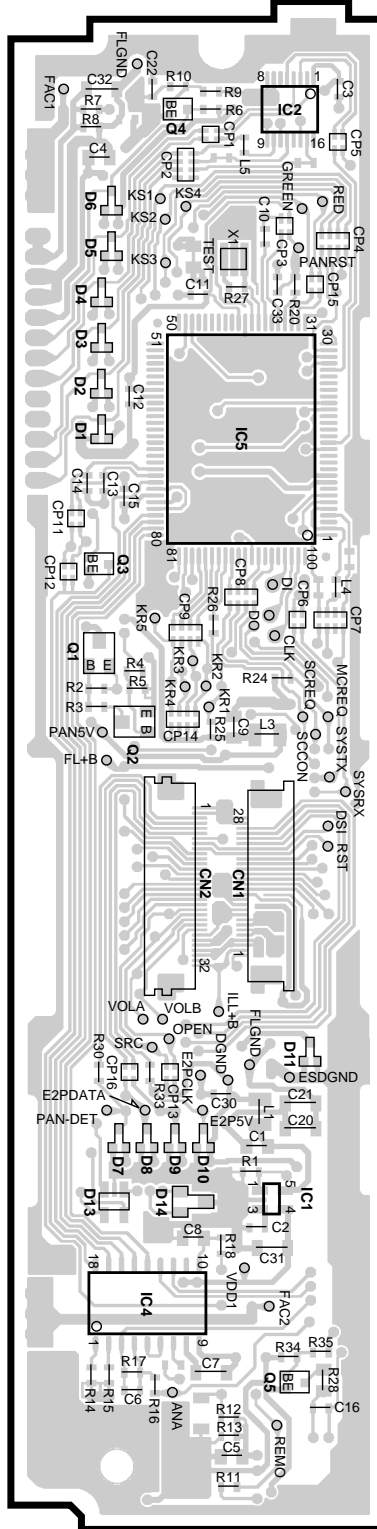


SWITCH UNIT
X16-2170-10 (J74-1482-12)

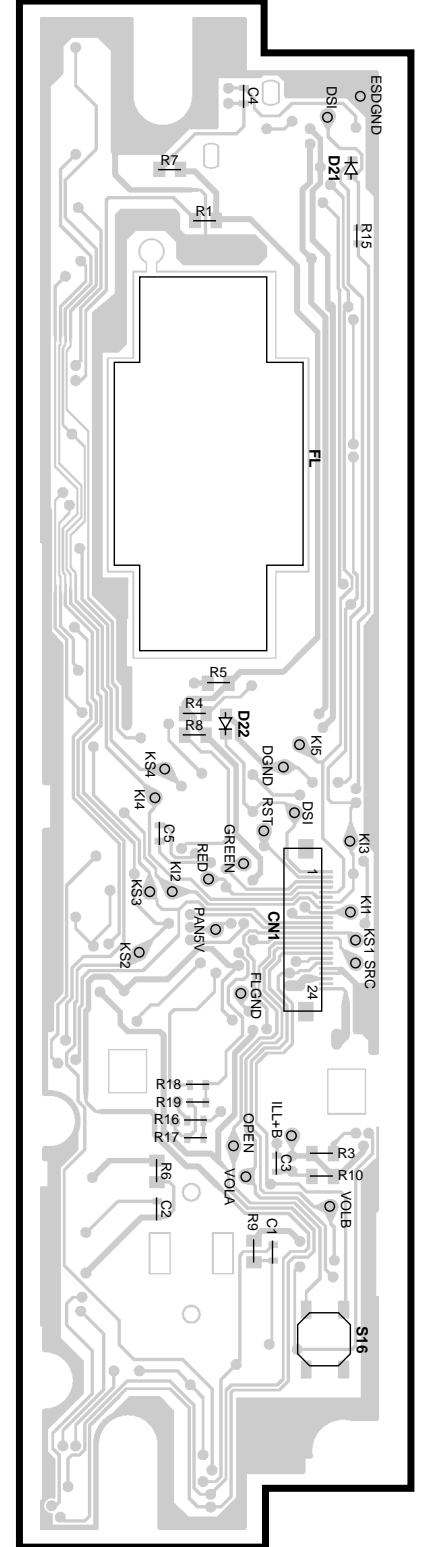

Refer to the schematic diagram for the values of resistors and capacitors.

PC BOARD (COMPONENT SIDE VIEW)

CD PLAYER UNIT
X32-5410-00 (J74-1487-12)

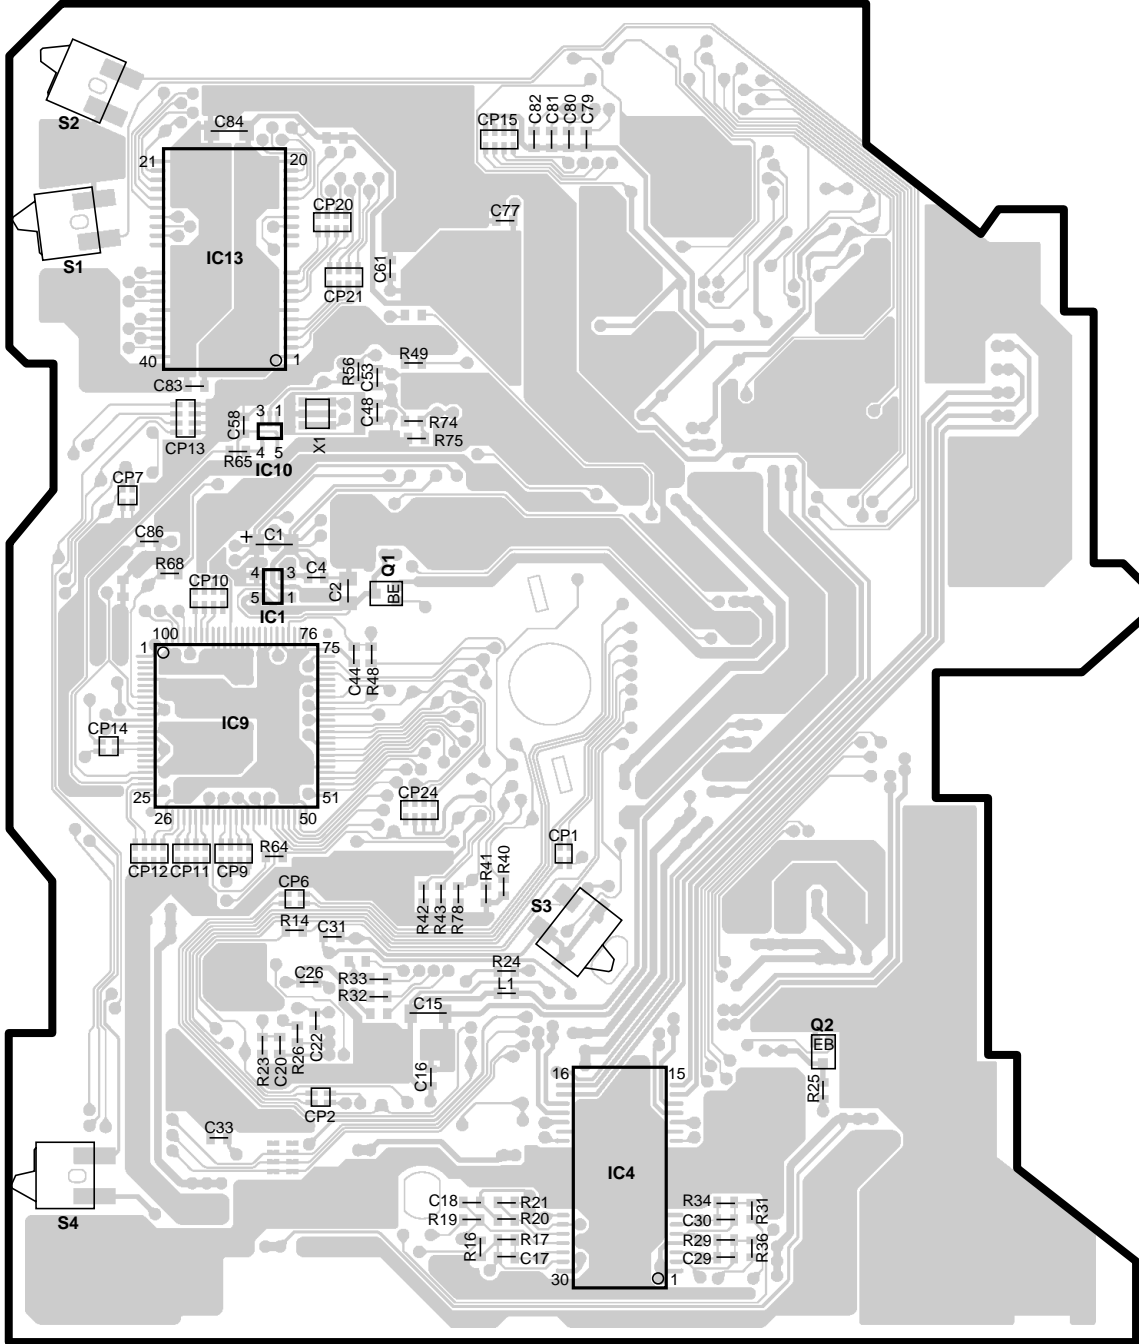


X32-5410-00

IC	Q	Address
1		3V
4		5W
13		2V
	1	3W
	2	5X

Refer to the schematic diagram for the values of resistors and capacitors.

PC BOARD (FOIL SIDE VIEW)

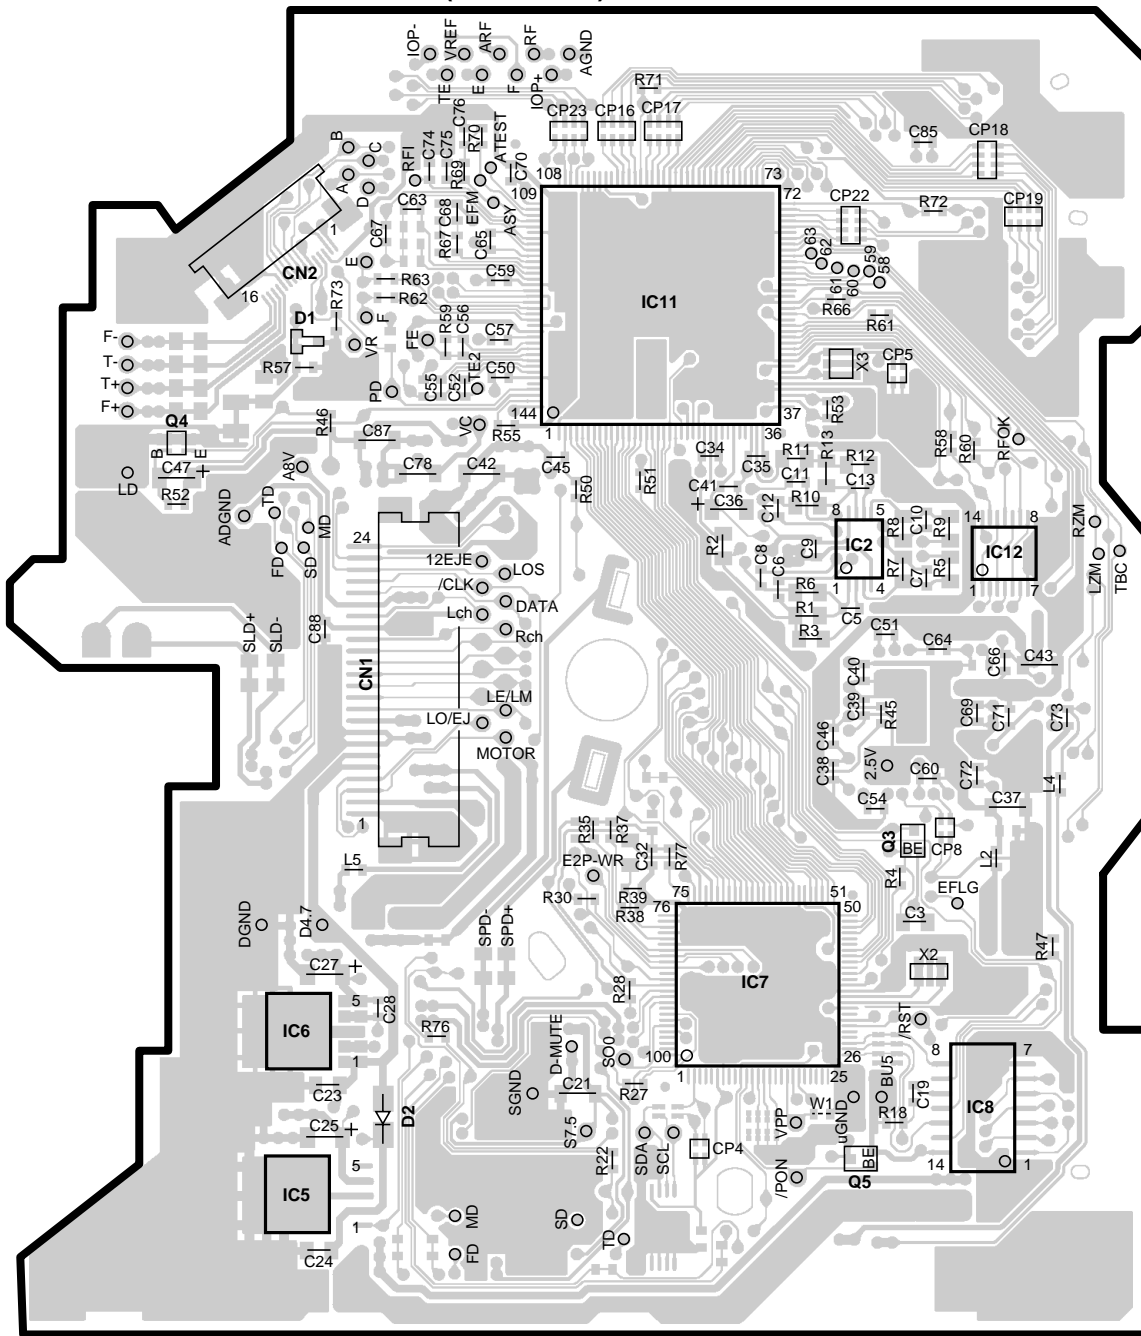CD PLAYER UNIT
X32-5410-00 (J74-1487-12)

X32-5410-00





IC	Q	Address	IC	Q	Address
2		3AC	11		2AB
6		5AA	3		4AC
7		5AB	4		3Z
8		5AC	5		5AC

Refer to the schematic diagram for the values of resistors and capacitors.


KDC-MP922/X869

(X25-964X-XX)

MODEL NAME	UNIT No.	A	B	C	D	E	F	G	H	L	J	K	M	A1 (X86-373X-XX)
KDC-X869	0-10	YES	YES	YES	YES	NO	YES	NO	YES	YES	YES	YES	YES	0-11
KDC-X869	0-11	YES	YES	YES	YES	NO	YES	NO	YES	YES	YES	YES	YES	0-11
KDC-MP922	0-12	YES	YES	YES	NO	NO	YES	NO	YES	YES	YES	YES	YES	0-11
FX-9000	0-01	YES	NO	YES	YES	YES	NO	NO	NO	NO	YES	NO	YES	0-01
KDC-PSW9524	2-71	YES	YES	NO	YES	YES	YES	YES	YES	YES	YES	NO	NO	2-70
KDC-8024	2-72	NO	NO	NO	YES	YES	NO	YES	NO	YES	NO	NO	NO	2-70
KDC-9023R	0-21	YES	YES	NO	YES	YES	YES	YES	YES	NO	YES	YES	YES	2-70

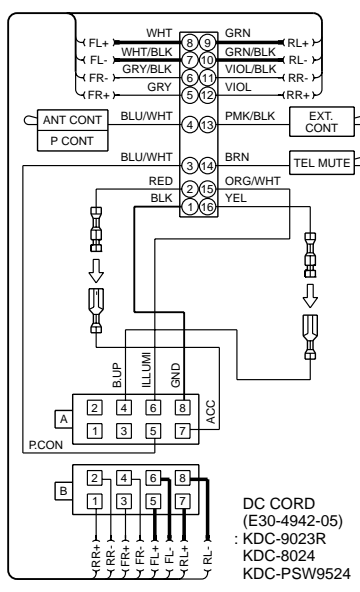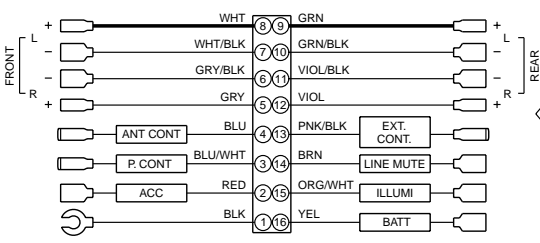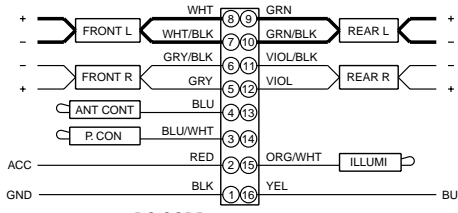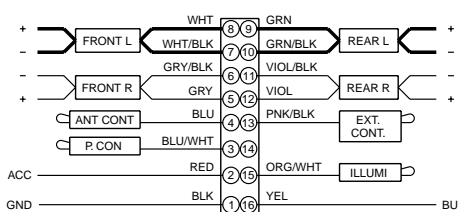

(X25-964X-XX)

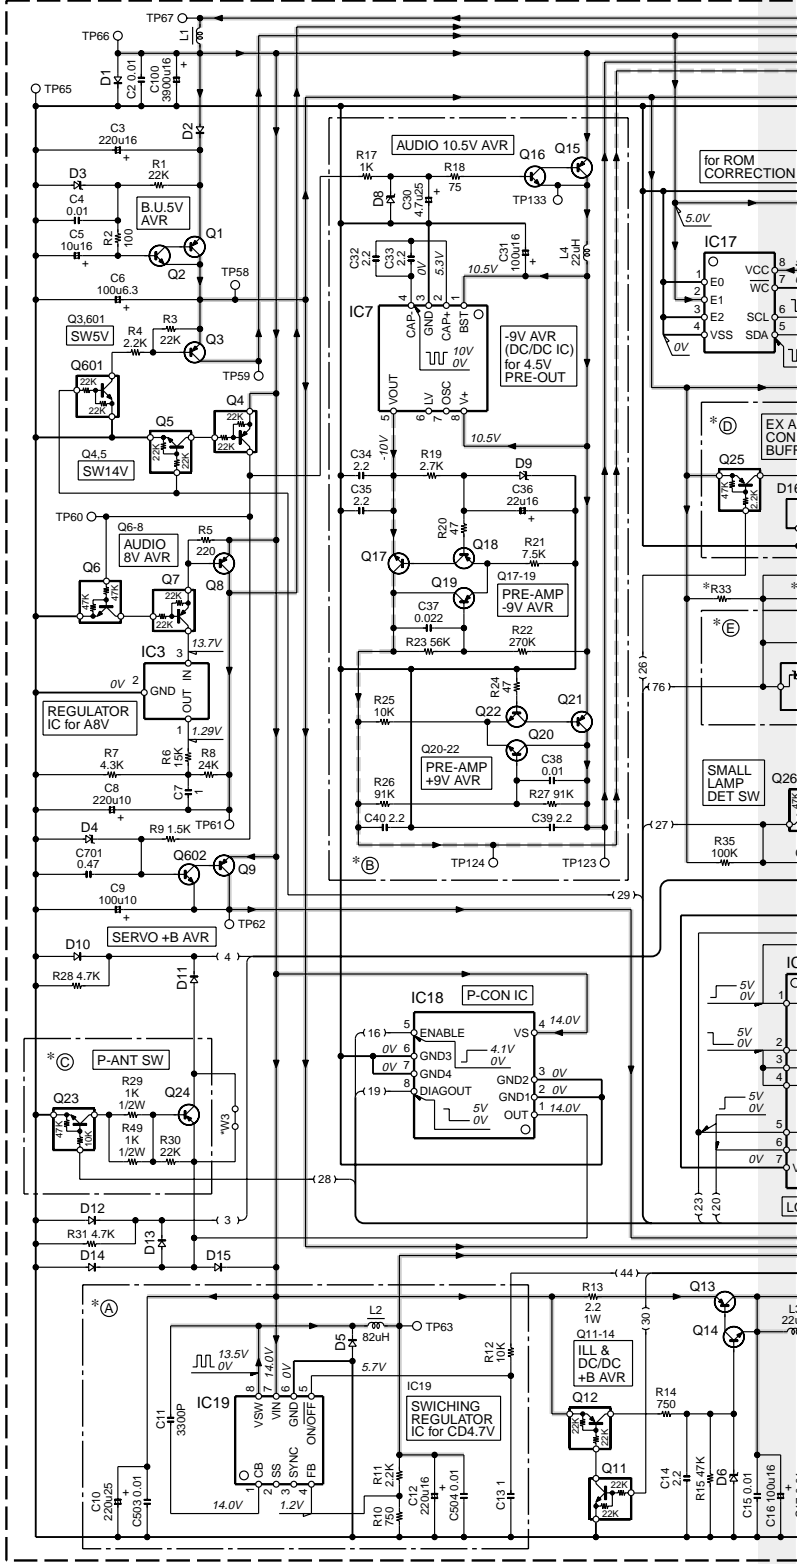

CAUTION : For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).


⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

- DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units


KDC-MP922/X869


(X25-964X-XX)

MODEL NAME	UNIT No.	C203-205	C264,265,268,269,297,298	C501	C502	C505	D203,204	IC1 (703033BGCXXX)	R33	R34	R47	R48,184	R106	R107	R108	R109	R124-126	R148,149,154,155,521	R185	R222,223,234,235,246,247	R230,231,242,243,254,255	R526	W3
KDC-X969	0-10	YES	22u16	NO	YES	NO	YES	020	NO	100K	NO	YES	NO	NO	YES	YES	NO	NO	NO	2.2K	NO	YES	NO
KDC-X869	0-11	YES	22u16	NO	YES	NO	YES	020	NO	100K	NO	YES	YES	NO	NO	NO	NO	NO	NO	2.2K	NO	YES	NO
KDC-MP922	0-12	YES	22u16	NO	YES	NO	YES	020	NO	100K	NO	NO	YES	NO	NO	YES	NO	NO	NO	2.2K	NO	YES	NO
FX-9000	0-01	YES	10u16	NO	NO	NO	YES	020	NO	47K	22K	YES	YES	NO	YES	NO	NO	NO	NO	2.2K	YES	YES	NO
KDC-PSW9524	2-71	NO	22u16	YES	YES	NO	NO	020	47K	22K	YES	YES	NO	NO	YES	YES	NO	NO	NO	2.2K	NO	YES	YES
KDC-8024	2-72	NO	10u16	YES	YES	NO	NO	021	47K	22K	YES	YES	NO	NO	NO	NO	NO	NO	NO	2.2K	NO	YES	YES
KDC-9023R	0-21	YES	22u16	YES	YES	NO	YES	020	47K	22K	YES	YES	YES	NO	NO	YES	NO	NO	NO	2.2K	NO	YES	YES

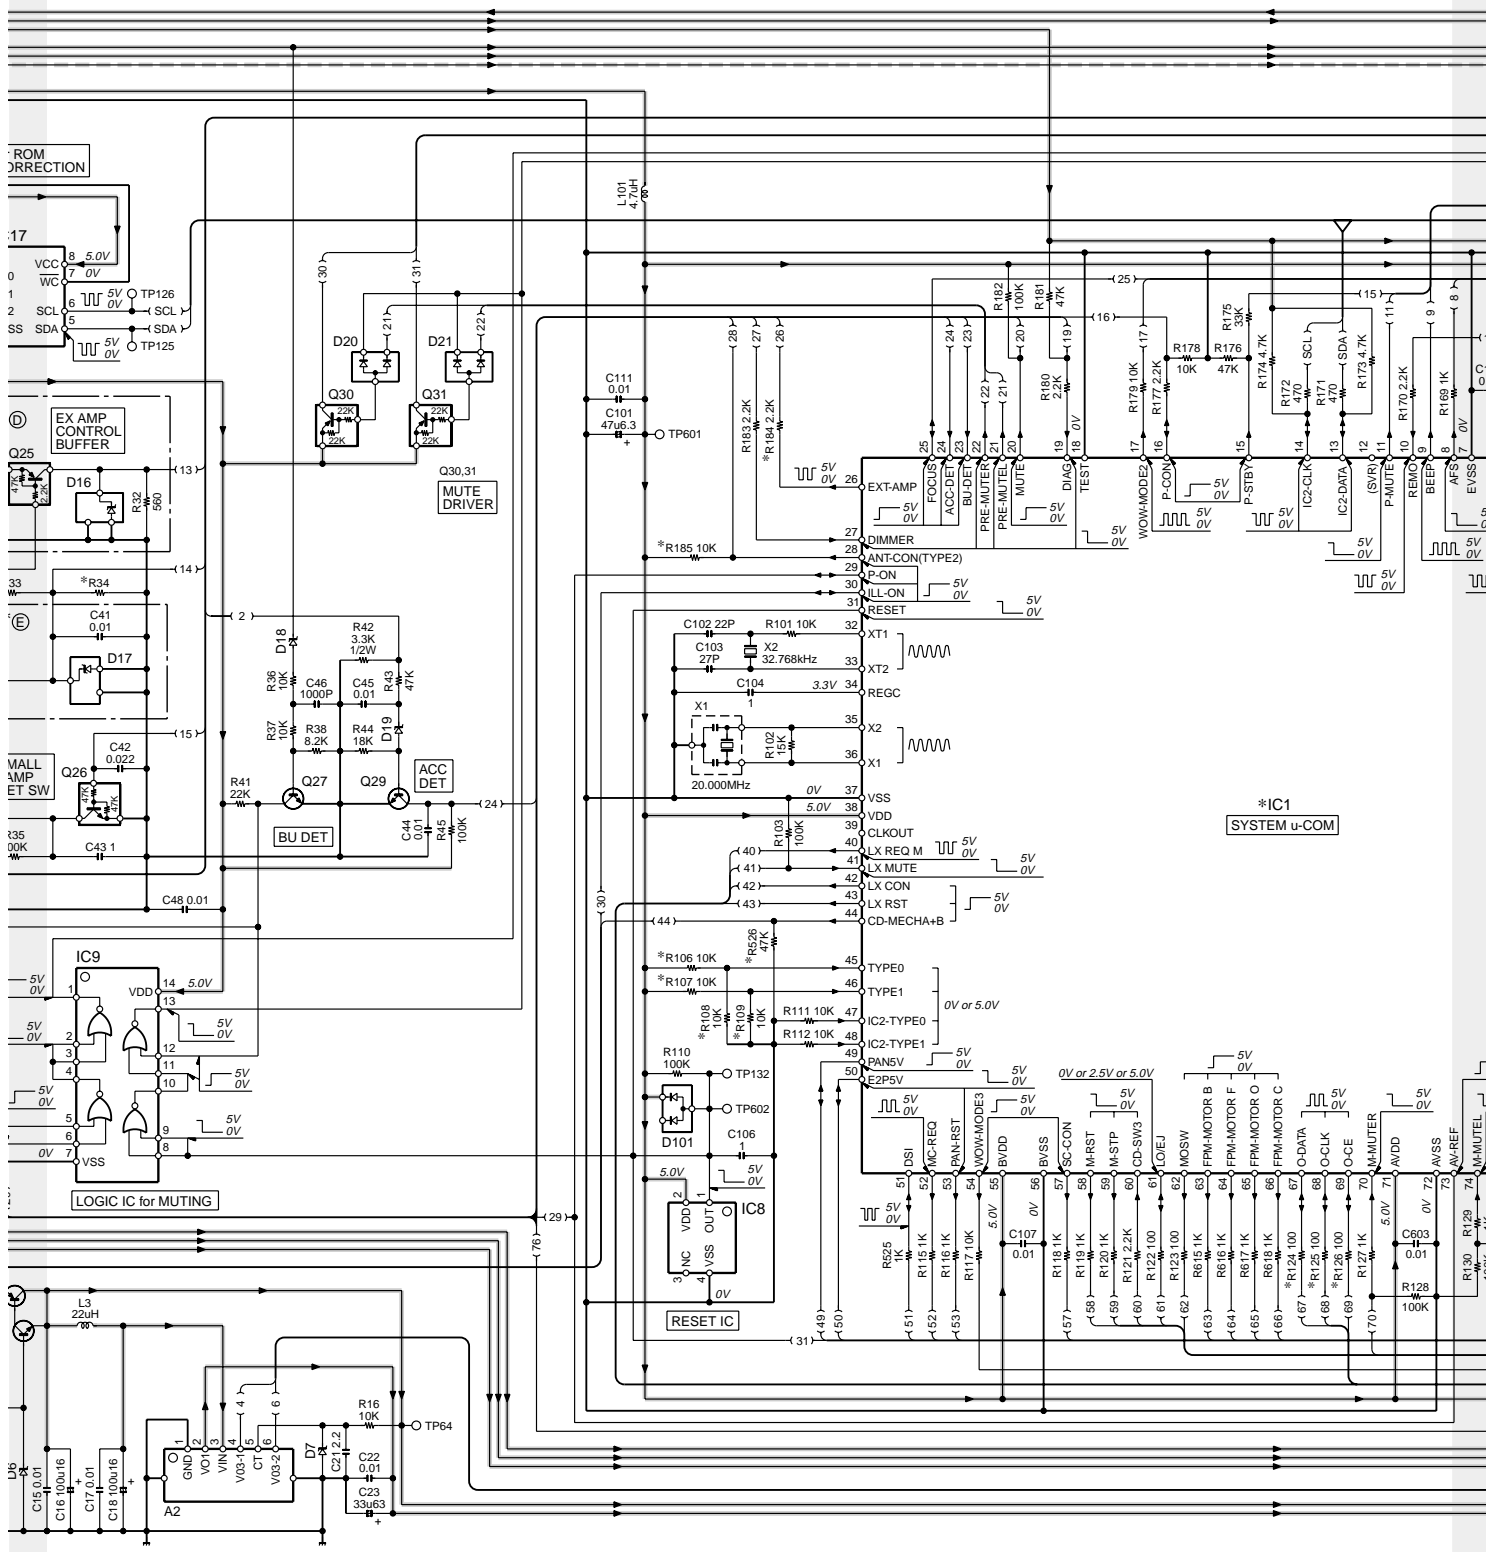


KDC-MP922/X869

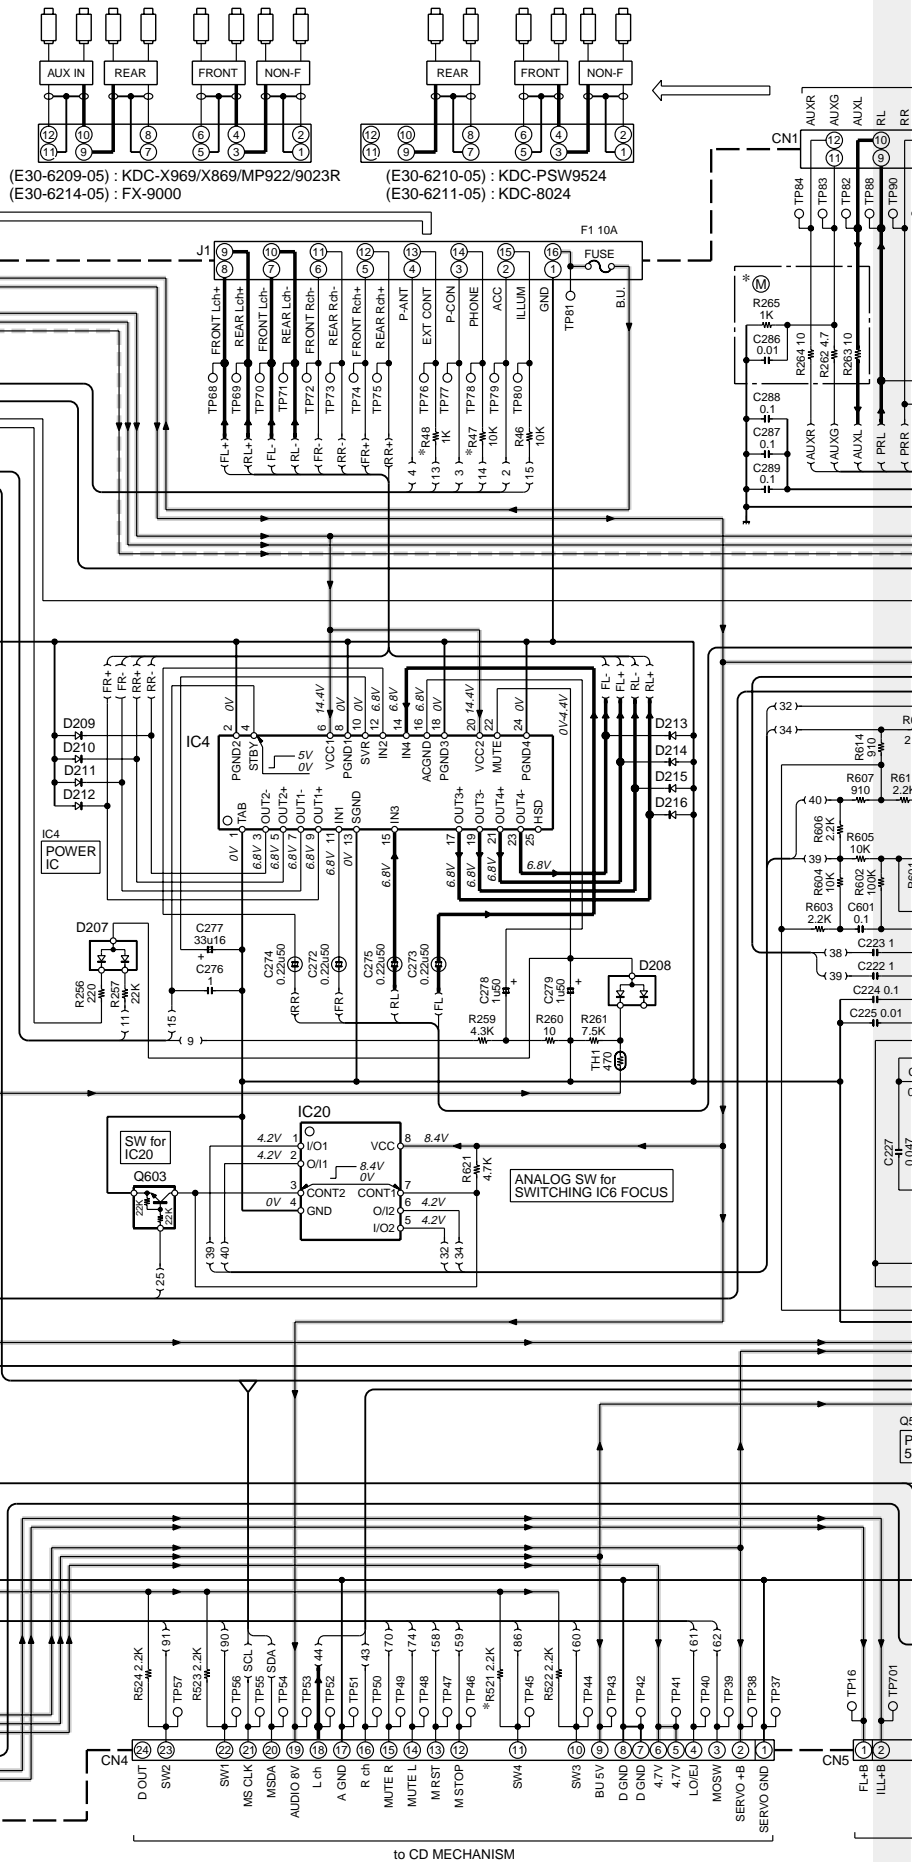



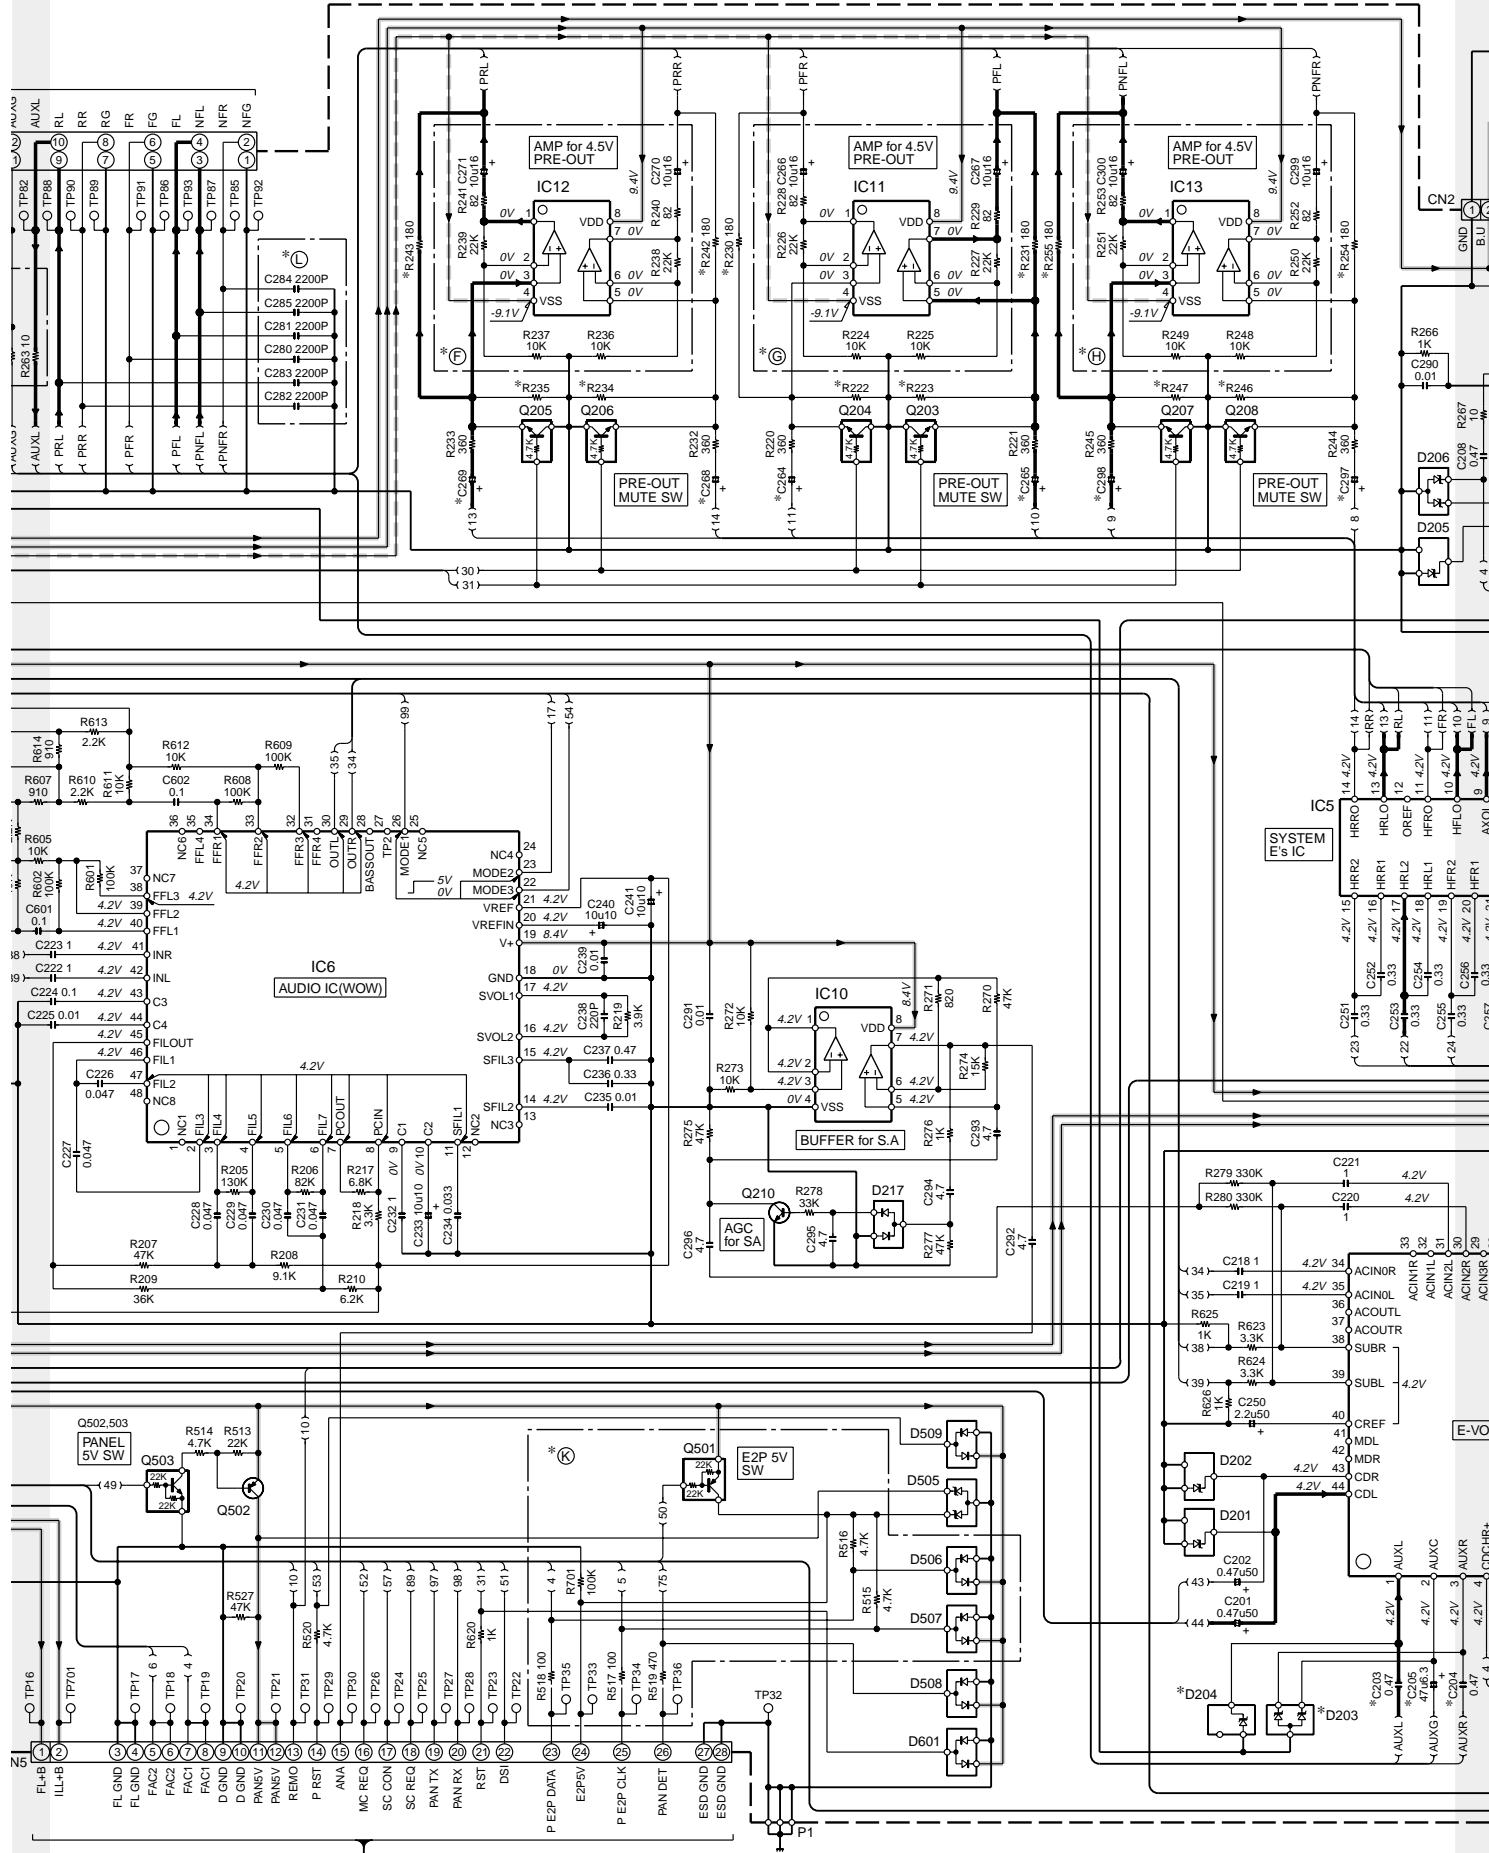


KDC-MP922/X869

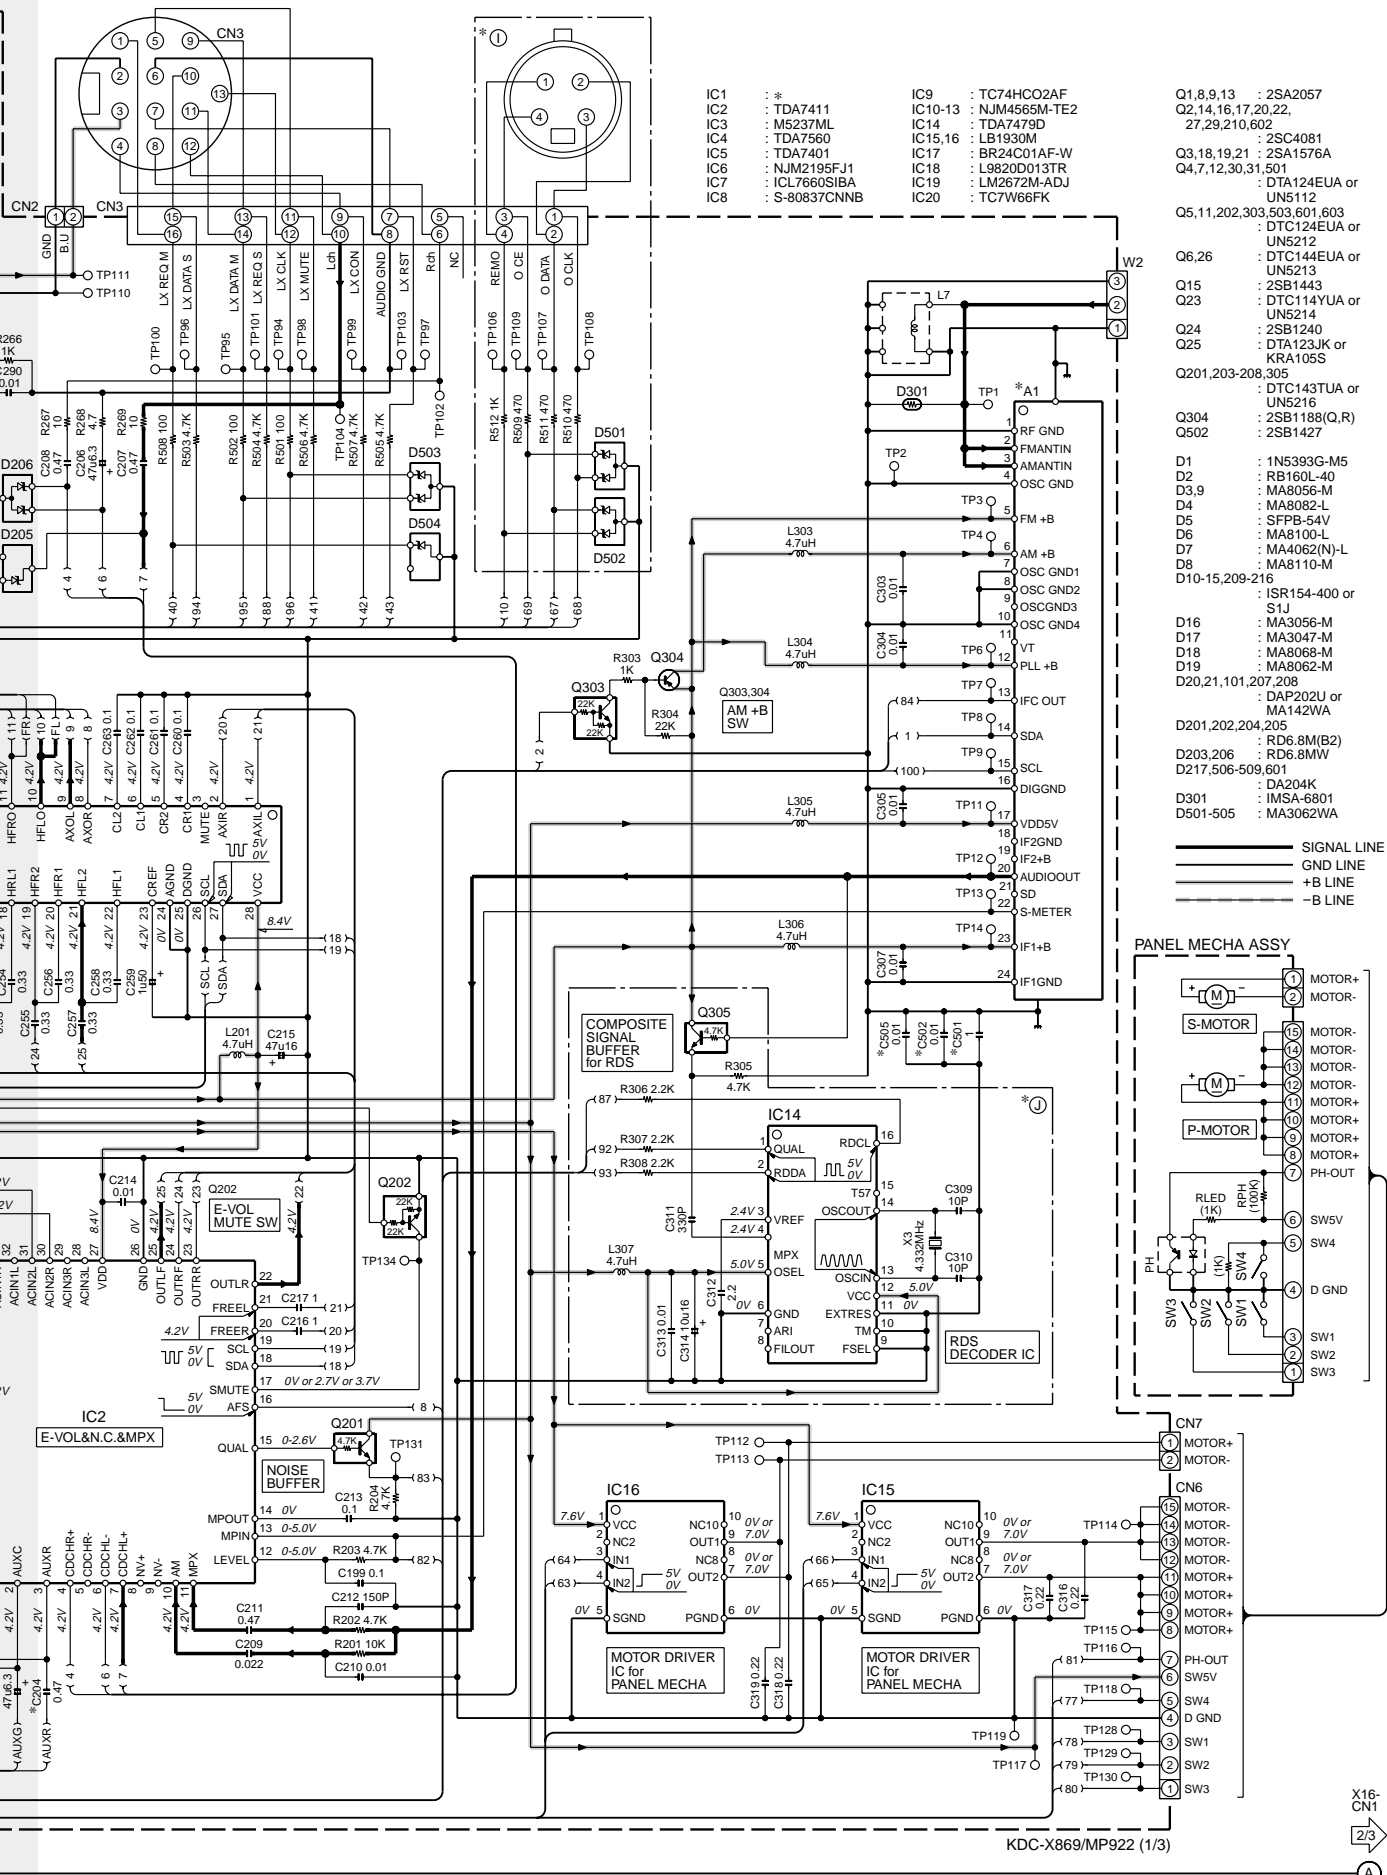

- IC1 : *
- IC2 : TDA7411
- IC3 : M5237ML
- IC4 : TDA7560
- IC5 : TDA7401
- IC6 : NJM2195FJ1
- IC7 : ICL7660SIBA
- IC8 : S-8083CNNB
- IC9 : TC74HCO2AF
- IC10-13 : NJM4565M-TE2
- IC14 : TDA7479D
- IC15,16 : LB1930M
- IC17 : BR24C01AF-W
- IC18 : LS820D013TR
- IC19 : LM2872M-ADJ
- IC20 : TC7V66FK

- Q1,8,9,13 : 2SA2057
- Q2,14,16,17,20,22,27,29,210,602 : 2SC4081
- Q3,18,19,21 : 2SA1576A
- Q4,7,12,30,31,501 : DTA124EUA or DTA124EUA or UN5112
- Q5,11,202,303,503,601,603 : DTC124EUA or DTC124EUA or UN5212
- Q6,26 : DTC144EUA or UN5213
- Q15 : 2SB1443
- Q23 : DTC114YUA or UN5214
- Q24 : 2SB1240
- Q25 : DTA123JK or KRA105S
- Q201,203-208,305 : DTC143TUA or UN5216
- Q304 : 2SB1188(Q,R)
- Q502 : 2SB1427
- D1 : 1N5393G-M5
- D2 : RB160L-40
- D3,9 : MA8056-M
- D4 : MA8082-L
- D5 : SFP8-54V
- D6 : MA8100-L
- D7 : MA4062(N)-L
- D8 : MA8110-M
- D10-15,209-216 : ISR154-400 or S1J
- D16 : MA3056-M
- D17 : MA3047-M
- D18 : MA8068-M
- D19 : MA8062-M
- D20,21,101,207,208 : DAP202U or MA142WA
- D201,202,204,205 : RD6.8M(B2)
- D203,206 : RD6.8MW
- D217,506-509,601 : DA204K
- D301 : IMSA-6801
- D501-505 : MA3062WA

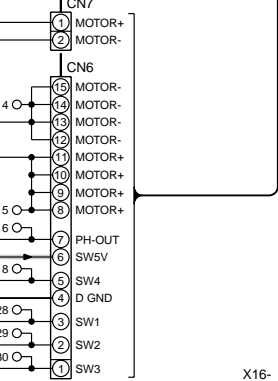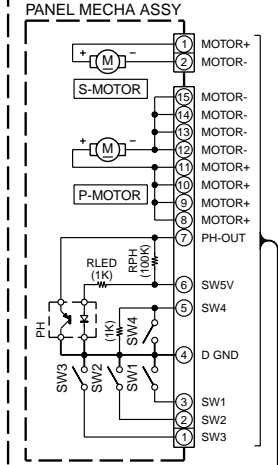


KDC-X869/MP922 (1/3)

1
2
3
4
5
6
7

KDC-MP922/X869

DISPLAY UNIT (X16-2120-10)

1
2
3
4
5
6
7



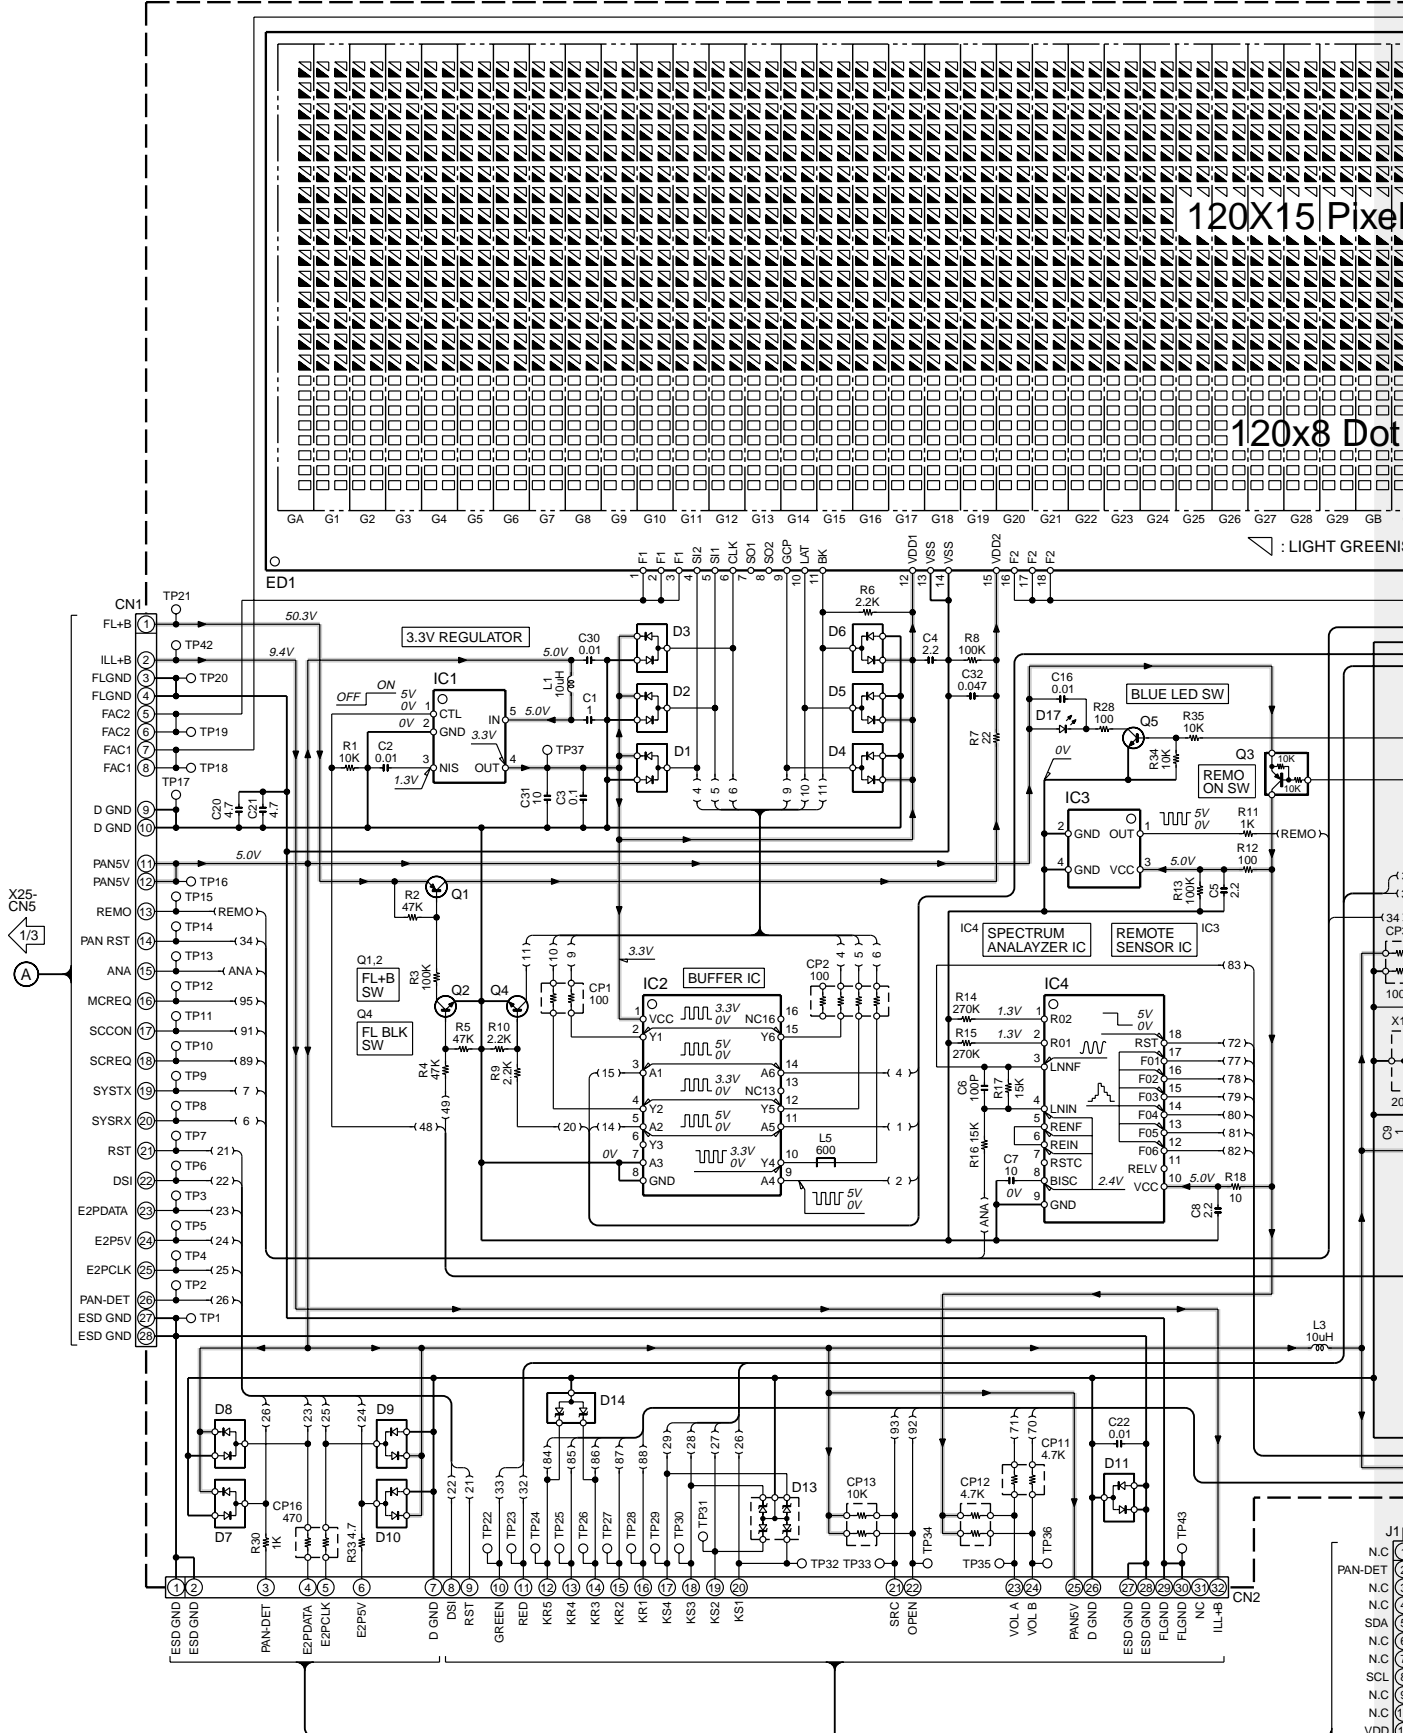


CAUTION : For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).

⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

- DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

KDC-MP922/X869

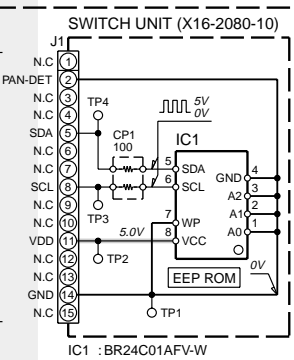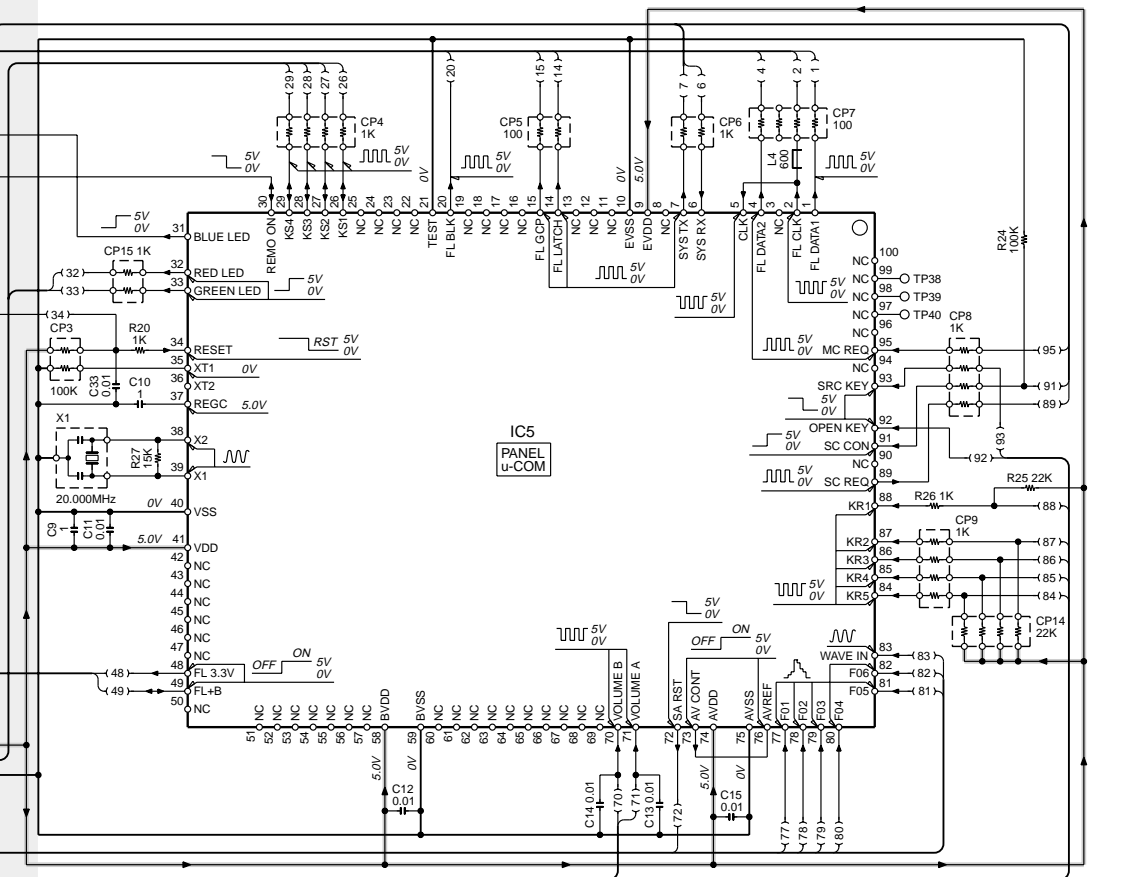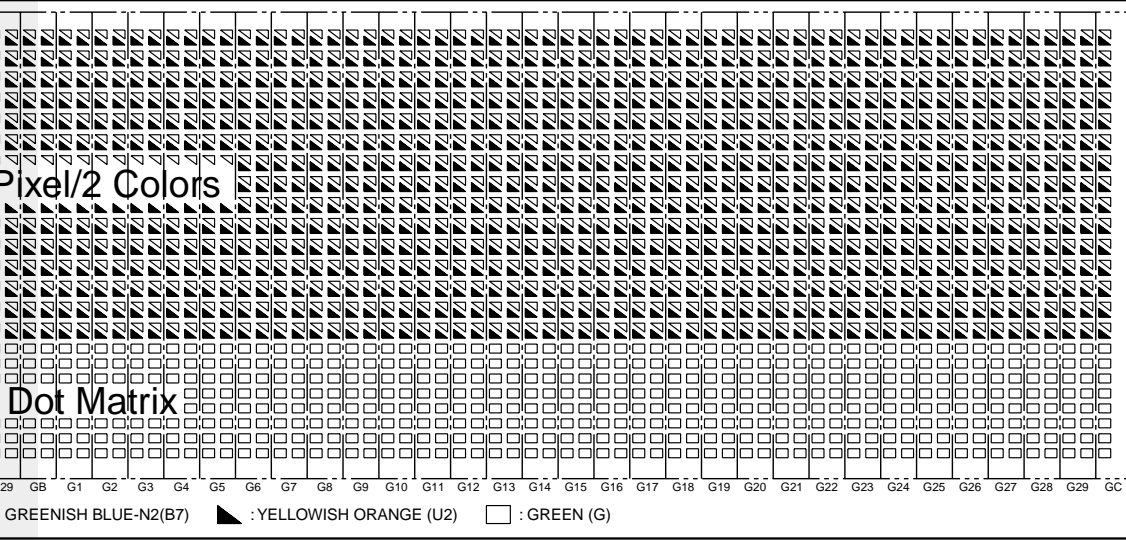

- GND LINE
- +B LINE
- IC1 : TAR5S33
- IC2 : TC74HC4050AFT
- IC3 : RS-171
- IC4 : BA3830F
- IC5 : 703032BGFA01
- Q1 : 2SA1163
- Q2 : 2SC2713
- Q3 : DTA114EUA or UN5111
- Q4,5 : 2SC4081
- D1-11 : DA204U
- D13 : FTZ6.8E
- D14 : MA3062WA
- D17 : B30-1564-05


KDC-X869/MP922 (2/3)

X16-CN1


3/3

(B)


- DTA123JK
- DTC114YUA
- DTC143TUA
- UN5111
- UN5213
- UN5214
- UN5216
- 2SA1163
- 2SA1576A
- 2SC2713




2SB1188




2SB1443




2SC4081




- DTA114EUA
- DTA124EUA
- DTA143EUA
- DTC124EUA
- DTC144EUA



NJM4565M-TE2




- DAP202U
- DA204K
- DA204U
- DTA114YUA



MA142WA

UN5212



1

2

3

4


5

6

7

KDC-MP922/X869

SWITCH UNIT (X16-2170-10)

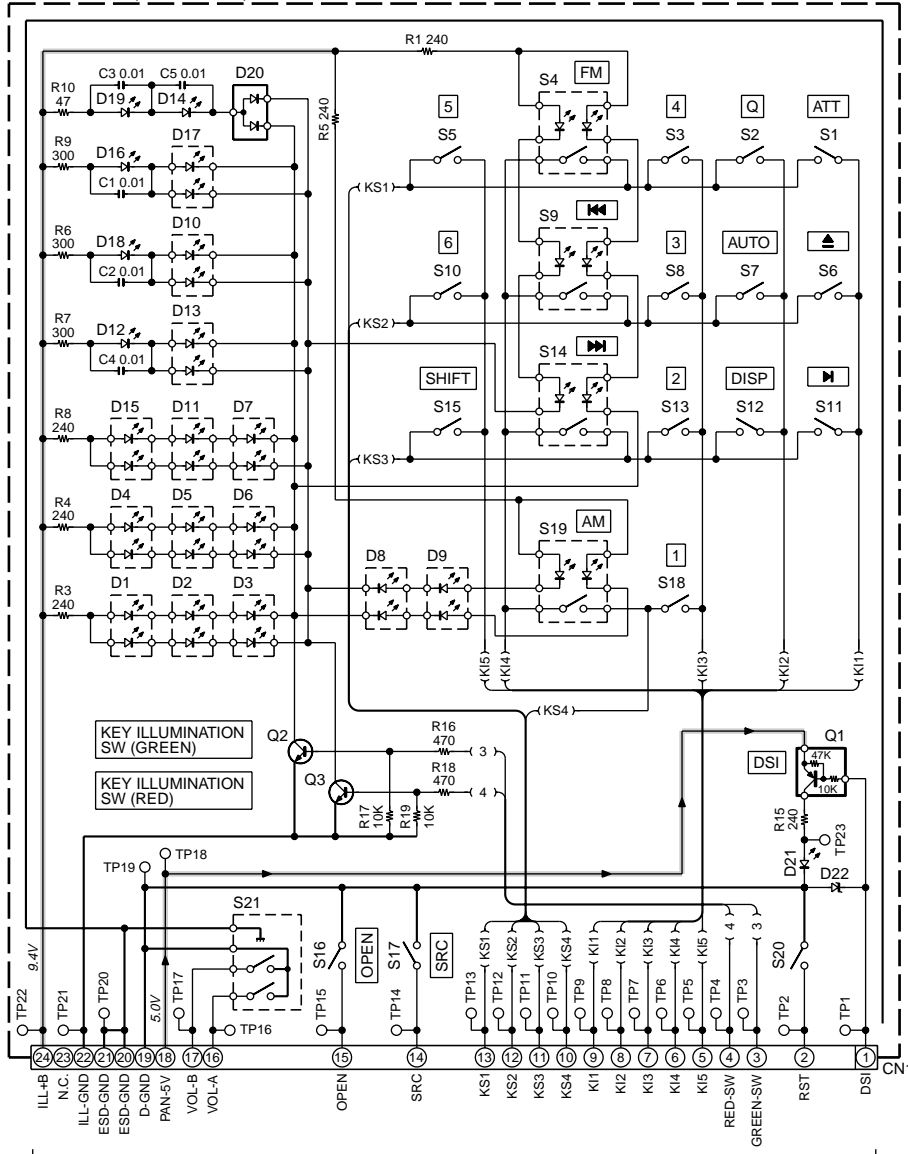

X16-

CN2

2/3

(B)

GND LINE

+B LINE

Q1 : DTA114YUA
Q2,3 : 2SC4081

D1-11,13,15,17

: B30-1605-05

D12,14,16,18,19

: B30-1564-05

D20 : DAP202U or

MA142WA


D21 : B30-1566-05

D22 : MA8068-M


KDC-X869 (3/3)

KDC-MP922 (3/3)


RD6.8M

TC74HCT7007AF
TC74HC02AF


BA3830F




BR24C01AF-W




M5237ML





MCH6101



NJM4580V



LB1930M

TC74HC4050AFT
TDA7479D

CAUTION : For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).

⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

- DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.

KDC-MP922/X869

AO


AP

AQ


AR

AS

1
2
3
4
5
6
7

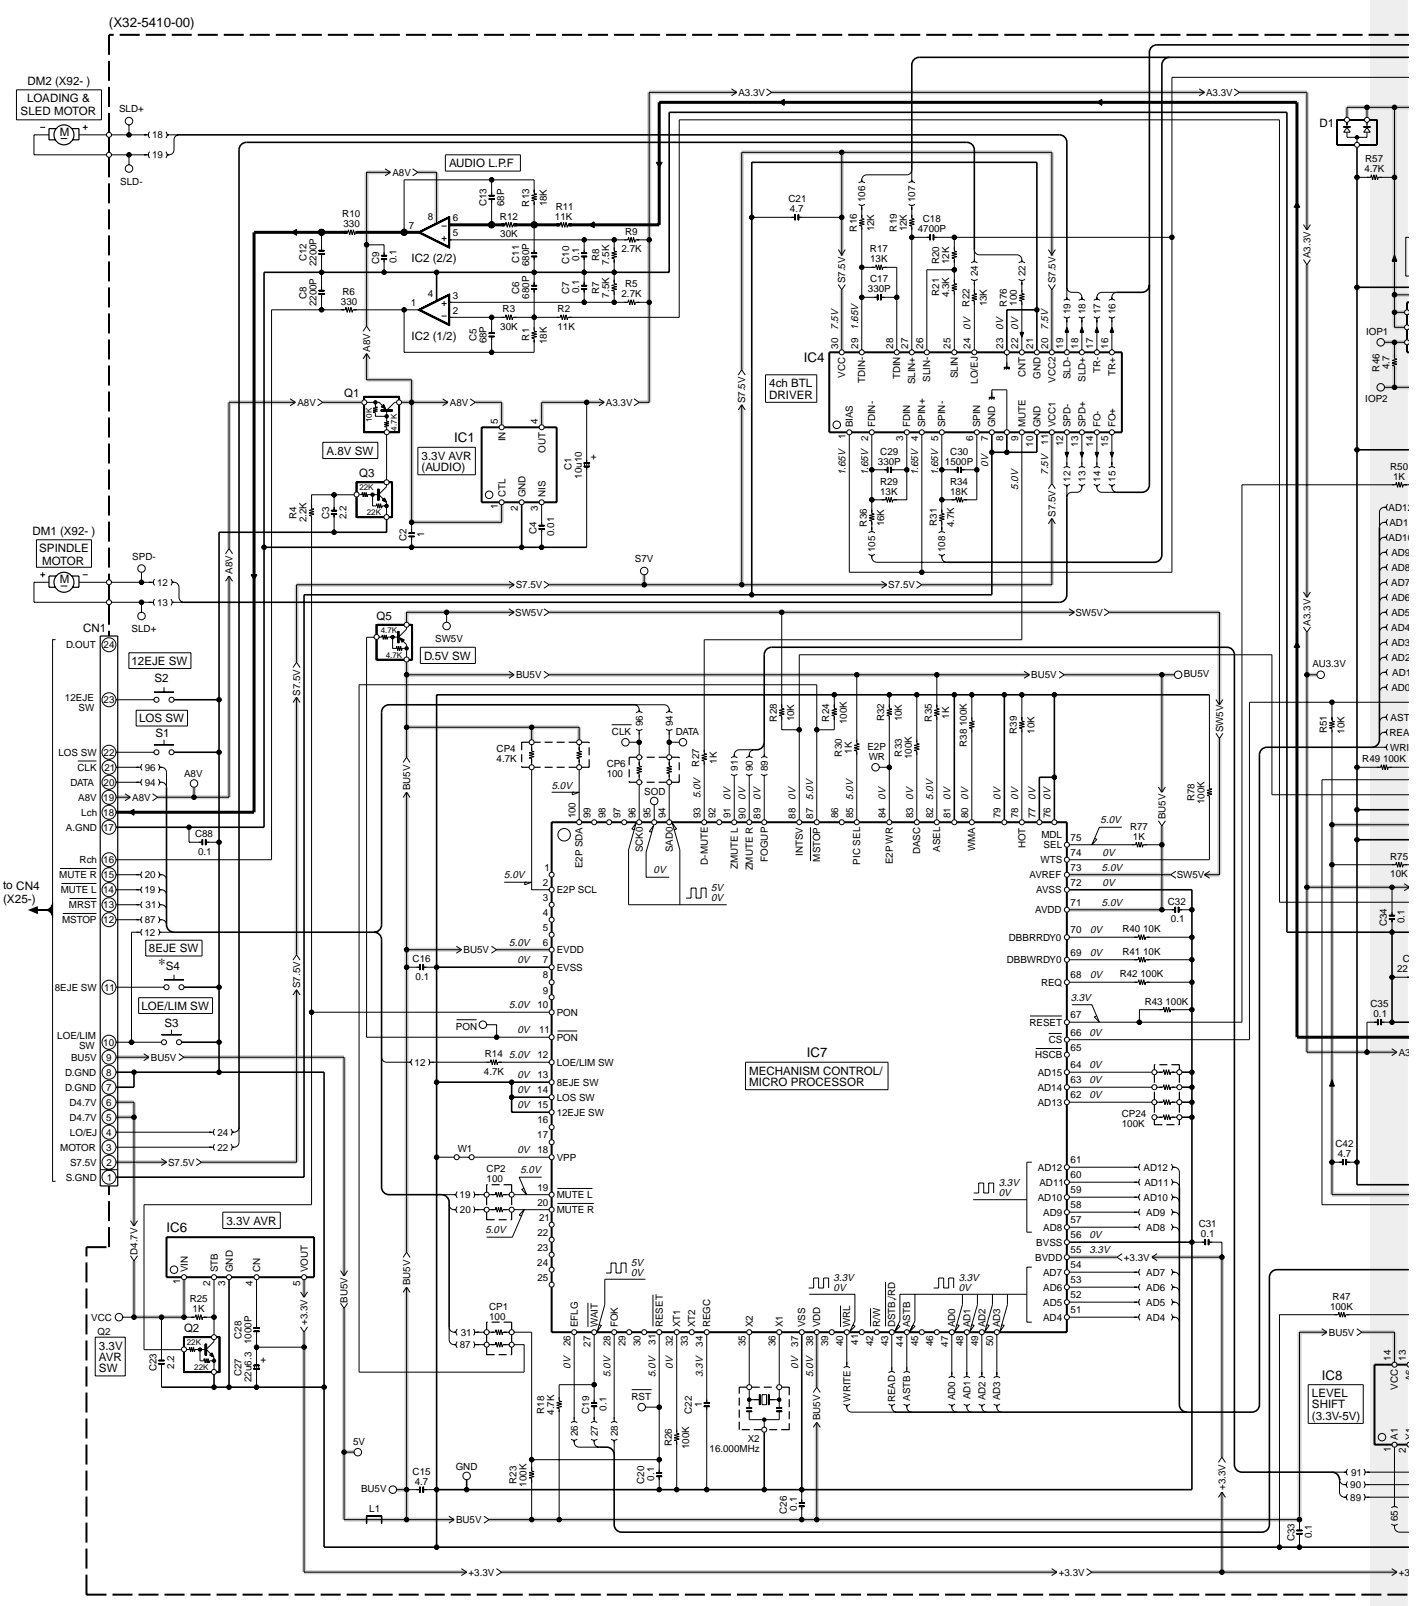

KDC-MP922/X869

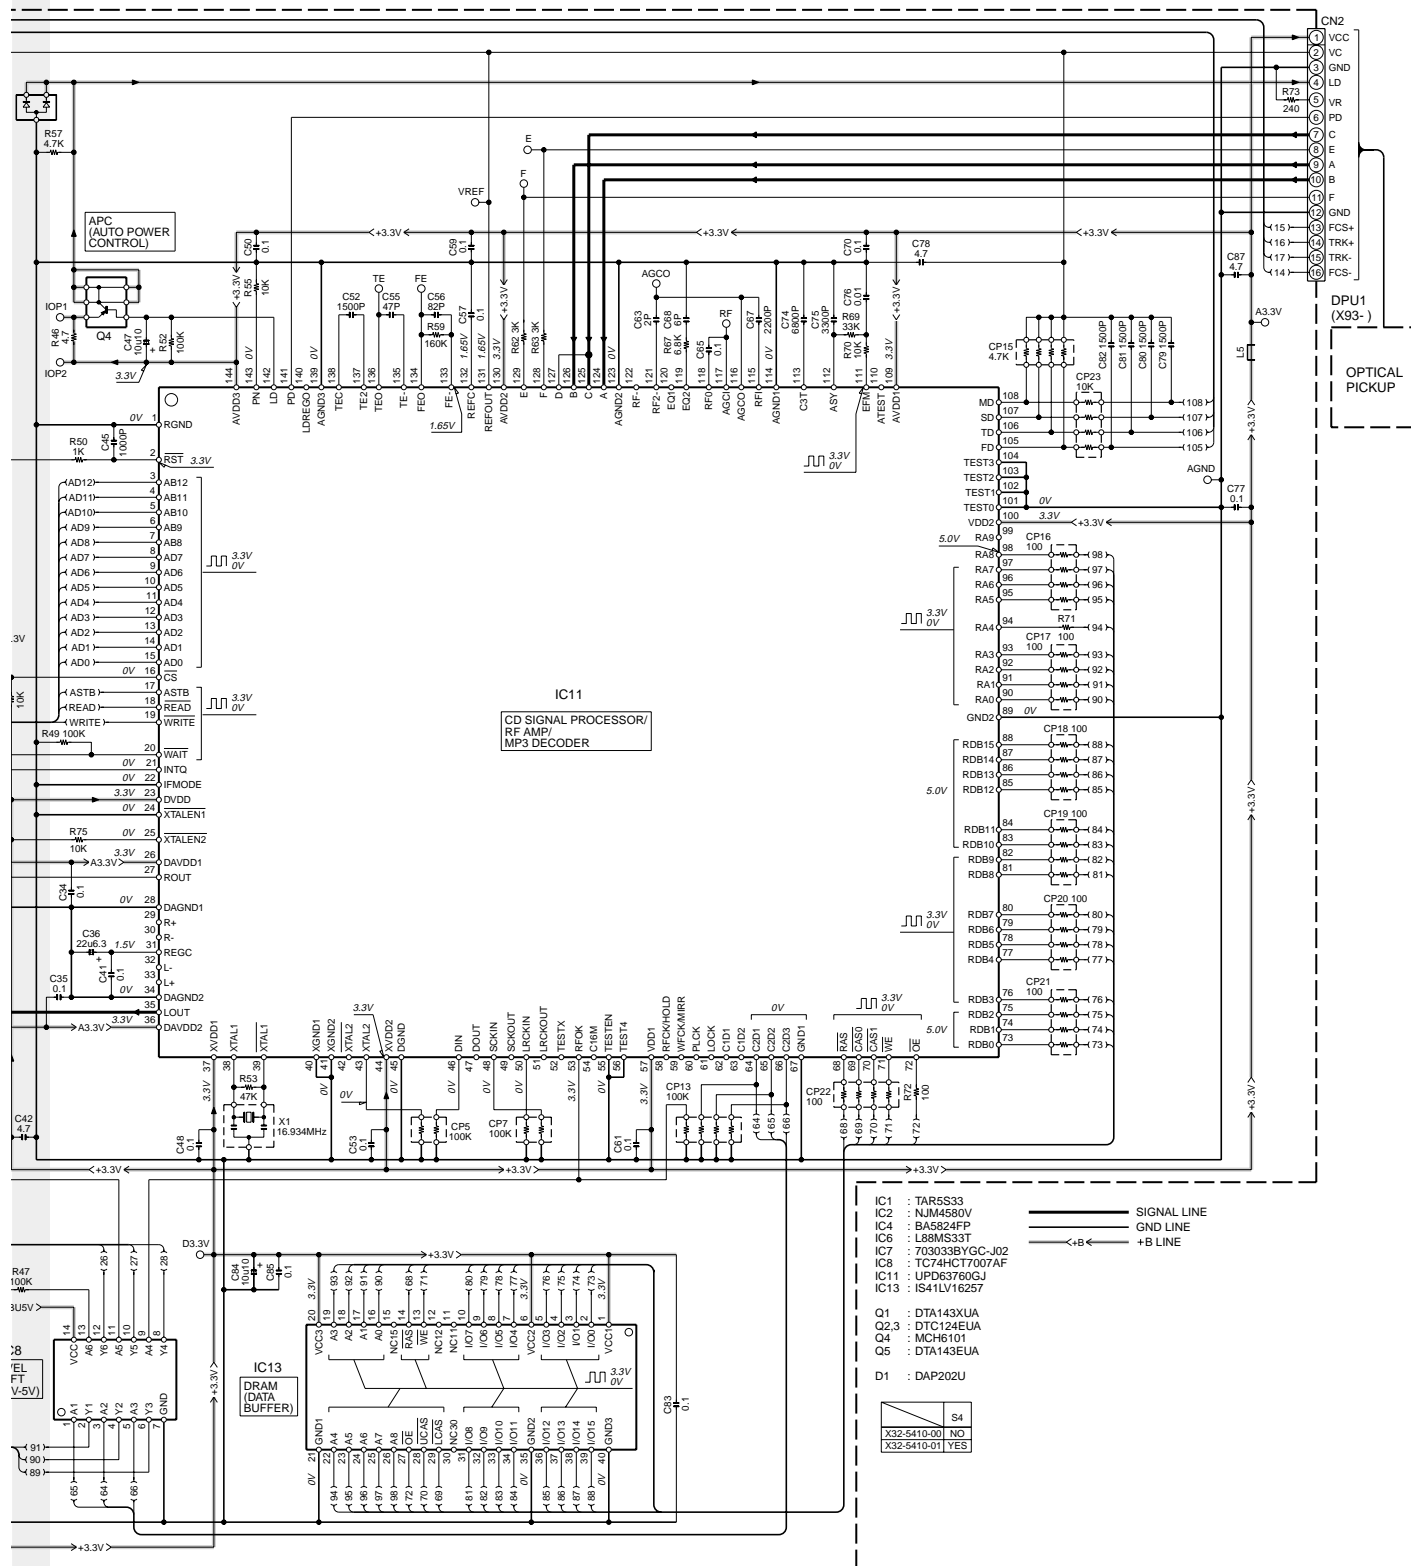

- IC1 : TAR5533
 - IC2 : NJM4580V
 - IC4 : BA5824FP
 - IC6 : L88MS33T
 - IC7 : 703033BYGC-J02
 - IC8 : TC74HC17007AF
 - IC11 : UPD63760CJ
 - IC13 : IS41LV16257
-
- Q1 : DTA143XUA
 - Q2,3 : DTC124EUA
 - Q4 : MCH6101
 - Q5 : DTA143EUA
-
- D1 : DAP202U
-
- | | |
|-------------|-----|
| | S4 |
| X32-5410-00 | NO |
| X32-5410-01 | YES |


CAUTION : For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list).

⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

- DC voltages are as measured with a high impedance voltmeter. Values may vary slightly due to variations between individual instruments or/and units.


KDC-MP922/X869

EXPLODED VIEW (MECHANISM)

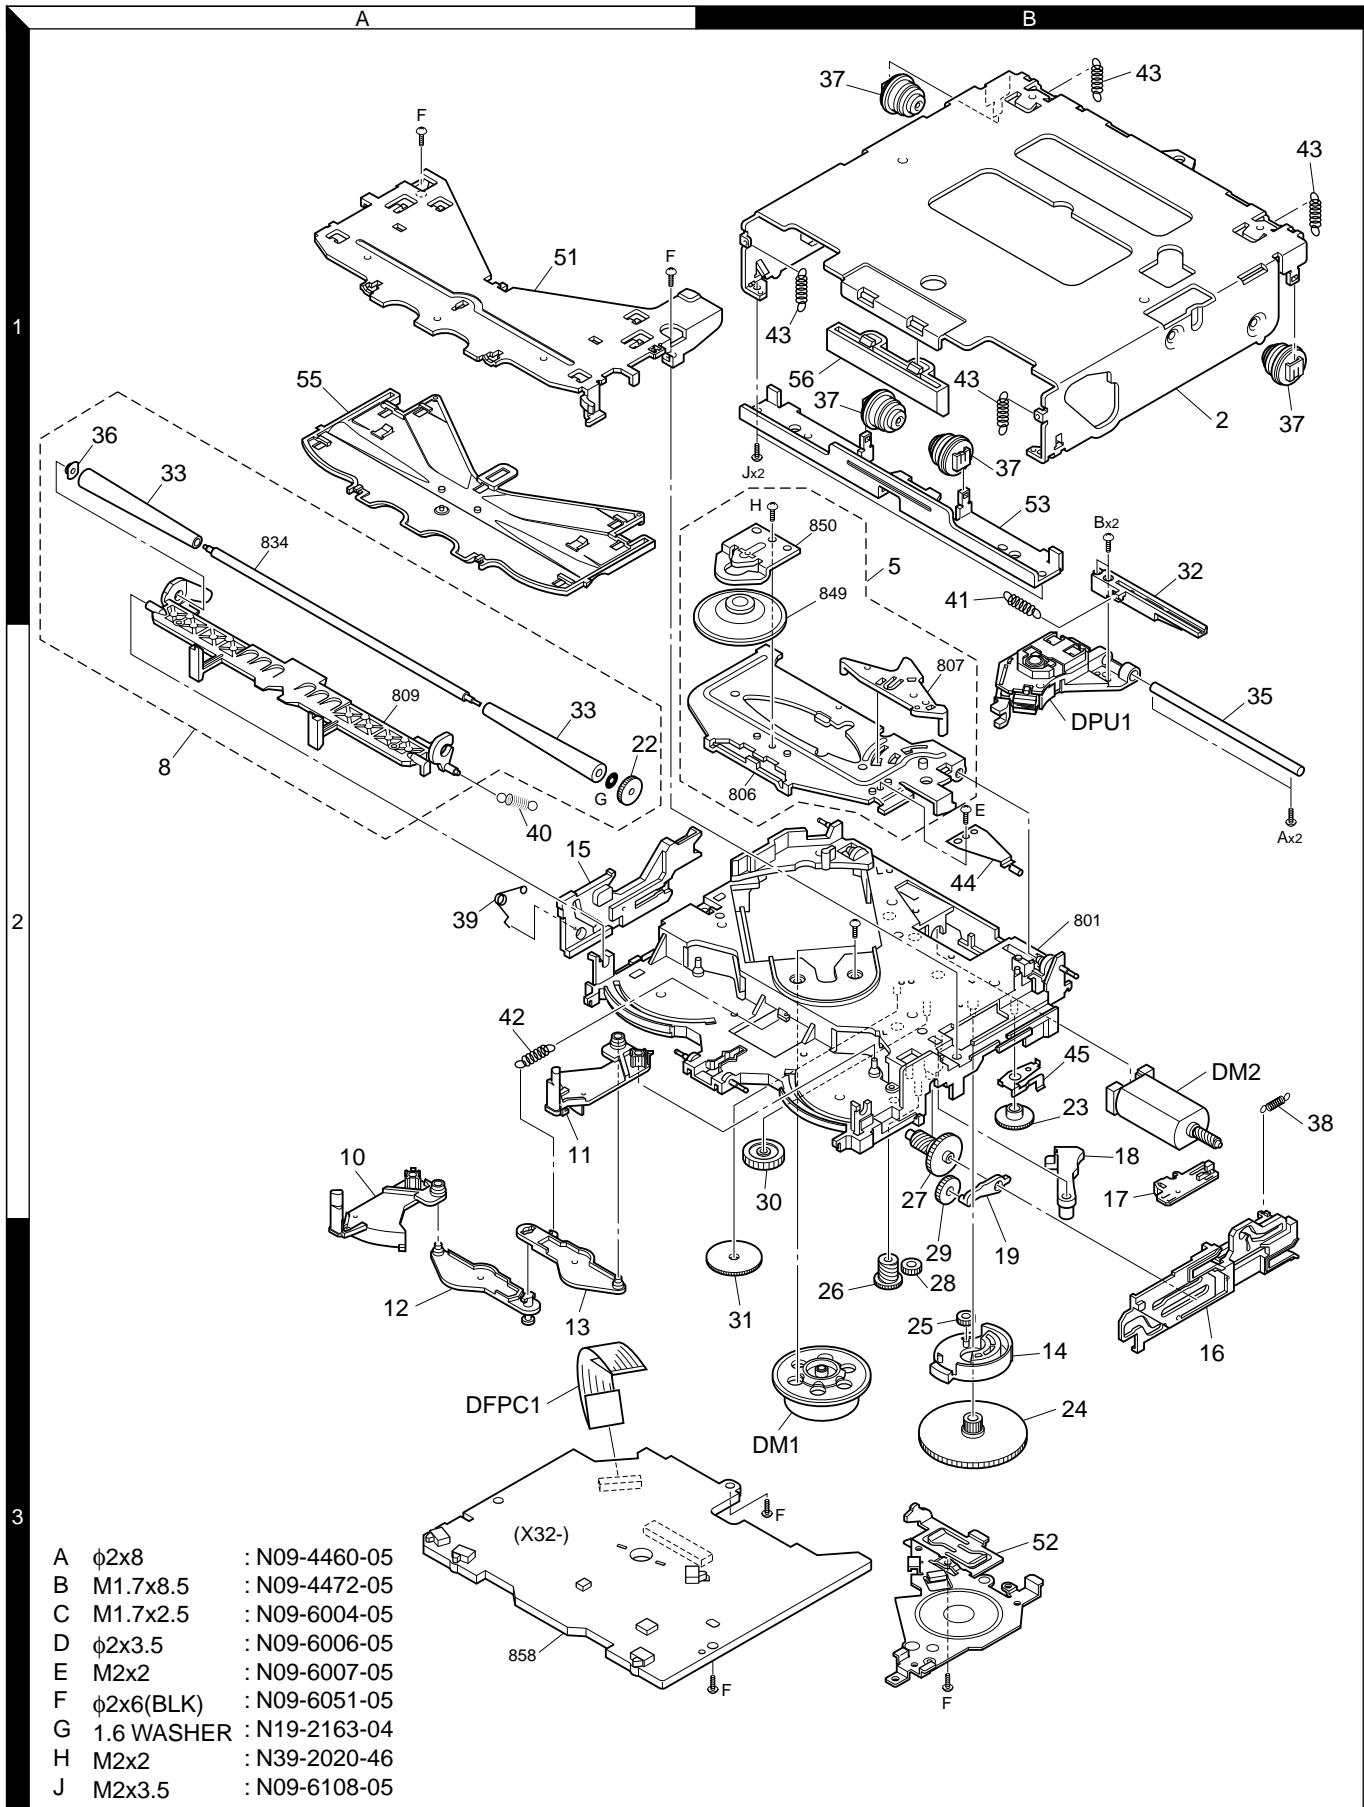

KDC-MP922/X869

EXPLODED VIEW (UNIT)

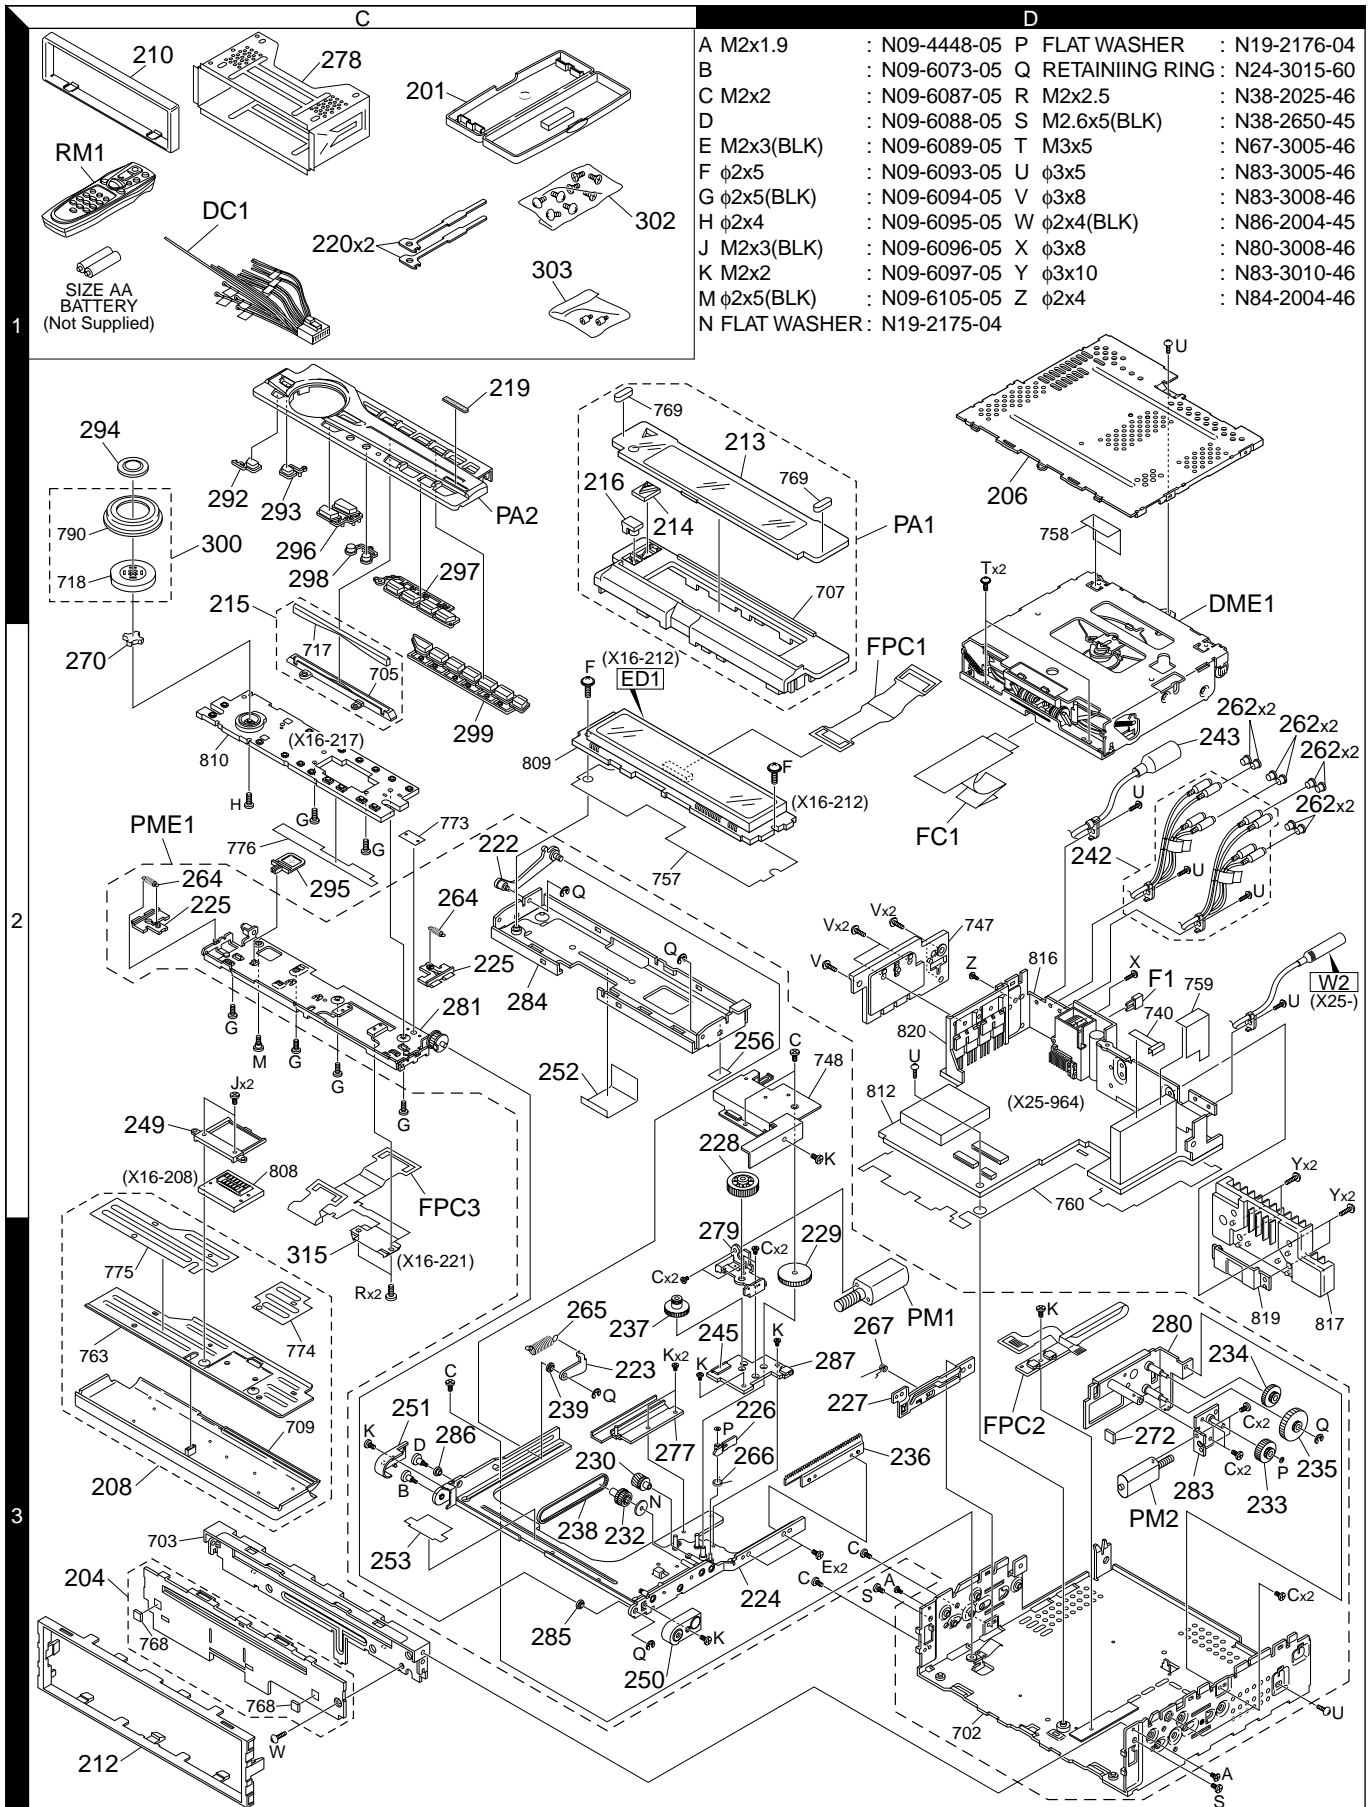

Parts with the exploded numbers larger than 700 are not supplied.

KDC-MP922/X869

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
KDC-MP922/X869					
201	1C	*	A02-2731-03	PLASTIC CABINET ASSY	
204	3C	*	A22-2988-03	SUB PANEL ASSY	
206	1D	*	A52-0831-02	TOP PLATE	
PA1	1D	*	A64-2976-01	PANEL ASSY	K1
PA1	1D	*	A64-2977-01	PANEL ASSY	K2
PA2	1C	*	A64-2993-02	PANEL ASSY	K1
PA2	1C	*	A64-2994-02	PANEL ASSY	K2
PME1	2C	*	A10-5029-11	CHASSIS ASSY	
RM1	1C		A70-2040-05	REMOTE CONTROLLER ASSY (RC-505)	
-			B46-0100-50	WARRANTY CARD	
-			B46-0606-04	ID CARD	
-		*	B46-0648-13	USER CARD	K1
-		*	B46-0653-03	USER CARD	
-		*	B64-2458-00	INSTRUCTION MANUAL (ENGLISH)	
-		*	B64-2459-00	INSTRUCTION MANUAL (FRE.SPA.)	
208	3C	*	B03-5015-03	DRESSING PLATE ASSY	K2
208	3C	*	B03-5016-03	DRESSING PLATE ASSY	K1
210	1C	*	B07-3078-01	ESCUTCHEON	K2
210	1C	*	B07-3079-01	ESCUTCHEON	K1
212	3C	*	B07-3080-02	ESCUTCHEON	
213	1D	*	B10-4383-01	FRONT GLASS	K1
213	1D	*	B10-4384-01	FRONT GLASS	K2
214	1C	*	B12-1221-04	INDICATOR	
215	1C	*	B12-1222-03	INDICATOR ASSY	
216	1C	*	B19-2201-04	LIGHTING BOARD	
219	1C	*	B43-1505-04	KENWOOD BADGE	
220	1C		D10-4674-04	LEVER	
222	2C	*	D10-4716-04	ARM ASSY	
223	3C	*	D10-4718-04	ARM ASSY	
224	3D	*	D10-4721-11	SLIDER ASSY	
225	2C	*	D10-4749-03	LEVER	
226	3D	*	D10-4750-04	LEVER	
227	3D	*	D12-0637-03	CAM	
228	2D	*	D13-2270-04	GEAR	
229	3D	*	D13-2272-04	GEAR	
230	3C	*	D13-2273-14	GEAR	
232	3C	*	D13-2274-14	GEAR	
233	3D	*	D13-2276-04	GEAR	
234	3D	*	D13-2277-04	GEAR	
235	3D	*	D13-2278-04	GEAR	
236	3D	*	D13-2289-03	RACK (GEAR)	
237	3C	*	D13-2290-04	GEAR ASSY	
238	3C	*	D16-0617-05	BELT	
239	3C	*	D23-0958-04	RETAINER	
242	2D	*	E30-6209-05	CORD WITH PINPLUG (3PR+1AUX)	
243	2D	*	E30-6216-05	CORD WITH DIN CONNECTOR (CH)	
245	3D	*	E41-0351-05	FLAT CABLE CONNECTOR	
△ DC1	1C		E30-6062-05	DC CORD	K1
△ DC1	1C		E30-6106-05	DC CORD	K2
FC1	2D	*	E39-0565-05	FLAT CABLE	
249	2C	*	F07-1121-03	COVER	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
250	3C	*	F07-1122-03	COVER	
251	3C	*	F07-1123-03	COVER	
252	2C	*	F09-1794-04	SHEET	
253	3C	*	F09-1798-04	SHEET	
256	2D	*	F09-1842-04	SHEET	
262	2D		F29-0049-05	INSULATING COVER	
△ 999			F52-0011-05	FUSE (MINI BLADE TYPE)	
△ F1	2D		F52-0006-05	FUSE (MINI BLADE TYPE)	
264	2C	*	G01-3162-04	EXTENSION SPRING	
265	3C	*	G01-3188-04	EXTENSION SPRING	
266	3C	*	G01-3189-04	TORSION COIL SPRING	
267	3D	*	G01-3199-04	TORSION COIL SPRING	
270	2C	*	G11-3539-04	CUSHION (VOL)	
272	3D	*	G11-3559-04	CUSHION	
-		*	H10-4854-12	POLYSTYRENE FOAMED FIXTURE	
-		*	H21-1151-04	PROTECTION SHEET	
-			H25-0329-04	PROTECTION BAG (280X450X0.03)	
-			H25-0337-04	PROTECTION BAG (180X300X0.03)	
-		*	H54-2716-03	ITEM CARTON CASE	K1
-		*	H54-2717-03	ITEM CARTON CASE	K2
277	3C	*	J19-5220-03	HOLDER	
278	1C		J21-9823-03	MOUNTING HARDWARE ASSY	
279	3D	*	J21-9951-03	MOUNTING HARDWARE ASSY	
280	3D	*	J21-9954-02	MOUNTING HARDWARE ASSY	
281	2C	*	J21-9956-12	MOUNTING HARDWARE ASSY	
283	3D	*	J21-9997-03	MOUNTING HARDWARE ASSY	
284	2C	*	J21-9999-02	MOUNTING HARDWARE ASSY	
285	3C	*	J31-1055-04	COLLAR	
286	3C	*	J31-1056-04	COLLAR	
287	3D	*	J74-1444-04	RIGID PRINTED WIRING BOARD	
FPC1	2D	*	J84-0153-05	FLEXIBLE PRINTED WIRING BOARD	
FPC2	3D	*	J84-0156-04	FLEXIBLE PRINTED WIRING BOARD	
292	1C	*	K24-4004-04	KNOB (PLAY)	
293	1C	*	K24-4005-04	KNOB (EJECT)	
294	1C	*	K24-4006-04	KNOB (ATT)	
295	2C	*	K24-4007-04	KNOB (OPEN)	
296	1C	*	K25-1527-03	KNOB (SRC,Q)	
297	1C	*	K25-1529-03	KNOB (AM/FM)	
298	1C	*	K25-1530-04	KNOB (SCRL)	
299	2C	*	K25-1528-03	KNOB (1-6)	K2
299	2C	*	K25-1532-03	KNOB (1-6)	K1
300	1C	*	K29-7031-03	KNOB ASSY (VOL)	
302	1C		N99-1723-05	SCREW SET	
303	1C	*	N99-1734-05	SCREW SET	
A	3D		N09-4448-05	MACHINE SCREW	
B	3C	*	N09-6073-05	STEPPED SCREW	
C	3D	*	N09-6087-05	MACHINE SCREW	
D	3C	*	N09-6088-05	STEPPED SCREW	
E	3D	*	N09-6089-05	MACHINE SCREW	
F	2C	*	N09-6093-05	TAPTITE SCREW	
G	2C	*	N09-6094-05	MACHINE SCREW	
H	2C	*	N09-6095-05	MACHINE SCREW	

K1 : KDC-X869 K2 : KDC-MP922

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

KDC-MP922/X869

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
J	2C	*	N09-6096-05	MACHINE SCREW		L1			L40-1005-68	SMALL FIXED INDUCTOR	
K	3C	*	N09-6097-05	MACHINE SCREW		L3			L40-1005-34	SMALL FIXED INDUCTOR	
M	2C	*	N09-6105-05	STEPPED SCREW		L3			L40-1005-68	SMALL FIXED INDUCTOR	
N	2C	*	N19-2175-04	FLAT WASHER		L4,5			L92-0332-05	CHIP FERRITE	
P	3D	*	N19-2176-04	FLAT WASHER		X1			L78-0821-05	RESONATOR	
Q	2C		N24-3015-60	E TYPE RETAINING RING		CP1			R90-1019-05	MULTI-COMP	100 X2
R	3C		N38-2025-46	PAN HEAD MACHIN SCREW		CP2			R90-1014-05	MULTI-COMP	100 X4
S	3D	*	N38-2650-45	PAN HEAD MACHIN SCREW		CP3			R90-0737-05	MULTI-COMP	100K X2
T	2D		N67-3005-46	PAN HEAD SEMS SCREW		CP4			R90-0724-05	MULTI-COMP	1K X4
U	2D		N83-3005-46	PAN HEAD TAPTITE SCREW		CP5			R90-1019-05	MULTI-COMP	100 X2
V	2D		N83-3008-46	PAN HEAD TAPTITE SCREW		CP6			R90-0725-05	MULTI-COMP	1K X2
W	3C		N86-2004-45	BINDING HEAD TAPTITE SCREW		CP7			R90-1014-05	MULTI-COMP	100 X4
RLED			RK73GB2A102J	CHIP R	1.0K J 1/10W	CP8,9			R90-0724-05	MULTI-COMP	1K X4
RPH			RK73GB2A104J	CHIP R	100K J 1/10W	CP11,12			R90-0719-05	MULTI-COMP	4.7K X2
SW1			S68-0871-05	PUSH SWITCH (PANEL MECHA)		CP13			R90-0726-05	MULTI-COMP	10K X2
SW2-3			S68-0863-05	PUSH SWITCH (PANEL MECHA)		CP14			R90-1012-05	MULTI-COMP	22K X4
SW4			S68-0864-05	PUSH SWITCH (PANEL MECHA)		CP15			R90-0725-05	MULTI-COMP	1K X2
PH			T95-0212-05	OPTO ISOLATOR (PANEL MECHA)		CP16			R90-1022-05	MULTI-COMP	470 X2
PM1	3D	*	T42-1076-14	MOTOR ASSY		R1			RK73GB2A103J	CHIP R	10K J 1/10W
PM2	3D	*	T42-1077-04	MOTOR ASSY		R2			RK73GB2A473J	CHIP R	47K J 1/10W
DME1	2D		X92-4670-01	CD MECHANISM ASSY		R3			RK73GB2A104J	CHIP R	100K J 1/10W
SUB-CIRCUIT UNIT (X16-2080-10)						R4,5			RK73GB2A473J	CHIP R	47K J 1/10W
J1			E59-0833-15	RECTANGULAR PLUG		R6			RK73GB2A222J	CHIP R	2.2K J 1/10W
CP1			R90-1019-05	MULTI-COMP	100 X2	R7			RK73GB2A220J	CHIP R	22 J 1/10W
IC1		*	BR24C01AFV-W	MEMORY IC		R8			RK73GB2A104J	CHIP R	100K J 1/10W
SUB-CIRCUIT UNIT (X16-2120-10)						R9,10			RK73GB2A222J	CHIP R	2.2K J 1/10W
D17			B30-1564-05	LED (1608, BLUE)		R11			RK73GB2A102J	CHIP R	1.0K J 1/10W
C1			CK73FB1C105K	CHIP C	1.0UF K	R12			RK73GB2A101J	CHIP R	100 J 1/10W
C2			CK73GB1H103K	CHIP C	0.010UF K	R13			RK73GB2A104J	CHIP R	100K J 1/10W
C3			CK73GB1C104K	CHIP C	0.10UF K	R14,15			RK73GB2A274J	CHIP R	270K J 1/10W
C3			CK73GB1H104K	CHIP C	0.10UF K	R16,17			RK73GB2A153J	CHIP R	15K J 1/10W
C4,5			CK73FB1A225K	CHIP C	2.2UF K	R18			RK73GB2A100J	CHIP R	10 J 1/10W
C6			CC73GCH1H101J	CHIP C	100PF J	R20			RK73GB2A102J	CHIP R	1.0K J 1/10W
C7			CK73EB0J106K	CHIP C	10UF K	R24			RK73GB2A104J	CHIP R	100K J 1/10W
C8			CK73FB1A225K	CHIP C	2.2UF K	R25			RK73GB2A223J	CHIP R	22K J 1/10W
C9			CK73FB1C105K	CHIP C	1.0UF K	R26			RK73GB2A102J	CHIP R	1.0K J 1/10W
C10			CK73GB0J105K	CHIP C	1.0UF K	R27			RK73GB2A153J	CHIP R	15K J 1/10W
C11-16			CK73GB1H103K	CHIP C	0.010UF K	R28			RK73FB2B101J	CHIP R	100 J 1/8W
C20,21			CK73EB1A475K	CHIP C	4.7UF K	R30			RK73GB2A102J	CHIP R	1.0K J 1/10W
C22			CK73GB1H103K	CHIP C	0.010UF K	R33			RK73GB2A44R7J	CHIP R	4.7 J 1/10W
C30			CK73GB1H103K	CHIP C	0.010UF K	R34,35			RK73GB2A103J	CHIP R	10K J 1/10W
C31			CK73EB0J106K	CHIP C	10UF K	D1-11			DA204U	DIODE	
C32			C93-1217-05	CHIP C	0.047UF K	D13			FTZ6.8E	ZENER DIODE	
C33			CK73GB1H103K	CHIP C	0.010UF K	D14			MA3062WA	ZENER DIODE	
CN1			E40-9364-05	FLAT CABLE CONNECTOR		ED1	*		CN2067M	FLUORESCENT INDICATOR TUBE	
CN2			E41-0166-05	FLAT CABLE CONNECTOR		IC1			TAR5S33	ANALOGUE IC	
-		*	H30-0573-04	ADHESIVE DOUBLE-COATED TAPE		IC2			TC74HC4050AFT	MOS-IC	
L1			L40-1005-34	SMALL FIXED INDUCTOR		IC3			RS-171	ANALOGUE IC	
						IC4			BA3830F	ANALOGUE IC	
						IC5	*		703032BGFA01	MI-COM IC	
						Q1			2SA1163	TRANSISTOR	
						Q2			2SC2713	TRANSISTOR	
						Q3			DTA114EUA	DIGITAL TRANSISTOR	
						Q3			UN5111	DIGITAL TRANSISTOR	

K1 : KDC-X869 K2 : KDC-MP922

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

SUB-CIRCUIT UNIT (X16-2120-10)

Ref. No.	Ad	New	Parts No.	Description	Destination
Q4,5			2SC4081	TRANSISTOR	
SWITCH UNIT (X16-2170-10)					
D1-11			B30-1605-05	LED (2COLOR PG/RED)	
D12			B30-1564-05	LED (1608, BLUE)	
D13			B30-1605-05	LED (2COLOR PG/RED)	
D14			B30-1564-05	LED (1608, BLUE)	
D15			B30-1605-05	LED (2COLOR PG/RED)	
D16			B30-1564-05	LED (1608, BLUE)	
D17			B30-1605-05	LED (2COLOR PG/RED)	
D18,19			B30-1564-05	LED (1608, BLUE)	
D21			B30-1566-05	LED (1608, RED)	
C1-5			CK73GB1H103K	CHIP C 0.010UF K	
CN1		*	E41-0419-05	FLAT CABLE CONNECTOR	
R1			RK73FB2B241J	CHIP R 240 J 1/8W	
R3-5			RK73FB2B241J	CHIP R 240 J 1/8W	
R6,7			RK73FB2B301J	CHIP R 300 J 1/8W	
R8			RK73FB2B241J	CHIP R 240 J 1/8W	
R9			RK73FB2B301J	CHIP R 300 J 1/8W	
R10			RK73FB2B470J	CHIP R 47 J 1/8W	
R15			RK73GB2A241J	CHIP R 240 J 1/10W	
R16			RK73GB2A471J	CHIP R 470 J 1/10W	
R17			RK73GB2A103J	CHIP R 10K J 1/10W	
R18			RK73GB2A471J	CHIP R 470 J 1/10W	
R19			RK73GB2A103J	CHIP R 10K J 1/10W	
S1		*	S70-0901-05	TACT SWITCH	
S2,3			S70-0864-05	TACT SWITCH	
S4			S70-0856-05	TACT SWITCH	
S5-8			S70-0864-05	TACT SWITCH	
S9			S70-0856-05	TACT SWITCH	
S10-13			S70-0864-05	TACT SWITCH	
S14			S70-0856-05	TACT SWITCH	
S15-18			S70-0864-05	TACT SWITCH	
S19			S70-0856-05	TACT SWITCH	
S20			S70-0864-05	TACT SWITCH	
S21		*	T99-0445-05	ROTARY ENCODER	
D20			DAP202U	DIODE	
D20			MA142WA	DIODE	
D22			MA8068-M	ZENER DIODE	
Q1			DTA114YUA	DIGITAL TRANSISTOR	
Q2,3			2SC4081	TRANSISTOR	
SUB-CIRCUIT UNIT (X16-2210-10)					
315	2C	*	E58-0968-05	RECTANGULAR RECEPTACLE	
FPC3	2C	*	J84-0154-05	FLEXIBLE PRINTED WIRING BOARD	
ELECTRIC UNIT (X25-9640-1x)					
C2			CK73GB1H103K	CHIP C 0.010UF K	
C3			C90-2866-05	ELECTRO 220UF 16WV	
C4			CK73GB1H103K	CHIP C 0.010UF K	
C5			CE04NW1C100M	ELECTRO 10UF 16WV	
C6			CE04NW0J101M	ELECTRO 100UF 6.3WV	
C7			CK73FB1C105K	CHIP C 1.0UF K	

Ref. No.	Ad	New	Parts No.	Description	Destination
C8			CE04CW1A221M	ELECTRO 220UF 10WV	
C9			CE04CW1A101M	ELECTRO 100UF 10WV	
C10		*	CE32AZ1E221M	CHIP EL 220UF 25WV	
C11			CK73GB1H332K	CHIP C 3300PF K	
C12		*	CE32AZ1C221M	CHIP EL 220UF 16WV	
C13			CK73GB0J105K	CHIP C 1.0UF K	
C14			CK73EB1C225K	CHIP C 2.2UF K	
C15			CK73GB1H103K	CHIP C 0.010UF K	
C16		*	CE32AZ1C101M	CHIP EL 100UF 16WV	
C17			CK73GB1H103K	CHIP C 0.010UF K	
C18		*	CE32AZ1C101M	CHIP EL 100UF 16WV	
C21			CK73FB1A225K	CHIP C 2.2UF K	
C22			C93-1218-05	CHIP C 0.010UF K	
C23			C90-5375-05	ELECTRO 33UF 63WV	
C30			CE04NW1E4R7M	ELECTRO 4.7UF 25WV	
C31			C90-2962-05	ELECTRO 100UF 16WV	
C32-35			CK73EB1C225K	CHIP C 2.2UF K	
C36			CE04NW1C220M	ELECTRO 22UF 16WV	
C37			CK73GB1E223K	CHIP C 0.022UF K	
C37			CK73GB1H223K	CHIP C 0.022UF K	
C38			CK73GB1H103K	CHIP C 0.010UF K	
C39,40			CK73EB1C225K	CHIP C 2.2UF K	
C42			CK73GB1E223K	CHIP C 0.022UF K	
C42			CK73GB1H223K	CHIP C 0.022UF K	
C43			CK73FB1C105K	CHIP C 1.0UF K	
C44,45			CK73GB1H103K	CHIP C 0.010UF K	
C46			CK73GB1H102K	CHIP C 1000PF K	
C48			CK73GB1H103K	CHIP C 0.010UF K	
C100			C90-2822-05	ELECTRO 3900UF 16WV	K2
C100			C90-5484-05	ELECTRO 3900UF 16WV	K1
C101			CE04NW0J470M	ELECTRO 47UF 6.3WV	
C102			CC73GCH1H220J	CHIP C 22PF J	
C103			CC73GCH1H270J	CHIP C 27PF J	
C104			CK73GB0J105K	CHIP C 1.0UF K	
C106			CK73GB0J105K	CHIP C 1.0UF K	
C107			CK73GB1H103K	CHIP C 0.010UF K	
C109			CK73GB1H102K	CHIP C 1000PF K	
C110,111			CK73GB1H103K	CHIP C 0.010UF K	
C199			CK73GB1C104K	CHIP C 0.10UF K	
C199			CK73GB1H104K	CHIP C 0.10UF K	
C201,202			CE04NW1HR47M	ELECTRO 0.47UF 50WV	
C203,204			CK73FB1C474K	CHIP C 0.47UF K	
C205,206			CE04NW0J470M	ELECTRO 47UF 6.3WV	
C207,208			CK73FB1C474K	CHIP C 0.47UF K	
C209			CK73GB1E223K	CHIP C 0.022UF K	
C209			CK73GB1H223K	CHIP C 0.022UF K	
C210			CK73GB1H103K	CHIP C 0.010UF K	
C211			CK73GB1A474K	CHIP C 0.47UF K	
C212			CC73GCH1H151J	CHIP C 150PF J	
C213			CK73GB1C104K	CHIP C 0.10UF K	
C213			CK73GB1H104K	CHIP C 0.10UF K	
C214			CK73GB1H103K	CHIP C 0.010UF K	
C215			CE04NW1C470M	ELECTRO 47UF 16WV	
C216-223			CK73FB1C105K	CHIP C 1.0UF K	
C224			CK73GB1C104K	CHIP C 0.10UF K	

K1 : KDC-X869 K2 : KDC-MP922

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-9640-1x)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
C224			CK73GB1H104K	CHIP C 0.10UF K		C603			CK73GB1H103K	CHIP C 0.010UF K	
C225			CK73GB1H103K	CHIP C 0.010UF K		C701			CK73GB1A474K	CHIP C 0.47UF K	
C226-231			CK73GB1E473K	CHIP C 0.047UF K		CN1			E41-0224-05	PIN ASSY	
C226-231			CK73GB1H473K	CHIP C 0.047UF K		CN2			E40-3237-05	PIN ASSY	
C232			CK73FB1C105K	CHIP C 1.0UF K		CN3	*		E41-0384-05	PIN ASSY	
C233			C92-0667-05	ELECTRO 10UF 10WV		CN4			E40-9527-05	FLAT CABLE CONNECTOR	
C234			CK73GB1E333K	CHIP C 0.033UF K		CN4			E41-0213-05	FLAT CABLE CONNECTOR	
C234			CK73GB1H333K	CHIP C 0.033UF K		CN5			E40-9368-05	FLAT CABLE CONNECTOR	
C235			CK73GB1H103K	CHIP C 0.010UF K		CN6	*		E41-0399-05	FLAT CABLE CONNECTOR	
C236			CK73GB1A334K	CHIP C 0.33UF K		CN7			E41-0009-05	PIN ASSY	
C237			CK73GB1A474K	CHIP C 0.47UF K		△ J1			E58-0863-15	RECTANGULAR RECEPTACLE	
C238			CC73GCH1H221J	CHIP C 220PF J		W2	*		E30-6218-05	CORD WITH PLUG	
C239			CK73GB1H103K	CHIP C 0.010UF K		L1			L33-1170-05	CHOKE COIL ASSY	
C240,241			C92-0667-05	ELECTRO 10UF 10WV		L2			L33-1126-05	CHOKE COIL	
C250	*		CE32AT1H2R2M	CHIP EL 2.2UF 50WV	K1	L3			L33-1029-05	SMALL FIXED INDUCTOR	
C250			C92-0687-05	ELECTRO 2.2UF 50WV	K2	L4			L40-2205-34	SMALL FIXED INDUCTOR (22UH)	
C251			CK73FB1C334K	CHIP C 0.33UF K		L7			L33-1039-05	LINE FILTER COIL	
C252			CK73GB1A334K	CHIP C 0.33UF K		L101			L40-4795-34	SMALL FIXED INDUCTOR	
C253			CK73FB1C334K	CHIP C 0.33UF K		L101			L40-4795-68	SMALL FIXED INDUCTOR (4.7UH)	
C254			CK73GB1A334K	CHIP C 0.33UF K		L102			L92-0075-05	CHIP FERRITE	
C255			CK73FB1C334K	CHIP C 0.33UF K		L201			L40-4795-34	SMALL FIXED INDUCTOR	
C256			CK73GB1A334K	CHIP C 0.33UF K		L201			L40-4795-68	SMALL FIXED INDUCTOR (4.7UH)	
C257			CK73FB1C334K	CHIP C 0.33UF K		L303-307			L40-4795-34	SMALL FIXED INDUCTOR	
C258			CK73GB1A334K	CHIP C 0.33UF K		L303-307			L40-4795-68	SMALL FIXED INDUCTOR (4.7UH)	
C259	*		CE32AT1H010M	CHIP EL 1.0UF 50WV	K1	X1			L78-0821-05	RESONATOR	
C259			C92-0686-05	ELECTRO 1UF 50WV	K2	X2			L77-2738-05	CRYSTAL RESONATOR	
C260-263			CK73GB1C104K	CHIP C 0.10UF K		X3			L77-2002-05	CRYSTAL RESONATOR	
C260-263			CK73GB1H104K	CHIP C 0.10UF K		U	2D		N83-3005-46	PAN HEAD TAPTITE SCREW	
C264,265			CE04NW1C220M	ELECTRO 22UF 16WV		X	2D		N80-3008-46	PAN HEAD TAPTITE SCREW	
C266,267			CE04NW1C100M	ELECTRO 10UF 16WV		Y	2D		N83-3010-46	PAN HEAD TAPTITE SCREW	
C266,267			CE04NW1C100M	ELECTRO 10UF 16WV		Z	2D		N84-2004-46	PAN HEAD TAPTITE SCREW	
C268,269			CE04NW1C220M	ELECTRO 22UF 16WV		R1			RK73FB2B223J	CHIP R 22K J 1/8W	
C270,271			CE04NW1C100M	ELECTRO 10UF 16WV		R2			RK73GB2A101J	CHIP R 100 J 1/10W	
C272-275			C90-5296-05	NP-ELECT 0.22UF 50WV		R3			RK73GB2A223J	CHIP R 22K J 1/10W	
C276			CK73FB1C105K	CHIP C 1.0UF K		R4			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C277			CE04NW1C330M	ELECTRO 33UF 16WV		R5			RK73FB2B221J	CHIP R 220 J 1/8W	
C278			C90-2935-05	ELECTRO 1.0UF 50WV		R6			RK73GB2A153J	CHIP R 15K J 1/10W	
C279			CE04NW1H010M	ELECTRO 1.0UF 50WV		R7			R92-3032-05	CHIP R 4.3K D 1/10W	
C280-285			CK73GB1H222K	CHIP C 2200PF K		R8			R92-3047-05	CHIP R 24K D 1/10W	
C286			CK73GB1H103K	CHIP C 0.010UF K		R9			RK73FB2B152J	CHIP R 1.5K J 1/8W	
C287-289			CK73FB1H104K	CHIP C 0.10UF K		R10			R92-3022-05	METAL R 750 D 1/10W	
C290,291			CK73GB1H103K	CHIP C 0.010UF K		R11			R92-3028-05	CHIP R 2.2K D 1/10W	
C292-296			CK73EB1A475K	CHIP C 4.7UF K		R12			RK73GB2A103J	CHIP R 10K J 1/10W	
C297,298			C92-0672-05	ELECTRO 22UF 16WV		R13			R92-2104-05	CHIP R 2.2 J 1W	
C299,300			CE04NW1C100M	ELECTRO 10UF 16WV		R14			RK73FB2B751J	CHIP R 750 J 1/8W	
C303-305			CK73GB1H103K	CHIP C 0.010UF K		R15			RK73GB2A473J	CHIP R 47K J 1/10W	
C307			CK73GB1H103K	CHIP C 0.010UF K		R16			RK73FB2B103J	CHIP R 10K J 1/8W	
C309,310			CC73GCH1H100D	CHIP C 10PF D		R17			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C311			CC73GCH1H331J	CHIP C 330PF J		R18			RK73GB2A750J	CHIP R 75 J 1/10W	
C312			CK73FB1A225K	CHIP C 2.2UF K		R19			RK73GB2A272J	CHIP R 2.7K J 1/10W	
C313			CK73GB1H103K	CHIP C 0.010UF K		R20			RK73GB2A470J	CHIP R 47 J 1/10W	
C314			CE04NW1C100M	ELECTRO 10UF 16WV		R21			RK73GB2A752J	CHIP R 7.5K J 1/10W	
C316-319			CK73GB1A224K	CHIP C 0.22UF K		R22			RK73GB2A274J	CHIP R 270K J 1/10W	
C502-504			CK73GB1H103K	CHIP C 0.010UF K		R23			RK73GB2A563J	CHIP R 56K J 1/10W	
C601,602			CK73GB1C104K	CHIP C 0.10UF K							
C601,602			CK73GB1H104K	CHIP C 0.10UF K							

K1 : KDC-X869 K2 : KDC-MP922

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-9640-1x)

Ref. No.	A d	N e w	Parts No.	Description	Desti- nation
R24			RK73GB2A470J	CHIP R 47 J 1/10W	
R25			RK73GB2A103J	CHIP R 10K J 1/10W	
R26,27			RK73GB2A913J	CHIP R 91K J 1/10W	
R28			RK73FB2B472J	CHIP R 4.7K J 1/8W	
R29			RD14DB2H102J	SMALL-RD 1.0K J 1/2W	
R30			RK73GB2A223J	CHIP R 22K J 1/10W	
R31			RK73FB2B472J	CHIP R 4.7K J 1/8W	
R32			RK73FB2B561J	CHIP R 560 J 1/8W	K1
R34,35			RK73GB2A104J	CHIP R 100K J 1/10W	
R36			RK73FB2B103J	CHIP R 10K J 1/8W	
R37			RK73GB2A103J	CHIP R 10K J 1/10W	
R38			RK73GB2A822J	CHIP R 8.2K J 1/10W	
R41			RK73GB2A223J	CHIP R 22K J 1/10W	
R42			RD14DB2H332J	SMALL-RD 3.3K J 1/2W	
R43			RK73EB2E473J	CHIP R 47K J 1/4W	
R44			RK73GB2A183J	CHIP R 18K J 1/10W	
R45			RK73GB2A104J	CHIP R 100K J 1/10W	
R46			RK73EB2E103J	CHIP R 10K J 1/4W	
R48			RK73EB2E102J	CHIP R 1.0K J 1/4W	K1
R49			RD14DB2H102J	SMALL-RD 1.0K J 1/2W	
R101			RK73GB2A103J	CHIP R 10K J 1/10W	
R102			RK73GB2A153J	CHIP R 15K J 1/10W	
R103			RK73GB2A104J	CHIP R 100K J 1/10W	
R106			RK73GB2A103J	CHIP R 10K J 1/10W	K2
R106,107			RK73GB2A103J	CHIP R 10K J 1/10W	K1
R109			RK73GB2A103J	CHIP R 10K J 1/10W	K2
R110			RK73GB2A104J	CHIP R 100K J 1/10W	
R111,112			RK73GB2A103J	CHIP R 10K J 1/10W	
R115,116			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R117			RK73GB2A103J	CHIP R 10K J 1/10W	
R118-120			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R121			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R122,123			RK73GB2A101J	CHIP R 100 J 1/10W	
R127			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R128			RK73GB2A104J	CHIP R 100K J 1/10W	
R129			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R130			RK73GB2A104J	CHIP R 100K J 1/10W	
R131			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R132			RK73GB2A104J	CHIP R 100K J 1/10W	
R133-136			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R137			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R138-140			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R141			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R142,143			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R144			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R145,146			RK73GB2A473J	CHIP R 47K J 1/10W	
R150,151			RK73GB2A104J	CHIP R 100K J 1/10W	
R152,153			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R156			RK73GB2A104J	CHIP R 100K J 1/10W	
R158			RK73GB2A104J	CHIP R 100K J 1/10W	
R159,160			RK73GB2A471J	CHIP R 470 J 1/10W	
R161			RK73GB2A104J	CHIP R 100K J 1/10W	
R162			RK73GB2A103J	CHIP R 10K J 1/10W	
R163,164			RK73GB2A471J	CHIP R 470 J 1/10W	
R165,166			RK73GB2A472J	CHIP R 4.7K J 1/10W	

Ref. No.	A d	N e w	Parts No.	Description	Desti- nation
R167			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R169			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R170			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R171,172			RK73GB2A471J	CHIP R 470 J 1/10W	
R173,174			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R175			RK73GB2A333J	CHIP R 33K J 1/10W	
R176			RK73GB2A473J	CHIP R 47K J 1/10W	
R177			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R178,179			RK73GB2A103J	CHIP R 10K J 1/10W	
R180			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R181			RK73GB2A473J	CHIP R 47K J 1/10W	
R182			RK73GB2A104J	CHIP R 100K J 1/10W	
R183			RK73GB2A222J	CHIP R 2.2K J 1/10W	K2
R183,184			RK73GB2A222J	CHIP R 2.2K J 1/10W	K1
R186			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R201			RK73GB2A103J	CHIP R 10K J 1/10W	
R202-204			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R205			RK73GB2A134J	CHIP R 130K J 1/10W	
R206			RK73GB2A823J	CHIP R 82K J 1/10W	
R207			RK73GB2A473J	CHIP R 47K J 1/10W	
R208			RK73GB2A912J	CHIP R 9.1K J 1/10W	
R209			RK73GB2A363J	CHIP R 36K J 1/10W	
R210			RK73GB2A622J	CHIP R 6.2K J 1/10W	
R217			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R218			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R219			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R220,221			RK73FB2B361J	CHIP R 360 J 1/8W	
R222,223			RK73FB2B222J	CHIP R 2.2K J 1/8W	
R224,225			RK73FB2B103J	CHIP R 10K J 1/8W	
R226,227			RK73FB2B223J	CHIP R 22K J 1/8W	
R228,229			RK73FB2B820J	CHIP R 82 J 1/8W	
R232,233			RK73FB2B361J	CHIP R 360 J 1/8W	
R234,235			RK73FB2B222J	CHIP R 2.2K J 1/8W	
R236,237			RK73FB2B103J	CHIP R 10K J 1/8W	
R238,239			RK73FB2B223J	CHIP R 22K J 1/8W	
R240,241			RK73FB2B820J	CHIP R 82 J 1/8W	
R244,245			RK73FB2B361J	CHIP R 360 J 1/8W	
R246,247			RK73FB2B222J	CHIP R 2.2K J 1/8W	
R248,249			RK73FB2B103J	CHIP R 10K J 1/8W	
R250,251			RK73FB2B223J	CHIP R 22K J 1/8W	
R252,253			RK73FB2B820J	CHIP R 82 J 1/8W	
R256			RK73GB2A221J	CHIP R 220 J 1/10W	
R257			RK73GB2A223J	CHIP R 22K J 1/10W	
R259			RK73GB2A432J	CHIP R 4.3K J 1/10W	
R260			RK73GB2A100J	CHIP R 10 J 1/10W	
R261			RK73GB2A752J	CHIP R 7.5K J 1/10W	
R262			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R263,264			RK73EB2E100J	CHIP R 10 J 1/4W	
R265,266			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R267			RK73EB2E100J	CHIP R 10 J 1/4W	
R268			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R269			RK73EB2E100J	CHIP R 10 J 1/4W	
R270			RK73GB2A473J	CHIP R 47K J 1/10W	
R271			RK73GB2A821J	CHIP R 820 J 1/10W	
R272,273			RK73GB2A103J	CHIP R 10K J 1/10W	

K1 : KDC-X869 K2 : KDC-MP922

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-9640-1x)

Ref. No.	Add	New	Parts No.	Description	Destination	Ref. No.	Add	New	Parts No.	Description	Destination
R274			RK73GB2A153J	CHIP R 15K J 1/10W		D203			RD6.8MW	ZENER DIODE	
R275			RK73GB2A473J	CHIP R 47K J 1/10W		D204,205			RD6.8M(B2)	ZENER DIODE	
R276			RK73GB2A102J	CHIP R 1.0K J 1/10W		D206			RD6.8MW	ZENER DIODE	
R277			RK73GB2A473J	CHIP R 47K J 1/10W		D207,208			DAP202U	DIODE	
R278			RK73GB2A333J	CHIP R 33K J 1/10W		D207,208			MA142WA	DIODE	
R279,280			RK73GB2A334J	CHIP R 330K J 1/10W		D209-216			S1J	DIODE	
R303			RK73FB2B102J	CHIP R 1.0K J 1/8W		D209-216			1SR154-400	DIODE	
R304			RK73GB2A223J	CHIP R 22K J 1/10W		D217			DA204K	DIODE	
R305			RK73GB2A472J	CHIP R 4.7K J 1/10W		D301			IMSA-6801	SURGE ABSORBER	
R306-308			RK73GB2A222J	CHIP R 2.2K J 1/10W		D503-505			MA3062WA	ZENER DIODE	
R501,502			RK73EB2E101J	CHIP R 100 J 1/4W		D506-509			DA204K	DIODE	
R503-507			RK73EB2E472J	CHIP R 4.7K J 1/4W		D601			DA204K	DIODE	
R508			RK73EB2E101J	CHIP R 100 J 1/4W		IC1	*		703033BGC020	MI-COM IC	
R513			RK73GB2A223J	CHIP R 22K J 1/10W		IC2			TDA7411	ANALOGUE IC	
R514-516			RK73GB2A472J	CHIP R 4.7K J 1/10W		IC3			M5237ML	ANALOGUE IC	
R517,518			RK73EB2E101J	CHIP R 100 J 1/4W		IC4			TDA7560	ANALOGUE IC	
R519			RK73EB2E471J	CHIP R 470 J 1/4W		IC5			TDA7401	ANALOGUE IC	
R520			RK73EB2E472J	CHIP R 4.7K J 1/4W		IC6	*		NJM2195FJ1	ANALOGUE IC	
R522-524			RK73GB2A222J	CHIP R 2.2K J 1/10W		IC7			ICL7660SIBA	ANALOGUE IC	
R525			RK73GB2A102J	CHIP R 1.0K J 1/10W		IC8			S-80837CNNB	MOS-IC	
R526,527			RK73GB2A473J	CHIP R 47K J 1/10W		IC9			TC74HC02AF	MOS-IC	
R601,602			RK73GB2A104J	CHIP R 100K J 1/10W		IC10-13			NJM4565M-TE2	ANALOGUE IC	
R603			RK73GB2A222J	CHIP R 2.2K J 1/10W		IC14			TDA7479D	ANALOGUE IC	
R604,605			RK73GB2A103J	CHIP R 10K J 1/10W		IC15,16			LB1930M	ANALOGUE IC	
R606			RK73GB2A222J	CHIP R 2.2K J 1/10W		IC17			BR24C01AF-W	ROM IC	
R607			RK73GB2A911J	CHIP R 910 J 1/10W		IC18			L9820D013TR	ANALOGUE IC	
R608,609			RK73GB2A104J	CHIP R 100K J 1/10W		IC19			LM2672M-ADJ	ANALOGUE IC	
R610			RK73GB2A222J	CHIP R 2.2K J 1/10W		IC20	*		TC7W66FK	MOS-IC	
R611,612			RK73GB2A103J	CHIP R 10K J 1/10W		Q1			2SA2057	TRANSISTOR	
R613			RK73GB2A222J	CHIP R 2.2K J 1/10W		Q2			2SC4081	TRANSISTOR	
R614			RK73GB2A911J	CHIP R 910 J 1/10W		Q3			2SA1576A	TRANSISTOR	
R615-618			RK73GB2A102J	CHIP R 1.0K J 1/10W		Q4			DTA124EUA	DIGITAL TRANSISTOR	
R620			RK73EB2E102J	CHIP R 1.0K J 1/4W		Q4			UN5112	DIGITAL TRANSISTOR	
R621			RK73GB2A472J	CHIP R 4.7K J 1/10W		Q5			DTC124EUA	DIGITAL TRANSISTOR	
R623,624			RK73GB2A332J	CHIP R 3.3K J 1/10W		Q5			UN5212	DIGITAL TRANSISTOR	
R625,626			RK73GB2A102J	CHIP R 1.0K J 1/10W		Q6			DTC144EUA	DIGITAL TRANSISTOR	
R701			RK73GB2A104J	CHIP R 100K J 1/10W		Q6			UN5213	DIGITAL TRANSISTOR	
D1			1N5393G-M5	DIODE		Q7			DTA124EUA	DIGITAL TRANSISTOR	
D2			RB160L-40	DIODE		Q7			UN5112	DIGITAL TRANSISTOR	
D3			MA8056-M	ZENER DIODE		Q8,9			2SA2057	TRANSISTOR	
D4			MA8082-L	ZENER DIODE		Q11			DTC124EUA	DIGITAL TRANSISTOR	
D5			SFPB-54V	DIODE		Q11			UN5212	DIGITAL TRANSISTOR	
D6			MA8100-L	ZENER DIODE		Q12			DTA124EUA	DIGITAL TRANSISTOR	
D7			MA4062(N)-L	ZENER DIODE		Q12			UN5112	DIGITAL TRANSISTOR	
D8			MA8110-M	ZENER DIODE		Q13			2SA2057	TRANSISTOR	
D9			MA8056-M	ZENER DIODE		Q14			2SC4081	TRANSISTOR	
D16			MA3056-M	ZENER DIODE	K1	Q15			2SB1443	TRANSISTOR	
D18			MA8068-M	ZENER DIODE		Q16,17			2SC4081	TRANSISTOR	
D19			MA8062-M	ZENER DIODE		Q18,19			2SA1576A	TRANSISTOR	
D20,21			DAP202U	DIODE		Q20			2SC4081	TRANSISTOR	
D20,21			MA142WA	DIODE		Q21			2SA1576A	TRANSISTOR	
D101			DAP202U	DIODE		Q22			2SC4081	TRANSISTOR	
D101			MA142WA	DIODE		Q23			DTC114YUA	DIGITAL TRANSISTOR	
D201,202			RD6.8M(B2)	ZENER DIODE		Q23			UN5214	DIGITAL TRANSISTOR	
						Q24			2SB1240	TRANSISTOR	

K1 : KDC-X869 K2 : KDC-MP922

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-9640-1x)

Ref. No.	A d	N e w	Parts No.	Description	Desti- nation
Q25			DTA123JK	DIGITAL TRANSISTOR	K1
Q25			KRA105S	DIGITAL TRANSISTOR	K1
Q26			DTC144EUA	DIGITAL TRANSISTOR	
Q26			UN5213	DIGITAL TRANSISTOR	
Q27			2SC4081	TRANSISTOR	
Q29			2SC4081	TRANSISTOR	
Q30,31			DTA124EUA	DIGITAL TRANSISTOR	
Q30,31			UN5112	DIGITAL TRANSISTOR	
Q201			DTC143TUA	DIGITAL TRANSISTOR	
Q201			UN5216	DIGITAL TRANSISTOR	
Q202			DTC124EUA	DIGITAL TRANSISTOR	
Q202			UN5212	DIGITAL TRANSISTOR	
Q203-208			DTC143TUA	DIGITAL TRANSISTOR	
Q203-208			UN5216	DIGITAL TRANSISTOR	
Q210			2SC4081	TRANSISTOR	
Q303			DTC124EUA	DIGITAL TRANSISTOR	
Q303			UN5212	DIGITAL TRANSISTOR	
Q304			2SB1188(Q,R)	TRANSISTOR	
Q305			DTC143TUA	DIGITAL TRANSISTOR	
Q305			UN5216	DIGITAL TRANSISTOR	
Q501			DTA124EUA	DIGITAL TRANSISTOR	
Q501			UN5112	DIGITAL TRANSISTOR	
Q502			2SB1427	TRANSISTOR	
Q503			DTC124EUA	DIGITAL TRANSISTOR	
Q503			UN5212	DIGITAL TRANSISTOR	
Q601			DTC124EUA	DIGITAL TRANSISTOR	
Q601			UN5212	DIGITAL TRANSISTOR	
Q602			2SC4081	TRANSISTOR	
Q603			DTC124EUA	DIGITAL TRANSISTOR	
Q603			UN5212	DIGITAL TRANSISTOR	
TH1			PTH9C42BD471Q	POSITIVE RESISTOR	
A2		*	W02-3430-05	ELECTRIC CIRCUIT MODULE	
A1		*	X86-3730-11	FRONT-END UNIT	

CD PLAYER UNIT (X32-5410-00)

C1			C92-0628-05	CHIP-TAN	10UF	10WV
C2			CK73FB1A105K	CHIP C	1.0UF	K
C3			CK73FB1A225K	CHIP C	2.2UF	K
C4			CK73GB1H103K	CHIP C	0.010UF	K
C5			CC73GCH1H680J	CHIP C	68PF	J
C6			CC73GCH1H681J	CHIP C	680PF	J
C7			CK73GB1H104K	CHIP C	0.10UF	K
C8			CK73GB1H222K	CHIP C	2200PF	K
C9,10			CK73GB1H104K	CHIP C	0.10UF	K
C11			CC73GCH1H681J	CHIP C	680PF	J
C12			CK73GB1H222K	CHIP C	2200PF	K
C13			CC73GCH1H680J	CHIP C	68PF	J
C15			CK73EB1A475K	CHIP C	4.7UF	K
C16			CK73GB1H104K	CHIP C	0.10UF	K
C17			CK73GB1H331K	CHIP C	330PF	K
C18			CK73GB1H472K	CHIP C	4700PF	K
C19,20			CK73GB1H104K	CHIP C	0.10UF	K
C21			CK73EB1A475K	CHIP C	4.7UF	K
C22			CK73GB0J105K	CHIP C	1.0UF	K

Ref. No.	A d	N e w	Parts No.	Description	Desti- nation
C23			CK73FB1A225K	CHIP C	2.2UF K
C26			CK73GB1H104K	CHIP C	0.10UF K
C27			C92-0712-05	CHIP-TAN	22UF 6.3WV
C28			CK73GB1H102K	CHIP C	1000PF K
C29			CK73GB1H331K	CHIP C	330PF K
C30			CK73GB1H152K	CHIP C	1500PF K
C31-35			CK73GB1H104K	CHIP C	0.10UF K
C36			C92-0712-05	CHIP-TAN	22UF 6.3WV
C41			CK73GB1H104K	CHIP C	0.10UF K
C42			CK73EB1A475K	CHIP C	4.7UF K
C45			CK73GB1H102K	CHIP C	1000PF K
C47			C92-0628-05	CHIP-TAN	10UF 10WV
C48			CK73GB1H104K	CHIP C	0.10UF K
C50			CK73GB1H104K	CHIP C	0.10UF K
C52			CK73GB1H152K	CHIP C	1500PF K
C53			CK73GB1H104K	CHIP C	0.10UF K
C55			CC73GCH1H470J	CHIP C	47PF J
C56			CC73GCH1H820J	CHIP C	82PF J
C57			CK73GB1H104K	CHIP C	0.10UF K
C59			CK73GB1H104K	CHIP C	0.10UF K
C61			CK73GB1H104K	CHIP C	0.10UF K
C63			CC73GCH1H020C	CHIP C	2.0PF C
C65			CK73GB1H104K	CHIP C	0.10UF K
C67			CK73GB1H222K	CHIP C	2200PF K
C68			CC73GCH1H060D	CHIP C	6.0PF D
C70			CK73GB1H104K	CHIP C	0.10UF K
C74			CK73GB1H682K	CHIP C	6800PF K
C75			CK73GB1H332K	CHIP C	3300PF K
C76			CK73GB1H103K	CHIP C	0.010UF K
C77			CK73GB1H104K	CHIP C	0.10UF K
C78			CK73EB1A475K	CHIP C	4.7UF K
C79-82			CK73GB1H152K	CHIP C	1500PF K
C83			CK73GB1H104K	CHIP C	0.10UF K
C84			C92-0628-05	CHIP-TAN	10UF 10WV
C85			CK73GB1H104K	CHIP C	0.10UF K
C87			CK73EB1A475K	CHIP C	4.7UF K
C88			CK73GB1H104K	CHIP C	0.10UF K
CN1			E41-0213-05	FLAT CABLE CONNECTOR	
CN2			E40-9536-05	FLAT CABLE CONNECTOR	
L1			L92-0329-05	CHIP FERRITE	
L5			L92-0329-05	CHIP FERRITE	
X1			L78-0851-05	RESONATOR (16.93MHZ)	
X2			L78-0862-05	RESONATOR (16.00MHZ)	
CP1,2			R90-1019-05	MULTI-COMP	100 X2
CP4			R90-0719-05	MULTI-COMP	4.7K X2
CP5			R90-0737-05	MULTI-COMP	100K X2
CP6			R90-1019-05	MULTI-COMP	100 X2
CP7			R90-0737-05	MULTI-COMP	100K X2
CP13			R90-0720-05	MULTI-COMP	100K X4
CP15			R90-0718-05	MULTI-COMP	4.7K X4
CP16-22			R90-1014-05	MULTI-COMP	100 X4
CP23			R90-0714-05	MULTI-COMP	10K X4
CP24			R90-0720-05	MULTI-COMP	100K X4

K1 : KDC-X869 K2 : KDC-MP922

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

CD PLAYER UNIT (X32-5410-00)

Ref. No.	Add	New	Parts No.	Description	Destination
R1			R92-3044-05	CHIP R 18K D 1/10W	
R2			R92-3041-05	CHIP R 11K D 1/10W	
R3			RK73FB2B303J	CHIP R 30K J 1/8W	
R4			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R5			RK73FB2B272J	CHIP R 2.7K J 1/8W	
R6			RK73FB2B331J	CHIP R 330 J 1/8W	
R7,8			RK73FB2B752J	CHIP R 7.5K J 1/8W	
R9			RK73FB2B272J	CHIP R 2.7K J 1/8W	
R10			RK73FB2B331J	CHIP R 330 J 1/8W	
R11			R92-3041-05	CHIP R 11K D 1/10W	
R12			RK73FB2B303J	CHIP R 30K J 1/8W	
R13			R92-3044-05	CHIP R 18K D 1/10W	
R14			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R16			RK73GB2A123J	CHIP R 12K J 1/10W	
R17			RK73GB2A133J	CHIP R 13K J 1/10W	
R18			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R19,20			RK73GB2A123J	CHIP R 12K J 1/10W	
R21			RK73GB2A432J	CHIP R 4.3K J 1/10W	
R22			RK73GB2A133J	CHIP R 13K J 1/10W	
R23,24			RK73GB2A104J	CHIP R 100K J 1/10W	
R25			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R26			RK73GB2A104J	CHIP R 100K J 1/10W	
R27			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R28			RK73GB2A103J	CHIP R 10K J 1/10W	
R29			RK73GB2A133J	CHIP R 13K J 1/10W	
R30			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R31			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R32			RK73GB2A103J	CHIP R 10K J 1/10W	
R33			RK73GB2A104J	CHIP R 100K J 1/10W	
R34			RK73GB2A183J	CHIP R 18K J 1/10W	
R35			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R36			RK73GB2A163J	CHIP R 16K J 1/10W	
R38			RK73GB2A104J	CHIP R 100K J 1/10W	
R39-41			RK73GB2A103J	CHIP R 10K J 1/10W	
R42,43			RK73GB2A104J	CHIP R 100K J 1/10W	
R46			RK73GB2A4R7J	CHIP R 4.7 J 1/10W	
R47			RK73GB2A104J	CHIP R 100K J 1/10W	
R49			RK73GB2A104J	CHIP R 100K J 1/10W	
R50			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R51			RK73GB2A103J	CHIP R 10K J 1/10W	
R52			RK73GB2A104J	CHIP R 100K J 1/10W	
R53			RK73GB2A473J	CHIP R 47K J 1/10W	
R55			RK73GB2A103J	CHIP R 10K J 1/10W	
R57			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R59			RK73GB2A164J	CHIP R 160K J 1/10W	
R62,63			RK73GB2A302J	CHIP R 3.0K J 1/10W	
R67			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R69			RK73GB2A333J	CHIP R 33K J 1/10W	
R70			RK73GB2A103J	CHIP R 10K J 1/10W	
R71,72			RK73GB2A101J	CHIP R 100 J 1/10W	
R73			RK73GB2A241J	CHIP R 240 J 1/10W	
R75			RK73GB2A103J	CHIP R 10K J 1/10W	
R76			RK73GB2A101J	CHIP R 100 J 1/10W	
R77			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R78			RK73GB2A104J	CHIP R 100K J 1/10W	

Ref. No.	Add	New	Parts No.	Description	Destination
W1			R92-1252-05	CHIP R 0 OHM J 1/16W	
S1,2			S68-0863-05	PUSH SWITCH	
S3			S68-0862-05	PUSH SWITCH	
D1			DAP202U	DIODE	
IC1			TAR5S33	ANALOGUE IC	
IC2			NJM4580V	ANALOGUE IC	
IC4			BA5824FP	ANALOGUE IC	
IC6			L88MS33T	ANALOGUE IC	
IC7			703033BYGC-J02	MI-COM IC	
IC8			TC74HCT7007AF	MOS-IC	
IC11			UPD63760GJ	MOS-IC	
IC13			IS41LV16257	DRAM IC	
IC13			MSM51V4265EP70	DRAM IC	
Q1			DTA143XUA	DIGITAL TRANSISTOR	
Q2,3			DTC124EUA	DIGITAL TRANSISTOR	
Q4			MCH6101	TRANSISTOR	
Q5			DTA143EUA	DIGITAL TRANSISTOR	
CD MECHANISM ASSY (X92-4670-01)					
2	1B		A10-4827-12	CHASSIS	
5	1B	*	D10-4576-43	ARM ASSY	
8	2A		D10-4579-03	LEVER ASSY	
10	3A		D10-4581-13	ARM	
11	2A		D10-4582-13	ARM	
12	3A		D10-4583-03	ARM	
13	3A		D10-4584-03	ARM	
14	3B		D10-4585-03	ARM	
15	2A		D10-4586-13	SLIDER	
16	3B		D10-4587-22	SLIDER	
17	3B	*	D10-4588-13	SLIDER	
18	3B		D10-4595-04	ARM	
19	3B		D10-4596-14	ARM	
22	2A		D13-2151-04	GEAR	
23	2B		D13-2152-04	GEAR	
24	3B		D13-2153-04	GEAR	
25	3B		D13-2154-04	GEAR	
26	3B		D13-2155-04	WORM	
27	3B		D13-2156-14	GEAR	
28	3B		D13-2157-04	GEAR	
29	3B		D13-2158-04	GEAR	
30	3B		D13-2168-04	GEAR	
31	3B		D13-2171-04	GEAR	
32	2B		D13-2172-03	RACK (GEAR)	
33	2A		D14-0759-04	ROLLER	
35	2B		D21-2382-04	SHAFT	
36	1A		D23-0954-04	RETAINER	
37	1B		D39-0246-05	DAMPER	
38	2B		G01-3072-04	EXTENSION SPRING	
39	2A		G01-3073-04	TORSION COIL SPRING	
40	2A		G01-3074-04	EXTENSION SPRING	
41	1B		G01-3075-04	EXTENSION SPRING	
42	2A		G01-3076-04	EXTENSION SPRING	
43	1B		G01-3077-04	EXTENSION SPRING	

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

CD MECHANISM ASSY (X92-4670-01)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
44	2B		G02-1399-04	FLAT SPRING	
45	2B		G02-1408-04	FLAT SPRING	
51	1A		J21-9676-22	MOUNTING HARDWARE	
52	3B		J21-9677-02	MOUNTING HARDWARE	
53	1B		J21-9678-03	MOUNTING HARDWARE	
55	1A		J90-1001-11	GUIDE	
56	1B		J90-1023-03	GUIDE	
A	2B		N09-4460-05	TAPTITE SCREW (OVAL P TAPTIT)	
B	1B		N09-4472-05	MACHINE SCREW (M1.7X8.5)	
C	2B		N09-6004-05	MACHINE SCREW (M1.7X2.5 IB-L)	
E	2B		N09-6007-05	MACHINE SCREW (PAN M2X2)	
F	1A		N09-6051-05	TAPTITE SCREW (BIND P 2X5)	
G	2A		N19-2163-04	FLAT WASHER	
H	1B		N39-2020-46	PAN HEAD MACHIN SCREW	
J	1B		N09-6108-05	MACHINE SCREW (M2*3.5TYPE3)	
DM1	3B		T42-1066-04	DC MOTOR ASSY (SP)	
DM2	2B		T42-1067-04	DC MOTOR ASSY (LO)	
DPU1	2D		X93-2010-00	OPTICAL PICKUP ASSY	


Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation

PARTS LIST

CAPACITORS


CC 45 TH 1H 220 J
 1 2 3 4 5 6

- 1 = Type ... ceramic, electrolytic, etc.
- 2 = Shape ... round, square, etc.
- 3 = Temp. coefficient
- 4 = Voltage rating
- 5 = Value
- 6 = Tolerance



• Capacitor value

- 010 = 1pF
- 100 = 10pF
- 101 = 100pF
- 102 = 1000pF = 0.001μF
- 103 = 0.01μF



• Temperature coefficient

1st Word	C	L	P	R	S	T	U
Color*	Black	Red	Orange	Yellow	Green	Blue	Violet
ppm/°C	0	-80	-150	-220	-330	-470	-750

2nd Word	G	H	J	K	L
ppm/°C	±30	±60	±120	±250	±500

Example : CC45TH = -470±60ppm/°C

• Tolerance (More than 10pF)

Code	C	D	G	J	K	M	X	Z	P	No code
(%)	±0.25	±0.5	±2	±5	±10	±20	+40 -20	+80 -20	+100 -0	More than 10μF : -10~+50 Less than 4.7μF : -10~+75

(Less than 10pF)

Code	B	C	D	F	G
(pF)	±0.1	±0.25	±0.5	±1	±2

• Voltage rating

2nd word	A	B	C	D	E	F	G	H	J	K	V
1st word											
0	1.0	1.25	1.6	2.0	2.5	3.15	4.0	5.0	6.3	8.0	-
1	10	12.5	16	20	25	31.5	40	50	63	80	35
2	100	125	160	200	250	315	400	500	630	800	-
3	1000	1250	1600	2000	2500	2150	4000	5000	6300	8000	-

CHIP CAPACITORS

(EX) CC 73 F SL 1H 000 J
 1 2 3 4 5 6 7

(Chip) (CH, RH, UJ, SL)


(EX) CK 73 F F 1H 000 Z
 1 2 3 4 5 6 7

(Chip) (B, F)

Refer to the table above.

- 1 = Type
- 2 = Shape
- 3 = Dimension
- 4 = Temp. coefficient
- 5 = Voltage rating
- 6 = Value
- 7 = Tolerance

• Dimension



Chip capacitor

Code	L	W	T
Empty	5.6±0.5	5.0±0.5	Less than 2.0
A	4.5±0.5	3.2±0.4	Less than 2.0
B	4.5±0.5	2.0±0.3	Less than 2.0
C	4.5±0.5	1.25±0.2	Less than 1.25
D	3.2±0.4	2.5±0.3	Less than 1.5
E	3.2±0.2	1.6±0.2	Less than 1.25
F	2.0±0.3	1.25±0.2	Less than 1.25
G	1.6±0.2	0.8±0.2	Less than 1.0
H	1.0±0.05	0.5±0.05	0.5±0.05

Chip resistor

Code	L	W	T
E	3.2±0.2	1.6±0.2	1.0
F	2.0±0.3	1.25±0.2	1.0
G	1.6±0.2	0.8±0.2	0.5±0.1
H	1.0±0.05	0.5±0.05	0.35±0.05

RESISTORS

• Chip resistor (Carbon)

(EX) RD 73 E B 2B 000 J
 1 2 3 4 5 6 7

(Chip) (B, F)

• Carbon resistor (Normal type)

(EX) RD 14 B B 2C 000 J
 1 2 3 4 5 6 7

(Chip) (B, F)

- 1 = Type ... ceramic, electrolytic, etc.
- 2 = Shape ... round, square, etc.
- 3 = Dimension
- 4 = Temp. coefficient
- 5 = Voltage rating
- 6 = Value
- 7 = Tolerance

• Rating wattage

Code	Wattage	Code	Wattage	Code	Wattage
1J	1/16W	2C	1/6W	3A	1W
2A	1/10W	2E	1/4W	3D	2W
2B	1/8W	2H	1/2W		

KDC-MP922/X869

SPECIFICATIONS

FM

Frequency Range (Frequency step) 87.9MHz~107.9MHz (200kHz)
Channel Space Selection 50kHz/200kHz
Usable Sensitivity (S/N 30dB) 9.3dBf (0.8 μ V/75 Ω)
Quieting Sensitivity (S/N 50dB) 15.2dBf (1.6 μ V/75 Ω)
Frequency Response (\pm 3.0dB) 30Hz~15kHz
S/N 70dB (MONO)
Selectivity \geq 80dB (\pm 400kHz)
Stereo Separation 40dB (1kHz)

AM

Frequency Range (Frequency step) 530kHz~1700kHz (10kHz)
Channel Space Selection 9kHz/10kHz
Usable Sensitivity (S/N 20dB) 28dB μ (25 μ V)

CD

Laser Diode GaAlAs (λ =780nm)
Digital Filter (D/A) 8 Times Over Sampling
D/A Converter 1 Bit
Spindle Speed (CD-DA) (MP3) 1000~400rpm (CLV. 2 times)
Wow & Flutter Below Measurable Limit
Frequency Response 10Hz~20kHz (\pm 1dB)
Total Harmonic Distortion 0.01% (1kHz)
S/N Ratio 105dB (1kHz)
Dynamic Range 93dB
Channel Separation 95dB
MP3 Decode Compliant with MPEG-1.0/2.0/2.5 Audio Layer-3

Preout Level/Load (Unbalanced) 5000mV/10k Ω (CD/CD-CH)
Preout Impedance 80 Ω

AUX Input

Frequency Response 20Hz~20kHz \pm 1dB
Input Maximum Voltage 1200mV
Input impedance 100k Ω

Amplifier

Maximum Power 50Wx4
Full Bandwidth Power (at less than 1% THD) 22Wx4

Tone

Bass 100Hz \pm 10dB
Middle 1kHz \pm 10dB
Treble 10kHz \pm 10dB

General

Operating Voltage (11V~16V allowable) 14.4V
Current Consumption 10A
Installation Size (WxHxD) 178x50x165 (mm)
..... 7x1-15/16x6-1/2 (in)
Weight 3.75lbs (1.70kg)

KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

KENWOOD CORPORATION

2967-3, Ishikawa-machi, Hachioji-shi, Tokyo 192-8525, Japan

KENWOOD USA CORPORATION
P.O. BOX 22745, 2201 East Dominguez Street, Long Beach, CA90801-5745, U.S.A.

KENWOOD ELECTRONICS CANADA INC.
6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.
P.O. Box 55-2791 Paitilla, Plaza Credicorp Bank Panama,
Piso 9, Oficina 901, Calle 50, Panama, Rep. de Panama

KENWOOD ELECTRONICS BRASIL LTDA.
Alameda Ministro Rocha Azevedo No. 456,
Edifício Jaú, 10o Andar, Cerqueira César, Cep 0140-001,
São Paulo-SP-Brasil

KENWOOD ELECTRONICS UK LIMITED
Kenwood House, Dwight Road, Watford, Herts, WD18 9EB, United Kingdom

KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rembrücker-Str. 15, 63150 Heusenstamm, Germany

KENWOOD ELECTRONICS FRANCE S.A.
13, Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS BELGIUM N.V.
Leuvensesteenweg 248 J, 1800 Vilvoorde, Belgium

KENWOOD ELECTRONICS ITALIA S.p.A.
Via G. Sirtori 7/9, 20129 Milano, Italy

KENWOOD IBÉRICA S.A.
Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (A.C.N. 001 499 074)
16 Giffnock Avenue, Centrecourt Estate, North Ryde,
N.S.W. 2113, Australia

KENWOOD ELECTRONICS (HONG KONG) LTD.
Unit 3712-3724, Level 37, Tower 1, Metroplaza, 223 Hing Fong Road, Kwai Fong, N.T.,
Hong Kong

KENWOOD ELECTRONICS GULF FZE
P.O. Box 61318, Jebel Ali, Dubai, U.A.E.

KENWOOD ELECTRONICS (THAILAND) CO., LTD.
2019 New Pechburi Road, Bangkok, Huaykwang, Bangkok, 10320 Thailand

KENWOOD ELECTRONICS SINGAPORE PTE. LTD.
1 Genting Lane, #07-00, Kenwood Building, Singapore, 349544

KENWOOD ELECTRONICS (MALAYSIA) SDN BHD
#4.01 Level 4, Wisma Academy Lot 4A, Jalan 19/1, 46300 Petaling Jaya, Selangor Darul Ehsan,
Malaysia