


- NOTES:
1. FOR ALL VOLTAGE AND CURRENT MEASUREMENTS, LINE = 117 V.A.C.
  2. DC VOLTAGE MEASURED WITH VTVM TO CHASSIS WITH NO SIGNAL INPUT.
  3. REAR SECTION OF DUAL CONTROLS USED IN LEFT CHANNEL.
  4. CAPACITORS C34 AND C35 OMITTED IN SETS SERIALIZED 10001A TO 10000A

Amplificador estereofónico "The Fisher" X-100-A.

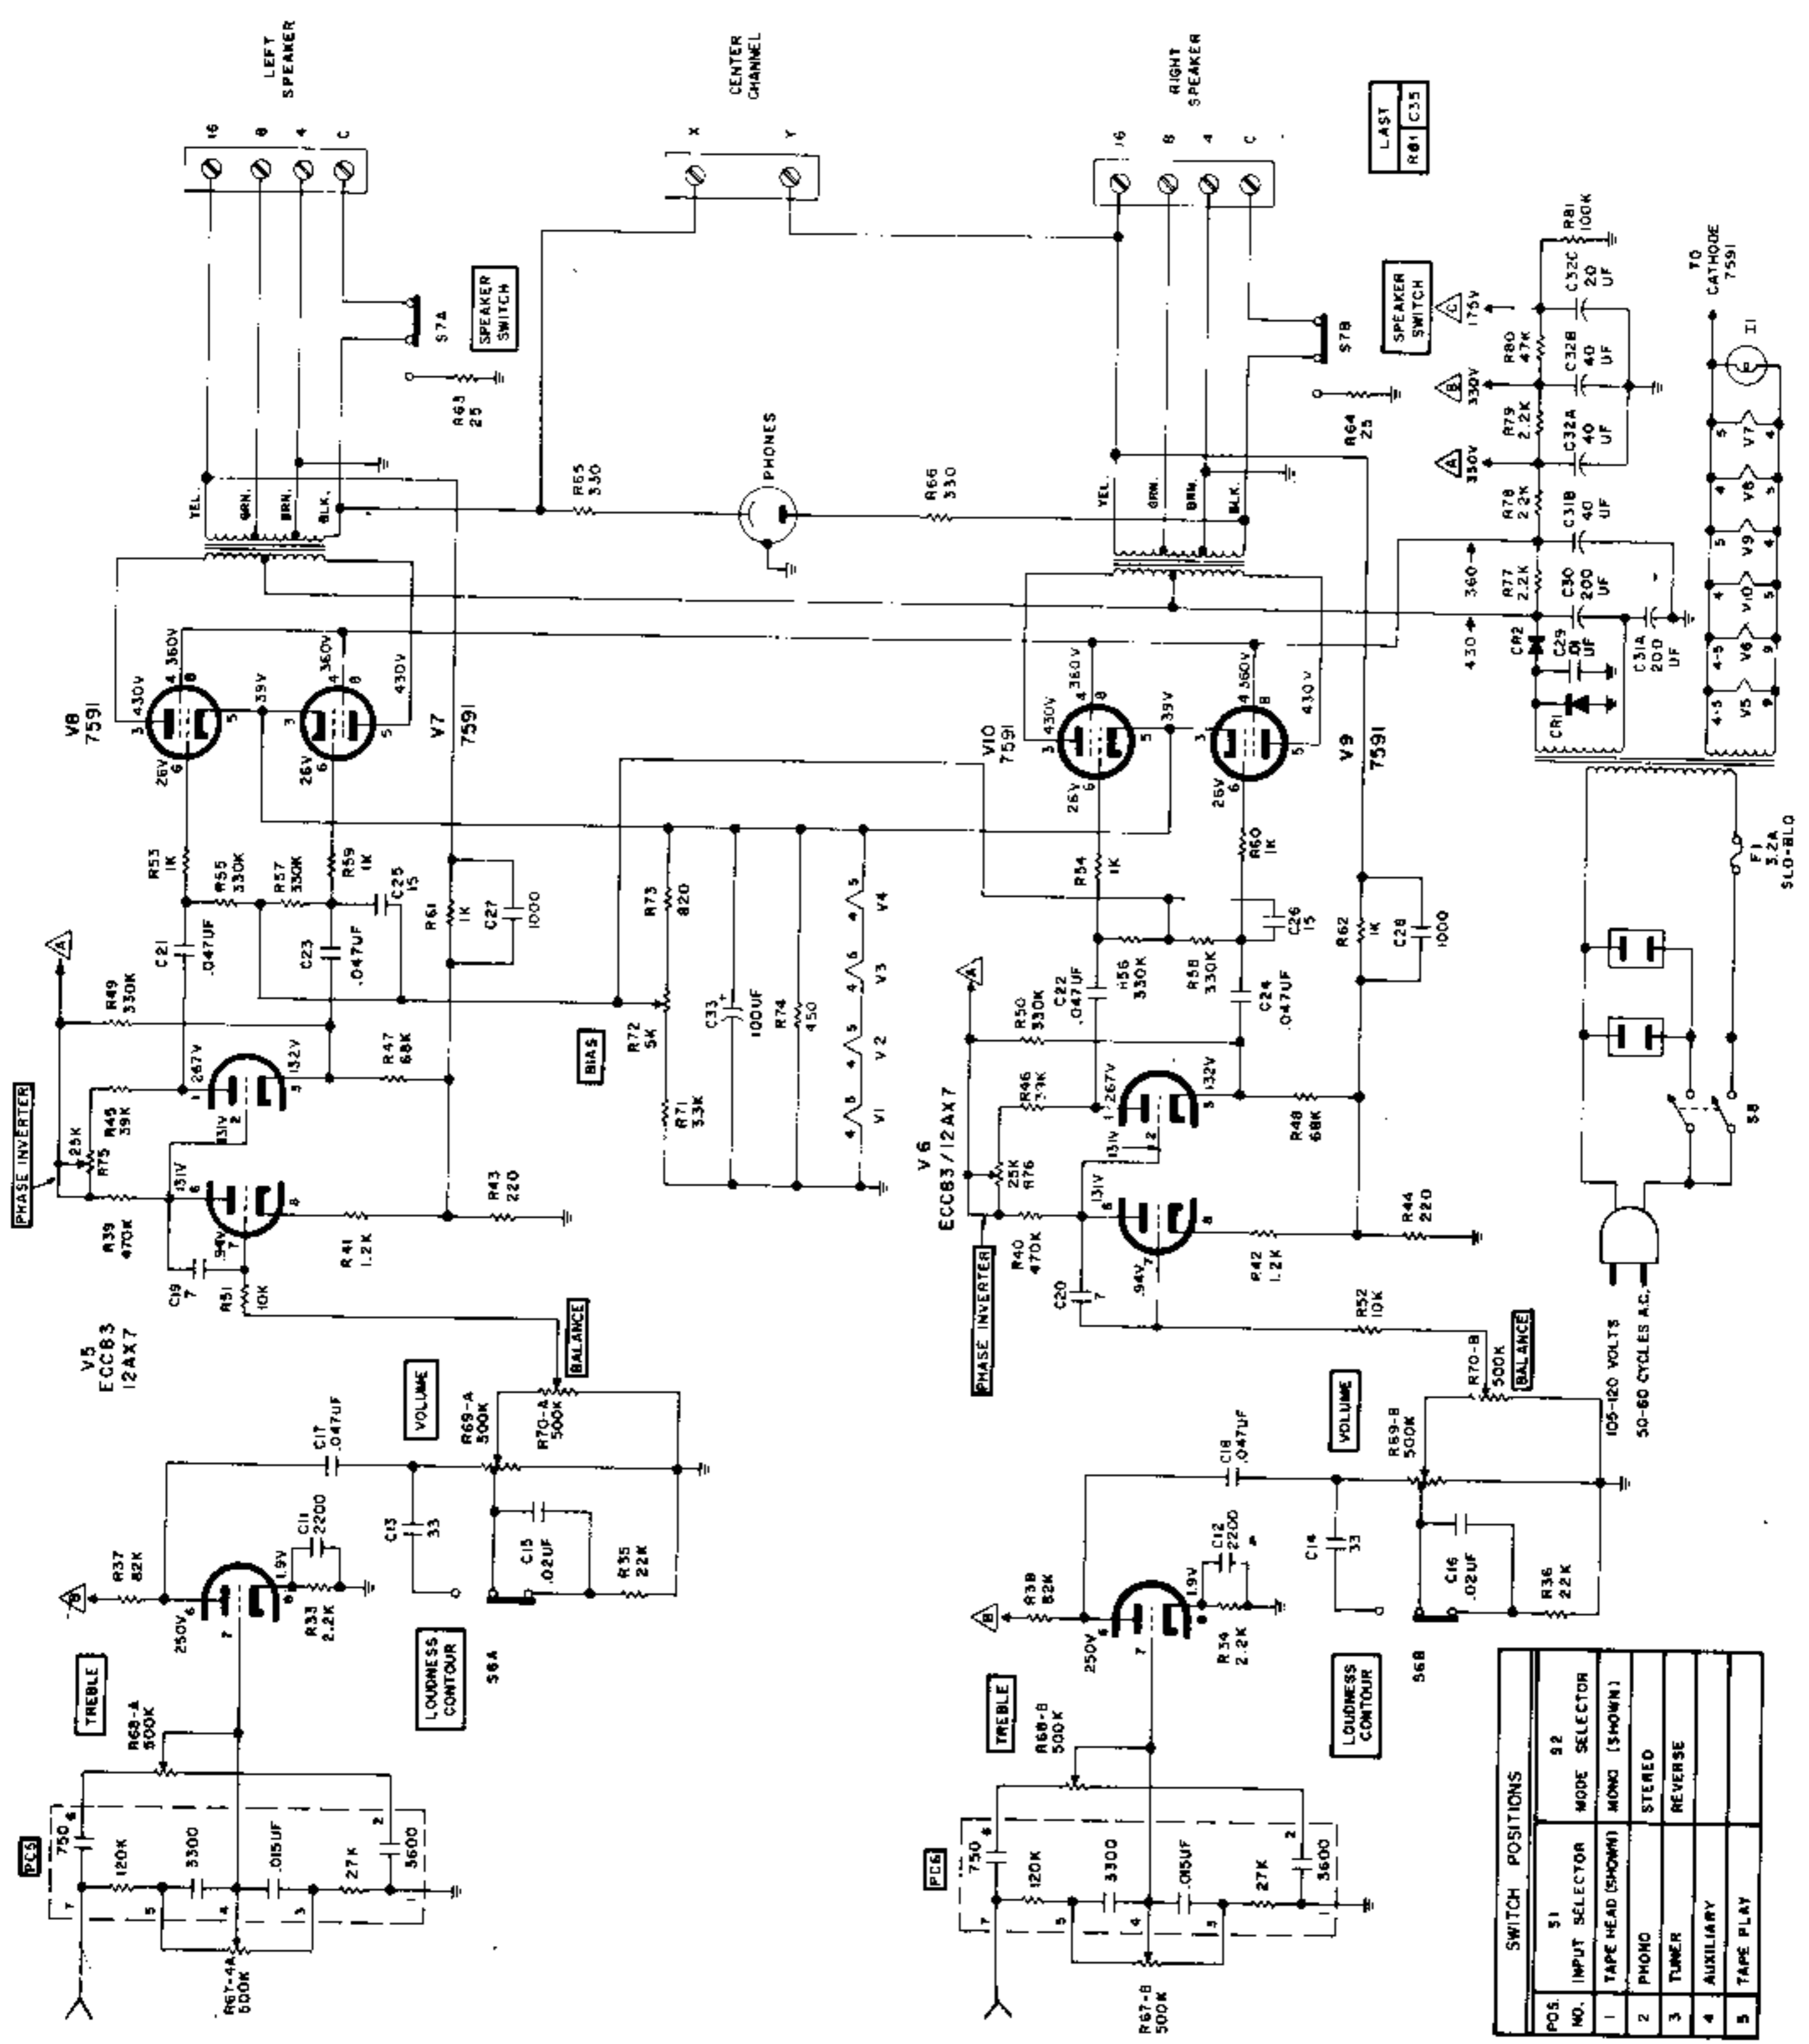

SWITCH POSITIONS	
POS. NO.	52
1	INPUT SELECTOR
2	TAPE HEAD (SHOW)
3	PHONO
4	TUNER
5	AUXILIARY
6	TAPE PLAY
7	MODE SELECTOR
8	MONO (SHOW)
9	STEREO
10	REVERSE

LAST  
R01 C35

TO CATHODE  
7591

F1  
3.2A  
350V  
SLO-BLO