



Servicing Notes: H.F. bias current R/P head 1.3 mA. (130 mV. across 100-ohm resistor in earthy lead), adjust by R28. A.F. current R/P head at 1000 c/s. measured as above 15 mV. (oscillator inoperative and DM71 removed). Positioning of R/P assembly very critical and should be adjusted on 6000-c/s. tape. Output stage quiescent current adjusted by R24 to 6 mA.

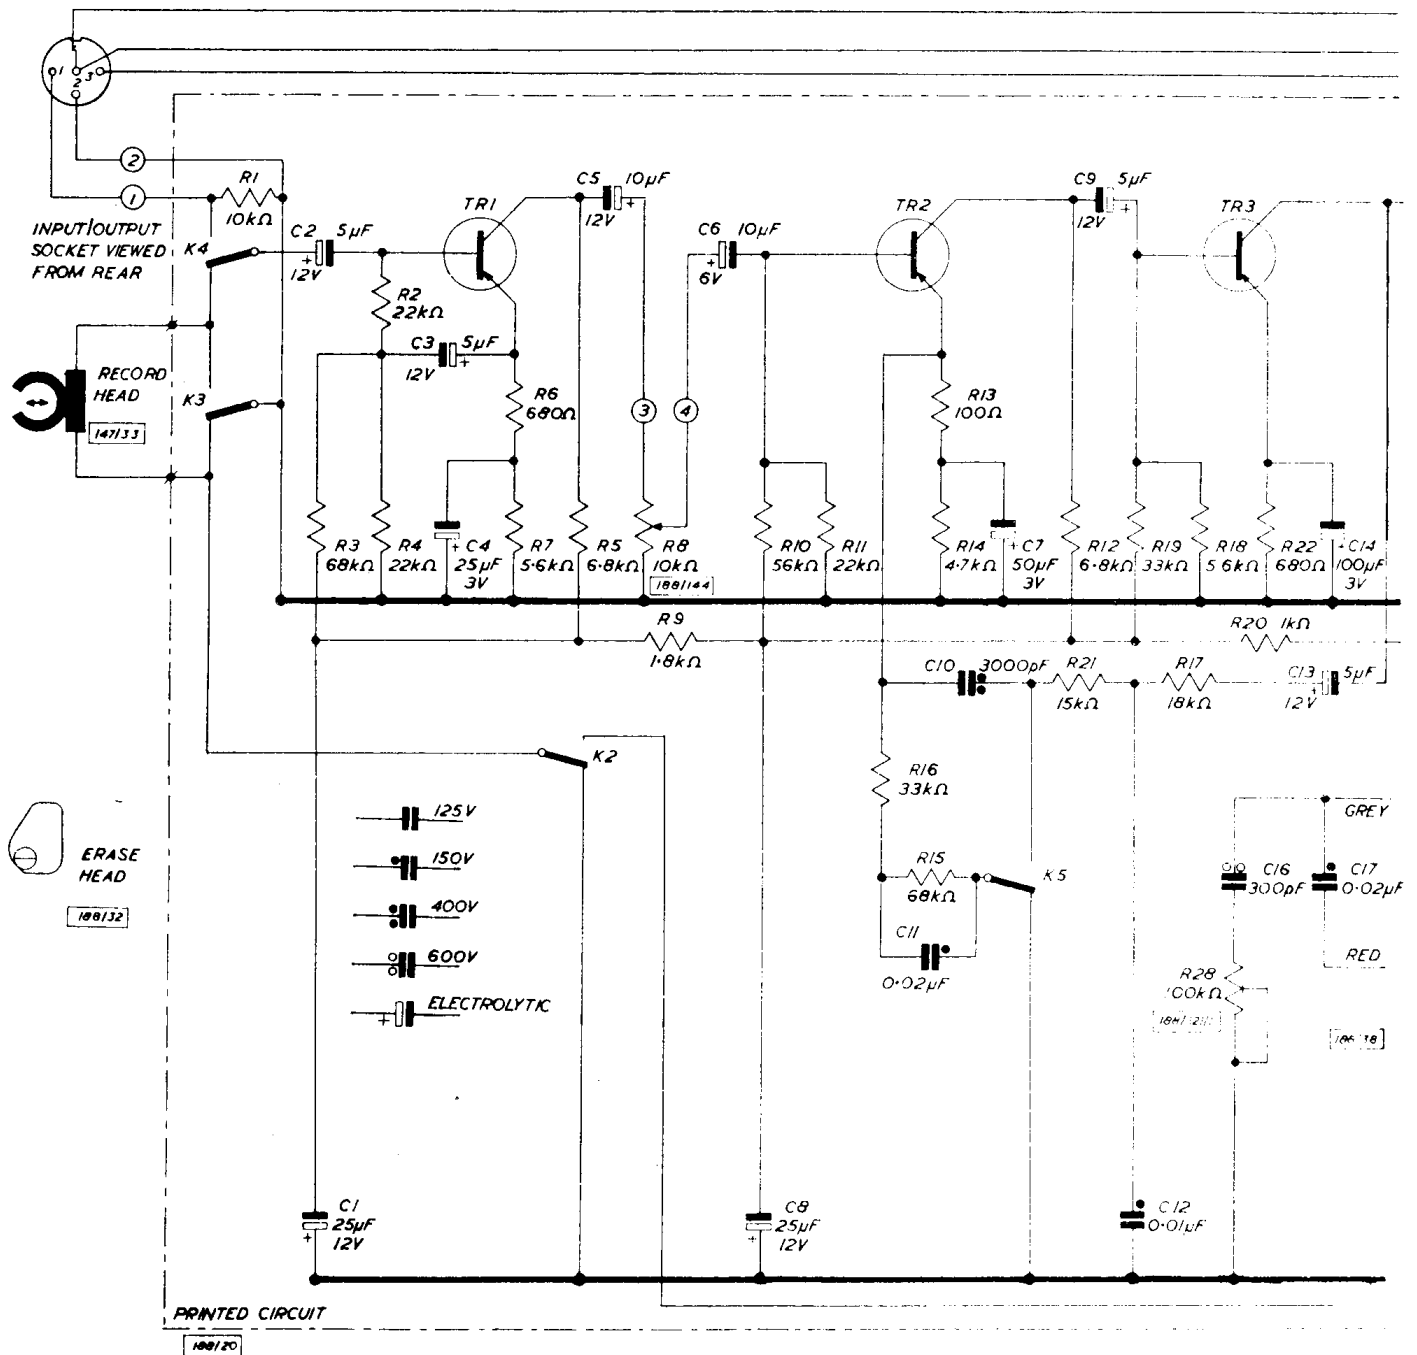

CIRCUIT DIAGRAM—

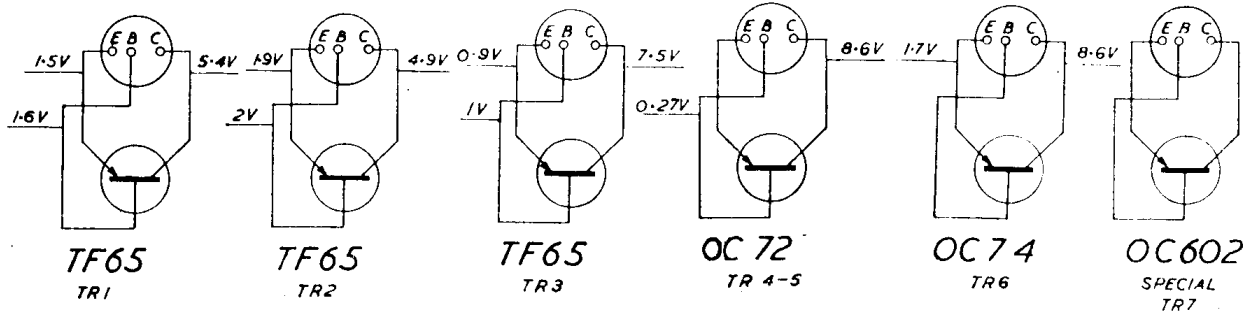