


- P.T.
 U MODEL P-2336
 J MODEL P-2337
 S MODEL P-2337
 E MODEL P-2336
- F001
 U MODEL 6A-125V
 J MODEL 6A-125V
 S MODEL 315A 250V
- RELAYS
 RY 001, RY 002 MAT4-CRJ
 RY 101 TECK-45-OH
 RY 102, RY 103, RY 601 FRL-644D12/2A5

- TRANSISTORS**
- PB-1221
 - Q101 2SA836
 - PB-1222
 - Q201, Q202, Q251, Q252 2SK68A
 - Q203, Q204, Q205, Q206 2SA836
 - Q253, Q254 2SA836
 - Q207, Q208, Q255, Q256 2SC1345
 - Q281 2SD526
 - Q282 2SB596
 - PB-1225
 - Q501, Q502 2SC458
 - Q503 2SA798
 - Q504, Q505, Q517 2SA872A
 - Q506, Q507 2SD756
 - Q508 2SB716
 - Q509, Q516 2SC1775A
 - Q510 2SC2336
- SWITCHES**
- S001 FUNC1
 - S002 MODE
 - S003 LOW I
 - S004 FILTE
 - S005 POWE
 - S301 PHONE
 - S401 MON1
 - S402 DUBB
 - S403 DUBB
 - S404 SUBSC
 - S405 LINEA
 - S406 SPEAR
- VOLUME**
- VR001 BALA
 - VR002 VOLU

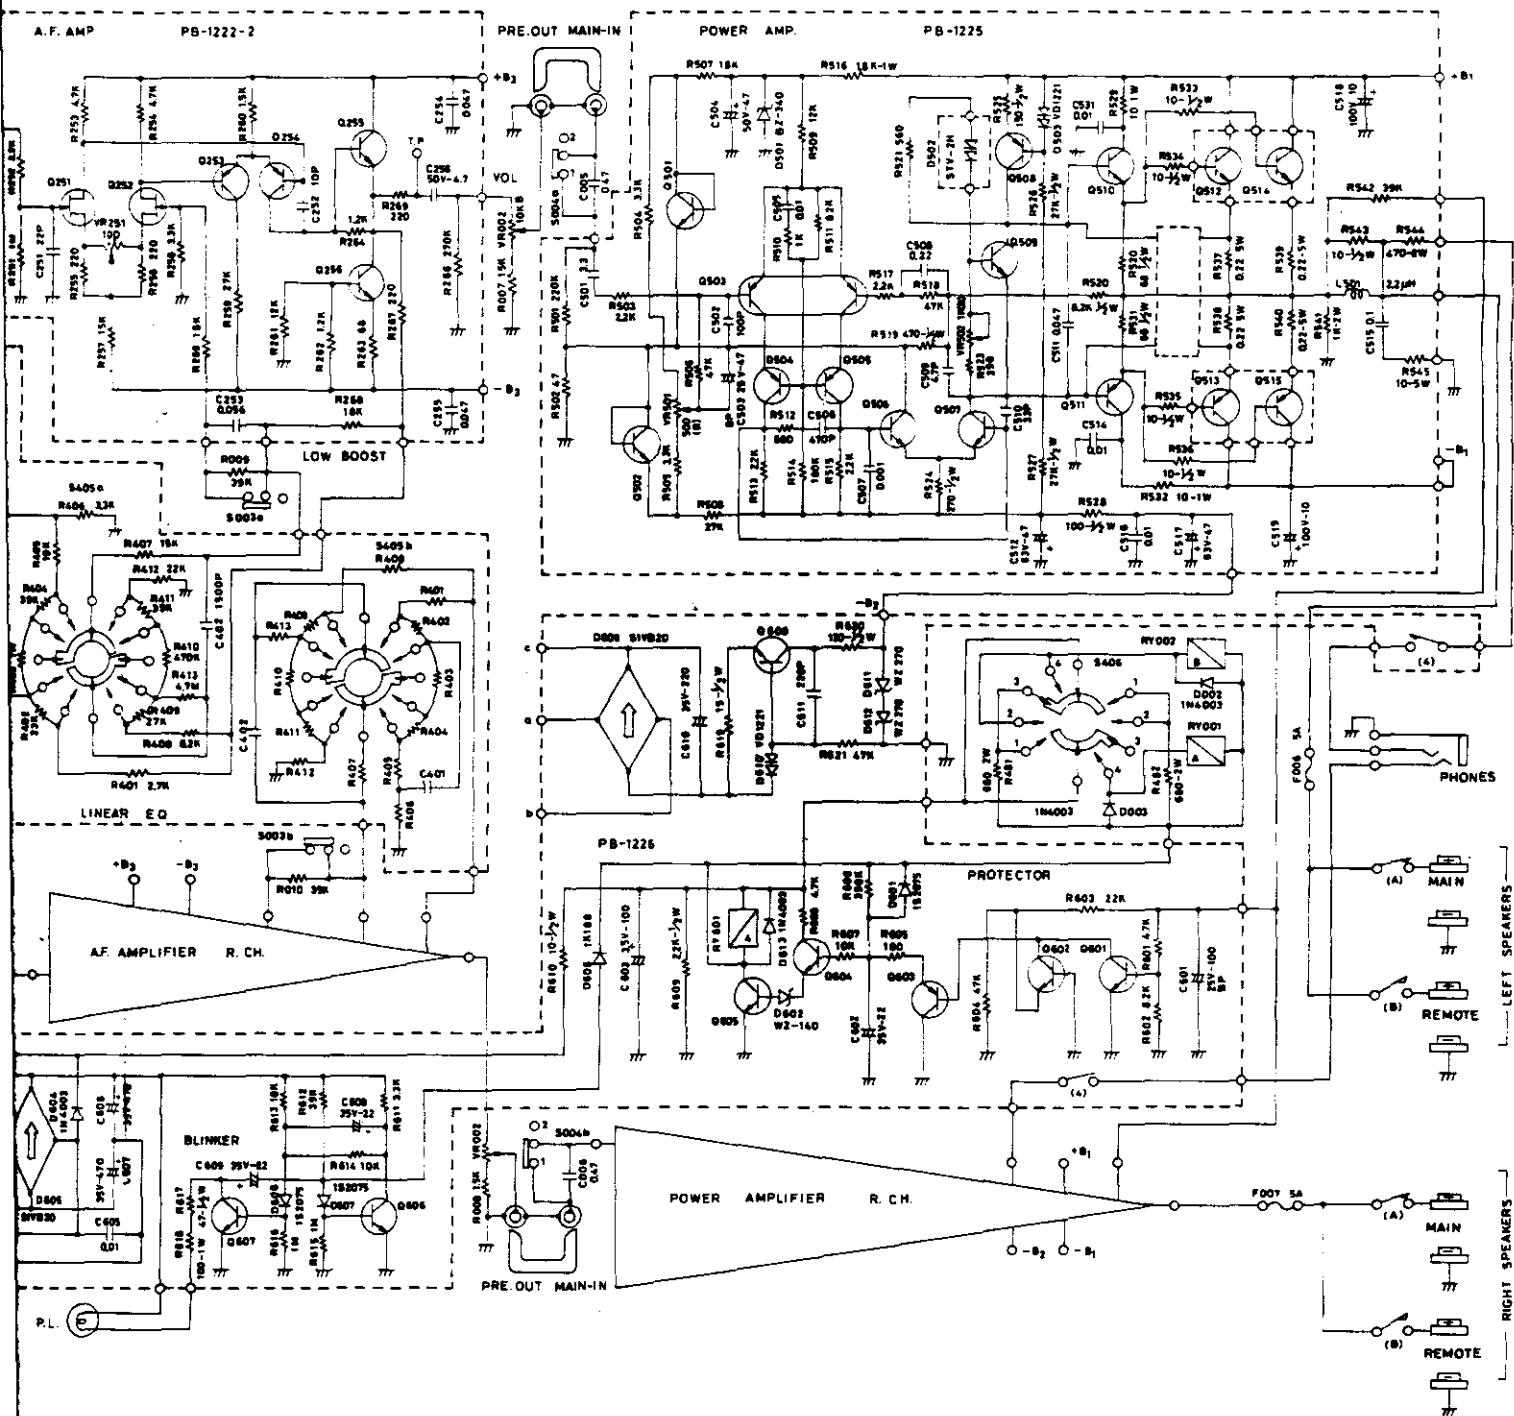

SWITCHES

- S001---FUNCTION (1. AUX 2. TUNER 3. PHONO-1 4. PHONO-2 5. PHONO-MC)
- S002---MODE (1. MONO 2. STEREO 3. REVERSE)
- S003---LOW BOOST (1. OFF 2. ON)
- S004---FILTER (1. GENERAL SPEAKER 2. ELECTRO STATIC SPEAKER)
- S005---POWER SW (1. OFF 2. ON)
- S301---PHONO IMPEDANCE (1. LOW 2. HIGH)
- S401---MONITOR (1. MONI 1 2. SOURCE 3. MONI 2)
- S402---DUBBING (1. FROM 2 2. SOURCE 3. REC. OFF)
- S403---DUBBING (1. FROM 1 2. SOURCE 3. REC. OFF)
- S404---SUBSONIC (1. 20HZ 2. FLAT 3. 10HZ)
- S405---LINEAR EQUALIZER (1. UPTILT 2 2. UPTILT 1 3. FLAT 4. DOWNTILT 1 5. DOWNTILT 2)
- S406---SPEAKER SELECT (1. OFF 2. REMOTE 3. MAIN 4. MAIN REMOTE)

VOLUME

- VR001---BALANCER
- VR002---VOLUME CONT.
- VR201, VR251---DC OFFSET ADJ.
- VR501---DC OFFSET ADJ.
- VR502---BIAS CURRENT ADJ.

1. UNLESS OTHERWISE SPECIFIED, ALL RESISTORS ARE IN OHM $\frac{1}{4}$ WATT. ALL CAPACITORS ARE IN MICRO FARAD.
2. TRANSISTORS AND DIODES MAY BE REPLACED WITH ANY TYPE HAVING COMPARABLE RATINGS.
3. DUE TO CONTINUED IMPROVEMENTS LUX RESERVE THE CIRCUIT OR SPECIFICATIONS.

ULTIMATE HIGH FIDELITY

