


JVC

SERVICE MANUAL

STEREO HEADPHONES

HA-NCX77-J/C/E

The " Product Exchange System" is applicable to this product.
For limited spare parts, refer to the parts list.

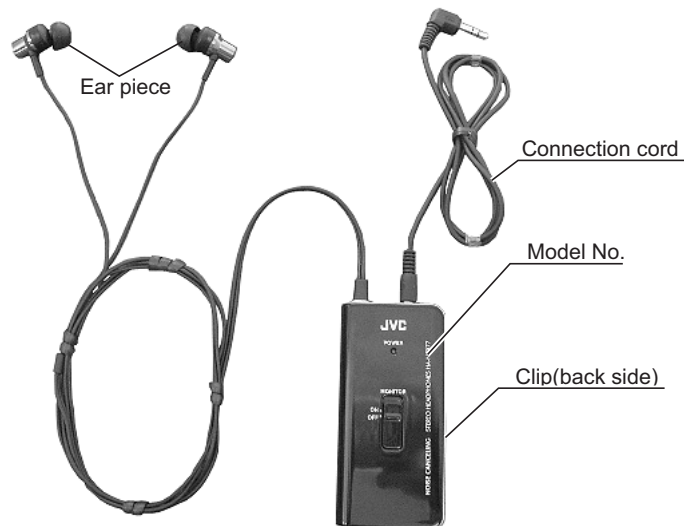

SPECIFICATION

Frequency response	8Hz- 24,000Hz
Noise reduction	more than 14 dB at 120Hz
Sensitivity	90dB/1mW (power- ON), 91dB/1mW (power- OFF)
Input impedance	32 Ω (power- ON), 34 Ω (power- OFF)
Power supply	AAA battery (DC 1.5V) x 1
Battery life	approx. 35 hours* (using Manganese AAA battery), approx. 70 hours* (using Alkaline AAA battery) Varies depending on operating conditions. *Without ambient noise.
Cord length	1.5m (4.9ft)(from mini plug to the left channel of the headphone,incl. connection cord)
Mass	48g (1.69oz) (incl. Battery, excl. connection cord) 55g (1.94oz) (incl. connection cord and battery)
Accessories	connection cord x1,soft case x1,manganese AAA battery x1,dual plug adapter (for in-flight use) X1,ear pieces 3 pairs (small, medium, large)

Design and specifications subject to change without notice.

Parts list

[M][1][M][M]

△	SYMBOL	PARTS NO.	PARTS NAME	Q'TY	DESCRIPTION
	1	J48091-001	Silicon ear piece	6	for HA-NCX77 Color:Black Size:S, M, L(The set contains pairs of each size)
	2	J34802-001	Battery Cover	1	
	3	J48083-001	CLIP	1	slide below and take it off
	4	J48087-001	CONNECTION CORD	1	0.7m
	5	LNT0081-001A	INST.BOOK	1	J/C
	5	LNT0082-001A	INST.BOOK	1	E
	5	LNT0079-001A	INST.BOOK	1	E
	6	-----	WARRANTY CARD	1	J/BT-51007-7C
	6	-----	WARRANTY CARD	1	C/BT-52006-2

* Parts marked (△) are safety parts. When replacing, be sure to use the specific one.

JVC

Victor company of Japan, Limited
ACCESSORIES CATEGORY 1644, Shimotsuruma, Yamato, Kanagawa 242-8514, Japan

(No.XC059)