

JVC


SERVICE MANUAL

MODEL
JA-S41
STEREO INTEGRATED AMPLIFIER



No. 2410
MAR. 1977

11. JA-S41 Schematic Diagram

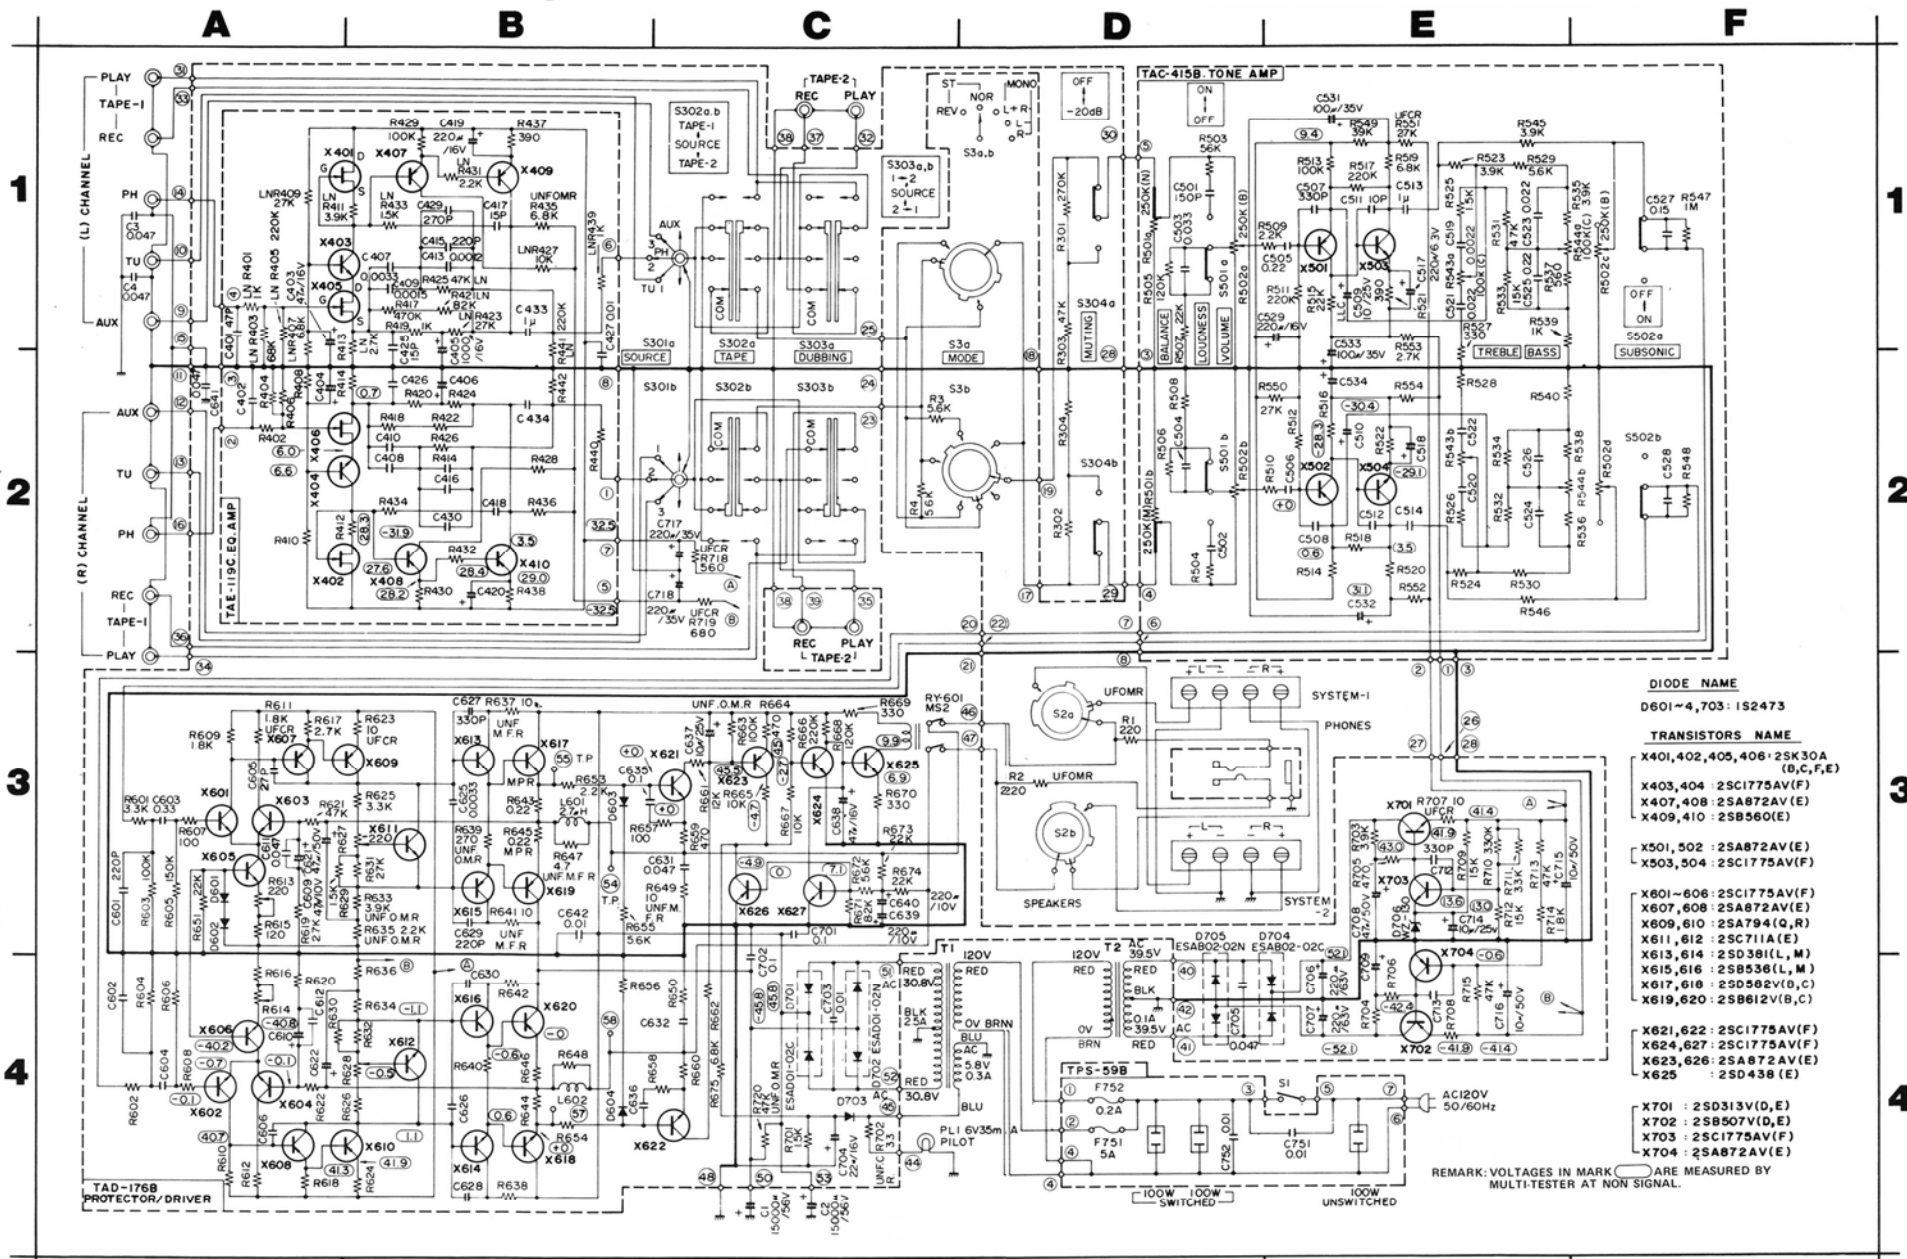

- DIODE NAME**
D601~4, 703: 1S2473
- TRANSISTORS NAME**
X401, 402, 405, 406: 2SK30A (B,C,F,E)
X403, 404: 2SC1775AV(F)
X407, 408: 2SA872AV(E)
X409, 410: 2SB560(E)
- X501, 502: 2SA872AV(E)
X503, 504: 2SC1775AV(F)
- X601~606: 2SC1775AV(F)
X607, 608: 2SA872AV(E)
X609, 610: 2SA794(Q,R)
X611, 612: 2SC711A(E)
X613, 614: 2SD381(L,M)
X615, 616: 2SB536(L,M)
X617, 618: 2SD313V(E)
X619, 620: 2SB612V(B,C)
- X621, 622: 2SC1775AV(F)
X624, 627: 2SC1775AV(F)
X623, 626: 2SA872AV(E)
X625: 2SD438(E)
- X701: 2SD313V(D,E)
X702: 2SB507V(D,E)
X703: 2SC1775AV(F)
X704: 2SA872AV(E)

REMARK: VOLTAGES IN MARK ARE MEASURED BY MULTI-TESTER AT NON SIGNAL.

Printed Circuit Board Ass'y Locations

P.C. Board Ass'y	Description	Page
TPS-59B	AC Socket P.C. Board Ass'y	12
TAE-119C	Equalizer Amp. P.C. Board Ass'y	13
TAD-176B	Main Amp. P.C. Board Ass'y	15
TAC-415B	Tone Control Amp. P.C. Board Ass'y	20

