


# JVC


## SERVICE MANUAL

### CASSETTE RECEIVER


## KS-FX321S, KS-FX321G

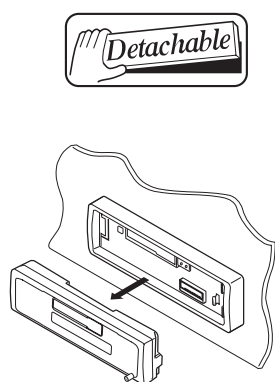

KS-FX321S

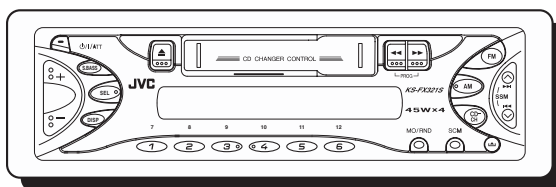

KS-FX321G

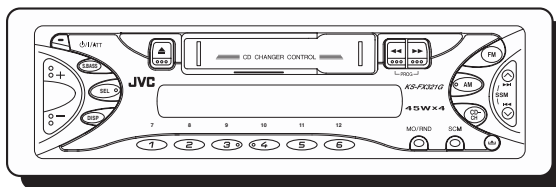

#### Area Suffix

UN ----- Asean  
(Indonesia)

This model is KS-FX321S\_UN-G\_UN that is added to the preceding model, the KS-FX321. Therefore, this service manual is consisting of difference parts list with KS-FX321. Please refer to the service manual of KS-FX321. (issue No.49771)

### TABLE OF CONTENTS

1	PRECAUTION.....	1-3
2	SPECIFIC SERVICE INSTRUCTIONS.....	1-3
3	DISASSEMBLY.....	1-3
4	ADJUSTMENT.....	1-3
5	TROUBLE SHOOTING.....	1-3

## SPECIFICATION

BAGIAN AMPLIFIER AUDIO	Output power maksimum	Depan	45 watt per chanel	
		Belakang	45 watt per chanel	
	Output Power kontinyu (RMS)	Depan	17 watt per chanel dalam 4 $\Omega$ , 40 Hz hingga 20 000 Hz dengan tidak lebih dari 0.8% distorsi harmonis total.	
		Belakang	17 watt per chanel dalam 4 $\Omega$ , 40 Hz hingga 20 000 Hz dengan tidak lebih dari 0.8% distorsi harmonis total.	
	Impedansi beban	4 $\Omega$ (toleransi antara 4 $\Omega$ hingga 8 $\Omega$ )		
	Batas tone kontrol	Bass	$\pm 10$ dB pada 100 Hz	
		Treble	$\pm 10$ dB pada 10 kHz	
	Respon Frekuensi	40 Hz hingga 20 000 Hz		
	Rasio Sinyal ke suara	70 dB		
Level Line-Out/ impedansi	2.0V/beban 20 k $\Omega$ (250 nWb/m)			
Bagian Radio	Batas Frekuensi	FM	87.5 MHz hingga 108.0 MHz	
		AM	531 kHz hingga 1 602 kHz	
	[Radio FM]	Sensitivitas yang dapat digunakan	11.3 dBf (1.0 $\mu$ V/75 $\Omega$ )	
		50 dB Sensitivitas Ketenangan	16.3 dBf (1.8 $\mu$ V/75 $\Omega$ )	
		Selektivitas Chanel Alternatif (400 kHz)	65 dB	
		Respon Frekuensi	40 Hz hingga 15 000 Hz	
		Pemisah Stereo	35 dB	
		Rasio penangkapan	2.0 dB	
	[Radio AM]	Sensitivitas	20 $\mu$ V	
Selektivitas		35 dB		
Bagian Dek Kaset	Sensitivitas & Getaran	0.15% (WRMS)		
	Waktu Menggulung cepat	190 detik (C-60)		
	Respon Frekuensi	50 Hz hingga 14 000 Hz (tape normal)		
	Rasio Sinyal ke suara	52 dB		
	Pemisah Stereo	40 dB		
UMUM	Power yang diperlukan Tegangan Operasional	DC 14.4 V (diperbolehkan antara 11V hingga 16 V)		
	Sistem Grounding	Ground Negatif		
	Temperatur kerja yang diperbolehkan	0°C hingga +40°C		
	Dimensi (L $\times$ T $\times$ K)	Ukuran pemasangan	182 mm $\times$ 52 mm $\times$ 150 mm	
		Ukuran panel	188 mm $\times$ 58 mm $\times$ 11 mm	
Berat	1.3 kg (tidak termasuk aksesoris)			

Desain dan spesifikasi dapat berubah tanpa pemberitahuan.

## SECTION 1 PRECAUTION

Please refer to "KS-FX321 No.49771" about this section.

## SECTION 2 SPECIFIC SERVICE INSTRUCTIONS

### 2.1 DIFFERENCE LIST

Parts list(General assembly) [P3-3 Block NO.M1MM]

△	Item	Parts name	Parts number			Q'ty
			UD	SUND	GUND	
	9	HEAT SINK	GE30568-006A	GE30938-003A	GE30938-003A	1
	16	SCREW	QYSDST2612Z	QYSDST2610Z	QYSDST2610Z	1
		SCREW	QYSDST2612Z	QYSDST2610Z	QYSDST2610Z	1
	18	FRONT CHASSIS	GE10053-001A	GE10053-002A	-----	1
	25	FRONT PANEL	GE10051-001A	GE10051-002A	GE10051-004A	1
	26	FINDER ASSY	GE30584-002A	GE30584-017A	GE30584-016A	1
	31	D.FUNC BUTTON	GE20131-031A	GE20131-032A	GE20131-033A	1
	58	D.FUNC BUTTON	-----	-----	GE20131-033A	1
	59	D.FUNC BUTTON	-----	-----	GE20131-033A-N	1
	34	PUSH BUTTON	GE20130-031A	GE20130-032A	GE20130-033A	1
	60	PUSH BUTTON	-----	-----	GE20130-033A	1
	61	PUSH BUTTON	-----	-----	GE20130-033A-N	1
	43	REAR COVER	GE10052-001A	GE10052-002A	-----	1
	62	LCD LENS	-----	SFJK3033-001	SFSJK3033-001	1
	63	LCD CASE	-----	GE30309-002A	GE30309-002A	1

## SECTION 3 DISASSEMBLY

Please refer to "KS-FX321 No.49771" about this section.

## SECTION 4 ADJUSTMENT

Please refer to "KS-FX321 No.49771" about this section.

## SECTION 5 TROUBLE SHOOTING

Please refer to "KS-FX321 No.49771" about this section.



**JVC**

VICTOR COMPANY OF JAPAN, LIMITED

AV & MULTIMEDIA COMPANY MOBILE ENTERTAINMENT CATEGORY 10-1,1chome,Ohwatari-machi,Maebashi-city,371-8543,Japan

(No.MA001)



Printed in Japan  
WPC