

SR4023

## Stereo Receiver



In this feature-laden world of multi-channel sound, the SR4023 receiver is proof positive that Marantz hasn't forgotten its heritage of high quality stereo components. Here's a two-channel receiver that combines great sound with simple installation, extreme flexibility, and, most of all, the meticulous engineering that makes a Marantz a Marantz - and a remarkably affordable Marantz at that.

- Sophisticated new aluminum/reinforced resin front panel
- Simplified, non-intimidating operation
- High quality discrete amplifier
- Large EI core transformer
- Pre-out/Main-in terminals
- Speaker A/B switching
- Low-pass preamp level Subwoofer output
- MM Phono preamplifier
- Composite video switching with monitor and recording outputs
- RS-232C communications port
- IR flasher input
- Triple IR code set
- Front Key Lock
- Detachable AC cord
- Hand held remote controller

**marantz**<sup>®</sup>  
LIFE AMPLIFIED<sup>™</sup>

# SR4023

## Stereo Receiver

### FEATURES

#### AUDIO

Main In/Pre Out	1/1
Bridge Mono Mode/Bi-Amp Mode	-
Headphone Out	1
Phono Input	MM
Analog L&R In	7
Analog L&R Out	3

#### OTHER


External control	RS-232C: 1, Flasher In: 1
D-Bus Remote (RC-5) In/Out	1/1
AC Outlets (Switched/Unswitched)	1/1

### SPECIFICATIONS

THD	0.08%
Input Sensitivity/Impedance	200mV/47k ohms
Frequency Response	-
S/N Ratio	95dB (IHF-A)
Number of Channels	2
Output Power	80W (4 ohms), 100W (4 ohms) (20Hz - 20kHz)
HDAM	-
Power Transformer	Large EI
Current Feedback Amplifier	-
Speaker Terminal	Screw type x2 pair
Tone Control	•
Source Direct	•
Speaker A/B	•

### GENERAL

Color	Black
Front Panel	Aluminum/Glass-reinforced resin
Remote Control	Marantz System Remote Controller
Power Requirement	AC 120V 60Hz
Power Consumption	220W
Dimensions W x H x D (Inches)	17 5/16" x 6 5/16" x 15 1/8"
Weight (lbs)	19.8

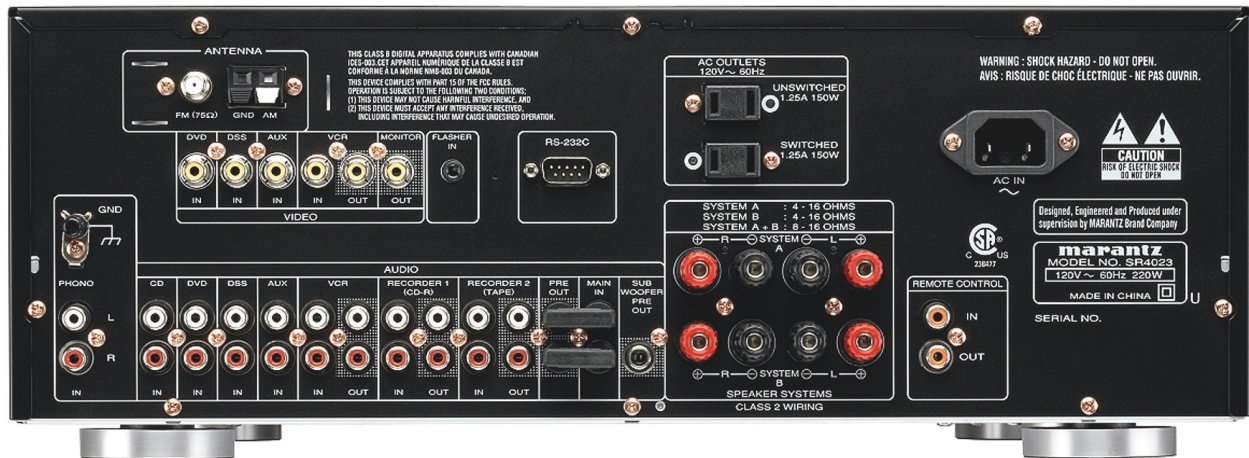

# marantz®

LIFE AMPLIFIED™

\*All specifications, dimensions and weights are subject to change without notice.  
 D&M Holdings, Marantz, Marantz America, Inc. or any of its subsidiaries will not assume any liability for errors in this spec sheet which may result in consequential errors being made by retail dealers, designers, custom installers, cabinet makers or end users, etc based upon information contained within this document.

©2008 Marantz America, Inc. • www.marantz.com