


McIntosh[®]
OWNER'S MANUAL

MQ108
CUSTOM
ENVIRONMENTAL
EQUALIZER



OWNER'S MANUAL

MQ108
CUSTOM
ENVIRONMENTAL
EQUALIZER

**IMPORTANT
SAFETY
INSTRUCTIONS**

**THESE
INSTRUCTIONS
ARE TO PROTECT
YOU AND THE
McINTOSH
INSTRUMENT.
BE SURE TO
FAMILIARIZE
YOURSELF
WITH THEM**

1. Read all instructions - Read the safety and operating instructions before operating the instrument.
2. Retain Instructions - Retain the safety and operating instructions for future reference.
3. Heed warnings - Adhere to warnings and operating instructions.
4. Follow Instructions - Follow all operating and use instructions.

WARNING: TO REDUCE RISK OF FIRE OR ELECTRICAL SHOCK, DO NOT EXPOSE THIS INSTRUMENT TO RAIN OR MOISTURE.

5. Power Sources - Connect the power supply only to the type described in the operating instructions or as marked on the unit.
6. Power-Cord Protection - Route power-supply cords so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the instrument.
7. Ventilation - Locate the instrument for proper ventilation. For example, the instrument should not be placed on a bed, sofa, rug, or similar surface that may block ventilation openings; or, placed in a built-in installation, such as a bookcase or cabinet, that may impede the flow of air through the ventilation openings.
8. Heat - Locate the instrument away from heat sources such as radiators, heat registers, stoves, or other appliance (including amplifiers) that produce heat.
9. Wall or Cabinet Mounting - Mount the instrument in a wall or cabinet only as described in the owner's manual.
10. Water and Moisture - Do not use the instrument near water - for example, near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool, etc.
11. Cleaning - Clean the instrument by dusting with a dry cloth. Clean the panel with a cloth moistened with a window cleaner.
12. Object and Liquid Entry - Do not permit objects to fall and liquids to spill into the instrument through enclosure openings.
13. Nonuse Periods - Unplug the power cord from the AC power outlet when left unused for a long period of time.
14. Damage Requiring Service - **Service must be performed by qualified service personnel when:**
 - A. The power supply cord or the plug has been damaged; or
 - B. Objects have fallen, or liquid has been spilled into the instrument; or
 - C. The instrument has been exposed to rain; or
 - D. The instrument does not appear to operate normally or exhibits a marked change in performance; or
 - E. The instrument has been dropped, or the enclosure damaged.
15. Servicing - Do not attempt to service beyond that described in the operating instructions. All other service should be referred to qualified service personnel.
16. Grounding or Polarization - Do not defeat the inherent design features of the polarized plug. Non-polarized line cord adaptors will defeat the safety provided by the polarized AC plug.
17. **CAUTION: TO PREVENT ELECTRICAL SHOCK DO NOT USE THIS (POLARIZED) PLUG WITH AN EXTENSION CORD, RECEPTACLE OR OTHER OUTLET UNLESS THE BLADES CAN BE FULLY INSERTED TO PREVENT BLADE EXPOSURE.**

ATTENTION: POUR PREVENIR LES CHOCS ELECTRIQUES PAS UTILISER CETTE FICHE POLARISEE AVEC UN PROLONGATEUR, UNE PRISE DE COURANT OU UNE AUTRE SORTIE DE COURANT, SAUF SI LES LAMES PEUVENT ETRE INSEREES A FOND SANS EN LAISSER AUCUNE PARTIE A DECOUVERT.



The lightning flash with arrowhead, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



CAUTION: TO PREVENT THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED PERSONNEL.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING: THIS UNIT IS CAPABLE OF PRODUCING HIGH SOUND PRESSURE LEVELS. CONTINUED EXPOSURE TO HIGH SOUND PRESSURE LEVELS CAN CAUSE PERMANENT HEARING IMPAIRMENT OR LOSS. USER CAUTION IS ADVISED AND EAR PROTECTION IS RECOMMENDED WHEN PLAYING AT HIGH VOLUMES.

Your decision to own this piece of McIntosh Stereo Equipment ranks you at the very top among discriminating music listeners. You now have "The Best". The McIntosh dedication to "Quality", is assurance that you will receive thousands of hours of musical enjoyment from this unit.

Please take a short time to read the information in this manual. We want you to be as familiar as possible with all the features and functions of your new piece of McIntosh. This will ensure that you receive all the performance benefits this instrument can offer you, and that it will become a highly valued part of your home music system.

The serial number, purchase date, and McIntosh Laboratory Service Contract number are important to you for possible insurance claim or future service. Record this information here.

Serial Number

Purchase Date

Service Contract Number

Upon application, McIntosh Laboratory provides a Service Contract to the original purchaser. Your McIntosh Authorized Service Agency can expedite repairs when you provide them with the Service Contract.

SERVICE CONTRACT. 4
 INTRODUCTION. 5
 ROOM ACOUSTICS. 5, 6
 EQUALIZING FOR OPTIMUM LISTENING. 6, 7
 HOW TO CONNECT. 7
 MEASURING THE ROOM ACOUSTICS. 7
 HOW TO PROGRAM THE MQ108. 8, 9
 SPECIFICATIONS. 10
 RESPONSE CURVES. 11, 12
 CHARTS. 13, 14

**THANK
YOU**

**TABLE OF
CONTENTS**

**McINTOSH
THREE YEAR
SERVICE
CONTRACT**

TAKE ADVANTAGE OF 3 YEARS OF CONTRACT SERVICE.
FILL IN THE APPLICATION NOW.

Your MQ108 Custom Environmental Equalizer will give you many years of satisfactory performance. If you have any questions, please contact,

McIntosh Laboratory Inc.

2 Chambers Street
Binghamton, New York 13903-2699
Phone: 607-723-3512

An application for A THREE YEAR SERVICE CONTRACT is included with this manual.

The terms of the contract are:

1. If the instrument covered by this contract becomes defective, McIntosh will provide all parts, materials, and labor needed to return the measured performance of the instrument to the original performance limits free of any charge. The service contract does not cover any shipping costs to and from the authorized service agency or the factory.
2. Any McIntosh authorized service agency will repair all McIntosh instruments at normal service rates. To receive the free service under the terms of the service contract, the service contract certificate must accompany the instrument when taken to the service agency.
3. Always have service done by a McIntosh authorized service agency. *If the instrument is modified or damaged as a result of unauthorized repair the service contract will be canceled.* Damage by improper use or mishandling is not covered by the service contract.
4. The service contract is issued to you as the original purchaser. To protect you from misrepresentation this contract cannot be transferred to a second owner.
5. Units in operation outside the United States and Canada are not covered by the McIntosh Factory Service Contract, irrespective of the place of purchase. Nor are units acquired outside the USA and Canada, the purchasers of which should consult with their dealer to ascertain what, if any, service contract or warranty may be available locally.

INTRODUCTION

The MQ108 is a programmable seven band equalizer. There are two filter bands for each channel, making a total of 14. Each filter can be programmed for frequency, bandwidth and amplitude boost or cut. It has 1/3 octave selectivity capability. The MQ108 connects to a stereo system between a preamplifier or control center and the power amplifier.

The MQ108 is designed to correct for frequency response problems created by standing waves and resonances in the listening room. The required programming is accomplished by first measuring the frequency response of the loudspeakers in the listening room with a 1/3 octave analyzer to determine the frequency ranges that need to be compensated. Then capacitors of the proper size to affect each of the needed frequency ranges and channels are inserted into the socket pins provided in the MQ108. Adjustments are then made with the level control for each band to achieve the desired results. Refer to the section HOW TO PROGRAM THE MQ108 for details.

The MQ108 was designed to be used in a stereo system to correct for problems caused by the room acoustics. Although the equalizer is not designed to correct specific loudspeaker problems or limitations, it can be helpful in improving the sound of any loudspeaker system in a typical listening room. The best results will always be achieved if a loudspeaker system of the highest quality is used.

Loudspeaker performance is affected by the listening room in the following ways.

- The position of the loudspeakers in the room.
- The position of the listener in the room.
- The dimensions of the room.
- The wall, floor and ceiling covering.
- The stiffness or flexibility of the room surfaces.
- Reflections from furniture or substructures in the room.

All these factors can affect the sound balance. Standing waves or room resonances occur due to reflections of the sound from wall to wall, from floor to ceiling and from any other room structures. The acoustic characteristics of a typical listening room can affect loudspeaker performance usually at frequencies below 1000Hz. The most pronounced effects are at frequencies below 250Hz and can alter frequency response as much as ± 15 dB.

These frequency response variations are the greatest in a square room with equal dimensions from wall to wall and floor to ceiling. A high quality loudspeaker with the ability to radiate perfectly uniform frequency response can have its sound characteristics changed drastically by a room with severe standing waves. In most every case the change will degrade the listening. The most common effect is one or more peaks in the bass frequency range. These bass peaks tend to mask the high frequencies which do not normally create standing waves due to their shorter wavelengths. There can also be dips in the bass response at certain frequency bands. Although dips in bass frequency response are undesirable, they generally are less objectionable than bass peaks.

A multiband equalizer, properly programmed, can make dramatic improvements in the sound of a high quality stereo system. Since the response peaks and dips can occur over a very narrow range of frequencies, 1/3 octave measurement and corrective equalization is essential.

Both left and right loudspeakers in a stereo system must be equalized independently. Since the loudspeakers are in different positions in the room, each speaker will drive the room to

ROOM ACOUSTICS

ROOM ACOUSTICS

EQUALIZING FOR OPTIMUM LISTENING

resonances at different frequencies. It is essential for the frequency response of both speakers to be similar if you are to hear the full depth and space potential of your speaker systems.

A loudspeaker system could be adjusted to measure an acoustically flat frequency response across the entire audio range of 20Hz to 20,000Hz. However, this type of system almost always sounds too bright. There are several reasons for this effect, which include human hearing, recording methods, and the acoustics of the living room and concert hall.

How the ear hears, differs from typical measuring techniques in ways that can be misleading. Most measurements combine the effects of the direct sound from the loudspeaker with the multiple room reflections or reverberation. Since typical room acoustics accentuate low notes and attenuate high notes, the response of a good loudspeaker will automatically take on a downward slope in a typical listening room. The ear, however, places more emphasis on the direct sound that has arrived unmodified from the loudspeaker. Equalizing the overall sound (both direct and reflected) to flat would give a strongly rising character to the important direct sound and an overall bright sound quality.

Additionally, most recordings are usually made with the microphones relatively close to the instruments. This is done to avoid including too much of the ambience of the recording studio or concert hall acoustics in the original recording. However, it is common practice in recording classical music to place additional microphones well back from the instruments in order to intentionally pick up a certain amount of the concert hall reverberation. The outputs from these "Far" microphones is then blended in a precise amount with the output from the "Near" microphones to add a desired degree of liveness and realism to the recording.

Concert hall acoustics will modify live sound and cause a gradual rolloff in high frequencies. This reduction of high frequencies is due to the absorption and losses in air, and increases as the distance from the instruments increases.

Typical home listening rooms are much smaller than a concert hall and the loudspeakers are much closer to the listener than the instruments in the concert hall. These smaller room dimensions result in much less high frequency attenuation from the loudspeakers to the listeners. The effects of reflected sound are also more pronounced in the smaller listening room.

When recordings made with mostly "Near" microphone techniques are reproduced in a home stereo system, they produce a much brighter sound than that heard in the original concert hall. The listening room does not furnish the gradual high frequency rolloff that occurs in the larger concert hall.

Room equalization therefore involves elimination of the most obvious peaks and dips in response, as well as a general contouring of the overall frequency response. The curves in the graph below have been compiled from listening tests, room measurements and concert hall measurements. These curves are intended only as a guide to establishing the desired system response in the listening area.

Smoothness in the response curve can be corrected by use of spectrum analyzer measurements. However, the final curve contour should be carefully considered based on listening evaluation and the individual listener preferences. The type of music the listener prefers usually is a major factor in selecting the desired curve contour.

Generally, a person who listens to classical music will prefer a response between curves B and C. A person who likes contemporary or rock music may prefer a response between

curves A and B. A person who listens to both rock and classical usually will prefer curve B. Smoothing the room response and frequency contouring can be accomplished by proper programming of the MQ108 equalizer.

EQUALIZING FOR OPTIMUM LISTENING

Connect the MQ108 between the outputs of a preamplifier or control center and the inputs of a power amplifier. The MQ108 has both Balanced and Unbalanced inputs and outputs. The MQ108 can also be connected between the preamplifier outputs and power amplifier inputs on a receiver or integrated amplifier-preamplifier.

It is not recommended that the MQ108 be connected to a tape monitor loop or signal processing loop, since the high output levels could possibly overdrive the MQ108 inputs.

Balanced Jack Pin Configuration:

Pin 1. System Ground

Pin 2. + Signal

Pin 3. - Signal

HOW TO CONNECT

AC POWER

Connect the MQ108 AC power cord into a switched AC outlet on a preamplifier or control center. The MQ108 will then turn on and off with the rest of the system.

Before equalization is performed, the room response must first be measured with a Spectrum Analyzer with third octave resolution. An analyzer such as the Audio Control SA-3050A, McIntosh AA2 or other similar analyzer will be satisfactory.

The analyzer microphone should be located in the listening area at normal ear height. Measurements should be made for each stereo channel separately. The results will be read on the instrument display, or by a meter, depending on the type of analyzer used. You may find it convenient to pencil in the response indications on one of the frequency response charts included in this manual. This will become your initial reference for determining the needed equalization.

After the initial room measurements are made, and the required equalization is determined, the MQ108 should be programmed. The same room measurements must then be repeated to determine the results of the equalization.

Since so many variables are present with room equalization and listener preferences, you may find it desirable to measure and then program the equalizer more than once, depending on the results of listening tests until you get the desired results. A convenient IN-OUT equalization switch is provided on the MQ108 for instant comparison of the system equalized and unequalized. When the switch is OUT, all equalization circuits are bypassed. When the circuit is IN, all equalization including HIGH FREQUENCY COMPENSATION is in the circuit and active.

MEASURING THE ROOM ACOUSTICS

HOW TO PROGRAM THE MQ108

Remove the MQ108 cover to access all the programming features. The McIntosh MQ108 has 14 programmable filter bands (seven in each channel). Each filter can be programmed for frequency and bandwidth. Each filter is also adjustable for amplitude boost or cut. The frequency, bandwidth and amplitude of each programmed section is determined by the selection of capacitors and the position of the level control. The capacitors required by the MQ108 are of standard values and readily available.

Each filter section is identified by number, which includes a detented level control and two capacitor plug-in locations, A and B. When the control is set at the detented position, the filter is electrically flat. When the desired capacitors are inserted and the control is turned clockwise, the filter boosts. When the control is turned counterclockwise, the filter cuts.

Capacitors A and B program the frequency and bandwidth of the filter. Capacitor values are determined by using the FREQUENCY PROGRAMMING table on the chart included in this manual and also attached to the inside of the MQ108 cover. If no capacitors are inserted in a filter section, turning the control will have no effect. Both capacitors must be used in the same section for proper operation.

FREQUENCY (Hz)	NARROW FILTER		WIDE FILTER	
	CAPACITOR A	CAPACITOR B	CAPACITOR A	CAPACITOR B
20	10	.39		
25	10	.27	4.7	056
31.5	10	.18		
40	56	.18		
50	56	.12	2.2	.022
63	.39	.12		
80	22	.12		
100	22	082	10	018
125	.18	056		
160	.12	056		
200	.12	039	.56	0082
250	.12	022		
315	082	022		
400	056	018		
500	056	012		
630	039	012		
800	022	012		
1000	022	0082		

Capacitors for frequencies that are not indicated on the enclosed chart can be determined by the following formula.

CAPACITOR	NARROW FILTER	WIDE FILTER
Capacitor A in Microfarads	23.5	118
	Frequency (Hz)	Frequency (Hz)
Capacitor B in Microfarads	7.2	1.44
	Frequency (Hz)	Frequency (Hz)

Preferred capacitors are metalized polyester or equivalent, and should have a voltage rating of 50V or higher.

CAPACITOR INSERTION and EQUALIZATION ADJUSTMENT

Two pairs of capacitor connecting pin sockets are provided for each equalizer section, marked A and B. It is not necessary to observe the polarity of the electrolytic capacitors.

For example, select the narrow filter at 31.5Hz as the first band of equalization in the left channel. Insert a 1.0 capacitor into the 1L, A connecting sockets. Insert a .18 capacitor in the 1L, B connecting sockets. Both capacitors must be inserted for proper performance. Select and insert capacitors for the next frequency to program on the left channel in the 2L connecting sockets. The first frequency to be programmed for the right channel should have capacitors inserted in the 1R connecting sockets. When capacitors are in place for each frequency and channel to be equalized, the level controls must be adjusted to the desired degree of boost or cut. At this point, make an initial setting of the HIGH FREQUENCY COMPENSATION controls to simulate which type of overall response curve desired, (A, B, or C).

To determine the results of the equalizing process, the response must be checked again with the analyzer. If you are using an analyzer with a continuous display, the controls may be adjusted and results seen immediately. If you are using an analyzer that indicates with a meter, the controls must be set in an intermediate position and the results plotted on a graph. After plotting the first response curve, you can then determine the need for further adjustments by running another response curve. This procedure should be repeated until you arrive at the response desired.

Depending on whether a wide or narrow band is used, and how much amplitude is programmed will affect the overall shape of the resulting response curves. It is possible for the response curves of two nearby frequencies to overlap. Readjustments must often be made with repeated response measurements until the final desired result is achieved. The HIGH FREQUENCY COMPENSATION controls will be valuable in setting the desired high frequency slope to best match the listening requirements.

If one equalization section does not provide sufficient equalization amplitude, a second section can be cascaded and programmed to the same frequency to double the amplitude in a particular frequency range. The duplicate section must be in a different bank of sections from the first. The first bank of sections is 1 through 4, and the second bank is 5 through 7.

Once the programming has been finished, and the desired results achieved, the cover should be replaced on the MQ108. No adjustments or changes should be made to the MQ108 programming without using an analyzer to check the results.

SPECIFICATIONS

(All specifications are valid with the MQ108 set for flat response.)

FREQUENCY RESPONSE

+0, -0.5dB from 20Hz to 20,000Hz

RATED OUTPUT

2.5V

OUTPUT IMPEDANCE

Balanced: 100 ohms

Unbalanced: 250 ohms

MAXIMUM VOLTAGE OUTPUT

8V from 20Hz to 20,000Hz

TOTAL HARMONIC DISTORTION

0.002% maximum from 20Hz to 20,000Hz at rated output

SENSITIVITY

2.5V for 2.5V rated output, (0.5V IHF)

SIGNAL TO NOISE RATIO, A-WEIGHTED

105dB below rated output (95dB IHF)

MAXIMUM INPUT SIGNAL

High level: 8V

INPUT IMPEDANCE

22,000 ohms

HIGH FREQUENCY COMPENSATION

\pm 10dB at 20,000Hz

PROGRAMMABLE FILTERS

14 sections (7 per channel), each of which can be programmed for 1/3 octave center frequencies (narrow), or 1 octave center frequencies (wide), from 20Hz to 1000Hz. Amplitude is continuously adjustable \pm 12dB for narrow and \pm 15dB for wide with controls detented for flat response.



SIZE

2.88 inches (7.3cm) H, 13.6 inches (34.5cm) W, 7.65 inches (19.4cm) D, including clearance for connectors


WEIGHT

5.5 pounds (2.5Kg) Net

RESPONSE CURVES

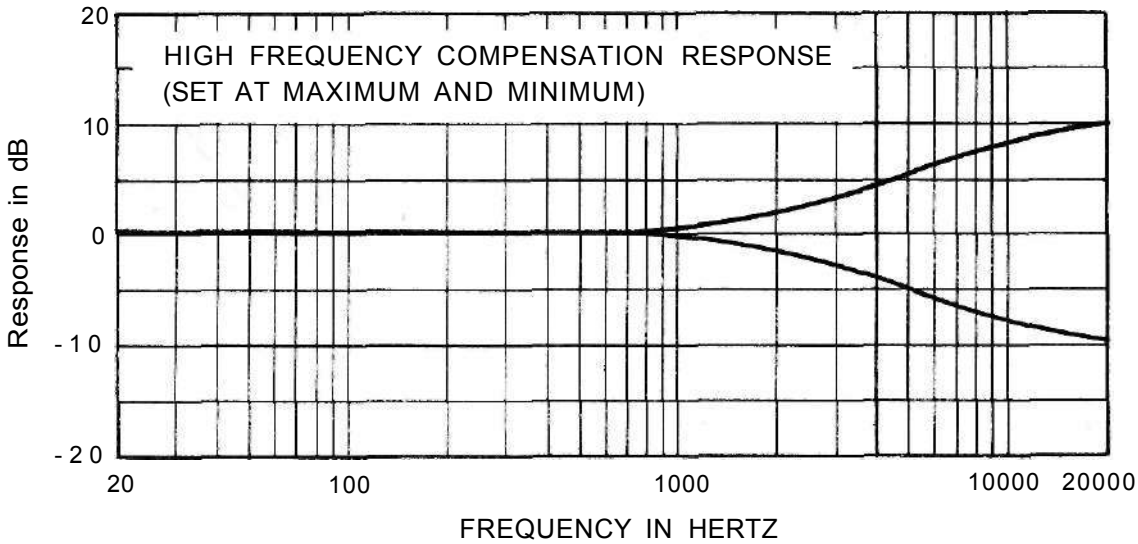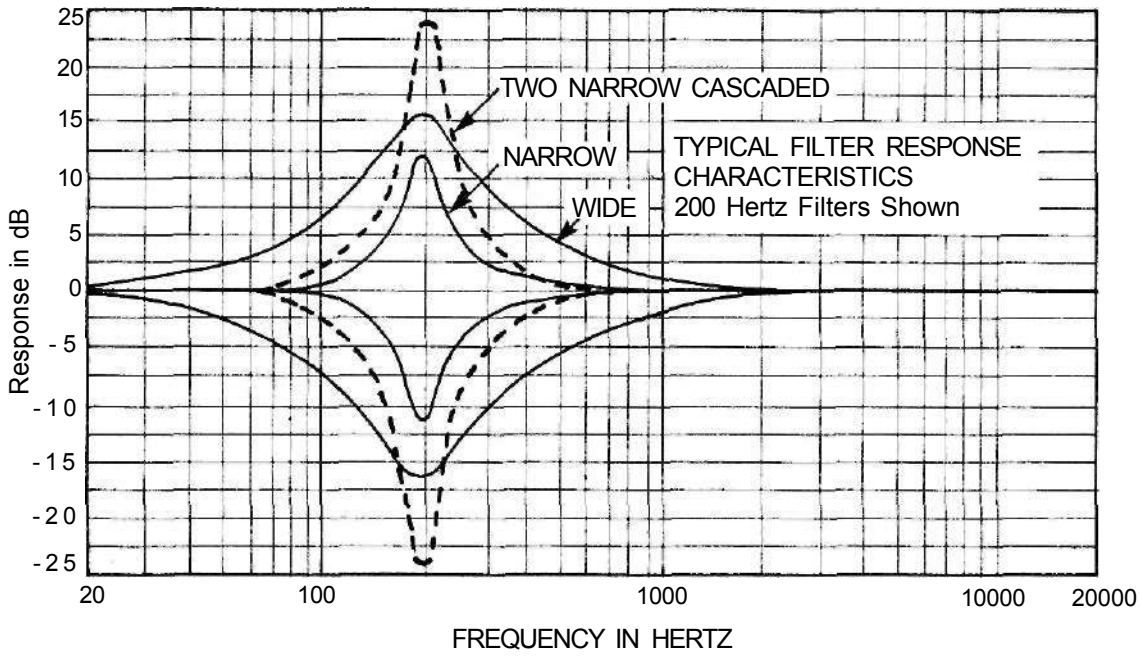


RESPONSE CURVES

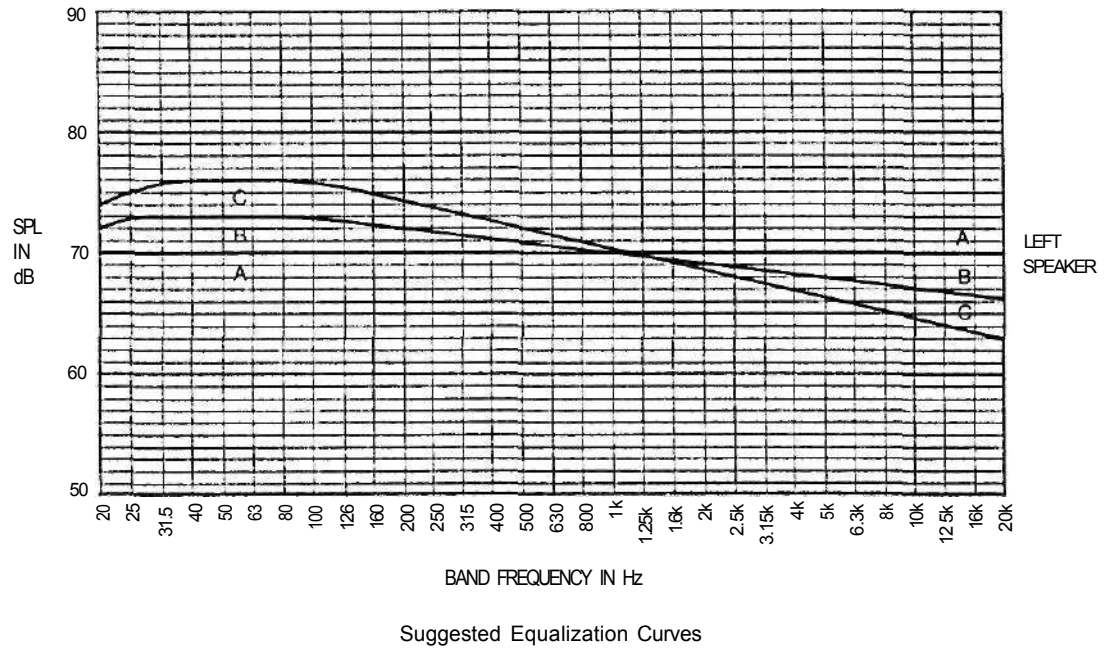


USE FOR CHARTING LOUDSPEAKER TESTS.

GRAPHS

LEFT SPEAKER

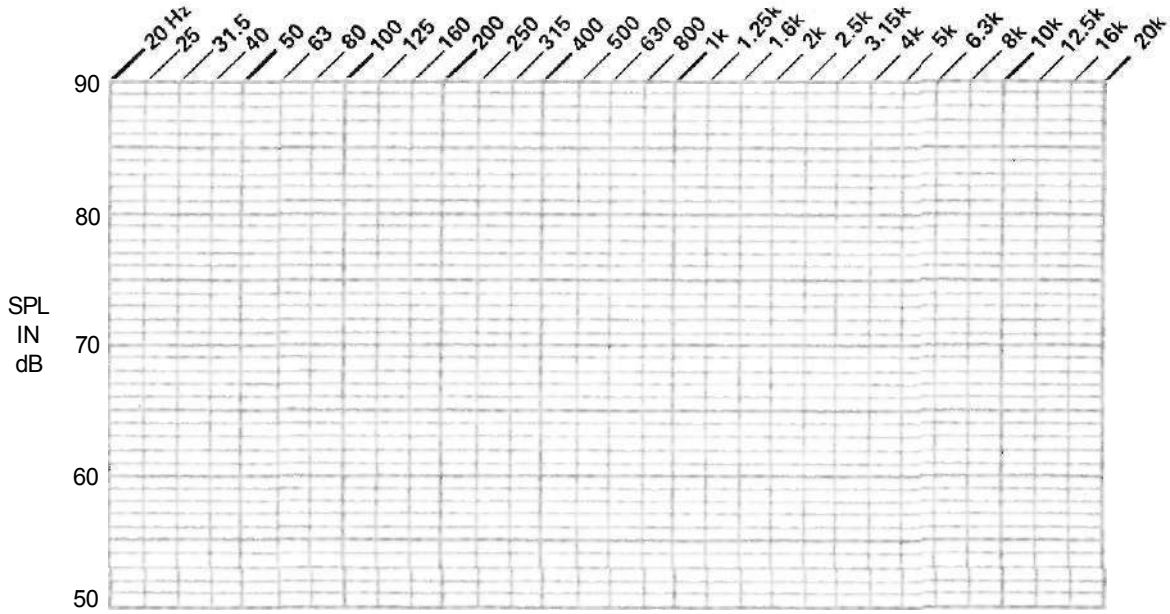


RIGHT SPEAKER

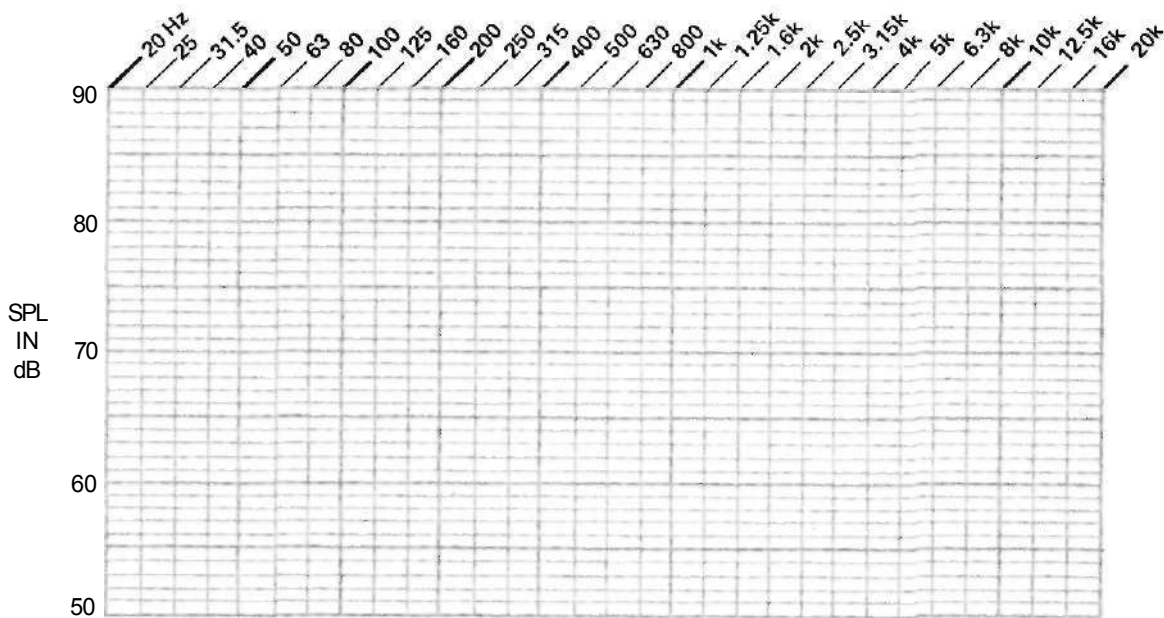


GRAPHS

USE FOR CHARTING LOUDSPEAKER TESTS.

LEFT SPEAKER

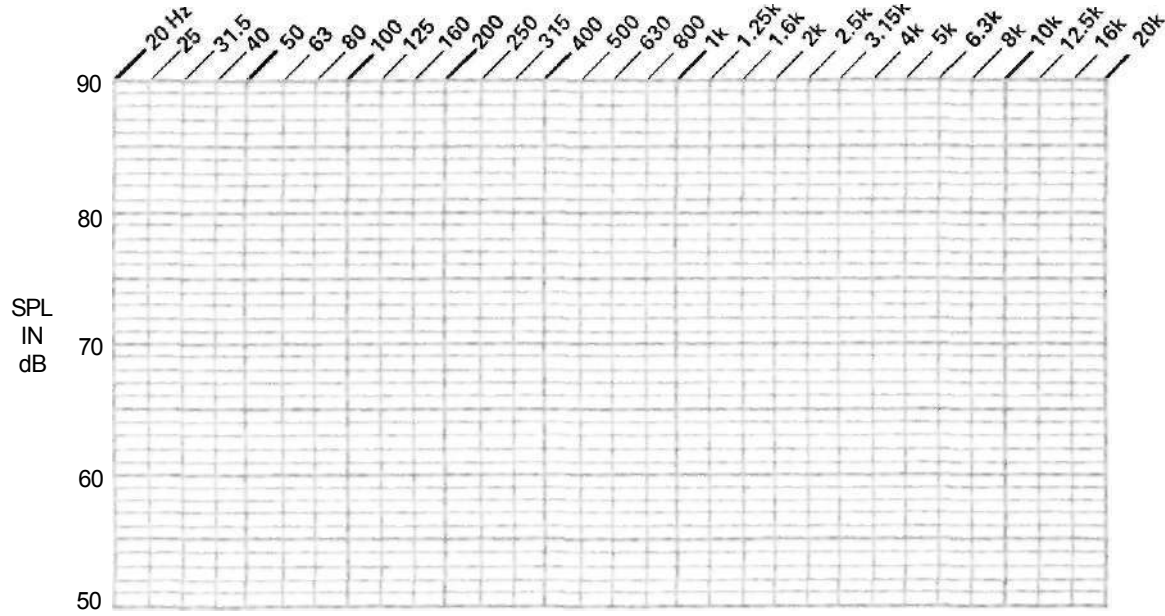

RIGHT SPEAKER

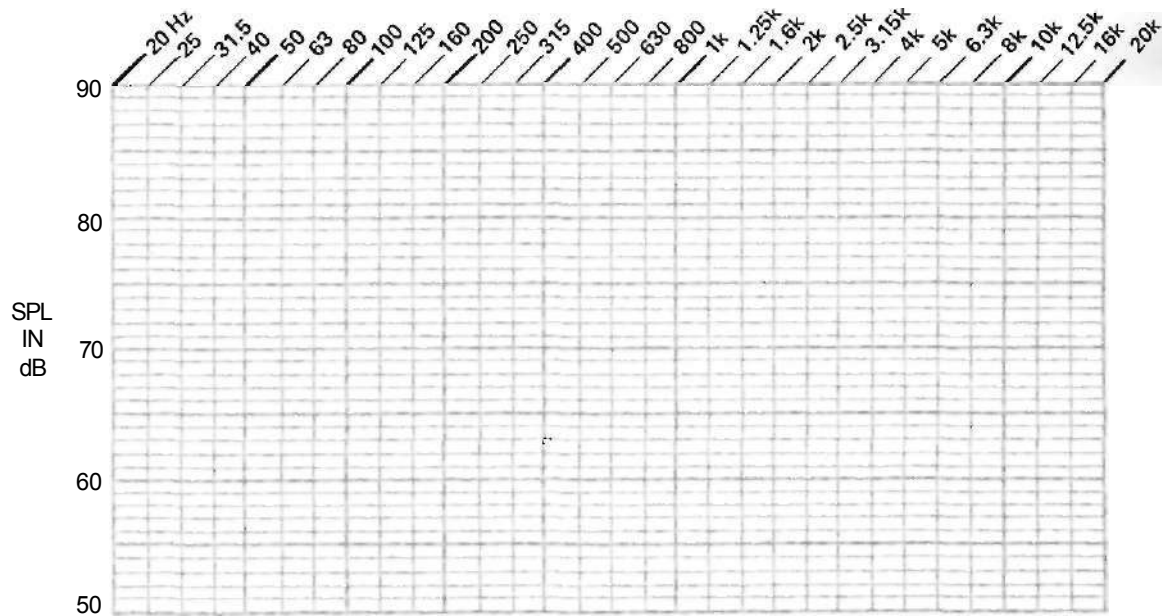

1911

THE UNIVERSITY OF CHICAGO
CHICAGO, ILLINOIS

1911



McINTOSH LABORATORY INC.
2 CHAMBERS STREET, BINGHAMTON, NEW YORK 13903-2699

The continuous improvement of its products is the policy of McIntosh Laboratory
Incorporated who reserve the right to improve design without notice.
Printed in the U.S.A.