


- 2SA1075*2 2SC945
 - 2SC2525*2 2SC1222
 - 2SA733A 2SC1222
 - 2SA750 2SC1400
 - 2SA872 2SC1775
 - 2SA912 2SC1845
 - 2SA1023 2SC1885
 - 2SC1980 2SC1980
 - 2SC2378 2SC2378
 - 2SK136 2SK136
 - 2SA794 2SC1567
 - 2SA899 2SC1904
 - 2SD924A 2SD924A
 - 2SB507T 2SB507T
 - 2SD313T 2SD313T
 - 2SB595 2SB595
 - 2SD525 2SD525
 - PA68H PA68H
 - 2SK150 2SK150
 - 2SC2291 2SC2291
 - 2SC2259 2SC2259
 - 2SA915 2SA915
 - HA1457 HA1457
 - HA12002 HA12002
- DC voltage measured with 20kΩ/V VOM under no signal.

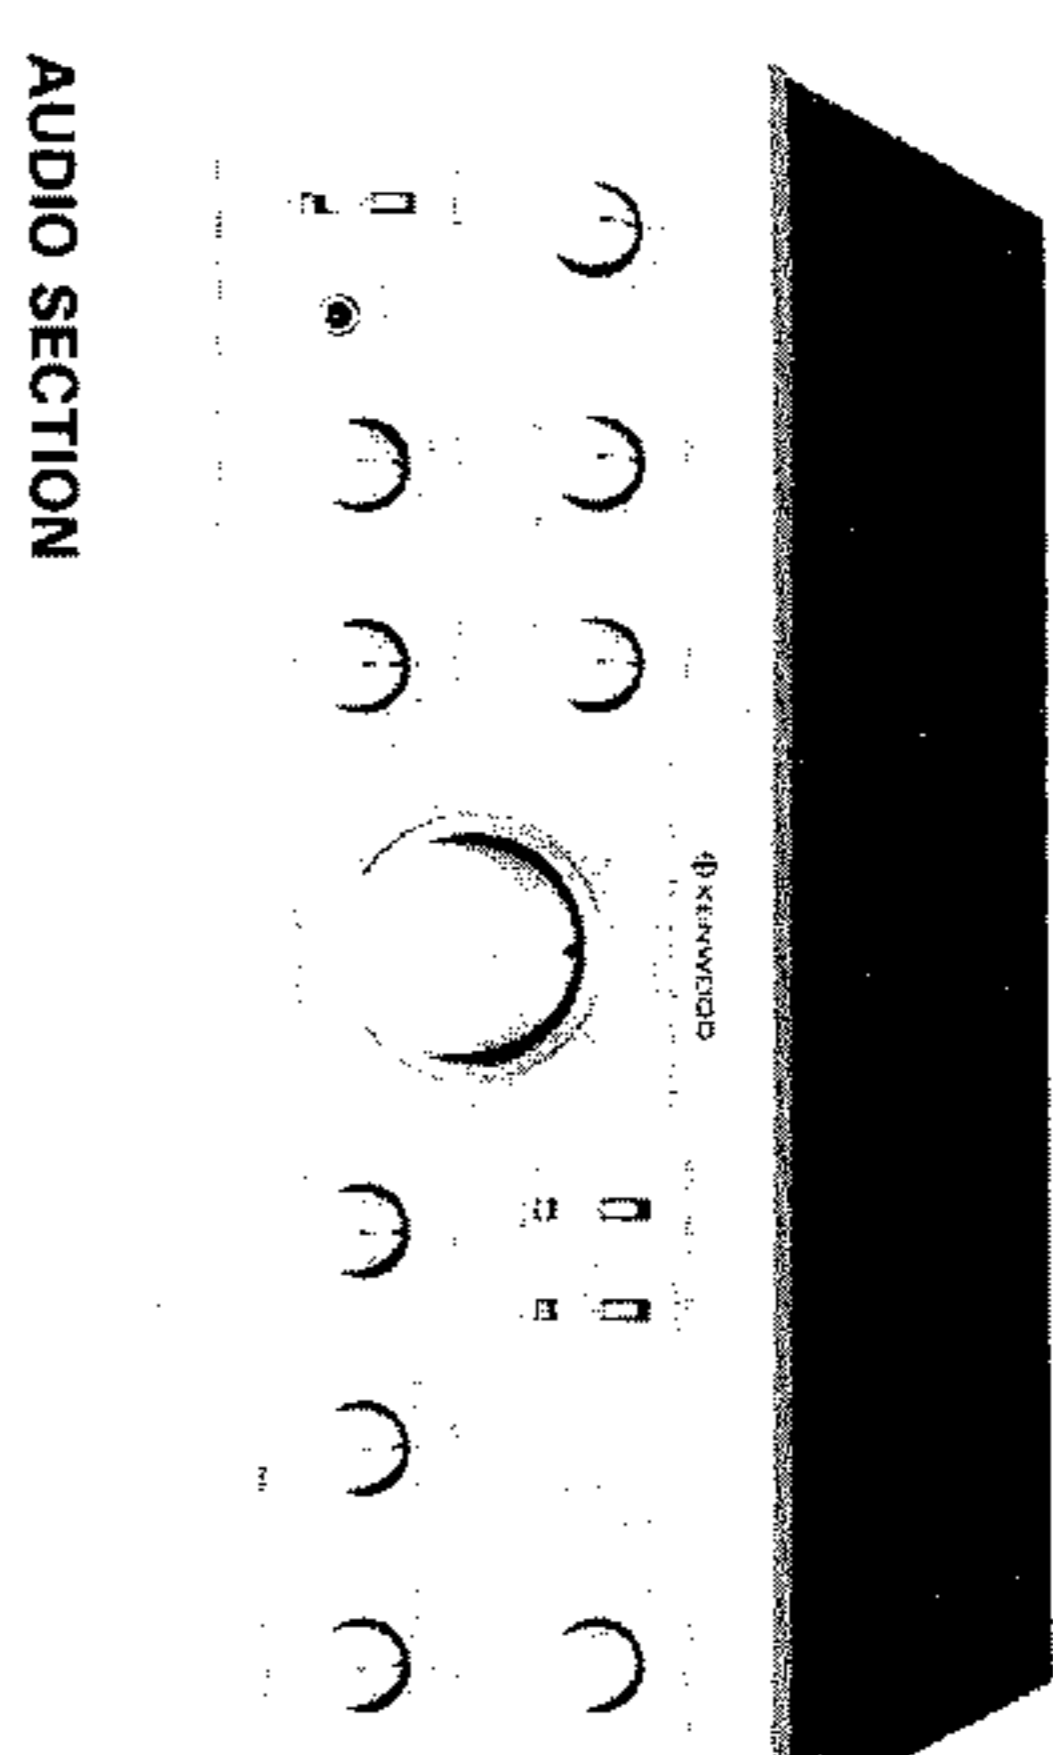

AUDIO SECTION

- Rated Output Power (FTC) 8 ohms at 20 Hz to 20 KHz 60 W + 60 W
- Maximum Output Power (DIN) 1% THD with 4 ohms loads, 1 KHz 90 W + 90 W
- Total Harmonic Distortion Rated Output Power into 8 ohms 0.02%
- Intermodulation Distortion 0.004%
- Power Bandwidth (at 0.03% THD) 5 Hz ~ 40 KHz
- Frequency Response DC ~ 400 KHz
- +0 dB, -3 dB
- S/N Weighted: Rated Output Power (IEC-A) () = Unweighted, at 50 mW, (DIN)
- Phono 87 dB (60 dB)
- Tuner, Aux, Tape 105 dB (60 dB)
- Damping Factor 100
- Input Sensitivity/Impedance Phono 2.5 mV/50 kohms
- Tuner, Aux, Tape 200 mV/50 kohms
- Tone Control Bass 100 Hz ± 7.5 dB
- Treble 10 KHz ± 7.5 dB
- Loudness Control (-30 dB) 100 Hz + 3 dB
- 100 Hz + 6 dB

GENERAL

- Power Consumption 550 W
- Dimensions W 440 mm
- H 153 mm
- D 407 mm
- Weight (Net) 11.5 kg

Note: Kenwood follows a policy of continuous advancements in developments. For this reason specifications may be changed without notice.