

NIKKO

TUNER

GAMMA 40

STEREO FM TUNER



TYPE AND VOLTAGE

W-TYPE:	UL and CSA type	120V AC
E -TYPE:	NK-STD type	220V AC
B -TYPE:	BS type	240V AC

SERVICE MANUAL

CONTENTS

SPECIFICATIONS	1
BLOCK DIAGRAM	2
DISASSEMBLY	3
ALIGNMENT	4 ~ 7
DIAL CORD INSTALLATION	8
PARTS LOCATION	9
SCHEMATIC DIAGRAM	10, 11
P. C. BOARD	12, 13
PARTS LIST	14 ~ 17
SEMICONDUCTOR DATA,	
TRANSISTORS	18
FIELD EFFECT TRANSISTOR	18
DIODES, LED'S	18
ZENER DIODES	18
INTEGRATED CIRCUITS	19 ~ 22

SPECIFICATIONS

ITEM	IF BAND "WIDE"	IF BAND "NARROW"
Usable Sensitivity:	better than 12 dB μ (4 μ V)	better than 12 dB μ (4 μ V)
50 dB Quieting Sensitivity:	better than 15 dB μ (5.62 μ V)	better than 15 dB μ (5.62 μ V)
Signal to Noise Ratio,		
MONO:	better than 75 dB	better than 75 dB
STEREO:	better than 65 dB	better than 65 dB
T. H. Distortion,		
MONO:	no more than 0.1 %	no more than 0.3 %
STEREO:	no more than 0.2 %	no more than 0.5 %
Capture Ratio:	better than 4 dB	better than 4 dB
Alternate Channel Selectivity:	better than 30 dB	better than 65 dB
Spurious Response Rejection:	better than 80 dB	better than 80 dB
Image Frequency Rejection:	better than 80 dB	better than 80 dB
IF Rejection:	better than 80 dB	better than 80 dB
AM Rejection:	better than 50 dB	better than 50 dB
Stereo Separation,		
(100 Hz):	better than 35 dB	better than 35 dB
(1 kHz):	better than 40 dB	better than 35 dB
(10 kHz):	better than 35 dB	better than 35 dB
(Hi-Blend ON, at 1 kHz):	21 \pm 6 dB	21 \pm 6 dB
Subcarrier Suppression:	better than 55 dB	better than 55 dB
Muting Sensitivity:	20 dB μ \pm 6 dB	20 dB μ \pm 6 dB
Output Level (Fixed):	1,000 mV \pm 2 dB	1,000 mV \pm 2 dB
Tuning Frequency Range:	87.4 ~ 109 MHz	87.4 ~ 109 MHz
Antenna Impedance:	300 ohms balanced and 75 ohms unbalanced	

General

Power Requirement,

U. S. A. & Canada model:	AC 120 V 60 Hz
European model:	AC 220 V 50 Hz
England model:	AC 240 V 50 Hz

Power Consumption: 20 Watts

Dimensions,

(Width):	480 mm, 19 inches
(Height):	70 mm, 2 3/4 inches
(Depth):	330 mm, 13 inches

Weight, without package 6 kg, 13.2 lbs

* Specifications are subject to change without notice.

BLOCK DIAGRAM

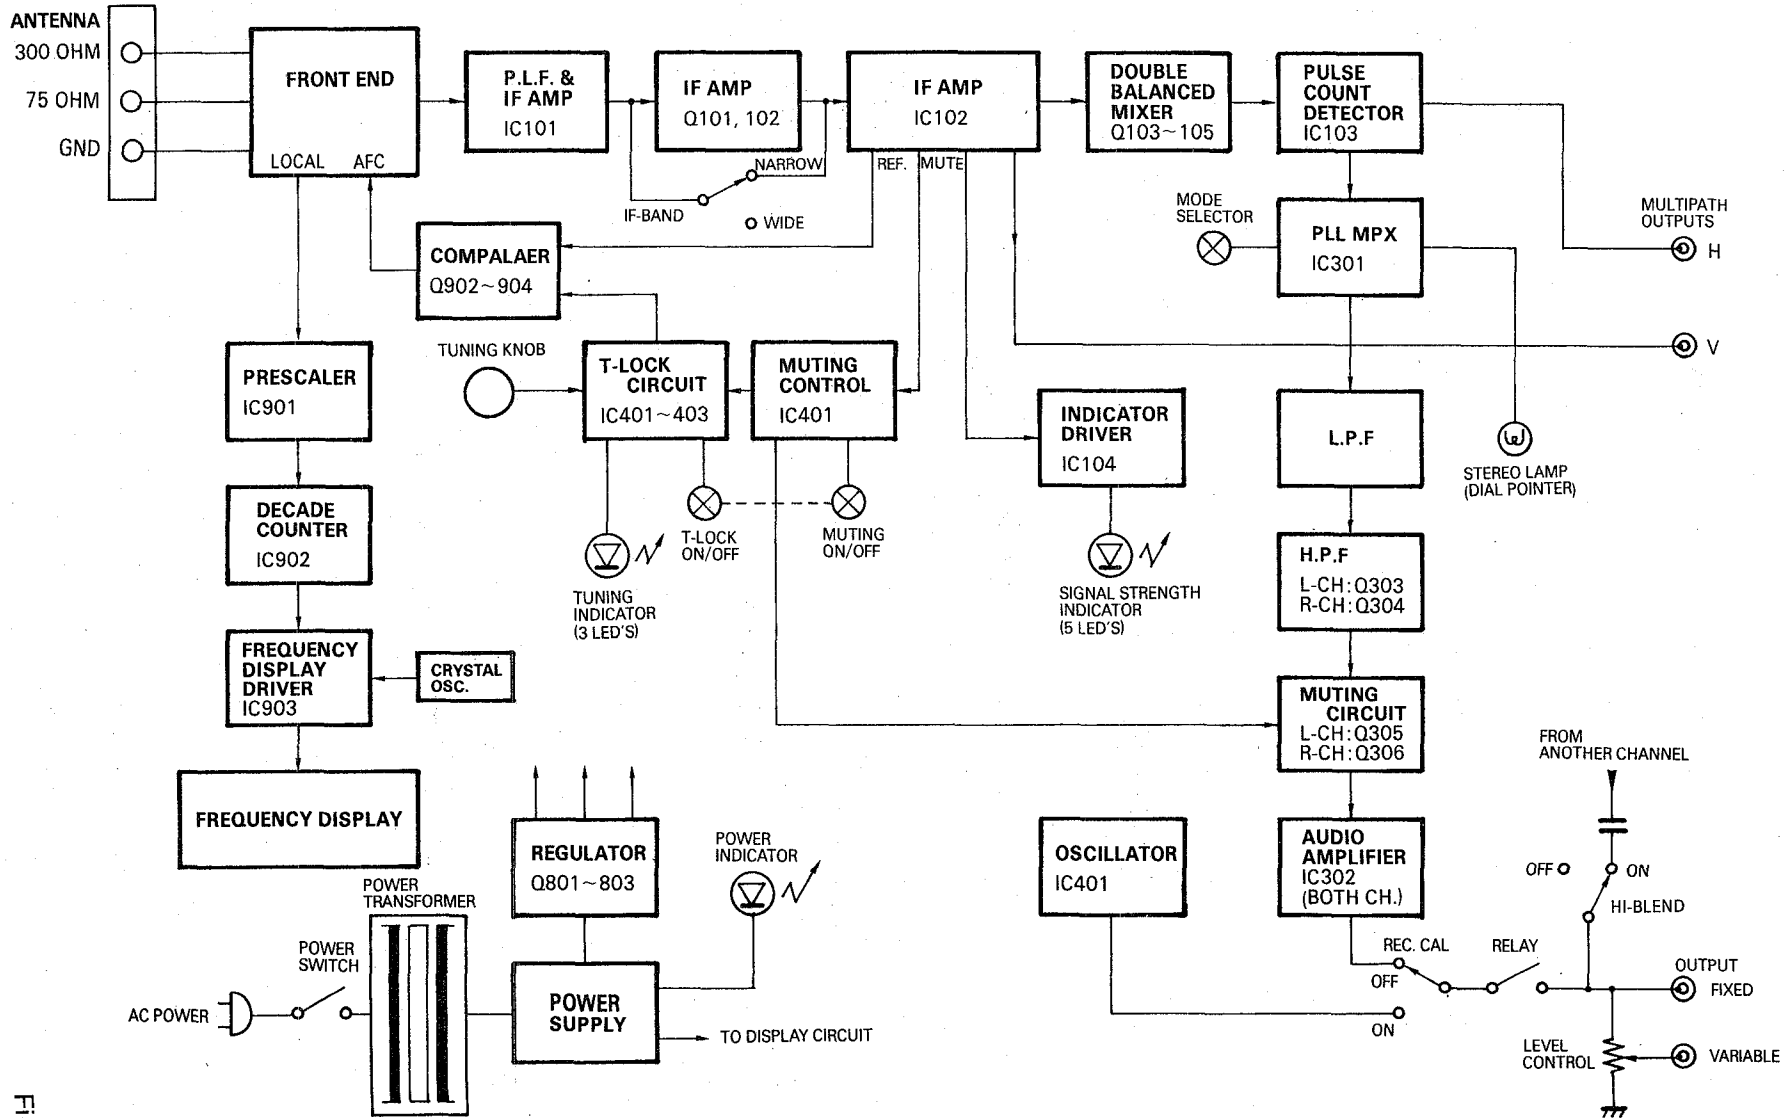


Figure 1

DISASSEMBLY

CABINET COVER REMOVAL

- a. Remove four screws from both sides of the metal cover.
- b. Remove four tapping screws from the top of the metal cover.
- c. Lift the cover away from the unit.
- b. Remove two tapping screws (#9 and #10) from the bottom of the unit as shown in Photo 1.
- c. Remove two tapping screws (#1 and #2) from the top of the unit as shown in Photo 2.
- d. Remove the front panel away from the unit.

BOTTOM PLATE REMOVAL

- a. Remove eight tapping screws (#1 ~ #8) as shown in Photo 1.
- b. Lift the bottom plate away from the unit.

POWER TRANSFORMER REMOVAL

- a. Disconnect all the power transformer cables.
- b. Remove two screws (#1 and #2) from the rear panel of the unit.
- c. Lift the power transformer away from the unit.

FRONT PANEL REMOVAL

- a. Remove TUNING knob from the front panel by using a hexagonal wrench.

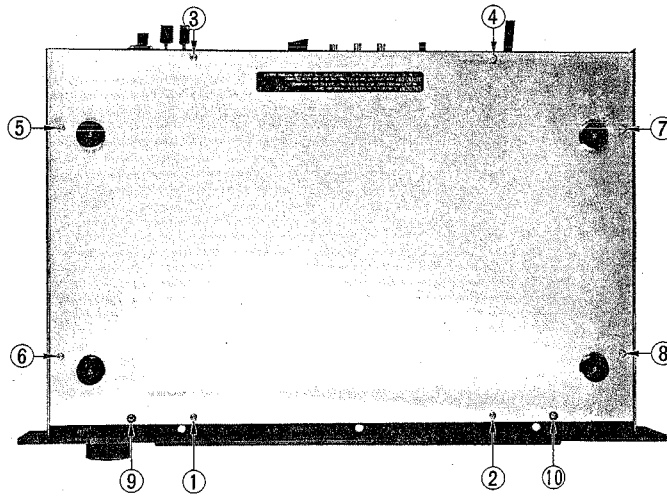


Photo 1

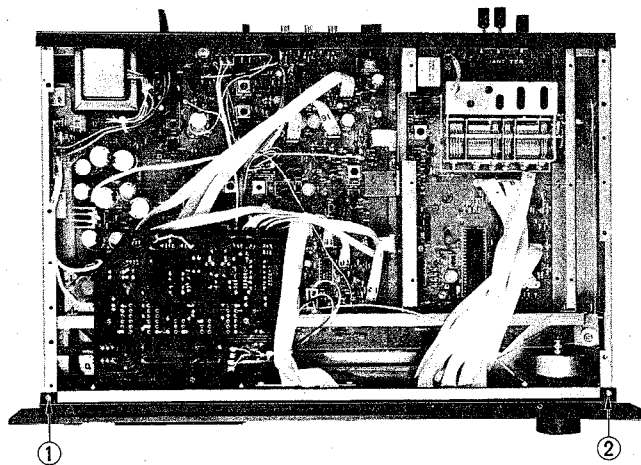


Photo 2

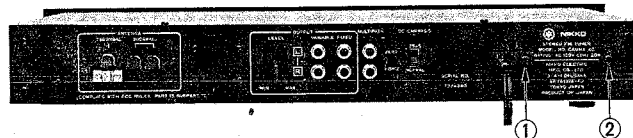


Photo 3

ALIGNMENT

TEST EQUIPMENT

Allow a minimum of 10 minutes warm-up for test equipment and the receiver to be tested.

Maintain rated line voltage.

- FM Signal Generator (FM SG)
- Oscilloscope
- AC Voltmeter
- Distortion Meter
- MPX Signal Generator (MPX SG)
- Frequency Counter
- DC Voltmeter
- RF Voltmeter

GENERAL ALIGNMENT INSTRUCTION

Always observe response curve on oscilloscope during alignment procedure:

1. Do not apply signal from FM stations. Apply signals only.
2. Use of excessive signal from FM SG can cause overloading of the tuner circuits. To properly align the tuner, adjust FM SG output level control so that response curve on oscilloscope is not distorted.

FM SECTION

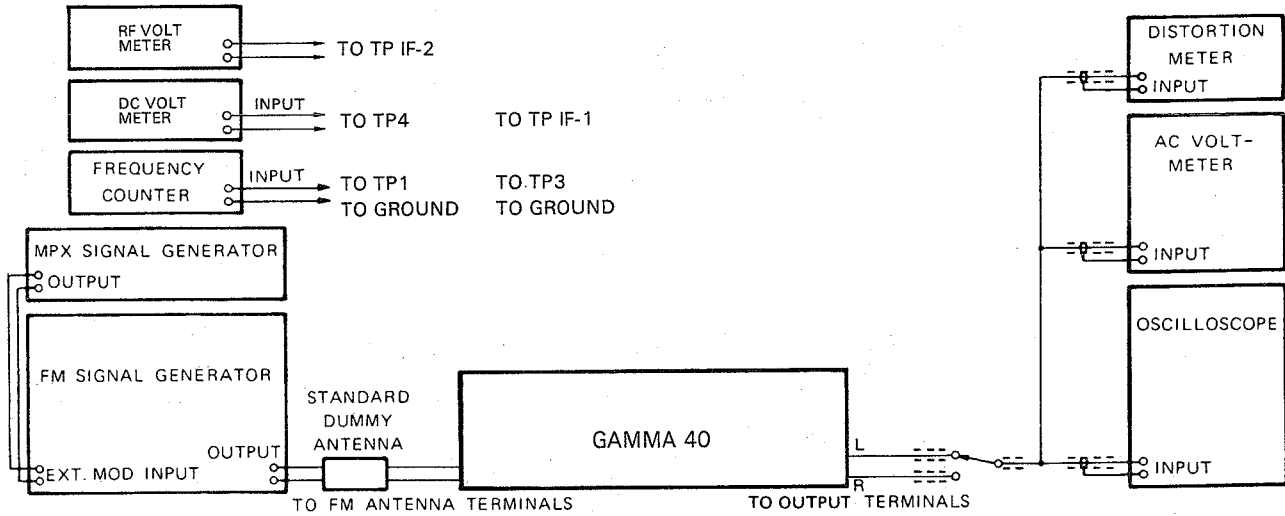


Figure 2 Test Equipment Hook-up

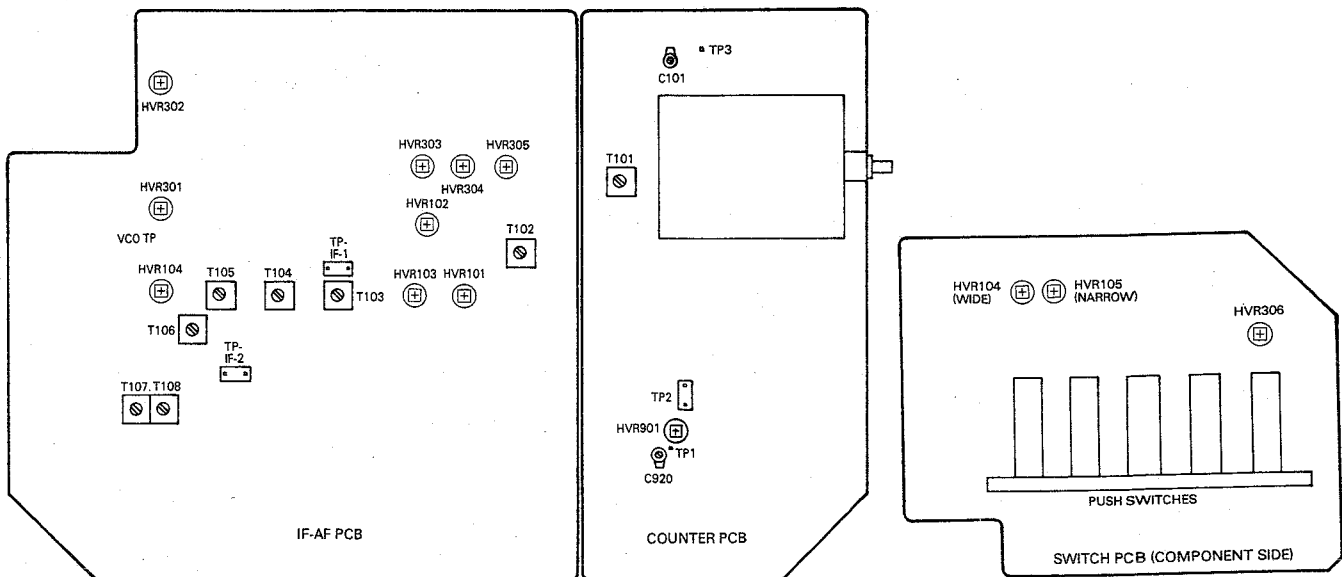


Figure 3 Adjustment Points

Frequency Display Circuit Adjustment

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE TUNER	FREQUENCY DISPLAY	ADJUSTMENT POINT	PROCEDURE	REMARKS
1	(No signal)		A. POWER to "ON" B. REC CAL to "OFF" C. IF BAND to "NARROW" D. HI-BLEND to "OFF" E. MODE to "MONO" F. T-LOCK to "OFF"	Any frequency	C920 (Figure 3)	Connect frequency counter to "TP1" (Fig. 3) and adjust for 4,000 kHz \pm 9 Hz.	
2	98 MHz/60 dB μ	(Unmodulated carrier)			TUNING KNOB of the tuner.	Connect frequency counter to "TP3" (Fig.3) and adjust for 10.7 MHz \pm 30 kHz.	
3a				98 MHz (Refer to PROCEDURE)	HVR901 (Figure 3)	Adjust until FREQUENCY DISPLAY indicates 98 MHz.	
				98 MHz	HVR901 (Figure 3)	Connect DC voltmeter to "TP4" (Fig. 3). Adjust so that voltmeter's reading changes from 8 V to 0 V.	This adjustment is only for W-type.
3b				98 MHz	HVR901 (Figure 3)	Connect 10 kohms resistor across "TP2". Adjust until turning on and off of the digit stops.	This adjustment is for E & B-type.

FM-IF Alignment

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE TUNER	FREQUENCY DISPLAY	ADJUSTMENT POINT	PROCEDURE
1	98 MHz/60 dB μ	400 Hz/mono [\pm 75 kHz]	A. POWER to "ON" B. REC CAL to "OFF" C. HI-BLEND to "OFF" D. MODE to "MONO" E. IF BAND to "NARROW" F. T-LOCK to "OFF"	98 MHz	T106 ↓ T105 ↓ T104 (Figure 3)	Connect RF voltmeter to "TP-IF2" (Fig. 3) and adjust for maximum voltmeter indication.
2					HVR104 (Figure 3)	Adjust until RF voltmeter indicates more than 0.7 V r.m.s.
3					T103 (Figure 3)	Connect DC voltmeter to "TP-IF1" (Fig. 3) and adjust for 0 \pm 50 mV.
4					T103 (Figure 3)	Connect frequency counter to "TP3" (Fig.3) and adjust for 10.7 MHz \pm 30 kHz.
5					98 MHz/10 dB μ	A ~ D: same as above. E. IF BAND to "WIDE" F. T-LOCK to "OFF"

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE TUNER	FREQUENCY DISPLAY	ADJUSTMENT POINT	PROCEDURE
6	98 MHz/10 dB μ	400 Hz/mono [± 75 kHz]	A ~ D & F: same as above. E. IF BAND to "NARROW"	98 MHz	T102 (Figure 3)	Adjust for minimum distortion.
7		1 kHz/mono [± 75 kHz]	A ~ D & E: same as above. F. T-LOCK to "ON"		C101 ↓ HVR102 ↓ T102 (Figure 3)	Adjust for minimum distortion.

Muting Circuit Adjustment

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE TUNER	FREQUENCY DISPLAY	ADJUSTMENT POINT	PROCEDURE
1	98 MHz/20 dB μ	400 Hz/mono [± 75 kHz]	A. POWER to "ON" B. REC CAL to "OFF" C. HI-BLEND to "OFF" D. MODE to "STEREO" E. T-LOCK to "OFF" F. IF BAND to "WIDE"	98 MHz	HVR103 (Figure 3)	Adjust until audio output is no longer present on oscilloscope.
2			A ~ E: same as above. F. IF BAND to "NARROW"		HVR101 (Figure 3)	

LED Signal Strength Display Circuit Adjustment

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE TUNER	FREQUENCY DISPLAY	ADJUSTMENT POINT	PROCEDURE
1	98 MHz/50 dB μ	400 Hz/mono [± 75 kHz]	A. POWER to "ON" B. REC CAL to "OFF" C. HI-BLEND to "OFF" D. MODE to "MONO" E. T-LOCK to "OFF" F. IF BAND to "WIDE"	98 MHz	Potentiometer "WIDE" (Figure 3)	Adjust until five signal-strength display LED's light up.
2			A ~ E: same as above. F. IF BAND to "NARROW"		Potentiometer "NARROW" (Figure 3)	
3	(No signal)		Same as above.	Where no signal is tuned.	HVR101 (Figure 3)	Adjust until any signal-strength display LED no longer lights up.

FM MPX Alignment

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE TUNER	LED FREQUENCY DISPLAY	ADJUST- MENT POINT	PROCEDURE	REMARKS
1	98 MHz/60 dB μ	(Unmodulated carrier)	A. POWER to "ON"	98 MHz	HVR301 (Figure 3)	Connect frequency counter to "VCO TP" (Figure 4) and adjust for 76 kHz.	
2		Pilot signal only: ± 7.5 kHz	B. REC CAL to "OFF"		HVR302 (Figure 3)	Adjust for minimum AC voltmeter deflection. Check that stereo indicator lamp lights up.	Outputs of right and left channel should be equal.
3		1000 Hz/stereo [main (L) & sub (L): ± 67.5 kHz/ pilot signal: ± 7.5 kHz]	C. IF BAND to "NARROW"		HVR305 (Figure 3)	Adjust for maximum separation (minimum output of right channel)	Both the separations (both the outputs of right and left channel) should be equal.
4		1000 Hz/stereo [main (R) & sub (-R): ± 67.5 kHz/ pilot signal: ± 7.5 kHz]	D. HI-BLEND to "OFF"			Adjust for maximum separation (minimum output of left channel)	
			E. MODE to "STEREO"				
			F. T-LOCK to "OFF"				

Record Calibration Circuit Adjustment

1. Connect a AC voltmeter to the output terminal of the tuner.
2. Set the POWER switch and "REC CAL" switch to ON.
3. Adjust the potentiometer HVR306 (refer to Fig. 3) so that the AC voltmeter indicates 333 mV r.m.s.

DIAL CORD INSTALLATION


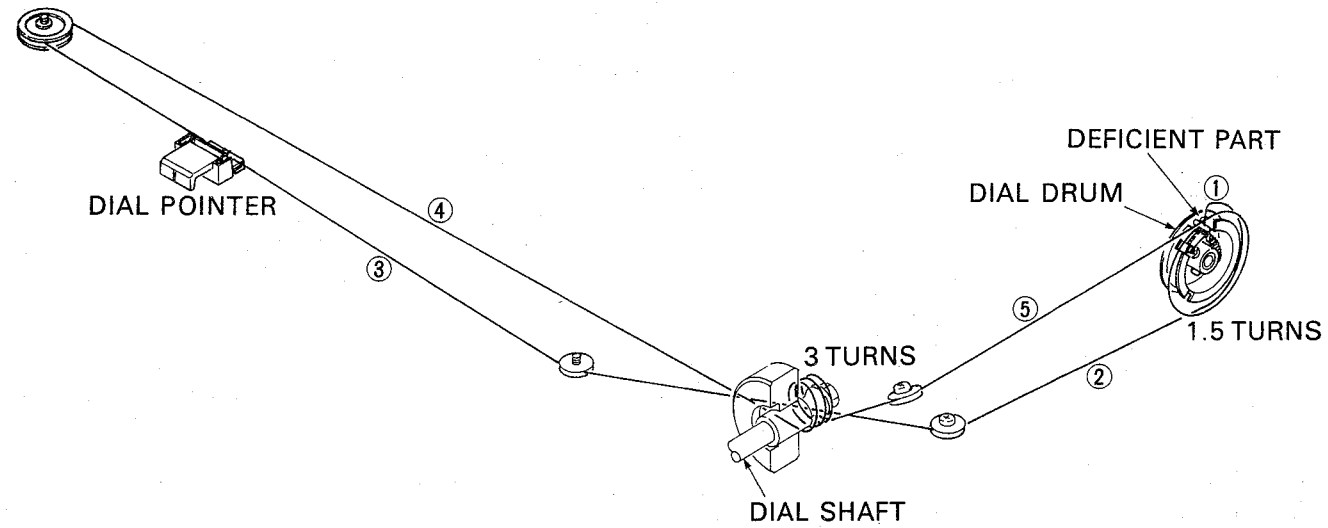


Figure 4

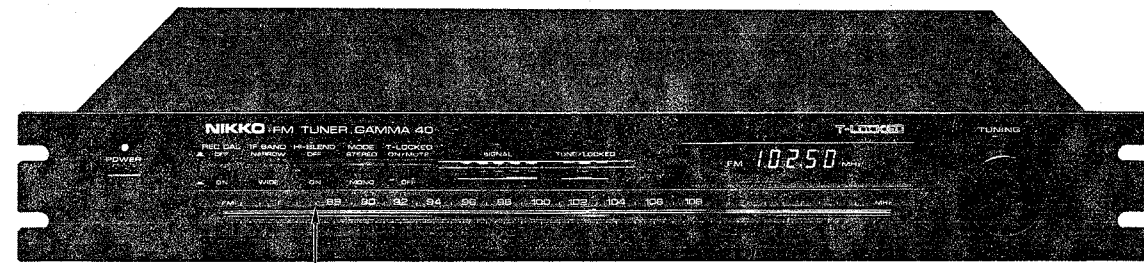


87 MHz Position

Photo 4

1. Remove an old dial cord.
2. Turn the dial drum shaft counter-clockwise until the rotor of the variable capacitor is completely out of the stator. If the deficient part of the dial drum is not in a straight line with the dial drum shaft (vertically), loosen the dial drum drive screws and adjust the dial drum to be placed on the top proton. Then re-tighten the dial drum screws.
3. String the dial drum and pulleys with a new dial cord in accordance with Fig. 4 (in circled numbered order).
4. Turn the dial shaft (Tuning knob) counter-clockwise until the rotor of the variable capacitor is fully rotated in the stator. Then fix the dial pointer to the string at a reading of 87 MHz on the dial scale. (See Photo 4)

PARTS LOCATION

NOTE: Numbers of three digits with a  are related to the KEY NUMBER on parts list.

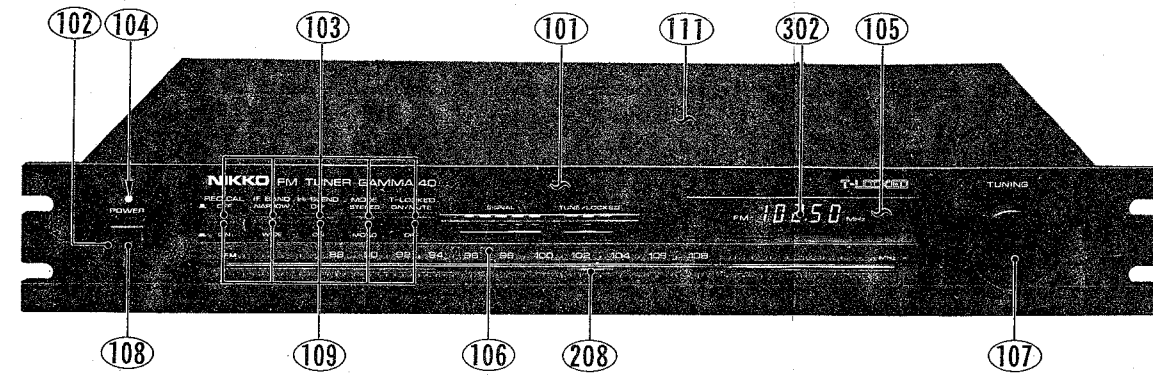


Photo 5

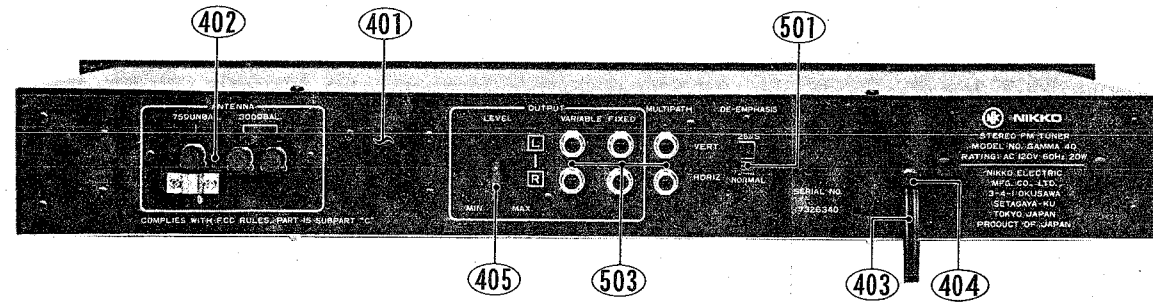


Photo 6


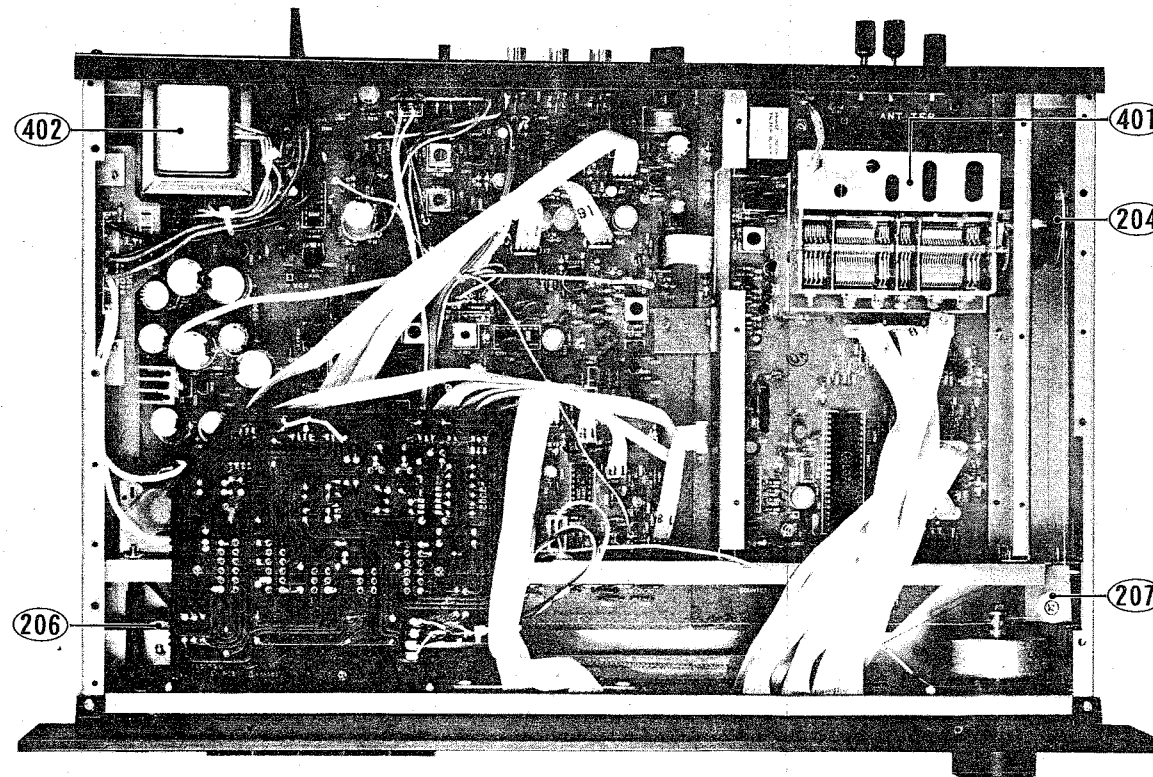


Photo 7

SCHEMATIC DIAGRAM

- NOTES:
1. SCHEMATIC IS SUBJECT TO CHANGE WITHOUT NOTICE.
 2. RESISTANCE VALUES ARE IN OHMS. K = 1,000; M = 1,000,000
 3. CAPACITANCE VALUES 1.0 AND ABOVE ARE IN pF OR μF (P = pF, M = μF). LESS THAN 1.0 ARE IN μF . (ELECTROLYTIC CAPACITANCE VALUES ARE IN $\mu F/WV$)
 4. VOLTAGES ARE MEASURED TO CHASSIS GROUND WITH A "DC VOLTMETER". V: VOLTAGES MEASURED WITH NO SIGNAL APPLIED.
 5. RED SYMBOLS ARE DELETED FOR W-TYPE.


- SCHEMATIC SYMBOLS:
- ⊖ POLYESTER FILM CAPACITOR
 - ⊖ POLYSTYRENE FILM CAPACITOR
 - ⊖ TANTALUM ELECTROLYTIC CAPACITOR
 - ⊖ NONFLAMMABLE RESISTOR

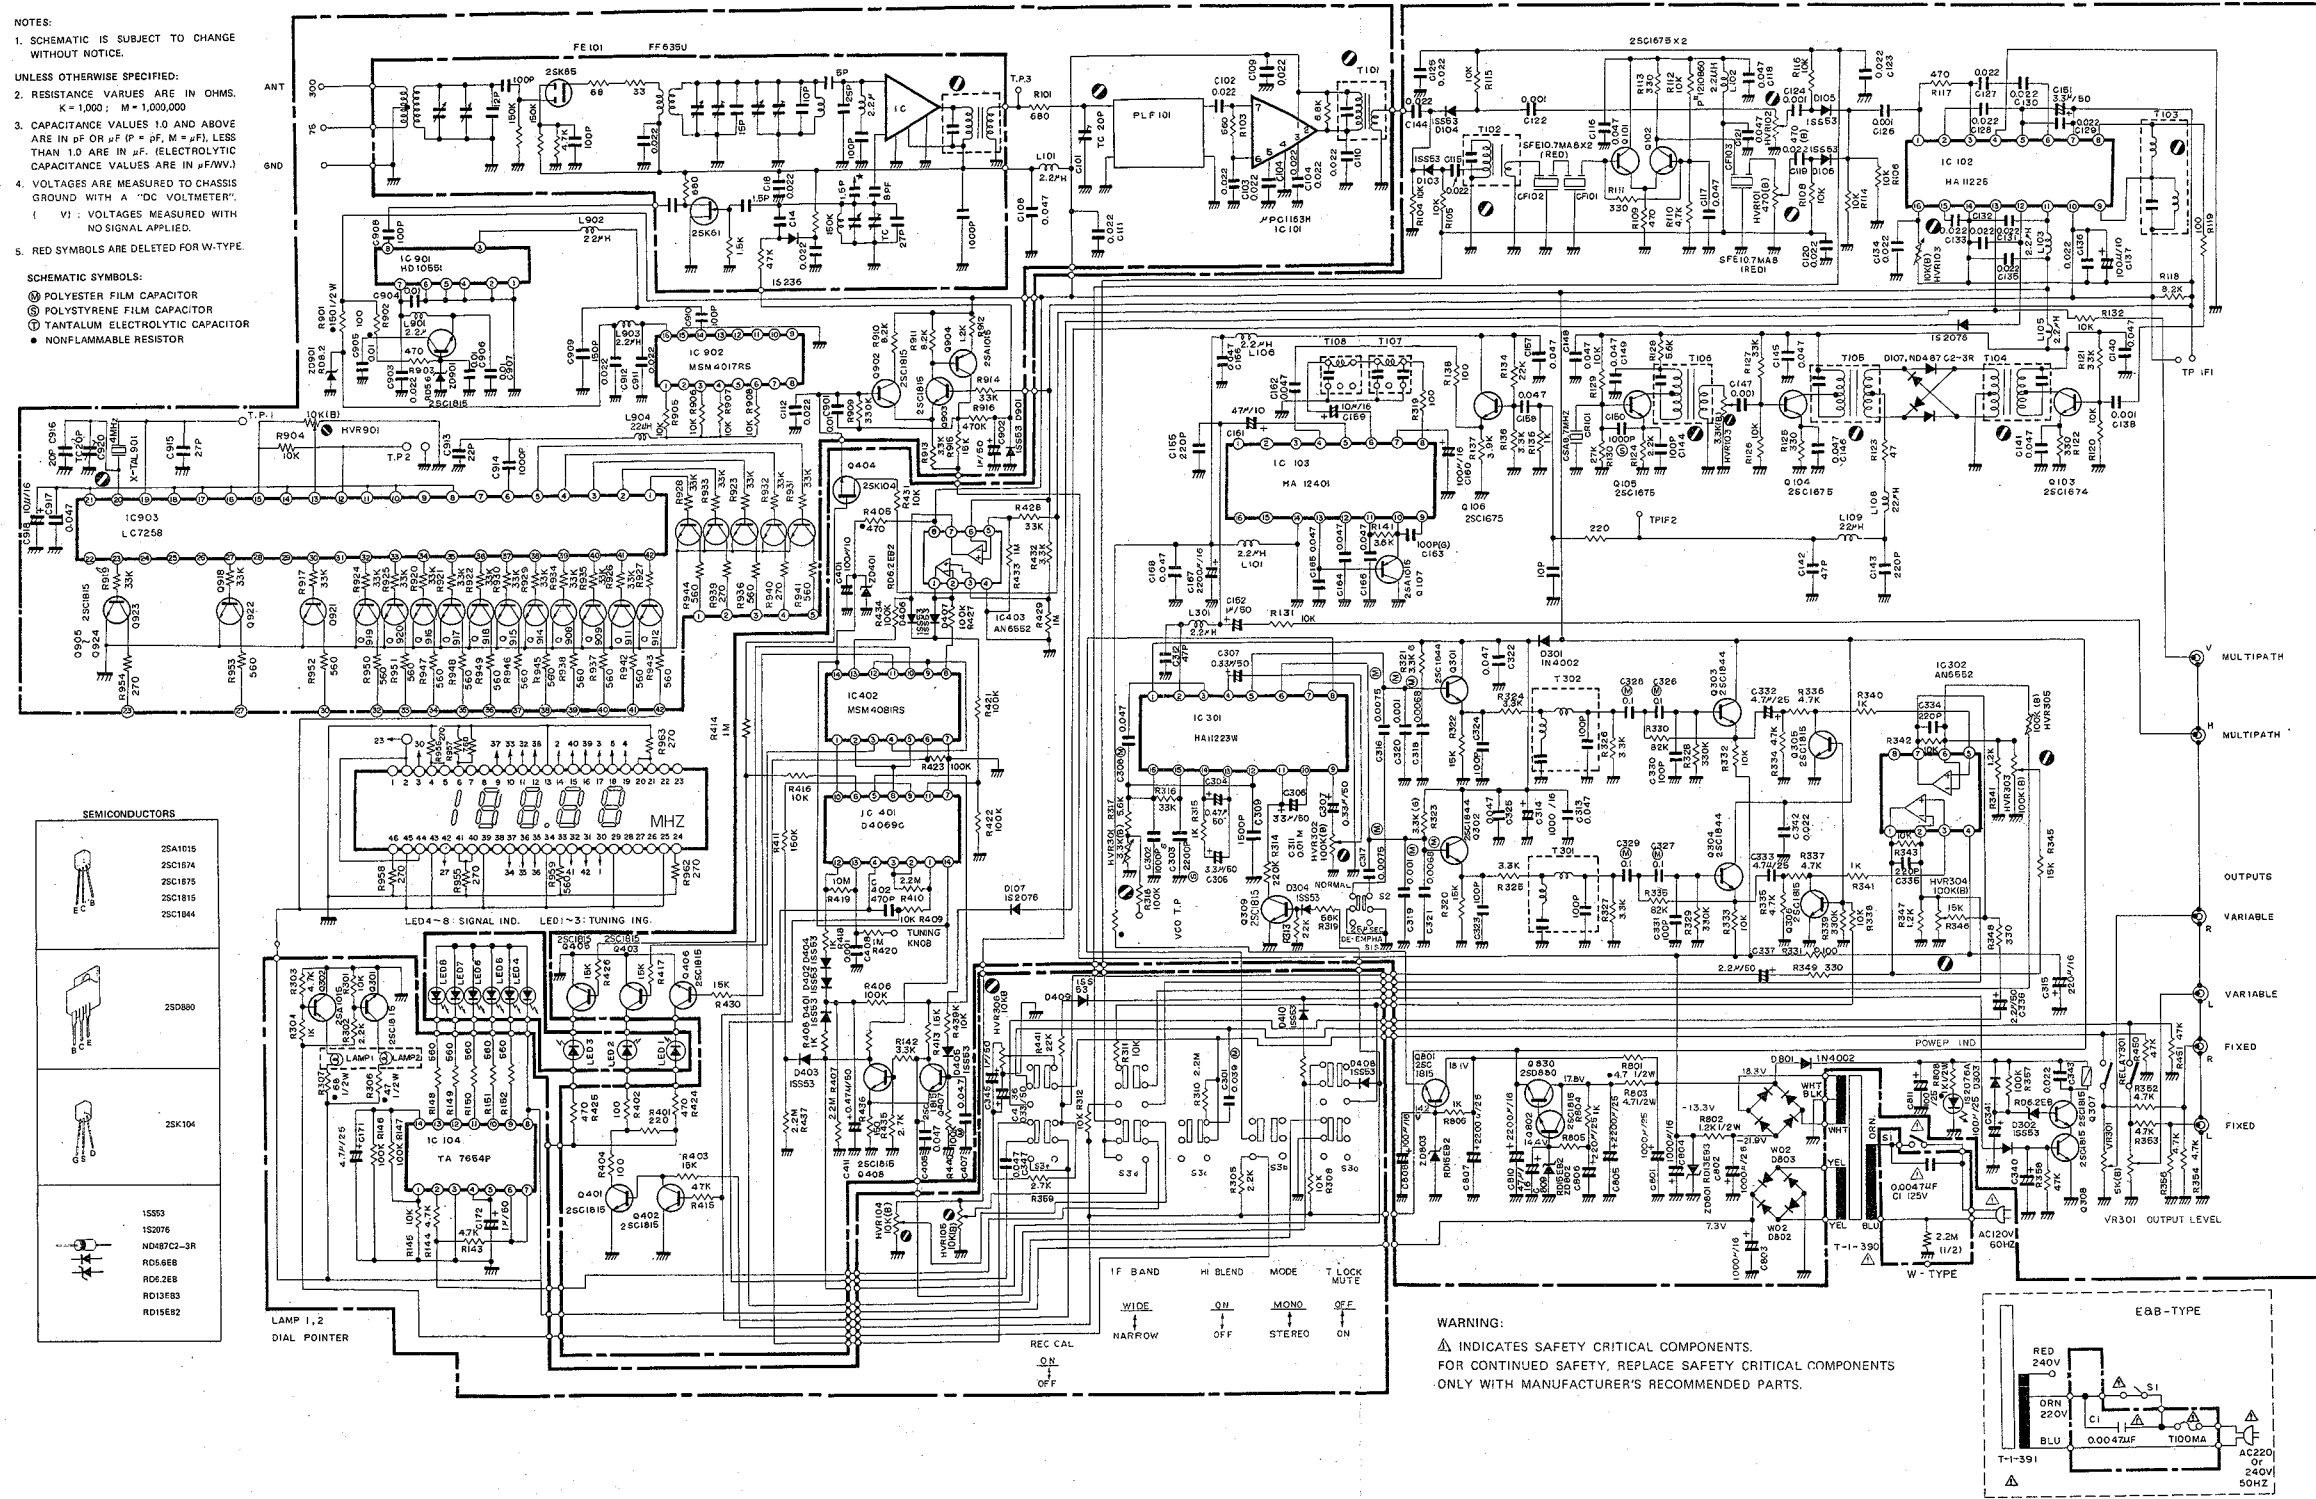


SEMICONDUCTORS

	25A1615
	25C1674
	25C1675
	25C1815
	25C1844
	25D880
	25K104
	15593
	152076
	ND487C2-3R
	RD5.6E8
	RD6.2E8
	RD13FB3
	RD15E82


WARNING:
 Δ INDICATES SAFETY CRITICAL COMPONENTS.
 FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS
 ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.




P. C. BOARD (BOTTOM VIEW)

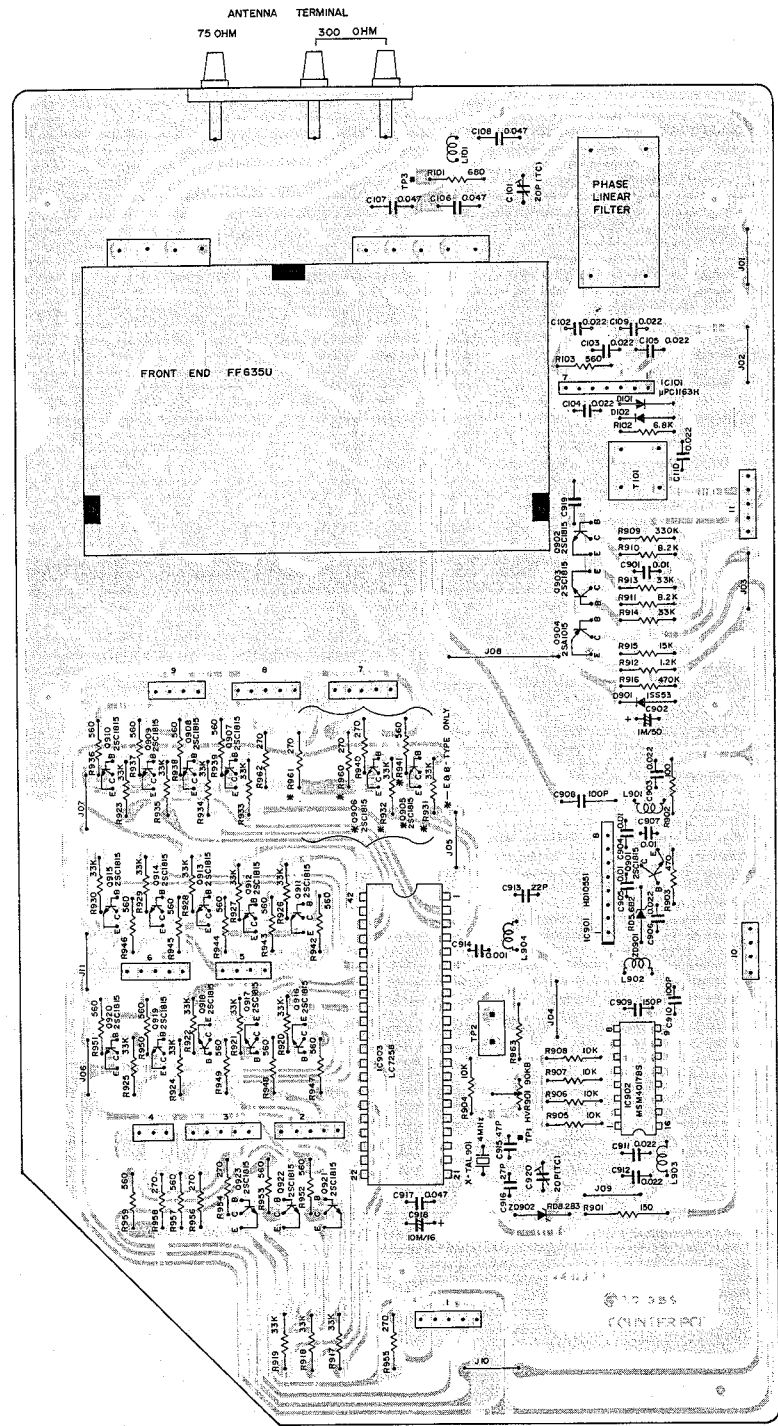

COUNTER PCB

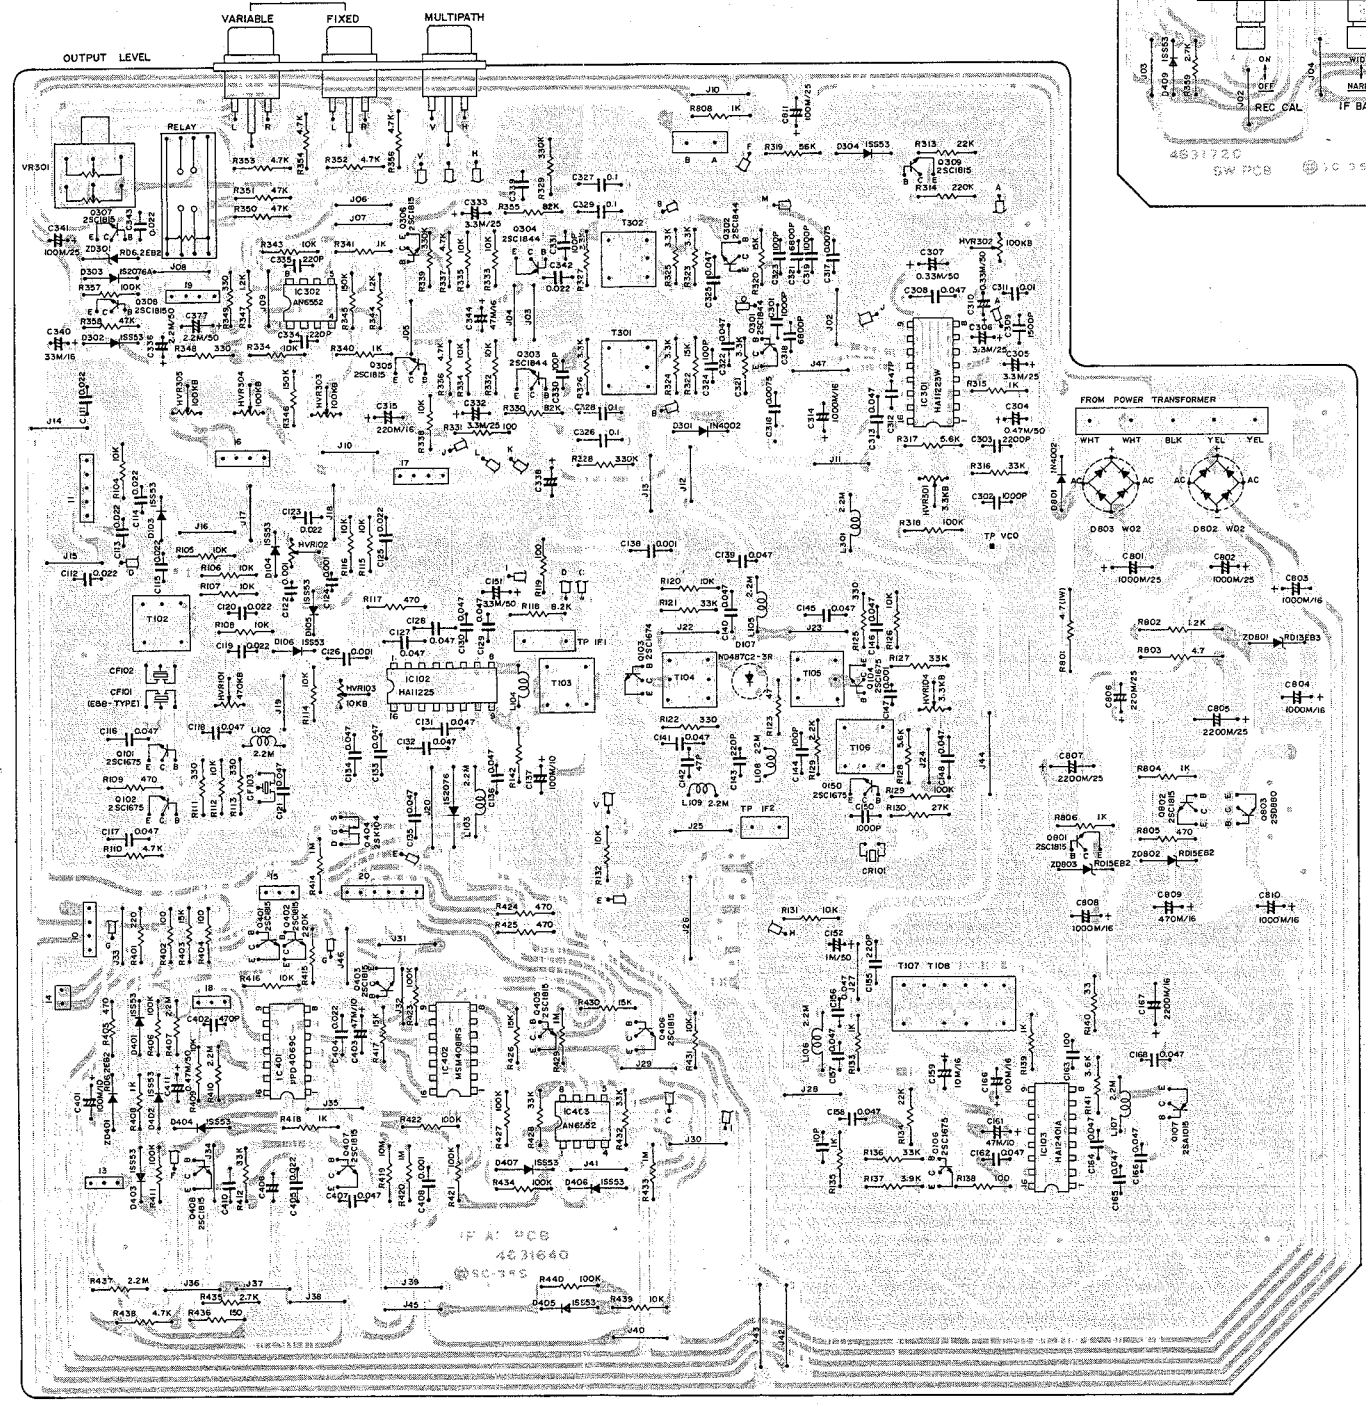

IF AF PCB

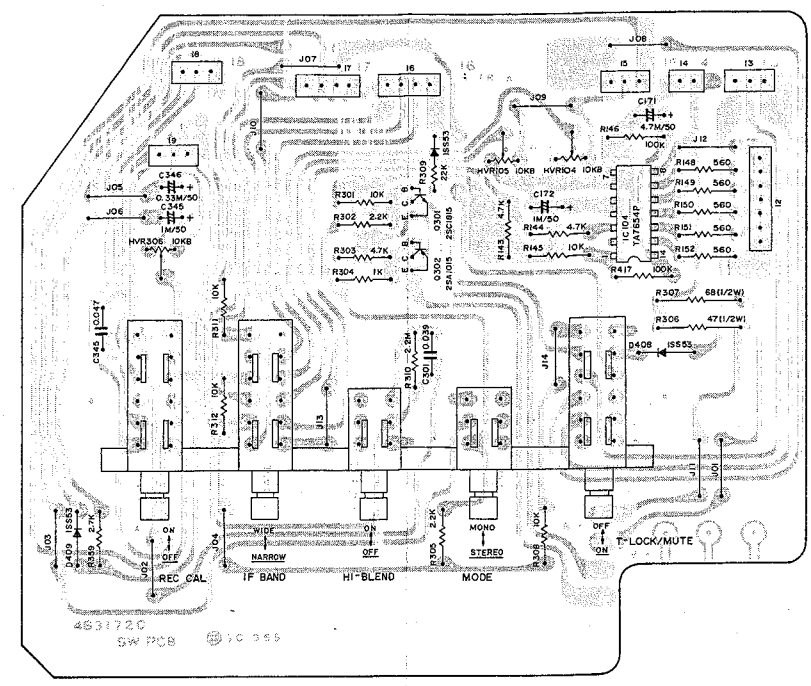

SW PCB

Figure 6

PARTS LIST

- * The KEY NUMBER (#) marked with a (*) on parts list relate to number of three digits with a (O). (Photo 5-7)
- + Numerals in file indicate the quantity of parts used in one type.
- ++ TR: Transistor
FET: Field effect transistor
VR: Volume control (Variable resistor)
RES: Carbon film fixed resistor
MO-RES: Metal oxide film fixed resistor
CEM-RES: Cemented wirewound fixed resistor
FP: Flame proof
C-CAP: Ceramic capacitor
E-CAP: Aluminum electrolytic capacitor
M-CAP: Polyester film capacitor
S-CAP: Polystyrene film capacitor
T-CAP: Tantalum electrolytic capacitor
BP-CAP: Bipolar electrolytic capacitor
LC-CAP: Low current leakage electrolytic capacitor.

- Assemblies and parts are subject to change without notice.
- Parts ordering procedure:
A. DO NOT USE THE "KEY" NUMBER AND "SYMBOL" NUMBER. (these are control # for the factory only)
B. Include in any order
a. Part number.
b. Part description.
c. Model number.
(any of the above lacking from an order may delay shipment of that order.)

CAUTION:

The Δ mark, the KEY NO. and the SYMBOL NO. circled with rectangle in the schematic diagram and the shaded area in the parts list designate components which have special characteristics important for safety and should be replaced only with types identical to those in the original circuit or specified in the parts list.

PART ORDERING PROCEDURE ----- DO NOT USE THE "KEY" NUMBER AND "SYMBOL" NUMBER. (these are control # for the factory only.) Include in any order: a. Part number, b. Part description, c. Model number. (any of the above lacking from an order may delay shipment of the order.)

KEY NO.	SYMBOL NO.	TYPE ⁺ WEB	DESCRIPTION ⁺⁺	PART NO.
PACKING MATERIALS & ACCESSORIES				
001	1 1 1		Carton box	9825730
002	2 2 2		Pad	9840930
003	1 1 1		Sack, polyethylen cloth	9640720
004	1 1 1		Sack, polyethylen cloth - #13	9640320
005a	1 --		Manual, instructions - in English and French	960339E
005b	- 1 1		Manual, instructions - in five different languages	960339K
006	1 --		Card, warranty	967010A
007	1 --		Manual, safety instructions	9670410
008	1 --		List, service stations	9690180
009	1 1 1		Antenna, FM - Q-MATCH	4581360
010	1 1 1		Cord, RCA phono pin plug - 2T-1 (NK)	962014A
CABINET ASSEMBLY				
*101a	1 1 1		Panel, front - SILVER	7885000
*101b	1 1 1		Panel, front - BLACK	7885010
*102	1 1 1		Guide, button - P15SQBK - power switch	7402680
*103	1 1 1		Guide, button - P5319BK - five elements	7402690
*104	1 1 1		Globe, power indicator	7402120
*105	1 1 1		Window, frequency display	7802610
*106a	1 1 1		Dial scale - SILVER	7802620
*106b	1 1 1		Dial scale - BLACK	7802630
*107a	1 1 1		Knob - 2GL-34 - tuning, SILVER	7851660
*107b	1 1 1		Knob - 2BK-34 - tuning, BLACK	7851750
*108a	1 1 1		Button, push - M15SQGL - power, SILVER	7852380
*108b	1 1 1		Button, push - M15SQBK - power, BLACK	7852390
*109	5 5 5		Button, push - P319BK - others	7852410
110	5 5 5		Shaft, extension - 31.5M	7401890
*111a	1 --		Cover, top	7820850
*111b	- 1 1		Cover, top	7820860
112	1 1 1		Plate, bottom	7326380
113	4 4 4		Foot, plastic	7401350
CHASSIS ASSEMBLY				
201a	1 --		Switch, push - U62SV TV-5 - power	4041480
201b	- 1 1		Switch, push - ESB-70823S - power	4041600
202a	1 --		C-CAP 0.0047uf AC125V	239472C
202b	- 1 1		C-CAP 0.0047uf AC400V	239472S
203	- 1 1		Cover, C-CAP	7400960
*204	1 1 1		Dial drum - 37φ	7400860
205	1 1 1		Spring - (R)	7440380

KEY NO.	SYMBOL NO.	TYPE ⁺ WEB	DESCRIPTION ⁺⁺	PART NO.
*206	1 1 1		Pulley - 20φ	7400830
*207	3 3 3		Pulley - 9φ	7400790
*208	1 1 1		Dial pointer assembly	7860610
FRONT CHASSIS ASSEMBLY				
301	1 1 1		Holder, LED's	7402700
*302	1 1 1		LED counter display	5060290
303	6 6 6		LED PG5531KY - green	5060170
304	2 2 2		LED TLY208 - yellow	5060250
305	1 1 1		Holder, dial shaft	7402750
BACK PLATE ASSEMBLY				
*401a	1 --		Plate, back - (W)	7326340
*401b	- 1 1		Plate, back - (E)	7326350
*402a	1 --		Transformer, power - T-1390 - AC120V	1103900
*402b	- 1 1		Transformer, power - T-1391 - AC220 or 240V	1103910
*403a	1 --		Cord, AC line - DP-70	606007A
*403b	- 1 1		Cord, AC line - CEE-2T	600510A
*403c	- 1 1		Cord, AC line - BS	600514A
*404a	1 --		Bush, power cord - SR3P-4	7400620
*404b	- 1 1		Bush, power cord - SR4N-4	7400690
*405	1 1 1		Knob - P2BK16LVD - output level	7851800
COUNTER PC BOARD ASSEMBLY				
(RF SECTION)				
*401	1 1 1		Front end - FF635U	4910190
*402	1 1 1		Terminal, antenna - 3PM	4450590
	2 2 2		Phase linear filter	1280350
T101	1 1 1		Transformer, FM-IF	1240400
L101	1 1 1		Coil - 2.2uH	1210860
IC101	1 1 1		IC μ PC1163H	518060S
Q902,903	2 2 2		TR 2SC1815 (Y or GR)	512107S
Q904	1 1 1		TR 2SA1015 (Y or GR)	510102S
D901	1 1 1		Diode 1SS53	501023S

KEY NO.	SYMBOL NO.	TYPE ⁺ WEB	DESCRIPTION ⁺⁺	PART NO.
C101	1 1 1		Capacitor, trimmer - 20P	4241060
C102~105	4 4 4		C-CAP 0.022uf+80, -20% 50V YG	231223Z
C106~108	3 3 3		C-CAP 0.047uf+80, -20% 50V YG	231473Z
C110,119	2 2 2		C-CAP 0.022uf+80, -20% 50V YG	231223Z
C901	1 1 1		M-CAP 0.01uf 10% 50V	222103K
C902	1 1 1		E-CAP 1uf 50V	211510Q
R909	1 1 1		RES 330kohm 5% $\frac{1}{2}$ W	328334J
R910,911	2 2 2		RES 8.2kohm 5% $\frac{1}{2}$ W	328822J
R912	1 1 1		RES 1.2kohm 5% $\frac{1}{2}$ W	328122J
R913,914	2 2 2		RES 33kohm 5% $\frac{1}{2}$ W	328333J
R915	1 1 1		RES 15kohm 5% $\frac{1}{2}$ W	328153J
R916	1 1 1		RES 470kohm 5% $\frac{1}{2}$ W	328474J
(COUNTER SECTION)				
X901	1 1 1		Crystal, quartz - 4MHz	1280650
L901,903	2 2 2		Coil - 2.2uH	1210860
L902,904	2 2 2		Coil - 22uH	1210930
IC901	1 1 1		IC HD10551	518093S
IC902	1 1 1		IC MSM4017RS	518092S
IC903	1 1 1		IC LC7258	518091S
182020	TR		2SC1815 (Y or GR)	512107S
ZD901	1 1 1		Zener diode RD5.6EB	502042S
ZD902	1 1 1		Zener diode RD8.2EB3	502076S
C920	1 1 1		Capacitor, trimmer - 20P	4241060
C903,906	2 2 2		C-CAP 0.022uf+80, -20% 50V YG	231223Z
C904,905	2 2 2		C-CAP 0.01uf +80, -20% 50V YG	231103Z
C907	1 1 1		C-CAP 0.01uf +80, -20% 50V YG	231103Z
C908,910	2 2 2		C-CAP 100pf 10% 50V SL	232101K
C911,912	2 2 2		C-CAP 0.022uf+80, -20% 50V YG	231223Z
C913	1 1 1		C-CAP 22pf 10% 50V SL	232220K
C914	1 1 1		C-CAP 0.001uf+80, -20% 50V YG	231102Z
C915	1 1 1		C-CAP 47pf 10% 50V NPO	232470C
C916	1 1 1		C-CAP 27pf 10% 50V NPO	232270C
C917	1 1 1		C-CAP 0.047uf+80, -20% 50V YG	231473Z
C918	1 1 1		E-CAP 10uf 16V	211220Q
R901	1 1 1		FP-MO-RES 150ohm 5% $\frac{1}{2}$ W	360151L
R902	1 1 1		FP-RES 100ohm 5% $\frac{1}{2}$ W	328101L
R903	1 1 1		RES 470ohm 5% $\frac{1}{2}$ W	328471J
R904~908	5 5 5		RES 10kohm 5% $\frac{1}{2}$ W	328103J
R917~935	191919		RES 33kohm 5% $\frac{1}{2}$ W	328333J
R936~939	4 4 4		RES 560ohm 5% $\frac{1}{2}$ W	328561J
R940	1 1 1		RES 270ohm 5% $\frac{1}{2}$ W	328271J
R941~953	131313		RES 560ohm 5% $\frac{1}{2}$ W	328561J
R954,956	2 2 2		RES 270ohm 5% $\frac{1}{2}$ W	328271J
R957,959	2 2 2		RES 560ohm 5% $\frac{1}{2}$ W	328561J
R958,960	2 2 2		RES 270ohm 5% $\frac{1}{2}$ W	328271J
R961,962	2 2 2		RES 270ohm 5% $\frac{1}{2}$ W	328271J
IF-AF PC BOARD ASSEMBLY				
(IF SECTION)				
T102	1 1 1		Transformer, FM-IF - 10.7 MHz	1240430
T103	1 1 1		Transformer, FM-IF - 10.7 MHz	1240390
T104	1 1 1		Transformer, FM-IF - 10.7 MHz	1240420
T105	1 1 1		Transformer, FM-IF - 8.74 MHz	1240440
T106	1 1 1		Transformer, FM-IF - 8.74 MHz	1240410
T107	1 1 1		Low pass filter - KM10DB	1280680
T108	1 1 1		Low pass filter - KM10DB	1280690
L102~107	5 5 5		Coil - 2.2uH	1210860
L108,109	2 2 2		Coil - 22uH	1210930

KEY NO.	SYMBOL NO.	TYPE ⁺ WEB	DESCRIPTION ⁺⁺	PART NO.
CR101	1 1 1		Ceramic resonator - 8.74 MHz	1280670
CF101~103	3 3 3		Ceramic filter - SFM-MA8 - red	128023A
IC102	1 1 1		IC HA11225	518070S
IC103	1 1 1		IC HA12401A	518094S
Q101,102	2 2 2		TR 2SC1675 (L or M)	515082S
Q103	1 1 1		TR 2SC1674 (L or M)	515083S
Q104~106	3 3 3		TR 2SC1675 (L or M)	515082S
Q107	1 1 1		TR 2SA1015 (Y or GR)	510102S
D103~106	4 4 4		Diode 1SS53	501023S
D107	1 1 1		Shotky barrier diode ND487C2-3R	507001S
C112~115	4 4 4		C-CAP 0.022uf+80, -20% 50V YG	231223Z
C116~118	3 3 3		C-CAP 0.047uf 5% 25V	232473J
C120	1 1 1		C-CAP 0.022uf+80, -20% 50V YG	231223Z
C121	1 1 1		C-CAP 0.047uf 5% 25V	232473J
C122,124	2 2 2		C-CAP 0.001uf+80, -20% 50V YG	231102Z
C123,125	2 2 2		C-CAP 0.022uf+80, -20% 50V YG	231223Z
C126	1 1 1		C-CAP 0.001uf+80, -20% 50V YG	231102Z
C127~136	101010		C-CAP 0.047uf+80, -20% 50V YG	231473Z
C137	1 1 1		E-CAP 100uf 10V	211130Q
C138	1 1 1		C-CAP 0.001uf+80, -20% 50V YG	231102Z
C139~141	3 3 3		C-CAP 0.047uf+80, -20% 50V YG	231473Z
C142	1 1 1		C-CAP 47pf 10% 50V SL	232470K
C143	1 1 1		C-CAP 220pf 10% 50V SL	232221K
C144	1 1 1		C-CAP 100pf 50V	232101C
C145,146	2 2 2		C-CAP 0.047uf+80, -20% 50V YG	231473Z
C147	1 1 1		C-CAP 0.001uf+80, -20% 50V YG	231102Z
C148,149	2 2 2		C-CAP 0.047uf+80, -20% 50V YG	231473Z
C150	1 1 1		S-CAP 1000pf 5% 50V	223102J
C151	1 1 1		E-CAP 3.3uf 50V	211513Q
C152	1 1 1		E-CAP 1uf 50V	211510Q
C155	1 1 1		C-CAP 220pf 10% 50V SL	232221K
C156~158	3 3 3		C-CAP 0.047uf 5% 25V	232473J
C159	1 1 1		E-CAP 10uf 16V	211220L
C160	1 1 1		E-CAP 100uf 16V	211230Q
C161	1 1 1		E-CAP 47uf 10V	211125Q
C162	1 1 1		C-CAP 0.047uf 5% 25V	232473J
C163	1 1 1		S-CAP 100pf 2% 50V	223101G
C164~166	3 3 3		C-CAP 0.047uf 5% 25V	232473J
C167	1 1 1		E-CAP 220uf 16V	211242S
C168	1 1 1		C-CAP 0.047uf 5% 25V	232473J
HVR101,102	2 2 2		Potentiometer - 470ohm (B)	4301400
HVR103	1 1 1		Potentiometer - 10kohm (B)	4300510
HVR104	1 1 1		Potentiometer - 3.3kohm (B)	4301320
R104~108	5 5 5		RES 10kohm 5% $\frac{1}{2}$ W	328103J
R109	1 1 1		RES 470ohm 5% $\frac{1}{2}$ W	328471J
R111	1 1 1		RES 330ohm 5% $\frac{1}{2}$ W	328331J
R112	1 1 1		RES 10kohm 5% $\frac{1}{2}$ W	328103J
R113	1 1 1		RES 330ohm 5% $\frac{1}{2}$ W	328331J
R114~116	3 3 3		RES 10kohm 5% $\frac{1}{2}$ W	328103J
R117	1 1 1		RES 470ohm 5% $\frac{1}{2}$ W	328471J
R118	1			

PART ORDERING PROCEDURE ----- DO NOT USE THE "KEY" NUMBER AND "SYMBOL" NUMBER. (these are control # for the factory only.) Include in any order: a. Part number, b. Part description, c. Model number. (any of the above lacking from an order may delay shipment of the order.)

KEY NO.	SYMBOL NO.	TYPE ⁺ WEB	DESCRIPTION ⁺⁺	PART NO.
	R138	1 1 1	RES 100ohm 5% ¼W	328101J
	R139	1 1 1	RES 1kohm 5% ¼W	328102J
	R140	1 1 1	FP-RES 33ohm 5% ¼W	328330L
	R141	1 1 1	RES, metal film 3.6kohm 2% ¼W	304362G
(DETECTOR SECTION)				
	IC401	1 1 1	IC µPD4069C	518072S
	IC402	1 1 1	IC MSM4081RS	518095S
	IC403	1 1 1	IC HA17458PS	518120S
	Q401~403	3 3 3	TR 2SC1815 (Y or GR)	512107S
	Q404	1 1 1	FET 2SK104 (F)	516026S
	Q405~408	4 4 4	TR 2SC1815 (Y or GR)	512107S
	D401~407	7 7 7	Diode 1SS53	501023S
	ZD401	1 1 1	Zener diode RD6.2EB2	502048S
	C401	1 1 1	E-CAP 100uf 10V	211130Q
	C403	1 1 1	E-CAP 47uf 10V	211125Q
	C404,405	2 2 2	C-CAP 0.022uf +80, -20% 50V YG	231223Z
	C407	1 1 1	M-CAP 0.047uf 10% 50V	222473K
	C408	1 1 1	C-CAP 0.001uf +80, -20% 50V YG	231102Z
	R401	1 1 1	RES 220ohm 5% ¼W	328221J
	R402	1 1 1	RES 100ohm 5% ¼W	328101J
	R403	1 1 1	RES 15kohm 5% ¼W	328153J
	R404	1 1 1	RES 100ohm 5% ¼W	328101J
	R405	1 1 1	FP-RES 470ohm 5% ¼W	328471L
	R406	1 1 1	RES 100kohm 5% ¼W	328104J
	R407	1 1 1	RES 2.2meg-ohm 5% ¼W	328225J
	R408	1 1 1	RES 1kohm 5% ¼W	328102J
	R409	1 1 1	RES 10kohm 5% ¼W	328103J
	R410	1 1 1	RES 2.2meg-ohm 5% ¼W	328225J
	R411	1 1 1	RES 100kohm 5% ¼W	328104J
	R412	1 1 1	RES 3.3kohm 5% ¼W	328332J
	R413	1 1 1	RES 1.5kohm 5% ¼W	328152J
	R414	1 1 1	RES 1meg-ohm 5% ¼W	328105J
	R415	1 1 1	RES 220kohm 5% ¼W	328224J
	R416	1 1 1	RES 10kohm 5% ¼W	328103J
	R417	1 1 1	RES 15kohm 5% ¼W	328153J
	R418	1 1 1	RES 1kohm 5% ¼W	328102J
	R419	1 1 1	RES 10meg-ohm 5% ¼W	328106J
	R420	1 1 1	RES 1meg-ohm 5% ¼W	328105J
	R421~423	3 3 3	RES 100kohm 5% ¼W	328104J
	R424,425	2 2 2	RES 470ohm 5% ¼W	328471J
	R426	1 1 1	RES 15kohm 5% ¼W	328153J
	R427	1 1 1	RES 100kohm 5% ¼W	328104J
	R428	1 1 1	RES 33kohm 5% ¼W	328333J
	R429	1 1 1	RES 1meg-ohm 5% ¼W	328105J
	R430	1 1 1	RES 15kohm 5% ¼W	328153J
	R431	1 1 1	RES 10kohm 5% ¼W	328103J
	R432	1 1 1	RES 33kohm 5% ¼W	328333J
	R433	1 1 1	RES 1meg-ohm 5% ¼W	328105J
	R434	1 1 1	RES 100kohm 5% ¼W	328104J
	R435	1 1 1	RES 2.7kohm 5% ¼W	328272J
	R436	1 1 1	RES 150ohm 5% ¼W	328151J
	R437	1 1 1	RES 2.2meg-ohm 5% ¼W	328225J
	R438	1 1 1	RES 4.7kohm 5% ¼W	328472J
	R439	1 1 1	RES 10kohm 5% ¼W	328103J
	R440	1 1 1	RES 100kohm 5% ¼W	328104J
(MPX SECTION)				
*501		1 1 1	Switch, slide - SL-13 - de emphasis selector	4020640
502	VR301	1 1 1	VR GM80R - 5kohm (B) - output level	4310640
*503		1 1 1	Terminal, RCA phono pin jack - 2Px3	4446020
	T301,302	2 2 2	Low pass filter - KM10DB - 38kHz filter	1270140
	L301	1 1 1	Coil - 22uH	1210860
	IC301	1 1 1	IC HA11223W	518054S

KEY NO.	SYMBOL NO.	TYPE ⁺ WEB	DESCRIPTION ⁺⁺	PART NO.
	IC302	1 1 1	IC AN6552	518096S
	Q301~304	4 4 4	TR 2SC1844 (E or F)	512106S
	Q305,306, Q309	3 3 3	TR 2SC1815 (Y or GR)	512107S
	D301	1 1 1	Diode 1N4002	560086S
	C302	1 1 1	S-CAP 1000pf 5% 50V	223102V
	C303	1 1 1	S-CAP 2200pf 5% 50V	223222V
	C304	1 1 1	LC-CAP 0.47uf 50V	211505L
	C305,306	2 2 2	E-CAP 3.3uf 25V	211313S
	C307	1 1 1	E-CAP 0.33uf 50V	211503S
	C308	1 1 1	M-CAP 0.047uf 5% 50V	222473J
	C309	1 1 1	S-CAP 1500pf 5% 50V	223152V
	C310	1 1 1	E-CAP 0.33uf 50V	211503S
	C311	1 1 1	M-CAP 0.01uf 5% 50V	222103J
	C312	1 1 1	C-CAP 47pf 10% 50V SL	232470K
	C313	1 1 1	C-CAP 0.047uf +80, -20% 50V YG	231473Z
	C314	1 1 1	E-CAP 1000uf 16V	211240S
	C315	1 1 1	E-CAP 220uf 16V	211232Q
	C316,317	2 --	M-CAP 0.015uf 5% 50V	222153J
	C316,317	-2 2	M-CAP 0.0075uf 5% 50V	228725J
	C318	1 1 1	M-CAP 0.0068uf 5% 50V	222682J
	C319,320	2 2 2	M-CAP 0.001uf 5% 50V	222102J
	C321	1 1 1	M-CAP 0.0068uf 5% 50V	222682J
	C322	1 1 1	C-CAP 0.047uf +80, -20% 50V YG	231473Z
	C323,324	2 2 2	C-CAP 100pf 10% 50V SL	232101K
	C325	1 1 1	C-CAP 0.047uf +80, -20% 50V YG	231473Z
	C326~329	4 4 4	M-CAP 0.1uf 5% 50V	222104J
	C330,331	2 2 2	C-CAP 100pf 10% 50V	232101K
	C332,333	2 2 2	E-CAP 3.3uf 25V	211313S
	C334,335	2 2 2	C-CAP 220pf 10% 50V SL	232221K
	C336,337	2 2 2	E-CAP 2.2uf 50V	211512Q
	HVR301	1 1 1	Potentiometer - 3.3kohm (B)	4301320
	HVR302			
	~HVR305	4 4 4	Potentiometer - 100kohm (B)	4301140
	R313	1 1 1	RES 22kohm 5% ¼W	328223J
	R314	1 1 1	RES 220kohm 5% ¼W	328224J
	R315	1 1 1	RES 1kohm 5% ¼W	328102J
	R316	1 1 1	RES 33kohm 5% ¼W	328333J
	R317	1 1 1	RES 5.6kohm 5% ¼W	328562J
	R318	1 1 1	RES 100kohm 5% ¼W	328104J
	R319	1 1 1	RES 56kohm 5% ¼W	328563J
	R320,322	2 2 2	RES 10kohm 5% ¼W	328153J
	R321,323	2 2 2	RES, metal film 3.3kohm 2% ¼W	304332G
	R324~327	4 4 4	RES 3.3kohm 5% ¼W	328332J
	R328,329	2 2 2	RES 330kohm 5% ¼W	328334J
	R330	1 1 1	RES 82kohm 5% ¼W	328823J
	R331	1 1 1	FP-RES 100ohm 5% ¼W	328101L
	R332~335	4 4 4	RES 10kohm 5% ¼W	328103J
	R336,337	2 2 2	RES 4.7kohm 5% ¼W	328472J
	R338	1 1 1	RES 10kohm 5% ¼W	328103J
	R339	1 1 1	RES 330kohm 5% ¼W	328334J
	R340,341	2 2 2	RES 1kohm 5% ¼W	328102J
	R342,343	2 2 2	RES 10kohm 5% ¼W	328103J
	R344	1 1 1	RES 1.2kohm 5% ¼W	328122J
	R345,346	2 2 2	RES 150kohm 5% ¼W	328154J
	R347	1 1 1	RES 1.2kohm 5% ¼W	328122J
	R348,349	2 2 2	RES 330ohm 5% ¼W	328331J
	R350,351	2 2 2	RES 47kohm 5% ¼W	328473J
	R352~356	4 4 4	RES 4.7kohm 5% ¼W	328472J
(POWER SUPPLY SECTION)				
		1 1 1	Res relay - FRL644D12	1700140
	Q307,308	2 2 2	TR 2SC1815 (Y or GR)	512107S
	Q801,802	2 2 2	TR 2SC1815 (Y or GR)	512107S
	Q803	1 1 1	TR 2SD880 (Y or GR)	513108S
	D302	1 1 1	Diode 1SS53	501023S
	D303	1 1 1	Diode 1S2076	501019S

PART ORDERING PROCEDURE ----- DO NOT USE THE "KEY" NUMBER AND "SYMBOL" NUMBER. (these are control # for the factory only.) Include in any order: a. Part number, b. Part description, c. Model number. (any of the above lacking from an order may delay shipment of the order.)

KEY NO.	SYMBOL NO.	TYPE ⁺ WEB	DESCRIPTION ⁺⁺	PART NO.
D304	111	111	Diode 1S2076A	501020S
D801	111	111	Diode 1N4002	560066S
D802	111	111	Diode W02	560061S
ZD801	111	111	Zener diode RD13EB3	502063S
ZD802,803	222	222	Zener diode RD15EB2	502050S
ZD804	111	111	Zener diode RD6.2EB2	502048S
C340	111	111	E-CAP 33uf 16V	211223Q
C341	111	111	E-CAP 100uf 25V	211330Q
C343	111	111	C-CAP 0.022uf +80, -20% 50V YG	231223Z
C801,802	222	222	E-CAP 1000uf 25V	211340S
C803,804	222	222	E-CAP 1000uf 16V	211240S
C805	111	111	E-CAP 2200uf 25V	211342S
C806	111	111	E-CAP 220uf 25V	211332Q
C807	111	111	E-CAP 2200uf 25V	211342S
C808,810	222	222	E-CAP 1000uf 16V	211240S
C809	111	111	E-CAP 470uf 16V	211235S
C811	111	111	E-CAP 100uf 25V	211330Q
R357	111	111	RES 100kohm 5% 1/4W	328104J
R358	111	111	RES 47kohm 5% 1/4W	328473J
R801,803	222	222	FP-MO-RES 4.7ohm 5% 1/4W	360478L
R802	111	111	FP-MO-RES 1.2kohm 5% 1/4W	360122L
R804,806	222	222	RES 1kohm 5% 1/4W	328102J
R805	111	111	RES 470ohm 5% 1/4W	328471J
R808	111	111	FP-MO-RES 1kohm 5% 1/4W	360102L
SWITCH PC BOARD ASSEMBLY				
(SWITCH SECTION)				
	111	111	Switch, penta push	4041570
IC104	111	111	IC TA7654P	518090S
Q301	111	111	TR 25C1815 (Y or GR)	512107S
Q302	111	111	TR 25A1015 (Y or GR)	510102S
D408~410	333	333	Diode 1SS53	501023S



KEY NO.	SYMBOL NO.	TYPE ⁺ WEB	DESCRIPTION ⁺⁺	PART NO.
C171	111	111	E-CAP 4.7uf 50V	211515Q
C172	111	111	E-CAP 1uf 50V	211510Q
C301	111	111	M-CAP 0.039uf 5% 50V	222393J
C345	111	111	E-CAP 1uf 50V	211510Q
C346	111	111	E-CAP 0.33uf 50V	211503S
C347	111	111	C-CAP 0.047uf +80, -20% 50V YG	231473Z
HVR104,105,				
HVR306	333	333	Potentiometer 10kohm (B)	4300510
R143,144	222	222	RES 4.7kohm 5% 1/4W	328472J
R145	111	111	RES 10kohm 5% 1/4W	328103J
R146,147	222	222	RES 100kohm 5% 1/4W	328104J
R148~152	555	555	RES 560ohm 5% 1/4W	328561J
R301	111	111	RES 10kohm 5% 1/4W	328103J
R302	111	111	RES 2.2kohm 5% 1/4W	328222J
R303	111	111	RES 4.7kohm 5% 1/4W	328472J
R304	111	111	RES 1kohm 5% 1/4W	328102J
R305	111	111	RES 2.2kohm 5% 1/4W	328222J
R306	111	111	FP-MO-RES 47ohm 5% 1/4W	360470L
R307	111	111	FP-MO-RES 68ohm 5% 1/4W	360680L
R308	111	111	RES 10kohm 5% 1/4W	328103J
R309	111	111	RES 22kohm 5% 1/4W	328223J
R310	111	111	RES 2.2meg-ohm 5% 1/4W	328225J
R311,312	222	222	RES 10kohm 5% 1/4W	328103J
R359	111	111	RES 2.7kohm 5% 1/4W	328272J
(FUSE SECTION)				
	-11	-11	Midget fuse - T100MA 250V	4720430
	1--	1--	RES 2.2meg-ohm 10% 1/4W	325225K
(POWER INDICATOR SECTION)				
	111	111	LED BR5504S - red	5060300
	111	111	Spacer, LED	7903160

INTEGRATED CIRCUIT LC7258

FUNCTION/MANUFACTURER

■ Frequency Display Driver for Radio/Sanyo

BLOCK DIAGRAM & CONNECTION INFORMATION

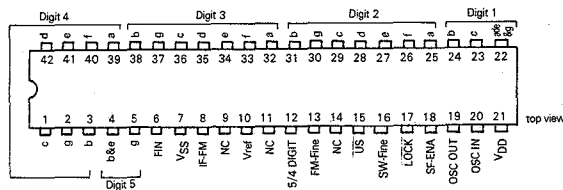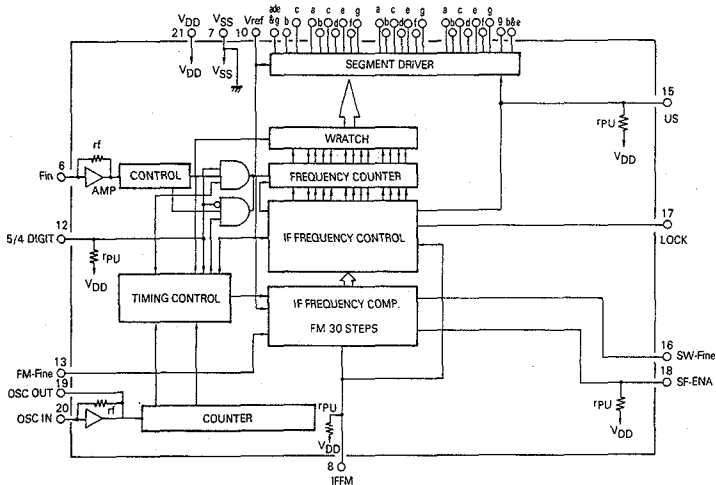



(TOP VIEW)

INTEGRATED CIRCUIT HD10551

FUNCTION/MANUFACTURER

■ Prescale/Hitachi

BLOCK DIAGRAM & CONNECTION INFORMATION

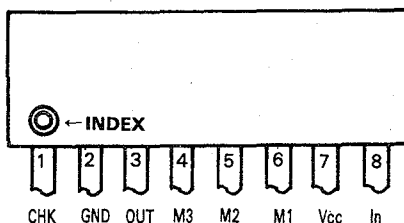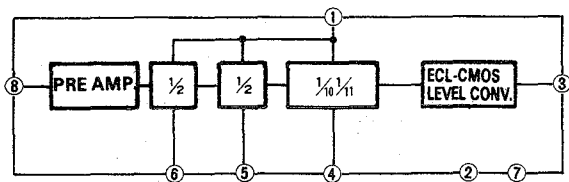



(SIDE VIEW)

INTEGRATED CIRCUIT HA12401A

FUNCTION/MANUFACTURER

- Pulse Count Detector/Hitachi

BLOCK DIAGRAM & CONNECTION INFORMATION

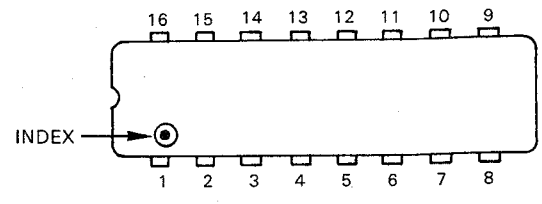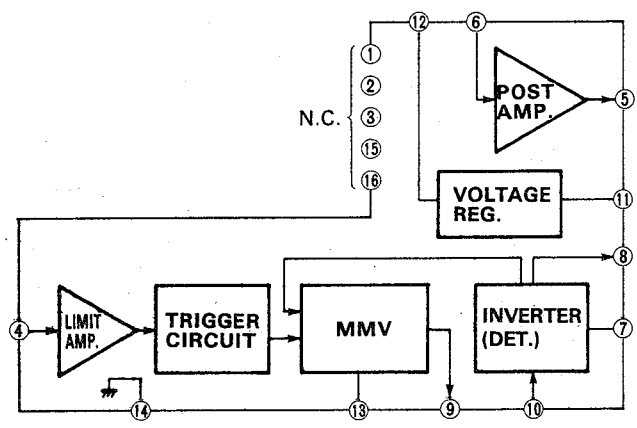



(TOP VIEW)

INTEGRATED CIRCUIT HA17458PS/AN6552

FUNCTION/MANUFACTURER

- Dual Operational Amplifier/Hitachi (HA17458PS), Matsushita (AN6552)

EQUIVALENT CIRCUIT & CONNECTION INFORMATION

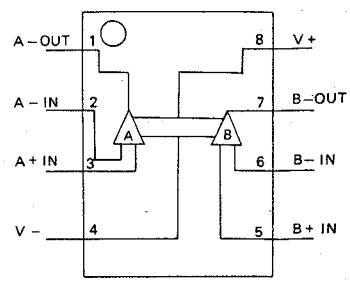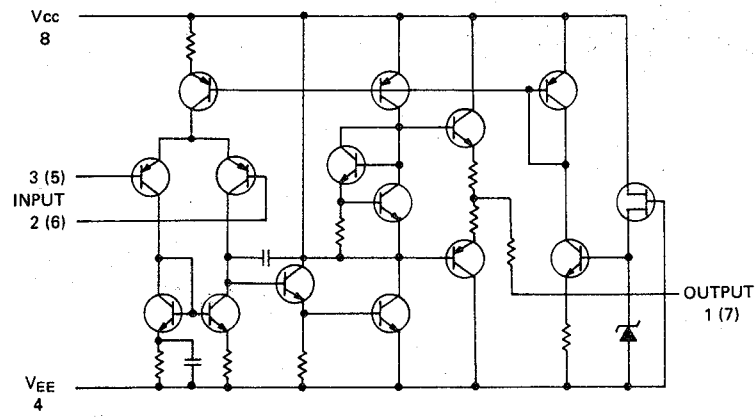


(TOP VIEW)

INTEGRATED CIRCUIT TA7654P


FUNCTION/MANUFACTURER

- LED Level Meter Driver/Toshiba

BLOCK DIAGRAM & CONNECTION INFORMATION

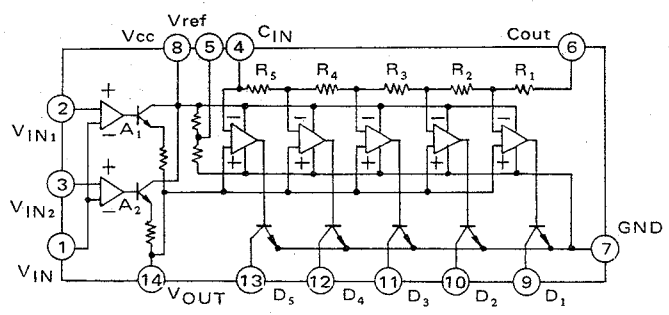

(TOP VIEW)

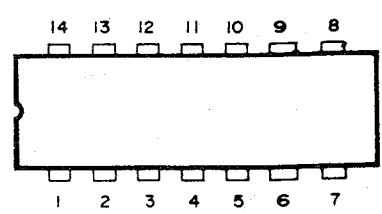


INTEGRATED CIRCUIT μ PD4069C


FUNCTION/MANUFACTURER

■ Hex Inverter (C-MOS IC)/NEC

EQUIVALENT CIRCUIT & CONNECTION INFORMATION



(1/6 CIRCUIT SHOWN)

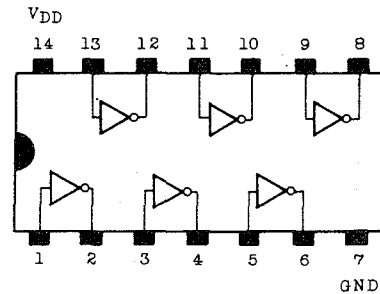


(TOP VIEW)

INTEGRATED CIRCUIT MSM4017RS


FUNCTION/MANUFACTURER

■ Decade Counter (C-MOS IC)/Oki

EQUIVALENT CIRCUIT & CONNECTION INFORMATION

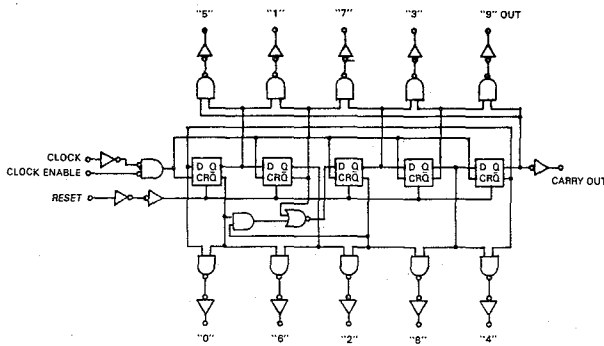

(1/4 CIRCUIT SHOWN)

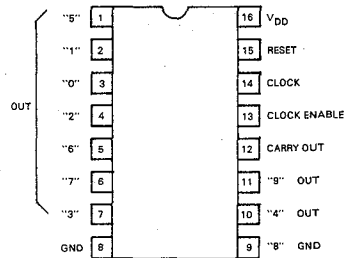


(TOP VIEW)

INTEGRATED CIRCUIT MSM4081RS


FUNCTION/MANUFACTURER

■ Quad 2-Input AND Gate (C-MOS IC)/Oki

EQUIVALENT CIRCUIT & CONNECTION INFORMATION

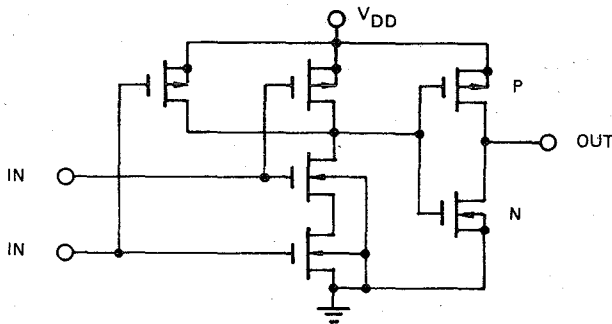

(1/4 CIRCUIT SHOWN)

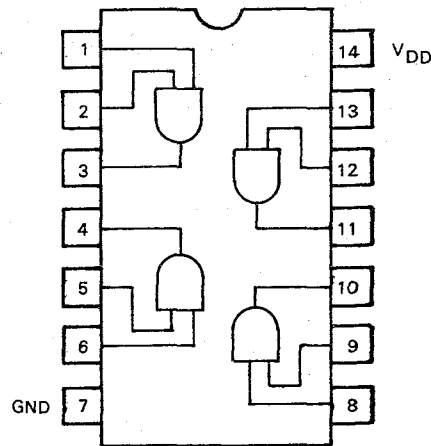

(TOP VIEW)