

ONKYO SERVICE MANUAL

SYNTHESIZED FM STEREO/AM TUNER MODEL T-4500



Black model

BUD, BUDN	120V AC, 60Hz
BUG	220V AC, 50Hz
BUW	120V/220V AC, 50/60Hz
BUQA, BUQB	240V AC, 50Hz

SAFETY-RELATED COMPONENT WARNING¹⁾

COMPONENTS IDENTIFIED BY MARK Δ ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

TABLE OF CONTENTS

Specifications	2
Service procedures	2
Block diagram	3
Exploded view	4
Parts list	5
Block diagram of IC	6
Adjustment procedures	11
Pc board view/parts list	13
Main circuit	13
Display/Operation switch	19
Schematic diagram	15
120V model	15
Other models	17
Packing view	22

ONKYO
AUDIO COMPONENTS

SPECIFICATIONS

FM:

Tuning Range:	87.50 – 108.00 MHz (50/25kHz steps) and/or 88.00 – 108.00MHz
Usable Sensitivity:	Mono: 10.3dBf, 0.9 μ V, IHF 0.8 μ V DIN (75 ohms) Stereo: 17.2dBf, 2.0 μ V, IHF 20 μ V DIN (75 ohms)
50dB Quieting Sensitivity:	Mono: 16.1dBf, 1.7 μ V (75 ohms) Stereo: 36.1dBf, 17 μ V (75 ohms)
Capture Ratio:	1.3dB (Wide)
Image Rejection Ratio:	90dB
IF Rejection Ratio:	90dB
Signal-to-Noise Ratio:	Mono: 78dB, IHF Stereo: 73dB, IHF
Selectivity:	60dB DIN (Narrow)
AM Suppression Ratio:	50dB
Total Harmonic Distortion:	Mono: 0.1% (Wide) Stereo: 0.2% (Wide)
Frequency Response:	30 – 15,000Hz+0.5–1.0dB
Stereo Separation:	45dB at 1kHz (Wide) 30dB at 70 – 10,000Hz (Wide)
Output Voltage:	0.75V
Muting Level:	17.2dBf, 2.0 μ V (75ohms)

AM:

Tuning Range:	European models: 522 – 1611kHz (9kHz steps) Canadian and USA models: 530 – 1710kHz (10kHz steps) Saudi Arabia & Worldwide models: 531 – 1602kHz (9kHz steps)
Usable Sensitivity:	25 μ V
Image Rejection Ratio:	40dB
IF Rejection Ratio:	40dB
Signal-to-Noise Ratio:	40dB
Total Harmonic Distortion:	0.7%
Output Voltage:	150mV
General	
Dimensions (W×H×D):	435×92×366mm 17-1/8"×3-5/8"×14-7/16"
Weight:	4.0kg 8.8lbs.
Supplied accessories:	<ul style="list-style-type: none"> ● AM loop antenna×1 ● FM T-shaped antenna×1 ● Connecting cable×1 ● RI remote control cable×1 ● 75/300ohm antenna adapter×1 (Except 220V model)

Specifications and features are subject to change without notice.

SERVICE PROCEDURES

1. Safety-check out

(Only U.S.A. model)

After correcting the original service problem, perform the following safety check before releasing the set to the customer.

Connect the insulating-resistance tester between the plug of power supply cord and chassis.

Specifications: 3.3Mohm \pm 10% at 500V.

2. Memory preservation

This unit does not require memory preservation batteries. A built-in memory power back-up system preserves contents of the memory during power failures and even when the unit is unplugged. The unit must be plugged in and the power switch turned on and off once in order to change the back-up system. Note that since this is not a permanent memory, the power switch must be turned on and off a few times each month to keep the back-up system operative. The period of time during which memory contents are preserved after power has last been turned off varies depending on climate and placement of the unit.

On the average, memory contents are protected over a period of 3 to 4 weeks (a minimum of 2 weeks) after the last time power has been turned off. This period is shorter when the unit is exposed to very high humidity or used in an area with an extremely humid climate.

3. Voltage Selector (Back Panel)

W models are equipped with a voltage selector to conform with local power supplies. Be sure to set this switch to match the voltage of the power supply in your area before

turning the power switch on. This switch is set to 220V at the factory. Voltage is changed by sliding the groove in the switch with a screwdriver to the right or left. Confirm that the switch has been moved all the way to the right or left before turning the power switch on. Models without a voltage selector can only be used in areas where the power supply is the same as that of the unit.


4. Tuning Step Frequency Switch (Back Panel)

W models are equipped with a switch for the AM (9kHz/10kHz) band. The switch should be set to the proper steps for the radio broadcast frequencies in your area.

5. Changing the AM band step


With the exception of the models below, AM BAND STEP selector switch is not provided.

MODEL	BAND STEP	J777
UD	10kHz \rightarrow 9kHz	Additional
UG/ UQ	9kHz \rightarrow 10kHz	Eliminated




DISPLAY PC BOARD

BLOCK DIAGRAM

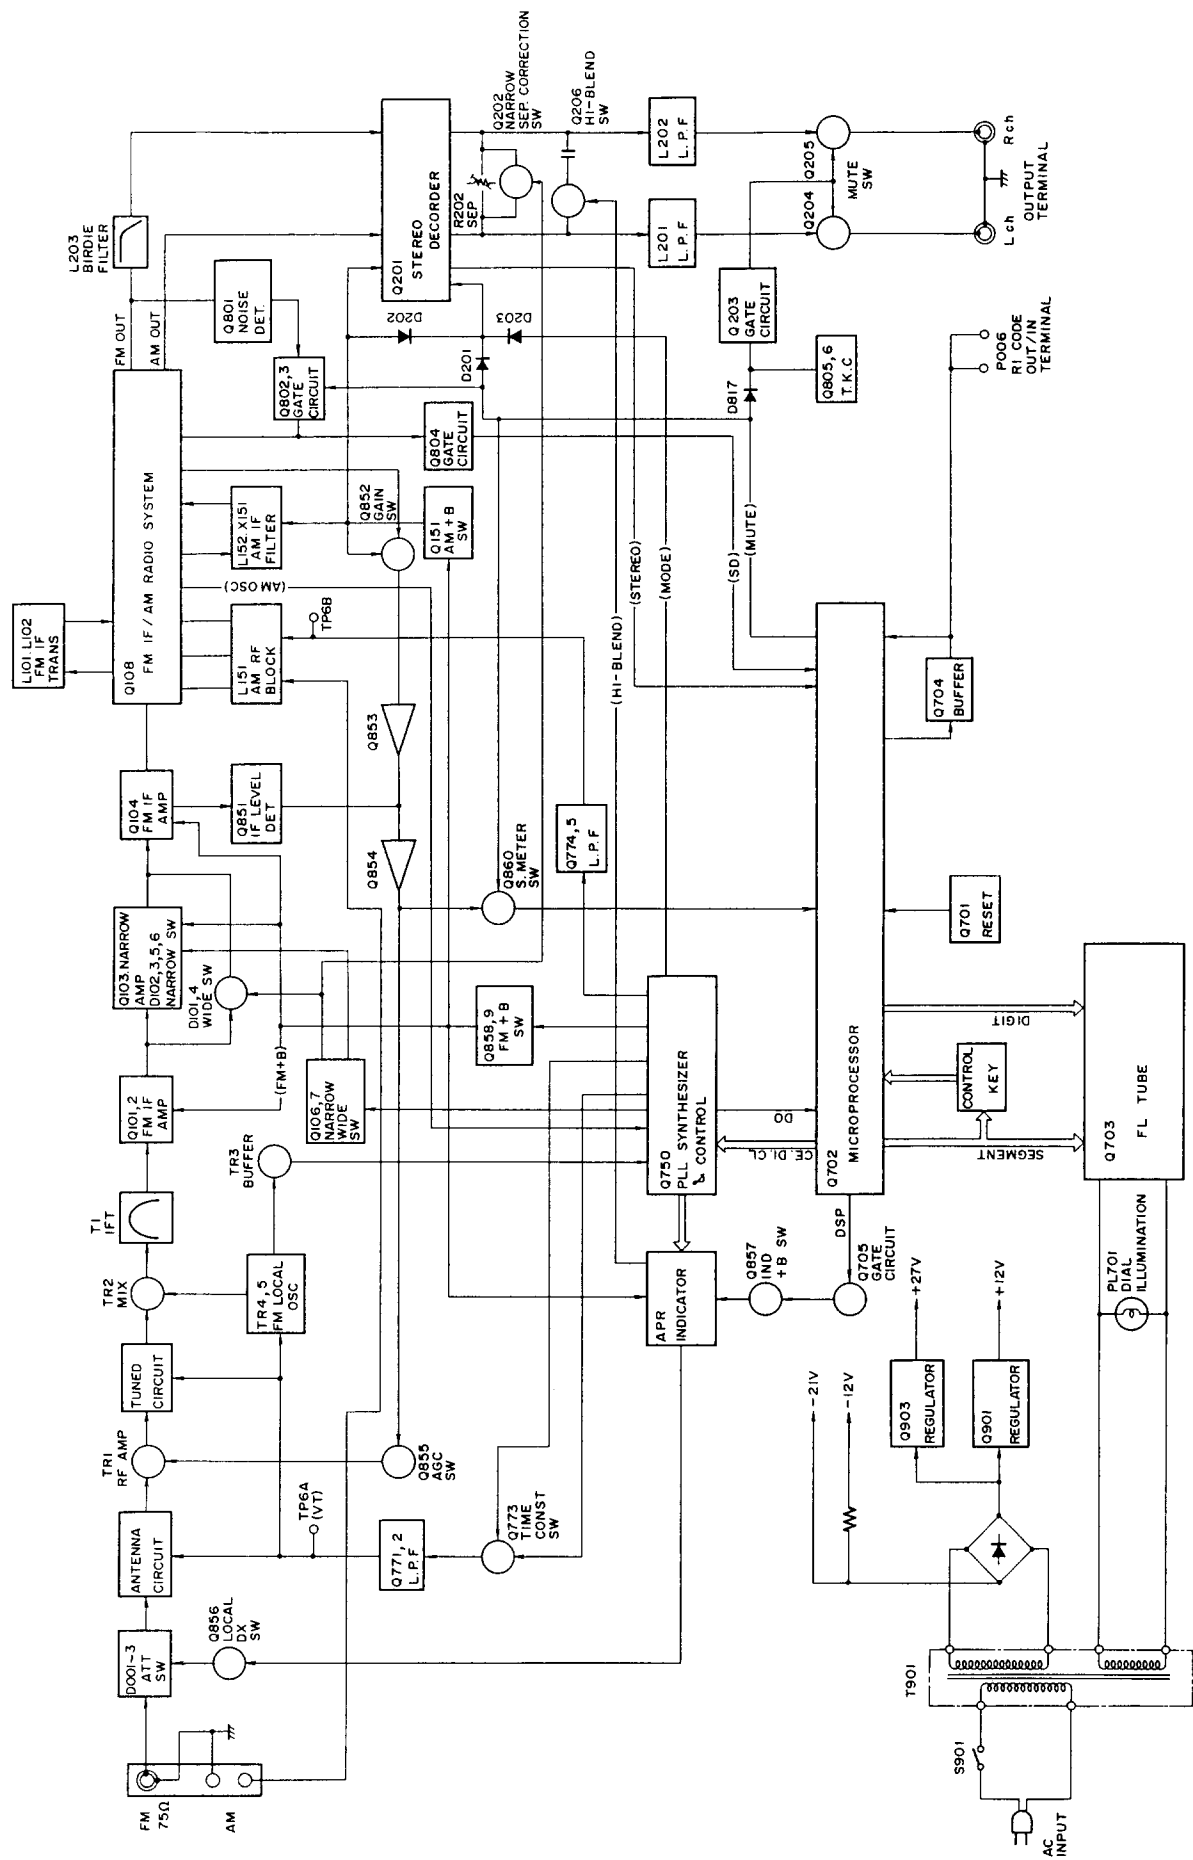

EXPLODED VIEW

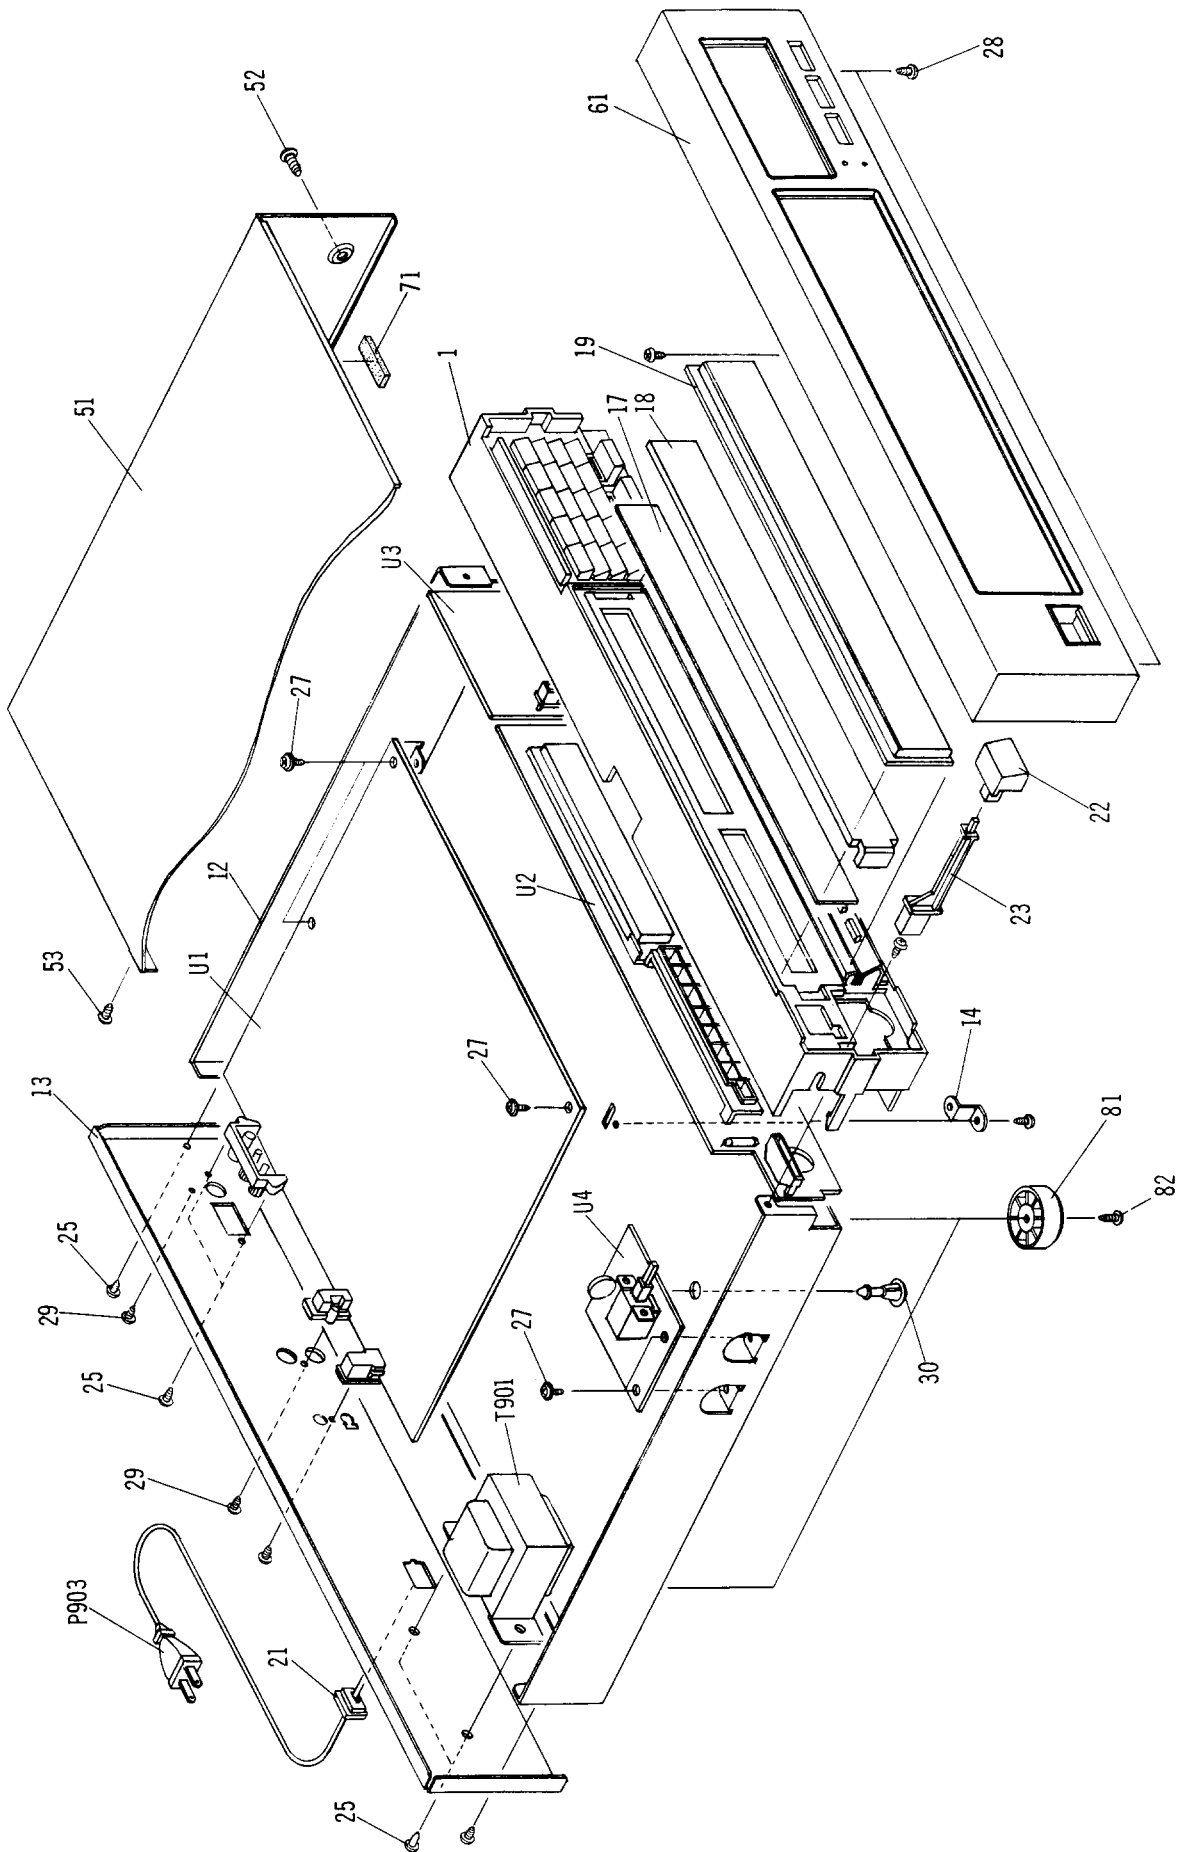

PARTS LIST

REF. NO.	PART NO.	DESCRIPTION
1	27110495A	Front bracket ass'y
12	27100191	Chassis
13	27121257A	Back panel (D)
	27121257-1A	Back panel (G)
	27121257-2A	Back panel (W)
	27121257-4A	Back panel (Q)
14	27141333	Bracket S
17	28133223	Back plate
18	28130257	Dial plate
19	28191510A	Clear plate
21	27300750	⚠ Bushing (Strainrelief)
22	28323175	Knob, power
23	27273069A	Joint
25	838440089	4TTB+8C (BC), Tapping screw
26	834430088	3TTS+8B (BC), Tapping screw
27	831130088	3TTW+8B, Tapping screw
28	833430080	3TTP+8P (BC), Tapping screw
29	834230108	3TTS+10B (Ni), Nickel screw (G/W)
30	27190524	KGLS-14R, Holder
51	28184437	Top cover
52	838440089	4TTB+8C (BC), Tapping screw
53	834430068	3TTS+8B (BC), Tapping screw
61	1A163121	Front panel ass'y
71	28140020	Cushion
72	28199164	Film
81	27175219-1	Leg
82	834430088	3TTS+8B (BC), Tapping screw
P903	253142A	⚠ AS-UC-7#18, Power supply cord (D)
	253149	⚠ AS-CEE, Power supply cord (G/W)
	253104	⚠ Power supply cord (U. K. model)
	253118	⚠ AS-SAA, Power supply cord (Australian model)
P904	25065123	NSS-1258P, Voltage selector switch (W)
T901	2300437	⚠ NPT-1035D, Power transformer (D)
	2300438	⚠ NPT-1035G, Power transformer (G)
	2300439	⚠ NPT-1035DG, Power transformer (W)
	2300464	⚠ NPT-1035Q, Power transformer (Q)
U1	1A163577-1	NARF-3577-1, Main circuit pc board ass'y (D)
	1A163577-1A	NARF-3577-1A, Main circuit pc board ass'y (G/Q)
	1A163577-1B	NARF-3577-1B, Main circuit pc board ass'y (W)
U2	1A163578-1	NADIS-3578-1, Display circuit pc board ass'y (D)
	1A163578-1A	NADIS-3578-1A, Display circuit pc board ass'y (G/Q)
	1A163578-1B	NADIS-3578-1B, Display circuit pc board ass'y (W)
U3	1A163579-1	NASW-3579-1, Switch circuit pc board ass'y
U4	1A163582-1	NAPS-3582-1, Power switch pc board ass'y (D)
	1A163582-1A	NAPS-3582-1A, Power switch pc board ass'y (G/Q/W)


NOTE: (D) : Only 120V model
 (G) : Only 220V model
 (Q) : Only 240V model
 (W) : Only Worldwide model

NOTE: THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

BLOCK DIAGRAM OF IC

Key matrix

Input / Output	KO (48)	K1 (49)	K2 (50)	K3 (51)
Sa (2)	P1/21	P2/22	P3/23	P4/24
Sb (3)	P5/25	P6/26	P7/27	P8/28
Sc (4)	P9/29	P10/30	P11/31	P12/32
Sd (5)	P13/33	P14/34	P15/35	P16/36
Se (6)	P17/37	P18/38	P19/39	P20/40
Sf (7)	TUN.LEVEL	DISPLAY	CHARACTER	CABLE
Sg (8)	DOWN/LAST	UP/NEXT	FM	AM
Sh (9)	APROPE	RF MDOE	IF BAND	HIBLEND
Sj (10)	MUTE MODE	ANTENNA	TUN.MODE	MEMORY
Sk (11)	C1	C2	C3	C4
Sm (12)	C5	C6	SHIFT	PRESENT/SCAN

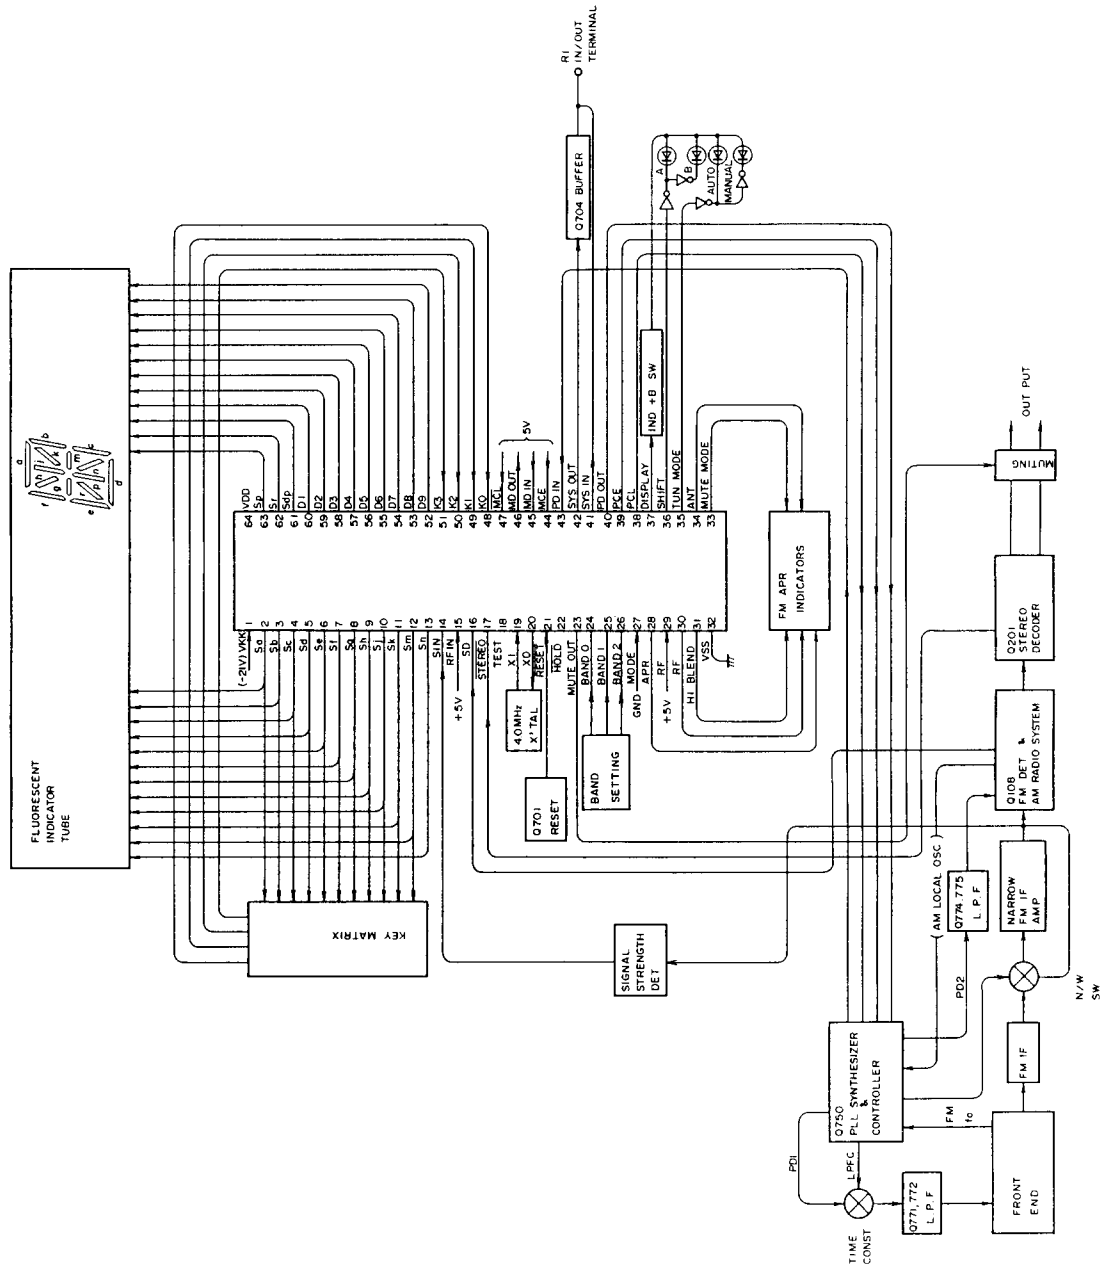




CONNECTION OF MICROPROCESSOR

TMP47C870 Terminal Description

Pin No.	Symbol	Description	
1	VKK	This is the power supply terminal for fluorescent indicator tube drive. Connect to -30V.	
2	Sa	These are the output terminal for segment and key return signal. "H" when active.	
3	Sb		
4	Sc		
5	Sd		
6	Se		
7	Sf		
8	Sg		
9	Sh		
10	Sj		
11	Sk		
12	Sm		
13	Sn		
14	S IN		This is the signal strength input terminal. (A/D converter input)
15	RF IN		This is RF input terminal. DX at the high level.
16	SD	This is the auto stop control input terminal. Auto tuning stops when this terminal becomes the high level.	
17	STEREO	This is the input terminal for detection of stereo broadcast. "L" when stereo broadcast.	
18	TEST	This is the test terminal for LSI. Connect to the ground terminal.	
19	X1	Connect to the 4.00MHz ceramic oscillator.	
20	XO		
21	RESET	This is the reset terminal. Reset at the low level when the power is turned on.	
22	HOLD	This is the hold input terminal. "L" when active.	
23	MUTE OUT	This is the muting output terminal. "H" when active.	
24	BAND 0	These are the band setting connection terminal.	
25	BAND 1		
26	BAND 2		
27	MODE	This is the connection terminal for function setting.	
28	APR	This is the output terminal for indication APR. ON at the high level. OFF at the low level.	
29	RF	This is the output terminal for indication RX. DX at the high level. LOCAL at the low level.	
30	IF	This is the output terminal for indication IF BAND. WIDE at the high level. NARROW at the low level.	
31	HI BLEND	This is the output terminal for indication HI-BLEND. OFF at the high level. ON at the low level.	
32	V _{SS}	Connect to the ground terminal.	

Pin No.	Symbol	Description
33	MUTE MODE	This is the output terminal for indication MUTING MODE. AUTO at the high level. MONO at the low level.
34	ANT	This is the output terminal for indication ANT. A at the high level. B at the low level.
35	TUN MODE	This is the output terminal for indication TUNING MODE. AUTO at the high level. MANUAL at the low level.
36	SHIFT	This is the output terminal for indication SHIFT. 1-20 at the high level. 20-40 at the low level.
37	DISPLAY	This is the display control output terminal. "L" during FL tube lights on.
38	PCL	This is the clock output terminal to PLL IC (LC7218).
39	PCE	This is the chip selector output terminal to PLL IC. "H" when active.
40	PD OUT	This is the data output terminal to PLL IC.
41	SYS IN	This is the system code input terminal. "H" when active.
42	SYS OUT	This is the system code output terminal. "L" when active.
43	PD IN	This is the data input terminal from PLL PIC (LC7218).
44	MCE	This is the chip selector output terminal to memory IC. Not used.
45	MD IN	This is the data input terminal from memory IC. Not used.
46	MD OUT	This is the data output terminal to memory IC. Not used.
47	MCL	This is the clock output terminal to memory IC. Not used.
48	K0	These are the key scan input terminals. "H" when active.
49	K1	
50	K2	
51	K3	
52	D9	These are the digit output terminal for fluorescent indicator tube. "H" when active.
53	D8	
54	D7	
55	D6	
56	D5	
57	D4	
58	D3	
59	D2	
60	D1	
61	DP	
62	Sr	
63	Sp	
64	V _{DD}	This is the device power source terminal. At the time of operation, the supply is 5V. The internal data memory is maintained by means of super capacitor.

9-BT-61GK (Fluorescent indicator tube)

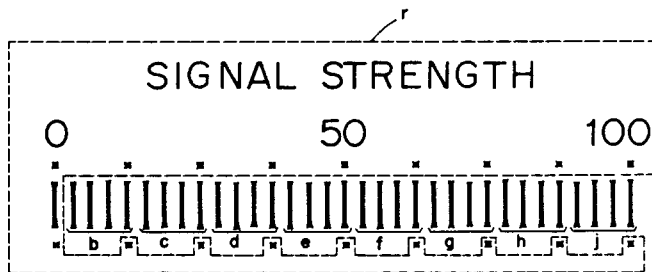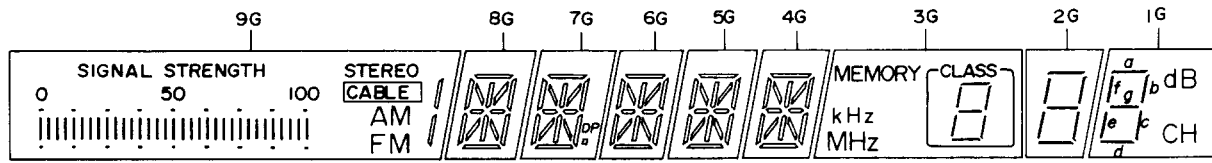

PIN CONNECTION

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	-
CONNECTION	F1	F1	NP	NP	NP	NP	s	1G	2G	3G	4G	5G	6G	7G	8G	9G	NP	NP	NP	NP	NP	p	r	a	-
PIN NO.	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49
CONNECTION	b	c	d	e	f	g	h	j	k	m	n	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	F2	F2

ANODE CONNECTION

	9G	8G	7G	6G	5G	4G	3G	2G	1G
a	/	a	a	a	a	a	a	a	a
b		b	b	b	b	b	b	b	b
c		c	c	c	c	c	c	c	c
d		d	d	d	d	d	d	d	d
e		e	e	e	e	e	e	e	e
f		f	f	f	f	f	f	f	f
g		g	g	g	g	g	g	g	g
h		h	h	h	h	h	-	-	-
j		j	j	j	j	j	-	-	-
k	STEREO	k	k	k	k	k	-	-	-
m	CABLE	m	m	m	m	m	MEMORY	-	-
n	AM	n	n	n	n	n	kHz	-	dB
p	FM	p	p	p	p	p	MHz	-	CH
r	SIGNAL STRENGTH 0 50 100	r	r	r	r	r	CLASS	-	-
s	-	-	DP	-	-	-	-	-	-

Preparation

- Input
- FM mono: 1kHz, 75kHz devi., 60dB/μV (65dBf)
- FM stereo: 1kHz, L+R 67.5kHz devi., Pilot signal 19kHz
7.5kHz devi.
- AM: 400Hz, 300% mod.

Reference specifications

Tuned voltage AM (10kHz steps) 530kHz 1.3±0.5V
1710kHz 7.5±0.5V
(9kHz steps) 522kHz 1.2±0.5V
1611kHz 7.0±0.5V
87.5MHz 2.8±0.5V
108MHz 21.0±0.5V

FM
Muting level 16±3dBμ
Muting width 35±10kHz
Auto stop level AM Less than 67dB/m
FM Less than 20dBμ
Stereo indicator level 16±4dBμ
Hi-Blend off level 30±5dBμ

FM section



Item	Step	Connection of instrument	FM SG output	Stereo modulator output	Tuned frequency	Output indicator	Adjustment point	Adjust for	Remarks
FM IF	1	Fig. 1	98.1MHz, 1kHz 75kHz devi. 60dBμ (65dBf)	—	98.1MHz	DC voltmeter	L101	0±20mV	RF MODE: DX IF BAND: Wide CABLE/MUTE SW: CABLE Repeat the steps 1, 2 and 3 until no further adjustment is necessary.
	2		AC voltmeter			IFT on front end	Maximum		
	3		Distortion Analyzer			L102	Minimum		
STEREO DISTORTION		Fig. 2	98.1MHz Ext. modulation 60dBμ (65dBf)	L+R 1kHz 67.5kHz devi. Pilot signal 7.5kHz devi.	98.1MHz	Distortion Analyzer	IFT (T1) on front end	Minimum	Don't turn more than 180°.
STEREO SEPARATION		Fig. 2	98.1MHz Ext. modulation 60dBμ (65dBf)	L channel R channel	98.1MHz	AC voltmeter (R channel)	R202	Minimum	Maximum and same separation
						AC voltmeter (L channel)		Minimum	
MUTING LEVEL		Fig. 2	16dBμ (21.2dBf) 15dBμ (20.2dBf)	—	98.1MHz	Oscilloscope	R101	Output: ON Output: OFF	CABLE/MUTE SW: OFF CABLE indicator is turns off.
SIGNAL INDICATOR		Fig. 2	98.1MHz, 1kHz 75kHz devi. 60dBμ (65dBf)	—	98.1MHz	8th. signal indicator	R102	Light on	

AM section


Step	AM SG output	Tuned frequency	Output indicator	Adjustment point	Adjust for
1		530kHz (522kHz)	Digital DC voltmeter	OSC coil on L151	$1.3 \pm 0.1V$
2	600kHz (603kHz) 400Hz 30% mod. 60dB/m	600kHz (603kHz)	AC coltmeter	ANT coil on L151	Maximum
3	990kHz 400Hz 30% mode. 60dB/m	990kHz	AC voltmeter	L152	Maximum
4	990kHz 400Hz 30% mod. 55dB/m	990kHz	4th. signal indicator	R151	Light on

() 9kHz step model


Adjustment point

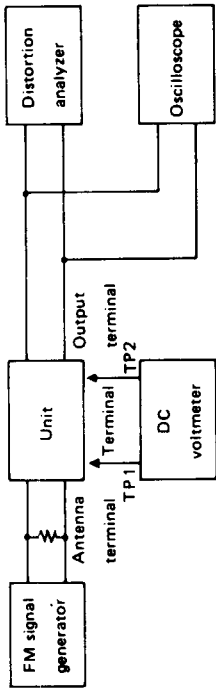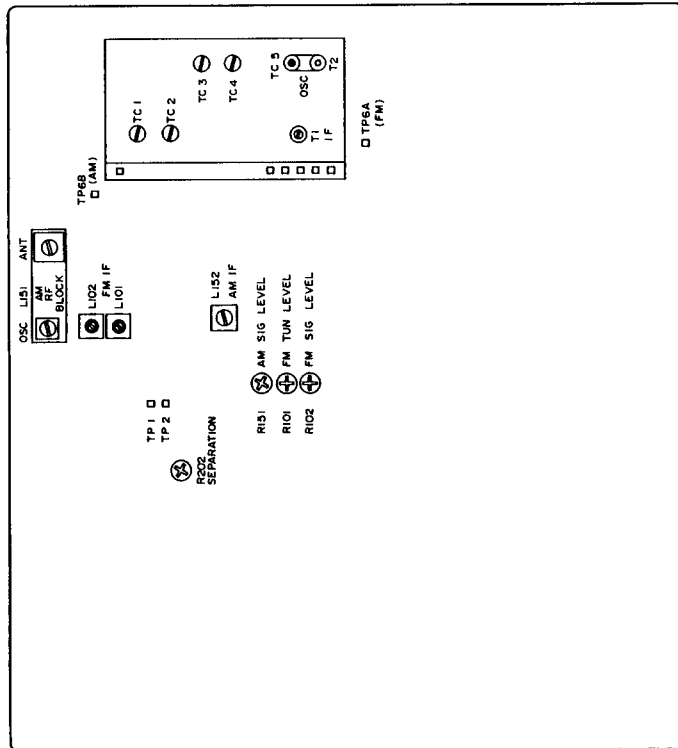


<Fig.1>

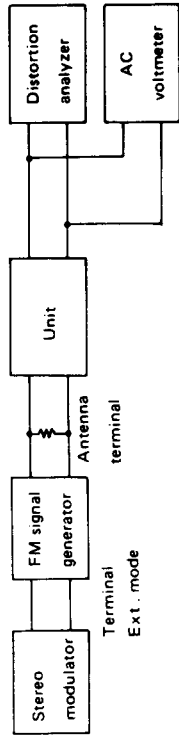

<Fig.2>

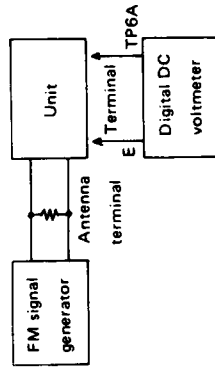

<Fig.3> Tuned Voltage

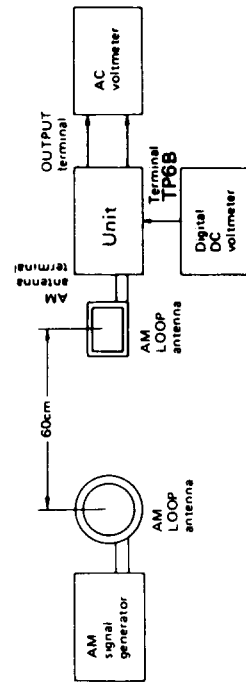


<Fig.4>

(AM)

SCHEMATIC DIAGRAM

MODEL

A B C D E F G

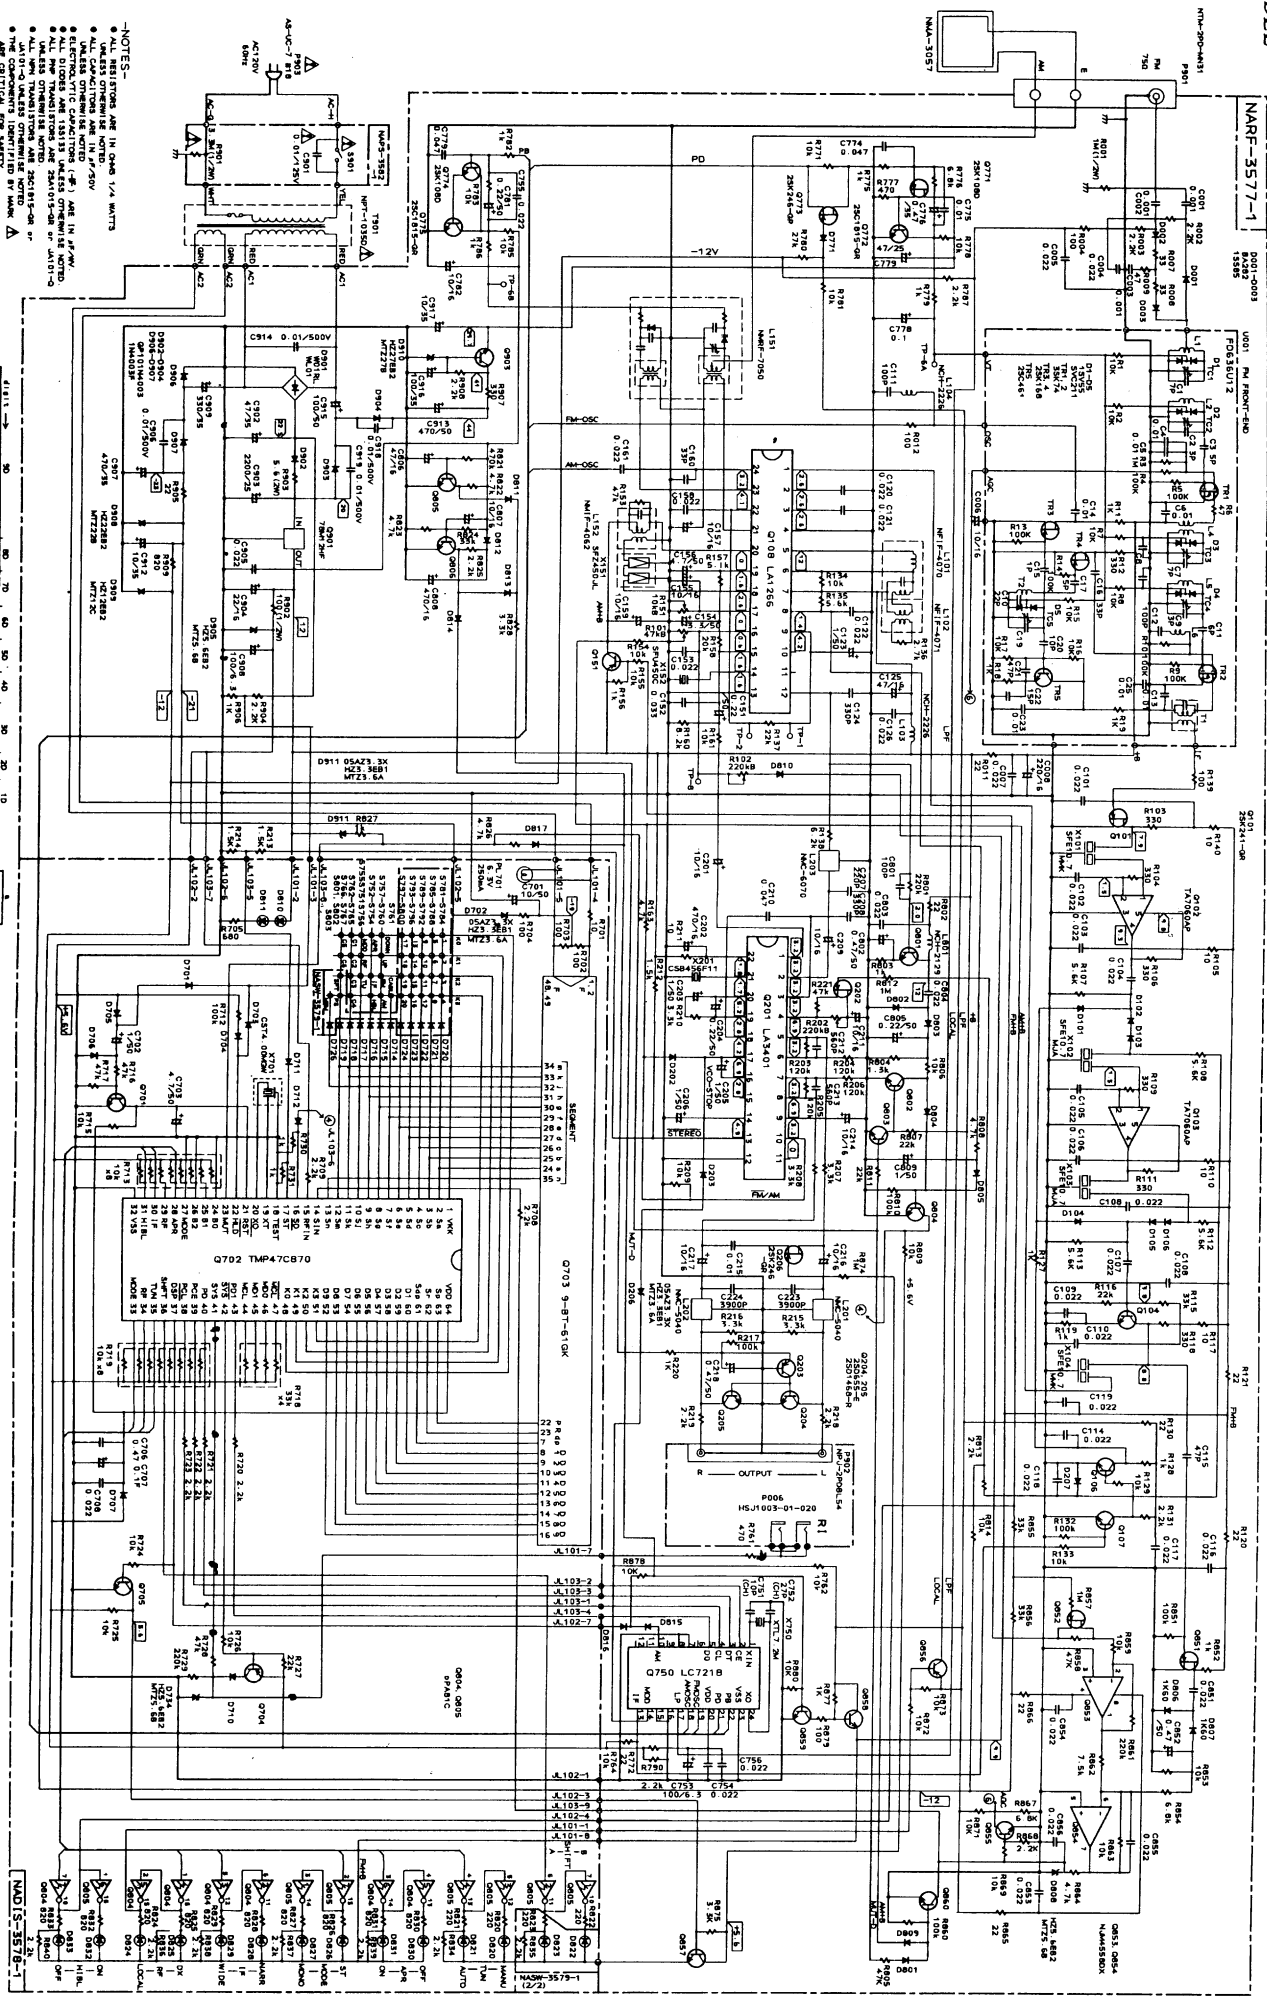

- NOTES:**
1. ALL TEST POINTS ARE IN CASE 1/4 MATS
 2. ALL TEST POINTS ARE IN CASE 1/4 MATS
 3. ALL TEST POINTS ARE IN CASE 1/4 MATS
 4. ALL TEST POINTS ARE IN CASE 1/4 MATS
 5. ALL TEST POINTS ARE IN CASE 1/4 MATS
 6. ALL TEST POINTS ARE IN CASE 1/4 MATS
 7. ALL TEST POINTS ARE IN CASE 1/4 MATS
 8. ALL TEST POINTS ARE IN CASE 1/4 MATS
 9. ALL TEST POINTS ARE IN CASE 1/4 MATS
 10. ALL TEST POINTS ARE IN CASE 1/4 MATS
 11. ALL TEST POINTS ARE IN CASE 1/4 MATS
 12. ALL TEST POINTS ARE IN CASE 1/4 MATS
 13. ALL TEST POINTS ARE IN CASE 1/4 MATS
 14. ALL TEST POINTS ARE IN CASE 1/4 MATS
 15. ALL TEST POINTS ARE IN CASE 1/4 MATS
 16. ALL TEST POINTS ARE IN CASE 1/4 MATS
 17. ALL TEST POINTS ARE IN CASE 1/4 MATS
 18. ALL TEST POINTS ARE IN CASE 1/4 MATS
 19. ALL TEST POINTS ARE IN CASE 1/4 MATS
 20. ALL TEST POINTS ARE IN CASE 1/4 MATS

ONKYO CORPORATION

PRINTED CIRCUIT BOARD-PARTS

MAIN CIRCUIT PC BOARD (NARF-3577-1/1A/1B)

CIRCUIT NO.	PART NO.	DESCRIPTION
	Front end	
U001	240062	BFD636U12
	ICs	
Q102, Q103	222407	TA7060AP
Q108	22240214	LA1266A
Q201	22240252	LA3401
Q750	22240253	LC7218
Q853, Q854	222502	NJM4558D-X
Q901	222780125NEC	78M12HF
	Transistors	
Q101	2212194	2SK241-Y
Q104	2210746	2SC945A-P
Q106, Q107	2211255 or 2210746	2SC1815-GR or 2SC945A-P
Q151, Q203	2211455 or 2212495	2SA1015-GR or JA101-Q
Q202, Q206	2211945	2SK246-GR
Q204, Q205	2211705 or 2212794	2SD655-E or 2SD1468-R
Q771	2212294	2SK108-D
Q772, Q775	2211255 or 2210746	2SC1815-GR or 2SC945A-P
Q773	2211945	2SK246-GR
Q774	2211255	2SC1815-GR
Q801-Q806	2211255 or 2210746	2SC1815-GR or 2SC945A-P
Q851	2212274	2SK192-Y
Q852	2211945	2SK246-GR
Q855, Q903	2211255 or	2SC1815-GR or
Q857-Q860	2210746	2SC945A-P
Q856	2211455 or 2212495	2SA1015-GR or JA101-Q
	Diodes	
D001-D003	223165 or 223149	BA282 or 1SS85

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
D101-D106	223163	ISS133		RF block	
D202, D203	223163	ISS133	L151	232148	NMRF-7050
D206	224450361	MTZ3.6A		Osc elements	
D207, D771	223163	ISS133	X201	3010152	CSB456F11, Ceramic
D801-D805	223163	ISS133	X750	3010151	XTL-7.2M, X'tal
D806, D807	223132	1K60		Capacitors	
D808	224450562	MTZ5.6B	C006	354741009	10 μ F, 16V, Elect.
D809-D817	223163	ISS133	C008	354742219	220 μ F, 16V, Elect.
D901	223862 or 223890	WL01 or W01RL	C123	354780109	1 μ F, 50V, Elect.
D902-D904	223880 or	GP101N4003 or	C125	354744709	47 μ F, 16V, Elect.
D906, D907	223896	1N4003F	C151	354782299	0.22 μ F, 50V, Elect.
D905	224450562	MTZ5.6B	C152	371123334	0.033 μ F \pm 5%, 50V, Mylar
D908	224652202 or 224452202	HZ22EB2 or MTZ22B	C154	354780339	3.3 μ F, 50V, Elect.
D909	224451203	MTZ12C	C155, C157	354741009	10 μ F, 16V, Elect.
D910	224652702 or 224452702	HZ27EB2 or MTZ27B	C156	354780479	4.7 μ F, 50V, Elect.
D911	224450361	MTZ3.6A	C159, C201	354741009	10 μ F, 16V, Elect.
	Transformers		C202	354744719	470 μ F, 16V, Elect.
L101	233396	NFIF-4070	C203	354780109	1 μ F, 50V, Elect.
L102	233397	NFIF-4071	C204	354782299	0.22 μ F, 50V, Elect.
L152	232139	NMIF-4062	C205, C206	354780109	1 μ F, 50V, Elect.
	Coils		C209, C211	354741009	10 μ F, 16V, Elect.
L001	233312	NFA-3051 (G/W)	C210	371124734	0.047 μ F \pm 5%, 50V, Mylar
L103, L104	233400M022	NCH-2226	C212, C213	370135614	560pF \pm 5%, 100V, APS (D)
L201, L202	233294	NMC-5040		370132714	270pF \pm 5%, 100V, APS (G/W)
L203	233383	NMC-6070	C214, C216	354741009	10 μ F, 16V, Elect.
L801	231081	NCH-2129	C215	371121034	0.01 μ F \pm 5%, 50V, Mylar
	Ceramic filters		C217	354741009	10 μ F, 16V, Elect.
X101, X104	3010137	SFE10.7MMK	C218	354784799	0.47 μ F, 50V, Elect.
X102, X103	3010087	SFE10.7MJA	C223, C224	371123924	3900pF \pm 5%, 50V, Mylar
X151	3010123	SFZ450JL	C221, C222	370131514	150pF \pm 5%, 100V, APS (W)
X152	3010076	SFU450C	C753	354721019	100 μ F, 6.3V, Elect.
			C774	371124734	0.047 μ F \pm 5%, 50V, Mylar
			C775	371121034	0.01 μ F \pm 5%, 50V, Mylar
			C776	395164797	0.47 μ F, 35V, Tantal
			C777	354754709	47 μ F, 25V, Elect.

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
C778	371121044	0.1 μ F \pm 5%, 50V, Mylar	D725	223163	1SS133
C779	371124734	0.047 μ F \pm 5%, 50V, Mylar	D734	224450562	MTZ5.6B
C781	354782299	0.22 μ F, 50V, Elect.		L.E.Ds	
C782	354741009	10 μ F, 16V, Elect.	D810, D811	225142	SEL2913K
C802	354784799	0.47 μ F, 50V, Elect.	D820, D825	225142	SEL2913K
C805	354782299	0.22 μ F, 50V, Elect.	D821, D824	225137CG,	SEL2413ECG,
C806	354744709	47 μ F, 16V, Elect.	D826, D829	225137DG or	SEL2413EDG or
C807	354741009	10 μ F, 16V, Elect.	D830, D833	225137DY	SEL2413EDY
C808	354744719	470 μ F, 16V, Elect.	D827, D828	225142	SEL2913K
C809	354780109	1 μ F, 50V, Elect.	D831, D832	225142	SEL2913K
C852	354784799	0.47 μ F, 50V, Elect.		Capacitors	
C902	354764709	47 μ F, 35V, Elect.	C701	354781009	10 μ F, 50V, Elect.
C903	354752229	2200 μ F, 25V, Elect.	C702	354780109	1 μ F, 50V, Elect.
C904	354742209	22 μ F, 16V, Elect.	C703	354780479	4.7 μ F, 50V, Elect.
C907	354764719	470 μ F, 35V, Elect.	C706	375524744	0.47 μ F \pm 5%, 50V, Plastic (MMT)
C908	354721019	100 μ F, 6.3V, Elect.	C707	3000057	0.1F, 5.5V, Super
C909	354763319	330 μ F, 35V, Elect.		Osc element	
C912	354761009	10 μ F, 35V, Elect.	X701	3010150	CST4.00MGW
C913	354784719	470 μ F, 50V, Elect.		Resistor	
C915	354781019	100 μ F, 50V, Elect.	R713	49163103408	10kohm \times 8, 1/10W, Network
C916	354761019	100 μ F, 35V, Elect.	R718	49121333403	33kohm \times 3, 1/8W, Network
C917	354761009	10 μ F, 35V, Elect.	R719	49163103408	10kohm \times 8, 1/10W, Network
	Resistors			Switches	
R001	431521055	1Mohm, 1/2W, Solid (D)	S751-S767	25035548	NPS-122-L510
R101	5210068	N06HR 47KBD, Semi-fixed	S791	25065286	NSS-22112 (W)
R102	5210072	N06HR 220KBD, Semi-fixed		Holders	
R151	5210064	N06HR 10KBD, Semi-fixed		27190710	L.E.D/POWER
R202	5210072	N06HR 220KBD, Semi-fixed		27190712	L.E.D
R902	442521014	100ohm, 1/2W, Metal oxide film			
R903	441720564	5.6ohm, 2W, Metal oxide film			
	Terminals				
P901	25060087	NTM-2PDMN31, Antenna			
P902	25045141	NPJ-2PDBL54, Output			
P006	25045172	HSJ1003-01-020, RI			
	Radiator				
P903	27160179	RAD-57			
	Sockets				
	25050272	NSCT-8P-100			
	25050273	NSCT-9P-101			
	Switch				
S201	25065286	NSS-22112, Band (W)			

SWITCH CIRCUIT PC BOARD (NASW-3579-1)

CIRCUIT NO.	PART NO.	DESCRIPTION
D720-D724	223163	1SS133, Diode
D726	223163	1SS133, Diode
D822, D823	225137CG,	SEL2413ECG,
	225137DG or	SEL2413EDG or
	225137DY	SEL2413EDY, LED
S781-S803	25035548	NPS-122-L510, Switches
	27190711	Holder

DISPLAY CIRCUIT PC BOARD (NADIS-3578-1/1A/1B)

CIRCUIT NO.	PART NO.	DESCRIPTION
	Lamp	
PL701	210064B	PL6.3V 250mA
	ICs	
Q702	22240251	TMP47C870
Q804, Q805	222807	μ PA81C
	FL tube	
Q703	212077	9-BT-61GK
	Transistors	
Q701, Q705	2211255 or 2210746	2SC1815-GR or 2SC945A-P
Q704	2211455 or 2212495	2SA1015-GR or JA101-Q
	Diodes	
D701	223163	1SS133
D703-D707	223163	1SS133
D708	224450361	MTZ3.6A
D710-D712	223163	1SS133
D714-D719	223163	1SS133


POWER SUPPLY CIRCUIT PC BOARD (NAPS-3582-1/1A)

CIRCUIT NO.	PART NO.	DESCRIPTION
C901	3500065A	\triangle 0.01 μ F, AC400V/125V, Capacitor IS
R901	431523355	\triangle 3.3Mohm, 1/2W, Solid resistor (D)
S901	25035558	\triangle NPS-111-L520P, Power switch

NOTE: (D) : Only 120V model
(G) : Only 220V/240V models
(W) : Only Worldwide model

NOTE: THE COMPONENTS IDENTIFIED BY MARK \triangle ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBERS SPECIFIED.

PACKING VIEW

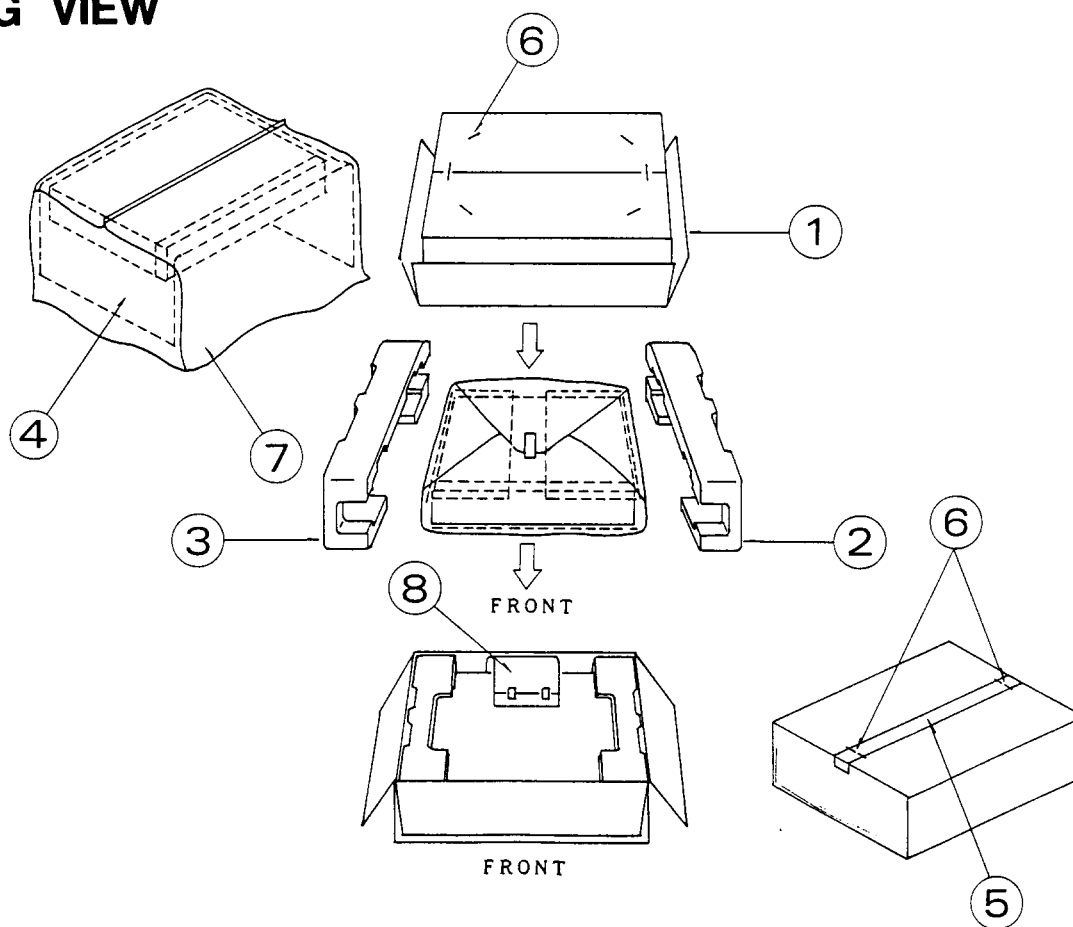

REF. NO.	PART NO.	DESCRIPTION		
1	29051918	Master carton box	29365019	Warranty card (Only U.S.A. model)
2	29091329A	Pad L	29358002G	Service station list (Only U.S.A. model)
3	29091330A	Pad R		
4	29095012-1	Protection sheet		220V/240V/Worldwide models
5	260012	Damp tape	292092	FM antenna
6	282301	Sealing hook	29341415	Instruction manual
7	29100036A	Poly-vinyl bag	2010098A	Connection cord
8	Accessory bag ass'y		2010169	Connection cord for RI
	120V model		232140	NMA-3057, AM loop antenna
	292064B	FM antenna	29341173	Instruction manual, Italian
	29341413	Instruction manual	29100006A	Poly-vinyl bag
	2010098A	Connection cord	25055040	CV-K-2, Conversion plug (Only worldwide model)
	2010169	Connection cord for RI		FM adaptor (Only 240V and world models)
	232140	NMA-3057, AM loop antenna	25060123	
	25060123	FM adaptor		
	29100006A	Poly-vinyl bag		

ONKYO CORPORATION

International Division: Onarimon Yusen Bldg., 23-5, Nishi-Shimbashi 3-chome, Minato-ku,
TOKYO 105, JAPAN Tel: 03-432-6987 Fax: 03-436-6979 TLX: 242-3551 ONKYO J
ONKYO U.S.A. CORPORATION
200 Williams Drive, Ramsey, N.J. 07446, U.S.A. Tel: 201-825-7950 Fax: 201-825-8150