


# ONKYO SERVICE MANUAL

## SYNTHESIZED FM STEREO/AM TUNER MODEL T-4700

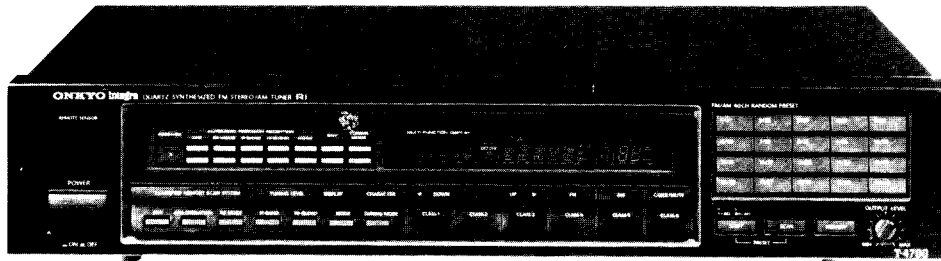

### Black model

BUD, BUDN	120V AC, 60Hz
BUG	220V AC, 50Hz
BUW	120V/220V AC, 50/60Hz

### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  $\Delta$  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

## TABLE OF CONTENTS

Specifications .....	2
Service procedures .....	2
Block diagram .....	3
Exploded view .....	4
Parts list .....	5
Microprocessor description .....	6
Block diagrams of IC .....	8
Adjustment procedures .....	11
Printed circuit board view .....	13
Main circuit .....	13
Display/Switches/Remocon/Volume .....	19
Schematic diagram .....	15
120V model .....	15
Other models .....	17
Printed circuit board parts list .....	19
Packing view .....	22

**ONKYO**  
**AUDIO COMPONENTS**

## SPECIFICATIONS

### FM:

Tuning Range:	87.50 – 108.00 MHz (50/25kHz steps) and/or 88.00 – 108.00MHz
Usable Sensitivity:	Mono: 10.3dBf, 0.9 $\mu$ V, IHF 0.8 $\mu$ V DIN (75 ohms) Stereo: 17.2dBf, 2.0 $\mu$ V, IHF 20 $\mu$ V DIN (75 ohms)
50dB Quieting Sensitivity:	Mono: 16.1dBf, 1.7 $\mu$ V (75 ohms) Stereo: 36.1dBf, 17 $\mu$ V (75 ohms)
Capture Ratio:	1.3dB (Wide)
Image Rejection Ratio:	100dB
IF Rejection Ratio:	100dB
Signal-to-Noise Ratio:	Mono: 85dB, IHF Stereo: 77dB, IHF
Selectivity:	60dB DIN (Narrow)
Alternate Channel Attenuation:	80dB IHF ( $\pm$ 400kHz)
AM Suppression Ratio:	55dB
Total Harmonic Distortion:	Mono: 0.03% (Wide) Stereo: 0.07% (Wide)
Frequency Response:	30 – 15,000Hz (+0.5 – 1.0dB)
Stereo Separation:	45dB at 1kHz (Wide) 33dB at 70 – 10,000Hz (Wide)
Output Voltage:	0 ~ 1V
Muting Level:	17.2dBf, 2.0 $\mu$ V (75ohms)

### AM:

Tuning Range:	European models: 522 – 1611kHz (9kHz steps) Canadian and USA models: 530 – 1710kHz (10kHz steps) Saudi Arabia & Worldwide models: 531 – 1602kHz (9kHz steps)
Usable Sensitivity:	25 $\mu$ V
Image Rejection Ratio:	40dB
IF Rejection Ratio:	40dB
Signal-to-Noise Ratio:	40dB
Total Harmonic Distortion:	0.7%
Output Voltage:	0~300mV

### General

Dimensions (W×H×D):	435×92×366mm 17-1/8"×3-5/8"×14-7/16"
Weight:	4.2kg 9.3lbs.
Supplied accessories:	<ul style="list-style-type: none"> <li>• AM loop antenna×1</li> <li>• FM T-shaped antenna×1</li> <li>• Connecting cable×1</li> <li>• <b>RI</b> remote control cable×1</li> <li>• 75/300ohm antenna adapter×2 (Except 220V model)</li> <li>• Remote control transmitter</li> </ul>

**Specifications and features are subject to change without notice.**

## SERVICE PROCEDURES

### 1. Safety-check out

(Only U.S.A. model)

After correcting the original service problem, perform the following safety check before releasing the set to the customer.

Connect the insulating-resistance tester between the plug of power supply cord and chassis.

Specifications: 3.3Mohm  $\pm$ 10% at 500V.

### 2. Memory preservation

This unit does not require memory preservation batteries. A built-in memory power back-up system preserves contents of the memory during power failures and even when the unit is unplugged. The unit must be plugged in and the power switch turned on and off once in order to change the back-up system. Note that since this is not a permanent memory, the power switch must be turned on and off a few times each month to keep the back-up system operative. The period of time during which memory contents are preserved after power has last been turned off varies depending on climate and placement of the unit.

On the average, memory contents are protected over a period of 3 to 4 weeks (a minimum of 2 weeks) after the last time power has been turned off. This period is shorter when the unit is exposed to very high humidity or used in an area with an extremely humid climate.

### 3. Voltage Selector (Back Panel)

W models are equipped with a voltage selector to conform with local power supplies. Be sure to set this switch to match the voltage of the power supply in your area before

turning the power switch on. This switch is set to 220V at the factory. Voltage is changed by sliding the groove in the switch with a screwdriver to the right or left. Confirm that the switch has been moved all the way to the right or left before turning the power switch on. Models without a voltage selector can only be used in areas where the power supply is the same as that of the unit.

### 4. Tunign Step Frequency Switch (Bottom Panel)


W models are equipped with a switch for the AM (9kHz/10kHz) band. The switch should be set to the proper steps for the radio broadcast frequencies in your area.

### 5. Changing the AM band step

With the exception of the worldwide model, AM BAND STEP selector switch is not provided.


When change the band step, refer the table as shown below.

MODEL	BAND STEP	J777
UD	10kHz→ 9kHz	Additional
UG/UQ	9kHz→10kHz	Eliminated




DISPLAY PC BOARD

# BLOCK DIAGRAM

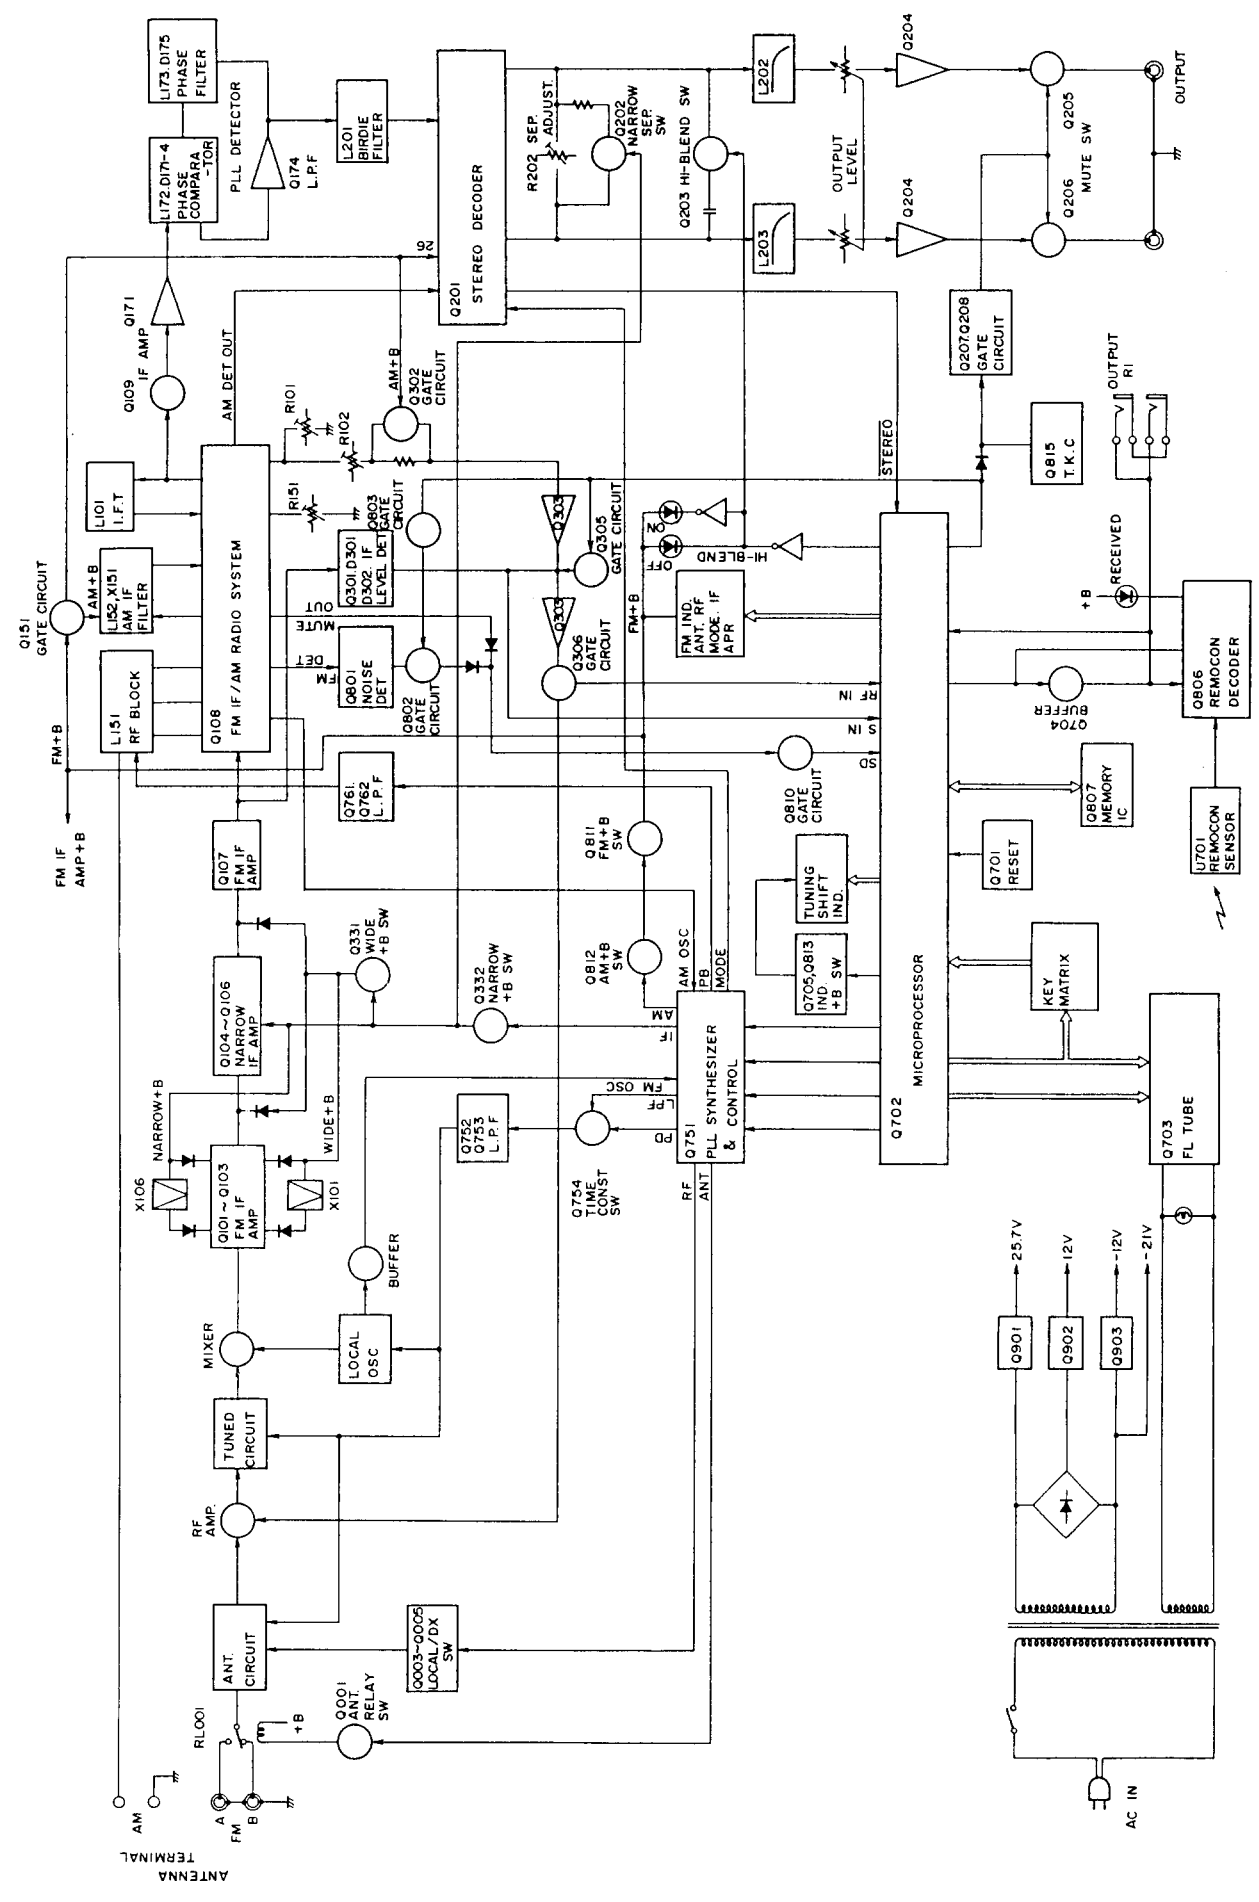

# EXPLODED VIEW

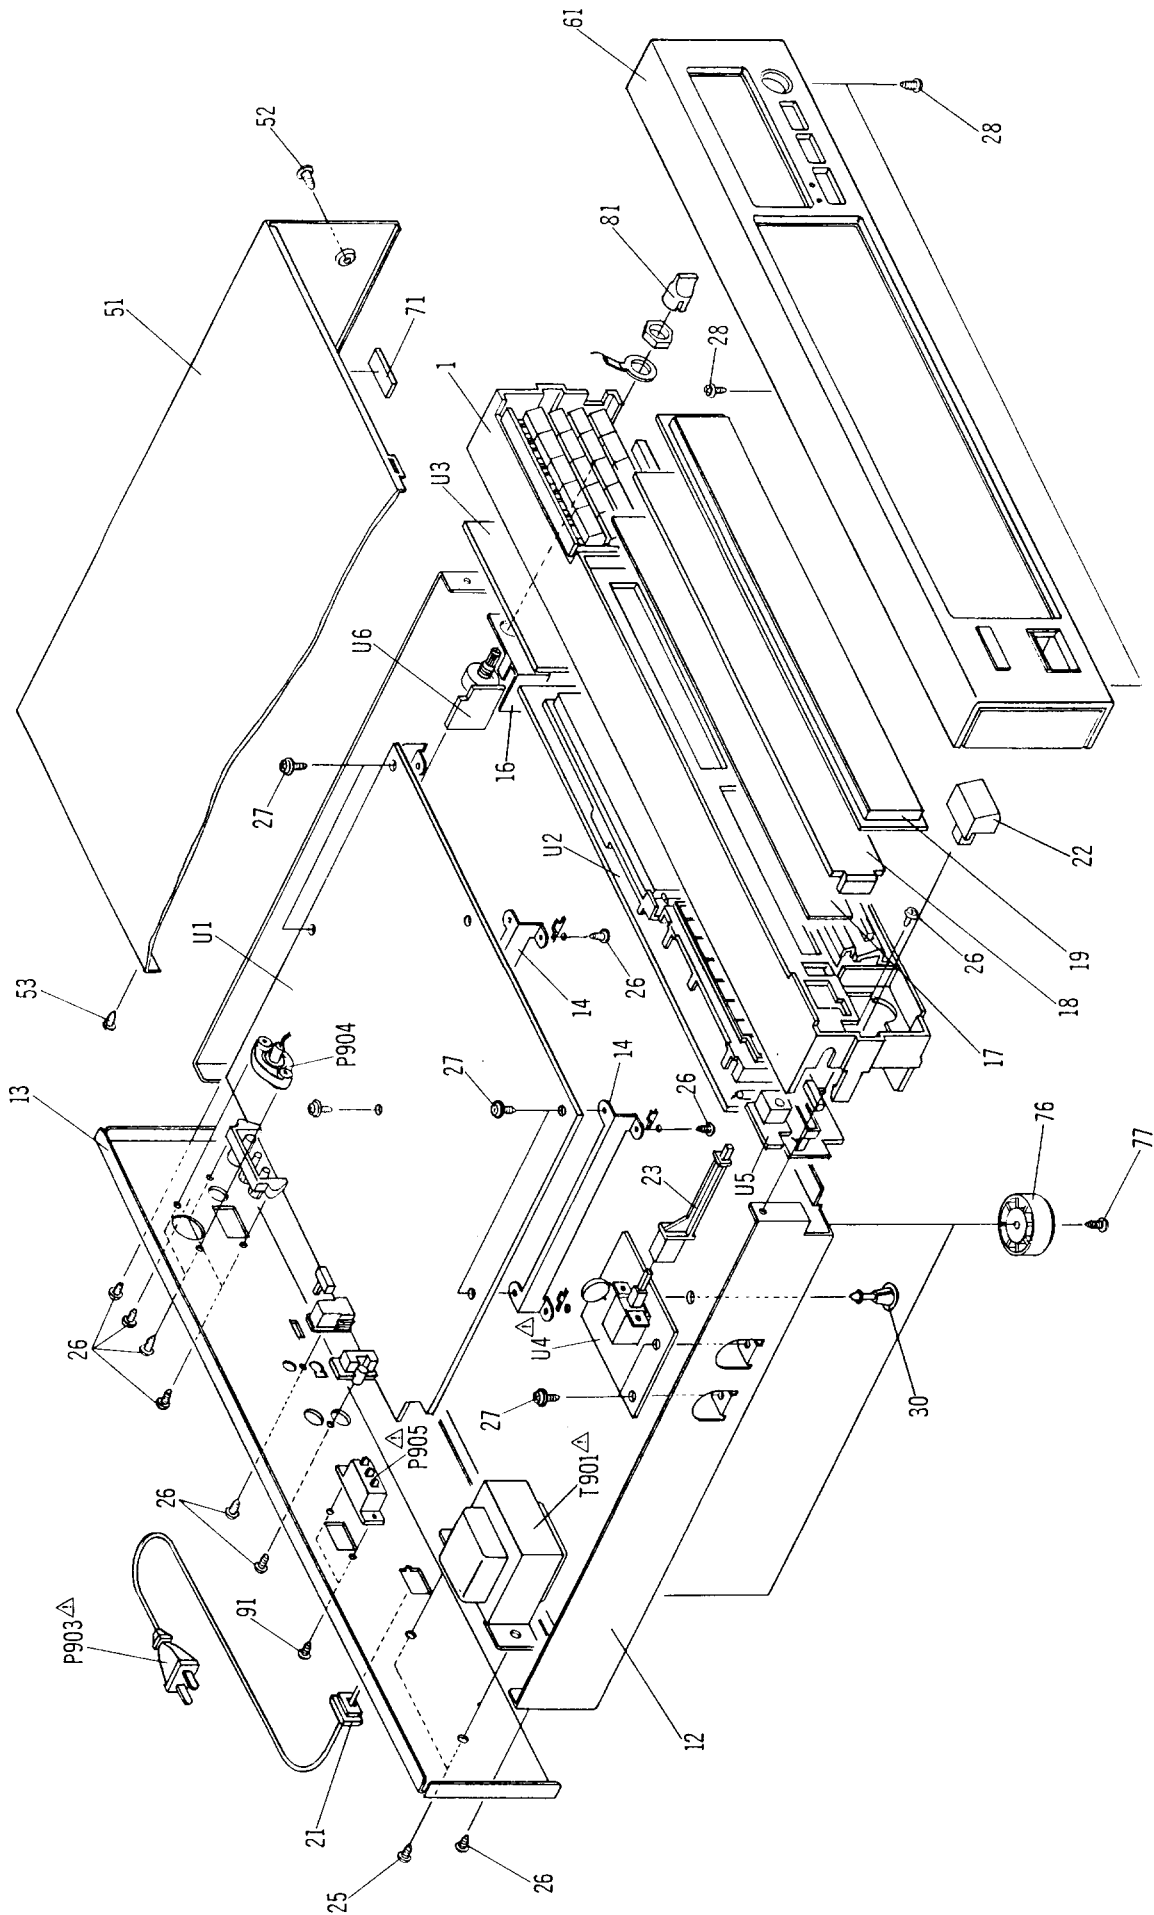

## PARTS LIST

REF.NO.	PART NO.	DESCRIPTION	REF.NO.	PART NO.	DESCRIPTION
1	27110525A	Front bracket ass'y	T901	2300497A	△ NPT-1050D, Power transformer <D>
12	27100191A	Chassis		2300498A	△ NPT-1050G, Power transformer <G>
13	27121299	Back panel <D>		2300499A	△ NPT-1050DG, Power transformer <W>
	27121299-1	Back panel <G>	U1	1A194595-1	NARF-3695-1, Main circuit pc board ass'y <D>
	27121299-2	Back panel <W>		1A194595-1A	NARF-3695-1A, Main circuit pc board ass'y <G>
14	27141358	Bracket, pcb		1A194595-1B	NARF-3695-1B, Main circuit pc board ass'y <W>
16	27150283	Shield plate	U2	1A194580-1	NADIS-3780-1, Display circuit pc board ass'y <D>
17	28133223-1	Dial plate		1A194580-1A	NADIS-3780-1A, Display circuit pc board ass'y <G>
18	28130257-1	Clear plate		1A194580-1B	NADIS-3780-1B, Display circuit pc board ass'y <W>
19	28191510A	△ Bushing, code(Strainrelief)	U3	1A194581-1	NASW-3781-1, Station switch pc board ass'y
21	27300750	Knob, power	U4	1A194582-1	NAPS-3782-1, Power switch pc board ass'y <D>
22	28323175	Joint, power		1A194582-1A	NAPS-3782-1A, Power switch pc board ass'y <G/W>
23	27273069A	4TTB+8C(BC), Self-tapping screw	U5	1A194583-1	NAETC-3783-1, Remote control sensor pc board ass'y
25	838440089	3TTS+8B(BC), Self-tapping screw	U6	1A194596-1	NAETC-3696-1, Output volume pc board ass'y
26	834430088	3TTW+8B, Self-tapping screw			
27	831130088	3TTP+8P(BC), Self-tapping screw			
28	833430080	KGLS-14R, Holder			
30	27190524	Top cover			
51	28184437	4TTB+8C(BC), Self-tapping screw			
52	838440089	3TTS+8B(BC), Self-tapping screw			
53	834430088	3TTW+8B(BC), Self-tapping screw			
61	1A194121	Front panel ass'y			
71	28140250	Cushion			
76	27175219-1	Leg			
77	834430088	3TTS+8B(BC), Self-tapping screw			
81	28323818	Knob, level			
91	82143006	3P+6FN(BC), Pan head screw <W>			
P903	253142A	△ AS-UC-7#18, Power supply cord <D>			
	253149	△ AS-CEE, Power supply cord <G/W>			
P904	25045156	KE31-0006, Socket, antenna			
P905	25065123	△ NPS-1258P, Switch, slide, Voltage selector <W>			


NOTE: <D>: Only 120V model  
<G>: Only 220V model  
<W>: Only Worldwide model

NOTE: THE COMPONENTS IDENTIFIED BY MARK △ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

# MICROPROCESSOR DESCRIPTIONS

Key matrix

Input	Output	KO (48)	K1 (49)	K2 (50)	K3 (51)
Sa (2)		P1/21	P2/22	P3/23	P4/24
Sb (3)		P5/25	P6/26	P7/27	P8/28
Sc (4)		P9/29	P10/30	P11/31	P12/32
Sd (5)		P13/33	P14/34	P15/35	P16/36
Se (6)		P17/37	P18/38	P19/39	P20/40
Sf (7)		TUN LEVEL	DISPLAY	CHARACTER	CABLE
Sg (8)		DOWN/LAST	UP/NEXT	FM	AM
Sh (9)		APR OPE	RF MDOE	IF BAND	HI BLEND
Sj (10)		MUTE MODE	ANTENNA	TUN. MODE	MEMORY
Sk (11)		C1	C2	C3	C4
Sm (12)		C5	C6	SHIFT	PRESENT/SCAN

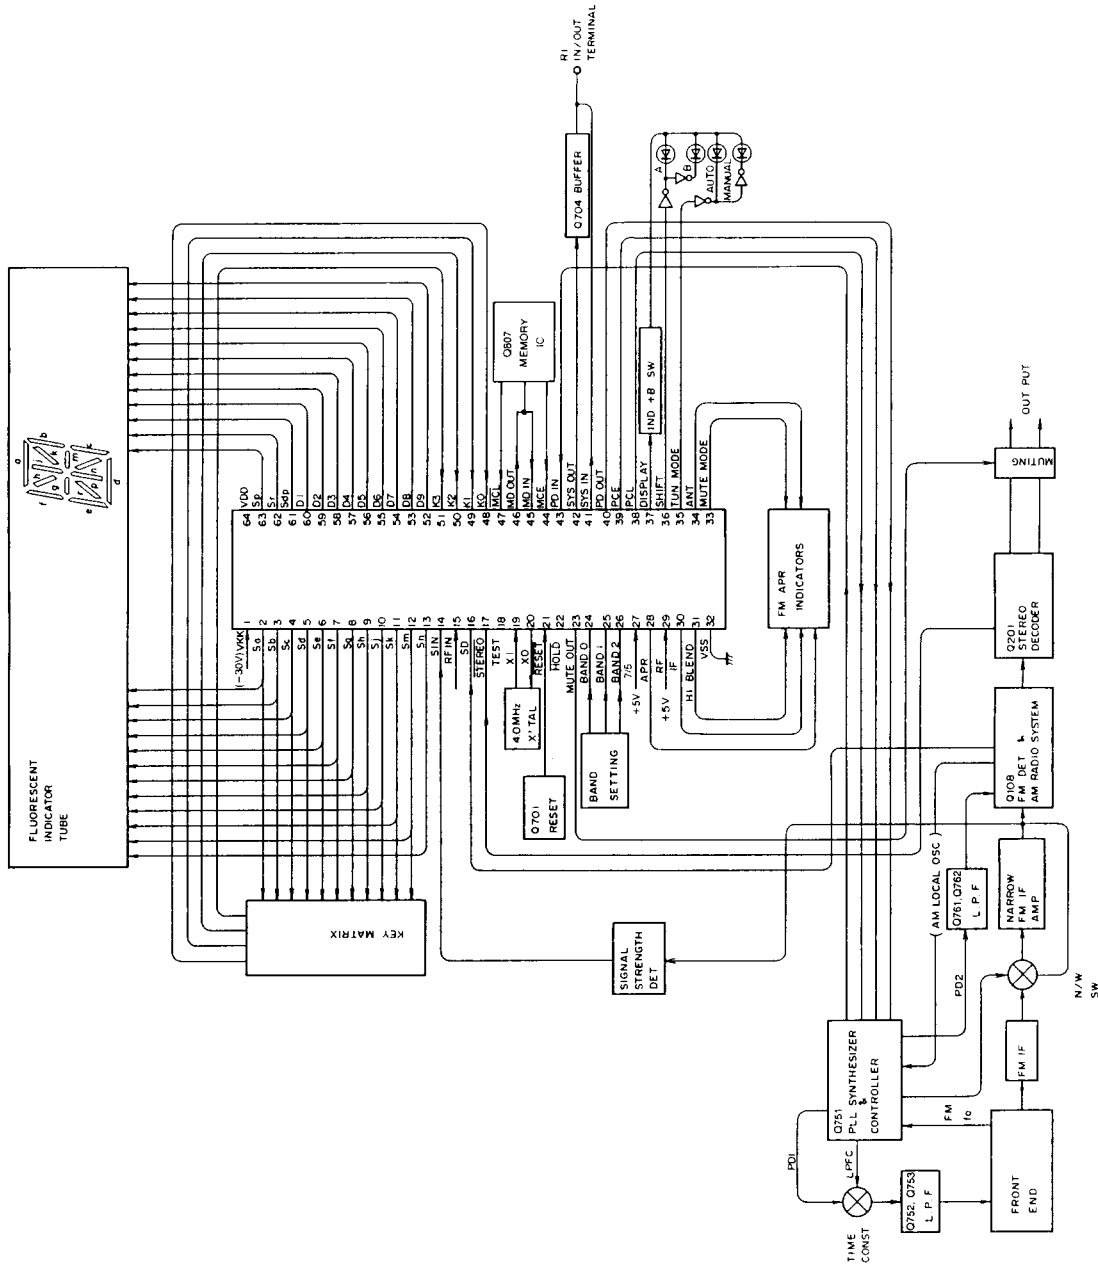

CONNECTION OF MICROPROCESSOR


## TMP47C870 Terminal Description

Pin No.	Symbol	Description
1	VKK	This is the power supply terminal for fluorescent indicator tube drive. Connect to -30V.
2	Sa	These are the output terminals for segment and key return signal. "H" when active
3	Sb	
4	Sc	
5	Sd	
6	Se	
7	Sf	
8	Sg	
9	Sh	
10	Sj	
11	Sk	
12	Sm	
13	Sn	
14	SIN	
15	RFIN	This is RF input terminal. DX at the high level.
16	SD	This is the auto stop control input terminal. Auto tuning stops when this terminal becomes the high level.
17	STEREO	This is the input terminal for detection of stereo broadcast. "L" when stereo broadcast.
18	TEST	This is the test terminal for LSI. Connect to the ground terminal.
19	X1	Connect to the 4.00MHz ceramic oscillator.
20	XO	
21	RESET	This is the reset terminal. Reset at the low level when the power is turned on.
22	HOLD	This is the hold input terminal. "L" when active.
23	MUTE OUT	This is the muting output terminal. "H" when active.
24	BAND 0	These are the band setting connection terminal.
25	BAND 1	
26	BAND 2	
27	7/5	This is the connection terminal for function setting.
28	APR	This is the output terminal for indication APR. ON at the high level. OFF at the low level.
29	RF	This is the output terminal for indication RX. DX at the high level. LOCAL at the low level.
30	IF	This is the output terminal for indication IF BAND. WIDE at the high level. NARROW at the low level.
31	HI BLEND	This is the output terminal for indication HI-BLEND. OFF at the high level. ON at the low level.
32	V <sub>SS</sub>	Connect to the ground terminal.

Pin No.	Symbol	Description
33	MUTE MODE	This is the output terminal for indication MUTING MODE. AUTO at the high level. MONO at the low level.
34	ANT	This is the output terminal for indication ANT. A at the high level. B at the low level.
35	TUN MODE	This is the output terminal for indication TUNING MODE. AUTO at the high level. MANUAL at the low level.
36	SHIFT	This is the output terminal for indication SHIFT. 1-20 at the high level. 21-40 at the low level.
37	DISPLAY	This is the display control output terminal. "L" during FL tube lights on.
38	PCL	This is the clock output terminal to PLL IC (LC7218).
39	PCE	This is the chip selector output terminal to PLL IC. "H" when active.
40	PD OUT	This is the data output terminal to PLL IC.
41	SYS IN	This is the system code input terminal. "H" when active.
42	SYS OUT	This is the system code output terminal. "L" when active.
43	PDIN	This is the data input terminal from PLL IC (LC7218).
44	MCE	This is the chip selector output terminal to memory IC.
45	MD IN	This is the data input terminal from memory IC.
46	MD OUT	This is the data output terminal to memory IC.
47	MCI	This is the clock output terminal to memory IC.
48	K0	These are the key scan input terminals. "H" when active.
49	K1	
50	K2	
51	K3	
52	D9	
53	D8	
54	D7	
55	D6	
56	D5	
57	D4	
58	D3	
59	D2	
60	D1	
61	DP	These are the segment output terminal for fluorescent indicator tube. "H" when active.
62	Sr	
63	Sp	
64	V <sub>DD</sub>	This is the device power source terminal. At the time of operation, the supply is 5V. The internal data memory is maintained by means of super capacitor.




μPD6252C (2048 bits EEPROM)

(EEPROM: Electrically Erasable Programmable Read Only Memory)

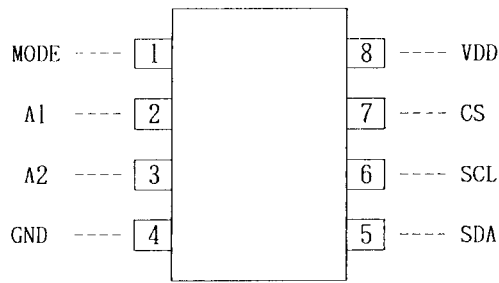

Pin No.	Symbol	Description
1	MODE	Input terminal to select the interface method to external IC.
2	A1	Not used. Connect to the ground terminal.
3	A2	
4	GND	Ground terminal.
5	SDA	Data input/output terminal. Connect to the terminals MDIN/MDOUT of the microprocessor IC and the terminal DI of PLL IC.
6	SCL	Clock input terminal. Connect to the terminal MCL of microprocessor IC.
7	CS	Chip selector terminal. Connect to the terminal MCE of microprocessor IC.
8	V <sub>DD</sub>	Power supply terminal. Connect to 5V.

9-BT-61GK (Fluorescent indicator tube)

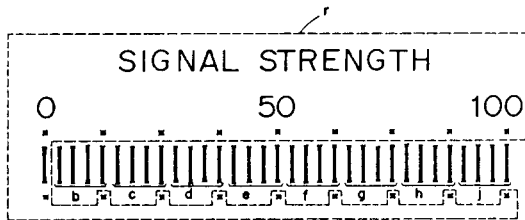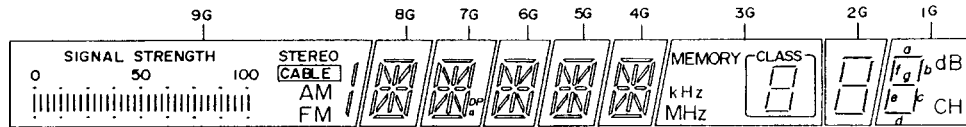

PIN CONNECTION

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	-
CONNECTION	F1	F1	NP	NP	NP	NP	s	1G	2G	3G	4G	5G	6G	7G	8G	9G	NP	NP	NP	NP	NP	p	r	a	-
PIN NO.	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49
CONNECTION	b	c	d	e	f	g	h	j	k	m	n	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	F2	F2

ANODE CONNECTION

	9G	8G	7G	6G	5G	4G	3G	2G	1G
a	/	a	a	a	a	a	a	a	a
b		b	b	b	b	b	b	b	b
c		c	c	c	c	c	c	c	c
d		d	d	d	d	d	d	d	d
e		e	e	e	e	e	e	e	e
f		f	f	f	f	f	f	f	f
g		g	g	g	g	g	g	g	g
h		h	h	h	h	h	-	-	-
j		j	j	j	j	j	-	-	-
k	STEREO	k	k	k	k	k	-	-	-
m	CABLE	m	m	m	m	m	MEMORY	-	-
n	AM	n	n	n	n	n	kHz	-	dB
p	FM	p	p	p	p	p	MHz	-	CH
r	SIGNAL STRENGTH 0 50 100	r	r	r	r	r	CLASS	-	-
s	-	-	DP	-	-	-	-	-	-



# ADJUSTMENT PROCEDURES

- Preparation  
 FM mono: 1kHz, 75kHz devi. 60dB $\mu$  (65dBf)  
 FM stereo: 1kHz, L+R 67.5kHz devi.,  
 Pilot signal 19kHz 7.5kHz devi.  
 AM: 400Hz, 30% mod.
- Set the operation keys as shown below.  
 ANTENNA: A HI-BLEND: OFF  
 RF MODE: DX MODE: AUTO  
 IF BAND: WIDE CABLE/MUTE: CABLE

## FM section

Item	Step	Connection of instrument	FM SC output	Stereo modulaotr output	Tuned frequency	Output indicator	Adjustment point	Adjust for	Remarks
FM RF/IF	1		98.1MHz, 1kHz 75kHz devi. 60dB (65dBf)	—	98.1MHz	DC voltmeter	L101	0 $\pm$ 20mV	
	2	Fig. 1	25dB (30dBf)	—	98.1MHz	AC voltmeter	IFT core on front end	Maximum	
	3					AC voltmeter	L001, L002	Maximum	RF MODE:LOCAL
FM DET		Fig. 2	98.1MHz, No mod. 60dB (65dBf)	—	98.1MHz	DC voltmeter	L173	0 $\pm$ 0.1V	RF MODE:DX
STEREO DISTORTION		Fig. 3	98.1MHz, Ext. mod. 60dB (65dBf)	L+R 67.5kHz devi. Pilot signal 7.5kHz devi.	98.1MHz	Distortion analyzer	IFT core on front end	Minimum	Don't turn more than 180°
STEREO SEPARATION		Fig. 3	98.1MHz, Ext. mod. 60dB (65dBf)	Channel L	98.1MHz	AC voltmeter of right channel	R202 L172 (Don't turn more than 180°)	Minimum	Maximum and same separation.
				Channel R		AC voltmeter of left channel	L201	Minimum	
MUTING LEVEL		Fig. 2	98.1MHz, 1kHz, 75kHz devi. 14dB (19.2dBf)	—	98.1MHz	Oscilloscope	R101	Output: ON	CABLE/MUTE SW: OFF CABLE indicator is turned off.
			13dB (18.2dB)					Output:OFF	
DX/LOCAL LEVEL		Fig. 2	60dB (65dBf)	—		LO CAL indicator	R102	Light on	RF MODEL: LOCAL When press the APR OPERATION switch, adjust R102 so that the LOCAL indicator lights on.

Step	AM SG output	Tuned frequency	Output indicator	Adjustment point	Adjustment for
1		530kHz (522kHz) <531kHz>	DC voltmeter	OSC coil on L151	1.3±0.1V
2	600kHz (603kHz) 400Hz, 30% mod.	600kHz (603kHz)	AC voltmeter	RF coil on L151	Maximum
3	990kHz 60dB/m	990kHz	AC voltmeter	L152	Maximum
4	990kHz 55dB/m	990kHz	4th signal indicator	R151	Light on

( ): 9kHz step models < >: Worldwide models


Reference specifications

Tuned voltage


- AM: 10kHz step models
- 1.3±0.4V~7.5±0.4V(530kHz~1710kHz)
- 9kHz step models(European models)
- 1.2±0.4V~7.0±0.4V(522kHz~1611kHz)
- 9kHz step models(Worldwide models)
- 1.2±0.4V~7.0±0.4V(531kHz~1602kHz)
- FM: 5±0.4V~25±0.4V(87.50MHz~108.00MHz)

Auto stop level


- AM: Less than 67dB/m
- AM: Less than 35dB/m
- FM: High level Less than 22dB/m
- Low level Less than 22dB/m

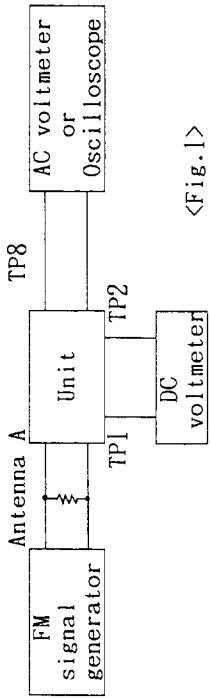


<Fig. 1>



<Fig. 2>

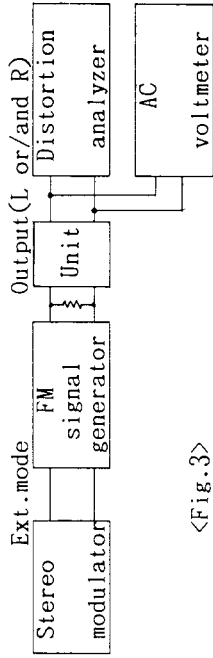


<Fig. 3>

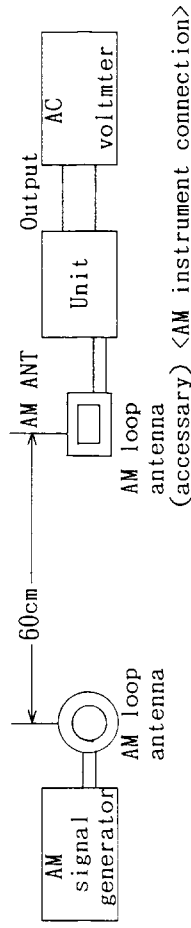

Confirmation of tuned voltage



<AM instrument connection>

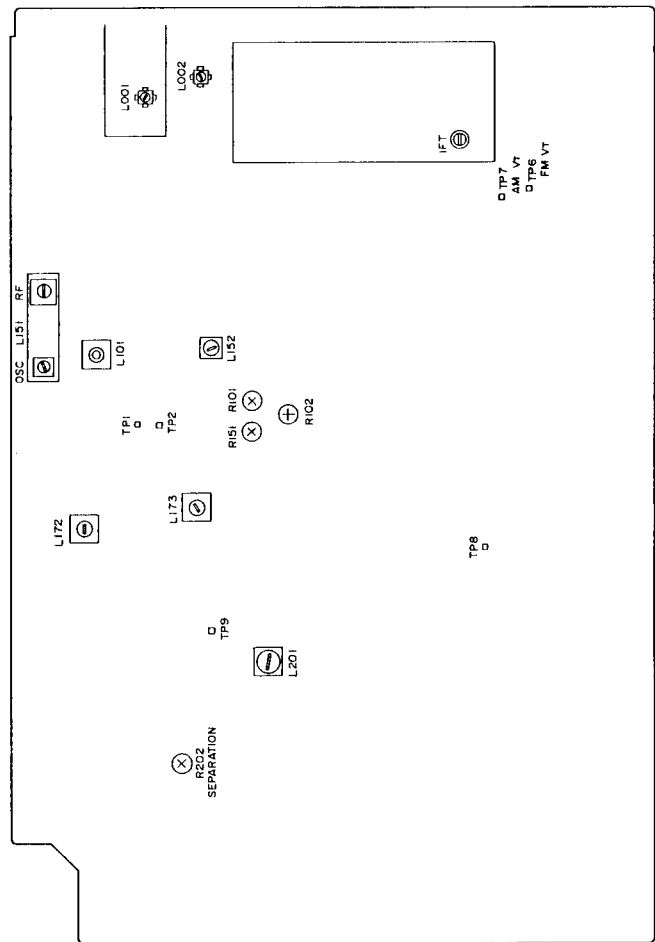

A

B

C

D

E

F

G

# SCHEMATIC DIAGRAM

## 120V MODEL

NARF-3695-1

U001 FM FRONT-END FE002-E03


U002 7947C70-4631

U003 9-8T-61OK

U004 13A13-00

U005 13A13-00

U006 13A13-00

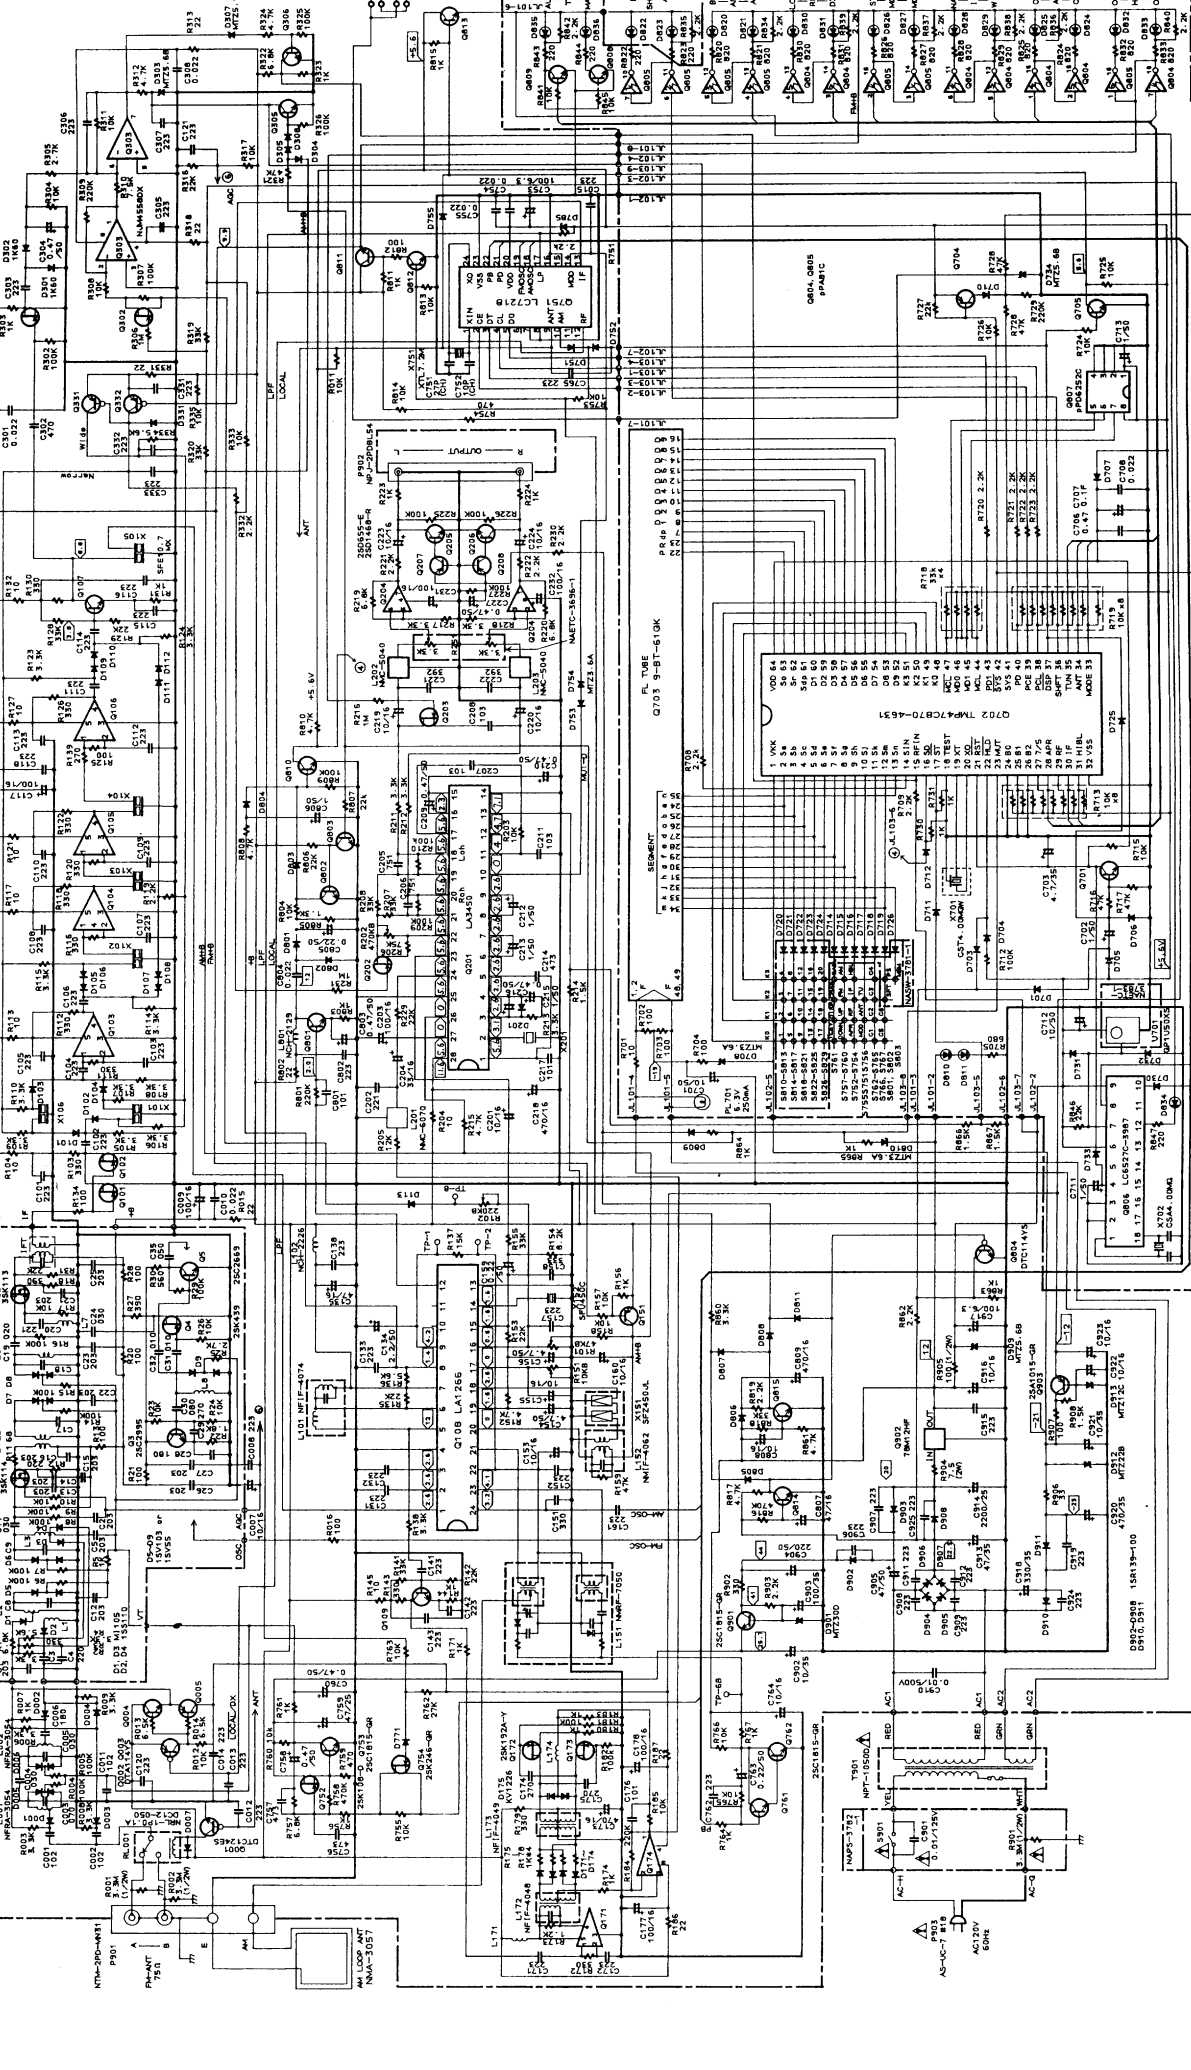

### NOTES

- COMPONENTS IDENTIFIED BY MARK 'A' ARE CRITICAL FOR SAFETY.
- REPLACE ONLY WITH PART NUMBER SPECIFIED. USE TUBE AND SOCKET SIGNAL.
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2N21815-OR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2N21815-OR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1N5113 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (C) ARE IN μF UNLESS OTHERWISE NOTED.
- ALL CAPACITORS ARE IN P.F./200V UNLESS OTHERWISE NOTED.
- ALL RESISTORS ARE IN OHMS (Ω) UNLESS OTHERWISE NOTED.
- ALL RESISTORS IN PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
- EXCEPT WHERE SHOWN OTHERWISE, ALL DIMENSIONS ARE IN MILLIMETERS.
- CIRCUMFERENCE IS SUBJECT TO CHANGE FOR IMPROVEMENT.

Q702 7947C70-4631

1	100K
2	10K
3	10K
4	10K
5	10K
6	10K
7	10K
8	10K
9	10K
10	10K
11	10K
12	10K
13	10K
14	10K
15	10K
16	10K
17	10K
18	10K
19	10K
20	10K
21	10K
22	10K
23	10K
24	10K
25	10K
26	10K
27	10K
28	10K
29	10K
30	10K
31	10K
32	10K
33	10K
34	10K
35	10K
36	10K
37	10K
38	10K
39	10K
40	10K
41	10K
42	10K
43	10K
44	10K
45	10K
46	10K
47	10K
48	10K
49	10K
50	10K
51	10K
52	10K
53	10K
54	10K
55	10K
56	10K
57	10K
58	10K
59	10K
60	10K
61	10K
62	10K
63	10K
64	10K
65	10K
66	10K
67	10K
68	10K
69	10K
70	10K
71	10K
72	10K
73	10K
74	10K
75	10K
76	10K
77	10K
78	10K
79	10K
80	10K
81	10K
82	10K
83	10K
84	10K
85	10K
86	10K
87	10K
88	10K
89	10K
90	10K
91	10K
92	10K
93	10K
94	10K
95	10K
96	10K
97	10K
98	10K
99	10K
100	10K

ONKYO CORPORATION

9305 FL TUBE

48 49

**MAIN CIRCUIT PC BOARD (NARF-3695-1/1A/1B)**

<b>CIRCUIT NO.</b>	<b>PART NO.</b>	<b>DESCRIPTION</b>
	<b>Front end</b>	
U001	240087	FE502
	<b>ICs</b>	
Q103-Q106	222407	TA7060AP
Q108	22240214	LA1266A
Q171	222407	TA7060P
Q174	222579	NJM4560D
Q201	22240285	LA3450
Q204	222579	NJM4560D
Q303	222502	NJM4558DX
Q751	22240253	LC7218
Q902	222780125NEC	78M12HF
	<b>Transistors</b>	
Q001	221281	DTC114YS
Q003	2212600	DTA124ES
Q004, Q305	2211183 or	2SC1740-R or
Q306	2211255	2SC1815-GR
Q005, Q151	2213074 or	2SA933-R or
Q207, Q208	2211455	2SA1015-GR
Q101, Q102	2212194	2SK241-Y
Q107, Q109	2210746	2SC945A-P
Q172, Q173	2212274	2SK192A-Y
Q202, Q203	2211945	2SK246-GR
Q205, Q206	2212794 or	2SD1468-R or
	2211705	2SD655-E
Q301	2212274	2SK192A-Y
Q302, Q754	2211945	2SK246-GR
Q331, Q332	2212600	DTA124ES
Q752	2212294	2SK108-D
Q753, Q901	2211255	2SC1815-GR
Q761, Q762	2211183 or	2SC1740-R or
Q801-Q803	2211255	2SC1815-GR
Q804	221281	DTC114YS
Q810-Q815	2211183 or	2SC1740-R or
	2211255	2SC1815-GR
Q903	2211455	2SA1015-GR
	<b>Diodes</b>	
D001-D004	223165	BA282
D005, D006	223154	1SV103, Variable capacitor
D007, D201	223163	1SS133
D101-D113	223163	1SS133
D171-D174	223170	SD187-4
D175	223136	KV1226, Variable capacitor
D301, D302	223132	1K60, Germanium

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
D303	224450562	MTZ5.6B, Zener	C154, C156 -	354780479	4.7 $\mu$ F, 50V, Elect.
D304, D305	223163	ISS133	C158	371123334	0.033 $\mu$ F $\pm$ 5%, 50V, Mylar
D307	224450512	MTZ5.1B, Zener	C159	354782299	0.22 $\mu$ F, 50V, Elect.
D308, D331	223163	ISS133	C160	354741009	10 $\mu$ F, 16V, Elect.
D751-D753	223163	ISS133	C173	391244717	470 $\mu$ F, 16V, Elect. (MUSE)
D754	224450361	MTZ3.6A, Zener	C177, C178	391241017	100 $\mu$ F, 16V, Elect. (MUSE)
D755, D758	223163	ISS133	C201	354741009	10 $\mu$ F, 16V, Elect.
D771, D811	223163	ISS133	C203	354741019	100 $\mu$ F, 16V, Elect.
D801-D809	223163	ISS133	C204	354763309	33 $\mu$ F, 35V, Elect.
D810	224450361	MTZ3.6A, Zener	C205, C206	370137514	750pF $\pm$ 5%, 100V, Plastic film (APS) <D>
D901	224453004	MTZ30D, Zener		370134714	470pF $\pm$ 5%, 100V, Plastic film (APS) <G/W>
D902-D908	22380032	ISR139-100	C207, C208	371121034	0.01 $\mu$ F $\pm$ 5%, 50V, Mylar
D909	224450562	MTZ5.6B, Zener	C209, C210	354784799	0.47 $\mu$ F, 50V, Elect.
D910, D911	22380032	ISR139-100	C211	371121034	0.01 $\mu$ F $\pm$ 5%, 50V, Mylar
D912	224452202	MTZ22B, Zener	C212, C213	354780109	1 $\mu$ F, 50V, Elect.
D913	224451203	MTZ12C, Zener	C214	371124734	0.047 $\mu$ F $\pm$ 5%, 50V, Mylar
	<b>Coils</b>		C215	354780109	1 $\mu$ F, 50V, Elect.
L001, L002	233404	NFRF-3054	C216	354784799	0.47 $\mu$ F, 50V, Elect.
L101	233403	NFIF-4074	C218	391244717	470 $\mu$ F, 16V, Elect. (MUSE)
L102, L171	233400M022	NCH-2226	C219, C220	354741009	10 $\mu$ F, 16V, Elect.
L151	232148	NMRF-7050	C221, C222	371123924	3900pF $\pm$ 5%, 50V, Mylar
L152	232139	NMIF-4062	C223, C224	354741009	10 $\mu$ F, 16V, Elect.
L172	233296	NFIF-4048	C227	354784799	0.47 $\mu$ F, 50V, Elect.
L173	233297	NFIF-4049	C228, C229	370132714	270pF $\pm$ 5%, 100V, Plastic film (APS) <W>
L174	233400K220	NCH-2238	C231, C232	391241017	100 $\mu$ F, 16V, Elect. (MUSE)
L201	233383	NMC-6070	C304	354784799	0.47 $\mu$ F, 50V, Elect.
L202, L203	233294	NMC-5040	C753	354721019	100 $\mu$ F, 6.3V, Elect.
L801	231081	NCH-2129	C756, C757	371124734	0.047 $\mu$ F $\pm$ 5%, 50V, Mylar
	<b>Ceramic filters</b>		C758, C760	354784799	0.47 $\mu$ F, 50V, Elect.
X101, X105	3010041	SFE10.7MX	C759	354764709	47 $\mu$ F, 35V, Elect.
X102, X104	3010130	SFE10.7MZ2K-A	C763, C805	354782299	0.22 $\mu$ F, 50V, Elect.
X103, X106	3010132	SFE10.7MJK-A	C803	354784799	0.47 $\mu$ F, 50V, Elect.
X151	3010123	SFZ450JL	C806	354780109	1 $\mu$ F, 50V, Elect.
X152	3010076	SFU450C	C807	354744709	47 $\mu$ F, 16V, Elect.
X201	3010152	CSB456F11	C808	354741009	10 $\mu$ F, 16V, Elect.
	<b>Crystal oscillator</b>		C809	354744719	470 $\mu$ F, 16V, Elect.
X751	3010151	XTL7.2M	C902	354761009	10 $\mu$ F, 35V, Elect.
	<b>Capacitors</b>		C903	354761019	100 $\mu$ F, 35V, Elect.
C007	354741009	10 $\mu$ F, 16V, Elect.	C904	354782219	220 $\mu$ F, 50V, Elect.
C009, C117	391241017	100 $\mu$ F, 16V, Elect. (MUSE)	C905	354784709	47 $\mu$ F, 50V, Elect.
C134	354780229	2.2 $\mu$ F, 50V, Elect.	C913	354764709	47 $\mu$ F, 35V, Elect.
C135	354744709	47 $\mu$ F, 16V, Elect.	C914	354752229	2200 $\mu$ F, 25V, Elect.
C153, C155	354741009	10 $\mu$ F, 16V, Elect.	C916	354741009	10 $\mu$ F, 16V, Elect.

CIRCUIT NO.	PART NO.	DESCRIPTION
C917	354721019	100 $\mu$ F, 6.3V, Elect.
C918	354763319	330 $\mu$ F, 35V, Elect.
C920	354764719	470 $\mu$ F, 35V, Elect.
C921	354761009	10 $\mu$ F, 35V, Elect.
C922, C923	354741009	10 $\mu$ F, 16V, Elect.
<b>Resistors</b>		
R001, R002	431523355	3.3Mohm, 1/2W, Solid <D>
R101	5210070	N06HR100KBD, Semi-fixed
R102	5210072	N06HR220KBD, Semi-fixed
R151	5210064	N06HR10KBD, Semi-fixed
R202	5210074	N06HR470KBD, Semi-fixed
R904	441720474	4.7ohm, 2W, Metal oxide film
R905	442521014	100ohm, 1/2W, Metal oxide film
<b>Relay</b>		
RL001	25065356	NRL-1P0.1A-DC12-050
<b>Switch</b>		
	25065286	NSS-22112, Slide, De-emphasis <W>
<b>Terminals</b>		
P901	25060087	NTM-2PDMN31, Antenna
P902	25045182	NPJ-2PDBL72, Output <D>
	25045211	NPJ-2PDBL91, Output <G/W>
P905	25045172	HSJ-1003-01-020, RI
<b>Radiator</b>		
	27160146	RAD-52
<b>Sockets</b>		
JL101, JL102	25050272	NSCT-8P-100
JL103	25050273	NSCT-9P-101
	2009990025	NSAS-12P0049
<b>Holder</b>		
	27190432	UAMS-07-0, Clamp
<b>Cable</b>		
	2010102	Antenna
<b>Shield plate</b>		
	27150181	

**DISPLAY CIRCUIT PC BOARD(NADIS-3780-1/1A/1B)**

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>Lamp</b>		
PL701	210064B	PL6.3V, 250mA
<b>ICs</b>		
Q702	22240251	TMP47C870-4631
Q804, Q805	222807	$\mu$ PA81C
Q806	22240243	LC6527C-3987
Q807	22240291	$\mu$ PD6252C
<b>Transistors</b>		
Q701	2213284	2SC1740S-R
Q704	2213074 or 2211455	2SA933-R or 2SA1015-GR
Q705, Q808	2211183 or	2SC1740-R or
Q809	2211255	2SC1815-GR
<b>FL tube</b>		
Q703	212077	9-BT-61GK
<b>Diodes</b>		
D701, D703	223163	1SS133
D704, D706	223163	1SS133
D707	223163	1SS133
D708	224450361	MTZ3.6A, Zener
D710-D712	223163	1SS133
D714-D719	223163	1SS133
D725	223163	1SS133
D730-D733	223163	1SS133
D734	224450562	MTZ5.6B, Zener
<b>L.E.Ds</b>		
D810, D811	225142	SEL2913K
D820, D821	225137CG,	SEL2413E-CG,
D824, D826	225137DG or	SEL2413E-DG or
D829, D831	225137DY	SEL2413E-DY
D833, D835	225137CG,	SEL2413E-CG,
	225137DG or	SEL2413E-DG or
	225137DY	SEL2413E-DY

CIRCUIT NO.	PART NO.	DESCRIPTION
D825, D827	225142	SEL2913K
D828, D830	225142	SEL2913K
D832, D836	225142	SEL2913K
D834	225141	SEL2213C
<b>Ceramic oscillators</b>		
X701	3010150	CST4.000MGW
X702	3010099	CSA4.00MG
<b>Capacitors</b>		
C701	353781009	10 $\mu$ F, 50V, Elect.
C702	353780109	1 $\mu$ F, 50V, Elect.
C703	395160477	4.7 $\mu$ F, 35V, Tantal
C706	375524744	0.47 $\mu$ F $\pm$ 5%, 50V, Plastic(MMT)
C707	3000057	0.1F, 5.5V, Super
C711, C713	353780109	1 $\mu$ F, 50V, Elect.
C712	353781009	10 $\mu$ F, 50V, Elect.
<b>Resistors</b>		
R713	49163103408	10k $\times$ 8, 1/10W, Network
R718	49121333403	33k $\times$ 3, 1/8W, Network
R719	49163103408	10k $\times$ 8, 1/10W, Network
<b>Switches</b>		
S751-S771	25035548	NPS-122-S510
S791	25065286	NSS-22112, Band <W>
<b>Holders</b>		
	27190710	Lamp
	27190712	L.E.D.

**STATION SWITCH PC BOARD(NASW-3781-1)**

CIRCUIT NO.	PART NO.	DESCRIPTION
<b>Diodes</b>		
D841-D846	223163	1SS133
<b>L.E.Ds</b>		
D847, D848	225137CG, 225137DG or 225137DY	SEL2413E-CG, SEL2413E-DG or SEL2413E-DY
<b>Switches</b>		
S810-S832	25035548	NPS-122-S510
<b>Holder</b>		
	27190711	

**POWER SWITCH PC BOARD(NAPS-3782-1/1A)**

CIRCUIT NO.	PART NO.	DESCRIPTION
C901	3500065A	$\Delta$ DE7150FZ103PAC400V/125V, Capacitor IS
R901	431523355	$\Delta$ 3.3Mohm, 1/2W, Solid resistor <D>
S901	25035558	$\Delta$ NPS-111-L520P, Power switch

**REMOTE CONTROL SENSOR PC BOARD (NAETC-3783-1)**

CIRCUIT NO.	PART NO.	DESCRIPTION
U701	24130003	GP1U50XS, Remote control sensor


**OUTPUT VOLUME PC BOARD(NAETC-3696-1)**

CIRCUIT NO.	PART NO.	DESCRIPTION
R241	5142003A	N16RGM3KB15, Variable resistor

NOTE: <D>: Only 120V model  
<G>: Only 220V model  
<W>: Only Worldwide model

NOTE: THE COMPONENTS IDENTIFIED BY MARK  $\Delta$  ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

# PACKING VIEW

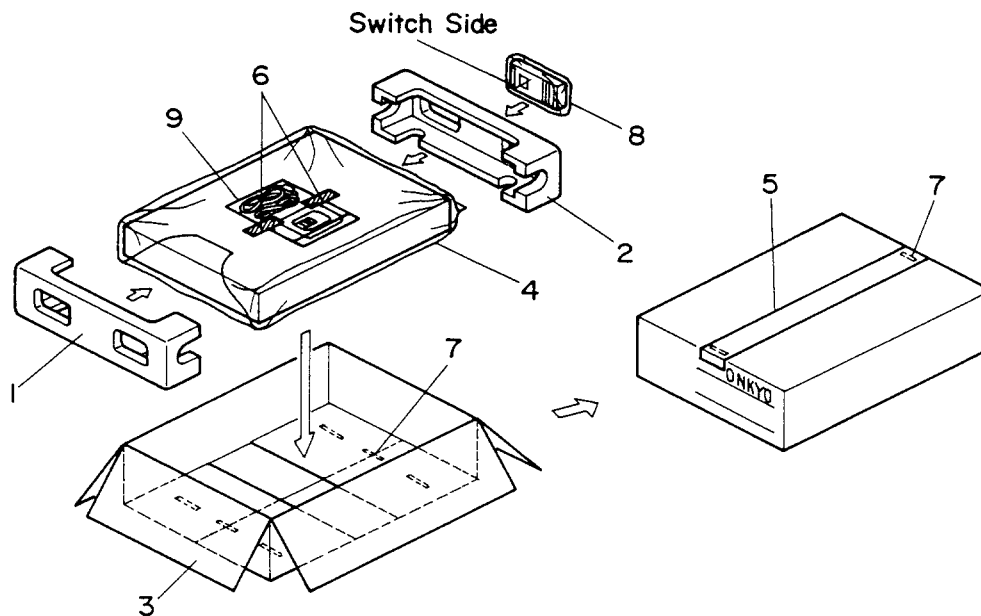

REF. NO.	PART NO.	DESCRIPTION		
1	29091329B	Pad L	29100006A	Poly-vinyl bag
2	29091330B	Pad R	25055040	CV-K-2, Conversion plug <W>
3	29051986	Master carton box	25060123	Two FM adaptors <D/W>
4	29100036A	Poly-vinyl bag	29365019	Warranty card <DN>
	29095012-1	Protection sheet	29365024	Warranty card <F>
5	29110071-1	50×700 mm, Dampson tape	29100107	Bag for warranty card <F>
6	29110032	30×300 mm, Adhesive tape	29358002G	Service station list <DN>
7	282301	Sealing hook		
8	24140165	RC-165T, Remote control transmitter		
9	Accessory bag ass'y			
	29341470	Instruction manual <D>		
	29341472	Instruction manual <G/W>		
	292064B	FM antenna <D>		
	292092	FM antenna <G/W>		
	232140	NMA-3057, AM loop antenna		
	2010098A	Connection cord		
	2010200	Connection cord for remote control		
	3010054	UM-3, Two batteries		

NOTE: <D>: Only 120V model  
 <G>: Only 220V model  
 <W>: Only Worldwide model  
 <DN>: Only U.S.A. model  
 <F>: Only French model

## ONKYO CORPORATION

International Division: Onarimon Yusen Bldg., 23-5, Nishi-Shimbashi 3-chome, Minato-ku,  
 TOKYO 105, JAPAN Tel: 03-432-6987 Fax: 03-436-6979 TLX: 242-3551 ONKYO J  
**ONKYO U.S.A. CORPORATION**  
 200 Williams Drive, Ramsey, N.J. 07446, U.S.A. Tel: 201-825-7950 Fax: 201-825-8150