

ONKYO® SERVICE MANUAL

**U.S.A. Model
DIGITAL SYNTHESIZED
FM STEREO TUNER
Model T-909**

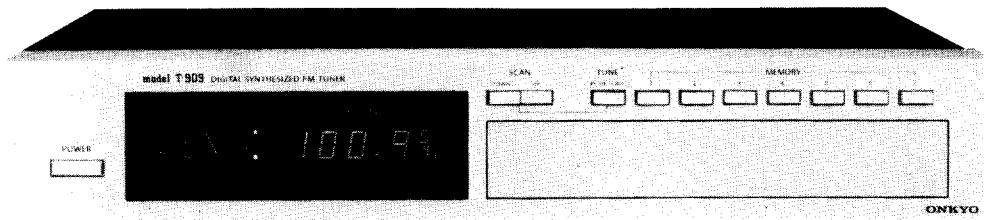


TABLE OF CONTENTS

Item	Page
Specifications	2
Precautions	2
Features	2
Circuit description	3
Exploded view	6
Component location	7
Alignment procedures	8
Digital section p.c.b. -parts list	10
Digital section-schematic diagram	11
Pin arrangements for digital IC	13
Tuner-schematic diagram	17
Tuner p.c.b. view	19
Tuner p.c.b. -parts list	21
Linear IC block diagram	22
Power supply p.c.b. view	24
Block diagram	25
Packing procedures	26

**ONKYO®
AUDIO COMPONENTS**

SPECIFICATIONS

Tuning Range:	88.1~107.9 MHz	AM Suppression Ratio:	55 dB
Tuning increments:	200 kHz	Harmonic Distortion:	FM mono: 0.08% at 1 kHz FM stereo: 0.15% at 1 kHz
Usable Sensitivity:	FM mono: 9.8 dBf, 1.7 μ V IHF 1.3 μ V (S/N 26 dB, 40 kHz Devi.) DIN	Stereo Separation:	45 dB at 1 kHz 40 dB at 100~10,000 Hz
	FM stereo: 17.2 dBf, 4 μ V IHF 45 μ V (S/N 46 dB, 40 kHz Devi.) DIN	Subcarrier Suppression:	70 dB
50 dB Quieting Sensitivity:	FM mono: 14.7 dBf, 3 μ V FM stereo: 36 dBf, 35 μ V	Muting Level:	17.2 dBf, 4 μ V
Intermediate Frequency:	10.7 MHz	Stereo Threshold:	17.2 dBf, 4 μ V
Capture Ratio:	1.5 dB	Frequency Response:	30~16,000 Hz (+0.5, -2dB)
Image Rejection Ratio:	85 dB	Tuning Frequency Accuracy:	30 ppm
IF Rejection Ratio:	100 dB	Power Supply Rating:	AC 120 volts 60 Hz
Spurious Rejection Ratio:	105 dB	Antennas:	300 ohms balanced, 75 ohms unbalanced and 75 ohms type “F” connector
Signal to Noise Ratio:	FM mono: 80 dB FM stereo: 74 dB	Semiconductors:	4 FETs, 56 ICs 45 Transistors, 60 Diodes
Alternate Channel Att.:	80 dB IHF	Dimensions:	450 W x 3 1/4" x 13 15/16"
Selectivity:	75 dB DIN (\pm 300 kHz, 40 kHz Devi.)	Weight:	5.9 kg., 13.0 lbs.

Specifications and features are subject to change without notice.

PRECAUTIONS

All CMOS devices have diode input protection against adverse electrical environments such as static discharge.

Unfortunately, there can be severe electrical environments during the process of handling. For example, static voltages generated by a person walking across a common waxed floor have been measured in the 4 to 15 kV range (depending on humidity, surface conditions, etc.). These static voltages are potentially disastrous when discharged into a CMOS input considering the energy stored in the capacity (\approx 300 pF) of the human body at these voltage levels.

Present CMOS gate protection structures can generally protect against overvoltages. This is usually sufficient except in the severe cases. Following are some suggested handling procedures for CMOS devices, many of which apply to most semiconductor devices.

1. All MOS devices should be stored or transported in materials that are somewhat conductive. MOS devices must not be inserted into conventional plastic “snow” or plastic trays.
2. All MOS devices should be placed on a grounded bench surface and operators should ground themselves prior to handling devices, since a worker can be statically charged with respect to the bench surface.
3. Nylon clothing should not be worn while handling MOS circuits.
4. When lead straightening or hand soldering is necessary, provide ground straps for the apparatus used.
5. Double check test equipment setup for proper polarity of voltage before conducting parametric or functional testing.
6. All unused device inputs should be connected to V_{DD} or V_{SS}.

FEATURES

Quartz Controlled Tuning Accuracy

Onkyo has solved tuning accuracy problems once and for all by employing one of the most accurate and stable reference frequency sources known today - the quartz crystal oscillator in a quartz synthesizer tuning system. Not even the slightest hint of station drift can be detected, irrespective of widely varying operational conditions.

Front Panel Digital Frequency Display

Befitting its high degree of tuning accuracy and stability, the T-909 displays the tuned frequency in digital form. Tuning operations involve no more than the pushing of a few buttons - nothing could be simpler, nor any more accurate.

Frequencies may be varied one at a time in 50 kHz steps (200 kHz steps for USA) or continuously at relatively high speed. And when the station has been accurately tuned, the TUNED indicator lamp will light up.

Tuning Memory for Automatic Tuning

A total of 7 favorite FM stations may be pre-set for automatic tuning. The actual setting operation involved is simplicity itself, while any pre-set memory may be cleared and reset for a new station with equal ease.

High Sensitivity Plus Superb Selectivity

With dual gate MOS FETs in the front-end RF stage and mixer circuit, and a tuned buffer circuit in the local oscillator, a truly excellent FM sensitivity of 1.7 μ V (9.8 dBf) has been attained. Distant FM stations that were once too remote for worthwhile FM listening are given greater clarity and brilliance. But what is even more remarkable is the conspicuous absence of interference, especially from adjacent stations.

Negligible Noise and Distortion

Although the T-909 has been designed for the ultimate in accuracy and speed, emphasis is also on quality of sound reproduction. An S/N ratio of 80 dB (mono) and a distortion rating of 0.08% (mono, 1 kHz) clearly reveal the extremely high standard of hi-fi FM reception achieved in the T-909.


Other Outstanding Features

As could be expected of a tuner of this class, space does not permit details on the numerous other important features, such as the PLL MPX IC and pilot cancellor, signal strength meter, de-emphasis switch for Dolby * broadcasts, multipath detector terminals (for oscilloscope connection) and the gold-plated output terminals.


* "DOLBY" IS A REGISTERED TRADEMARK OF DOLBY LABORATORIES INC.

CIRCUIT DESCRIPTION


T-909 BLOCK DIAGRAM

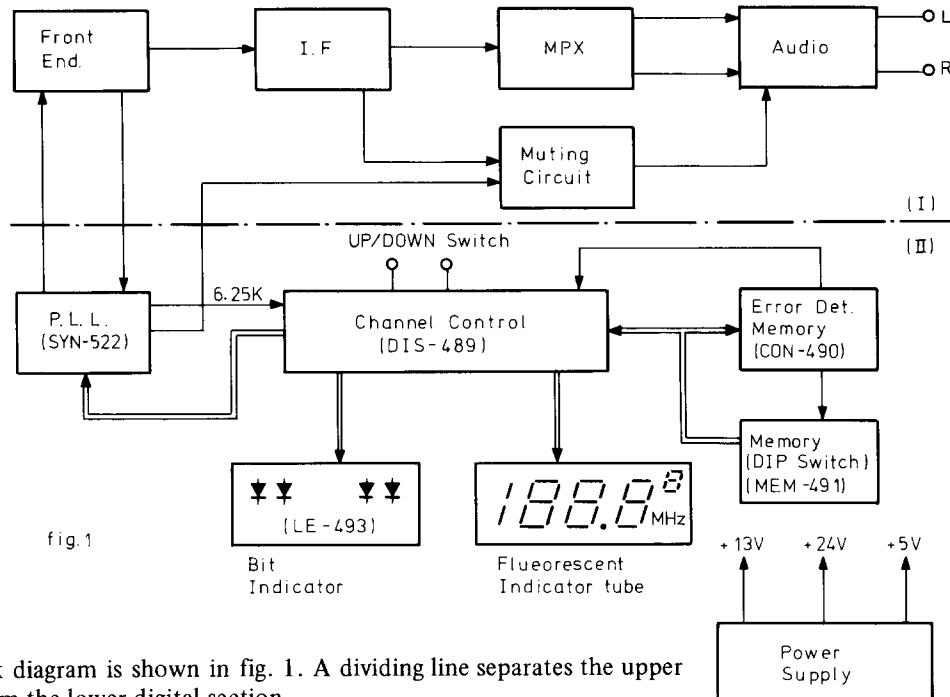

SYN-522 BLOCK DIAGRAM

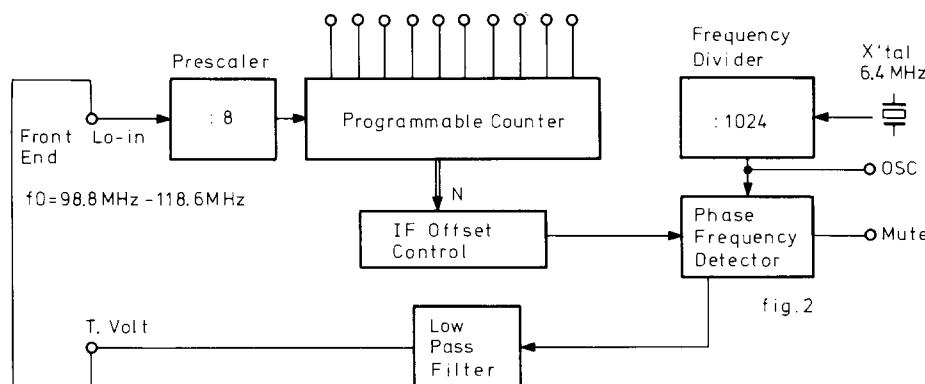

In conventional tuners, radio stations are "tuned" by varying the capacitance of a variable capacitor. In digital tuners, however, this tuning operation is achieved by varying the voltage applied to a variable capacitance diode. In the PLL circuit (block diagram shown in fig. 2), the subdivided oscillator frequency and a reference frequency undergo phase comparison to obtain the voltage to be applied to the variable capacitance diode.

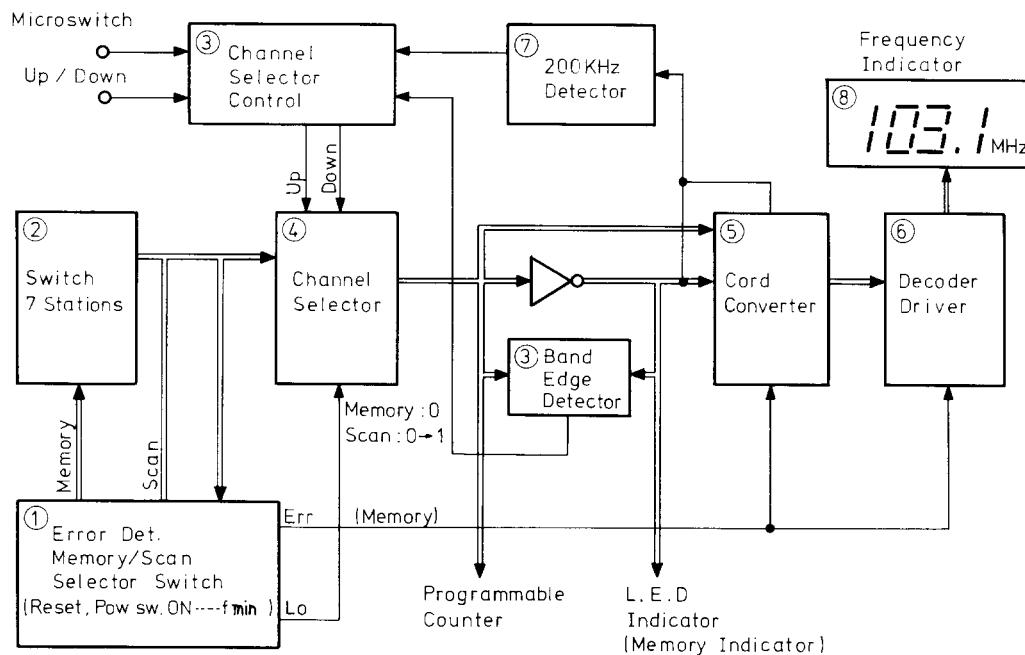

1. Memory/Scan Selector Switch and Error Detector Circuit

The memory/scan selector switch contains 7 memory switching positions and 1 scan switching position.

The Lo terminal is 0 during "memory", but changes to 1 during "scan" when the scan frequency is stored in the channel selector by the time constant circuit.

The error detector circuit is activated whenever the code set by the memory DIP switch does not correspond to the code determined by the received frequency, resulting in the fluorescent E (Error) indicator lamp lighting up.

2. DIP Switch

By setting the DIP switch (tuned manually to light up the LED lamp) to the code determined by the received frequency, the frequency will be recalled from memory by pressing the switch.

3. Channel Selector Control

Scan pulse signals appear at the output whenever the UP or DOWN switches are pressed. Note, however, that the band edge detector is activated when either f_{max} (107.9 MHz) or f_{min} (88.1 MHz) is reached, thereby stopping the output scan pulse signals.

4. Channel Selector

The input code is passed straight through to the output during memory mode, but when the scan switch is on, the code set by CON-490 (f_{min} = 88.1 MHz) is stored in the memory. That is, the input signal appears at the output when Lo is 0.

The code which has been stored in the memory by the scan pulse signal from the channel selector control then changes the received frequency by advancing or delaying the counter. Frequency is changed by 50 kHz per scan pulse.

5. Code Converter

The channel selector output code is distributed to each frequency unit column (100MHz, 10MHz, 1MHz, and 100 kHz), and then converted into binary numbers corresponding to decimal numbers.

6. Decoder/Driver

The code converted into binary form is then converted into a code form employed to drive the fluorescent indicator lamps. The 12.5 V drive voltage for these indicator lamps (the rest of the digital section employs high level voltage in the 3 to 5 V range) is obtained from the inverter C-MOS IC acting as a driver circuit.

7. 200 kHz Detector Circuit

Frequencies in the European model are changed in steps of 50 kHz, but in the USA model frequencies are changed in steps of 200 kHz. And since the channel selector counter is advanced or delayed by 50 kHz per step, the USA model is equipped with a 200 kHz detector circuit in order to advance or delay the channel selector counter 4 counts at a time.


Tuned frequency and channel selector output cords


Frequency (MHz)	J	I	H	G	F	Frequency (MHz)	E	D	C	B	A
87	0	1	0	1	1	.00	0	0	0	0	0
88	0	1	1	0	0	.05	0	0	0	0	1
89	0	1	1	0	1	.10	0	0	0	1	0
90	0	1	1	1	0	.15	0	0	0	1	1
91	0	1	1	1	1	.20	0	0	1	0	0
92	1	0	0	0	0	.25	0	0	1	0	1
93	1	0	0	0	1	.30	0	0	1	1	0
94	1	0	0	1	0	.35	0	0	1	1	1
95	1	0	0	1	1	.40	0	1	0	0	0
96	1	0	1	0	0	.45	0	1	0	0	1
97	1	0	1	0	1	.50	1	0	0	0	0
98	1	0	1	1	0	.55	1	0	0	0	1
99	1	0	1	1	1	.60	1	0	0	1	0
100	1	1	0	0	0	.65	1	0	0	1	1
101	1	1	0	0	1	.70	1	0	1	0	0
102	1	1	0	1	0	.75	1	0	1	0	1
103	1	1	0	1	1	.80	1	0	1	1	0
104	1	1	1	0	0	.85	1	0	1	1	1
105	1	1	1	0	1	.90	1	1	0	0	0
106	1	1	1	1	0	.95	1	1	0	0	1
107	1	1	1	1	1						

Band Edge Control Cords


	J	I	H	G	F	E	D	C	B	A
UP	1	1	1	1	1	1	1	0	0	0
DOWN	0	1	1	0	0	0	0	0	1	0

NOTES: The frequency when set the power switch to ON or the tuned switch to reset is 88.1 MHz

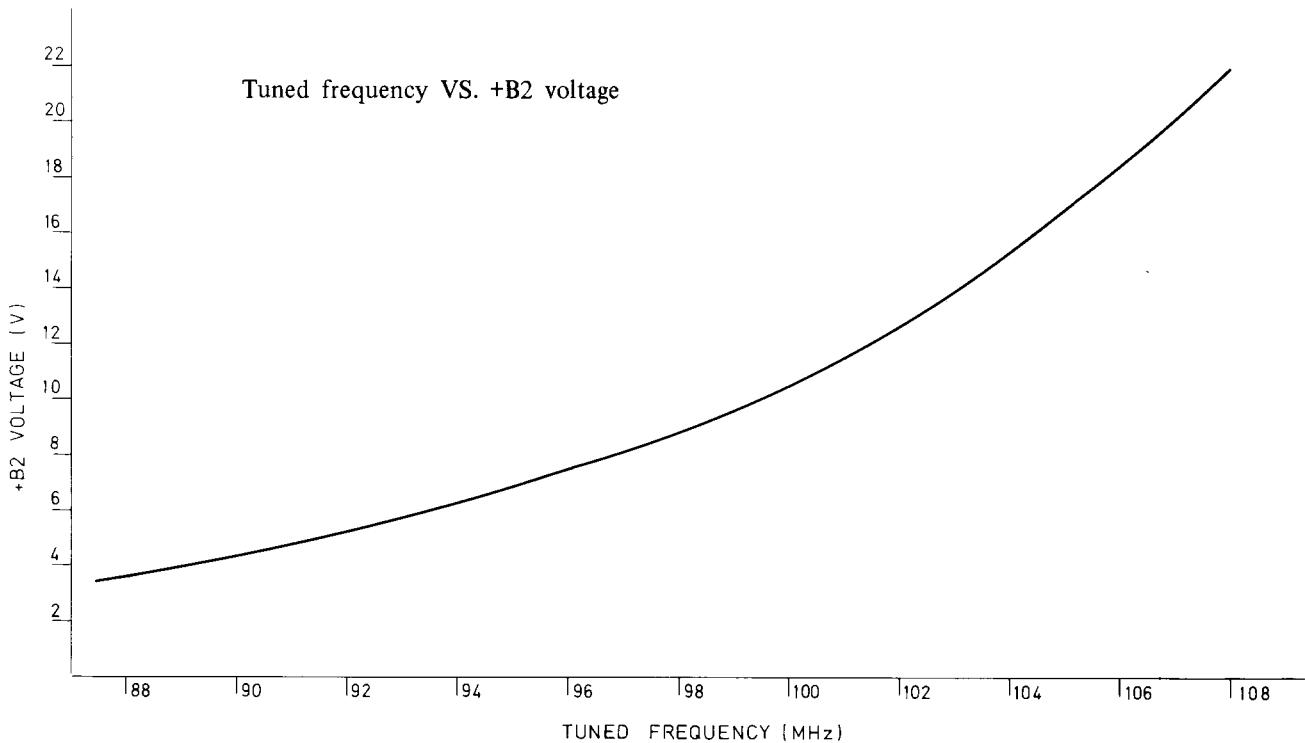

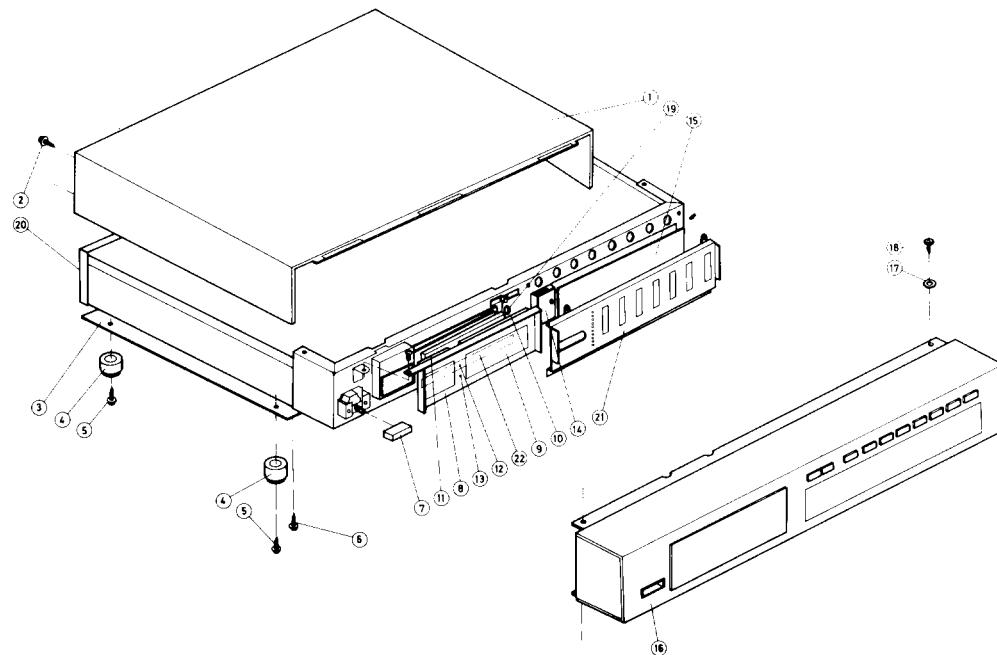EXPLODED VIEW**EXPLODED VIEW-PARTS LIST**


Ref. No.	Parts No.	Description	Ref. No.	Parts No.	Description
1	2811044	Top cover	12	225018	GL-2PR1, Stereo indicator L.E.D.
2	831430082	3STW+8BQ (BC)	13	225019	GL2PG1, Tuned indicator L.E.D.
3	27170042	Bottom board	14	13749593A	NALE493a, L.E.D. p.c.b.
4	280379	Leg	15	13749591A	NAMEM-491a, Memory p.c.b.
5	834130122	3STS+12BQ	16	13752121	Front panel ass'y
6	831130082	3STW+8BQ	17	87313006	M-3B
7	28320168A-1	Power switch knob	18	831130082	3STW+8BQ
8	28133008	Plate	19	27300107	Programming stylus
9	28191026	Smoking plate	20	27120120	Back panel
10	28140102	Cushion	21	28142602	Plate (M)
11	28140103	Cushion	22		Cushion

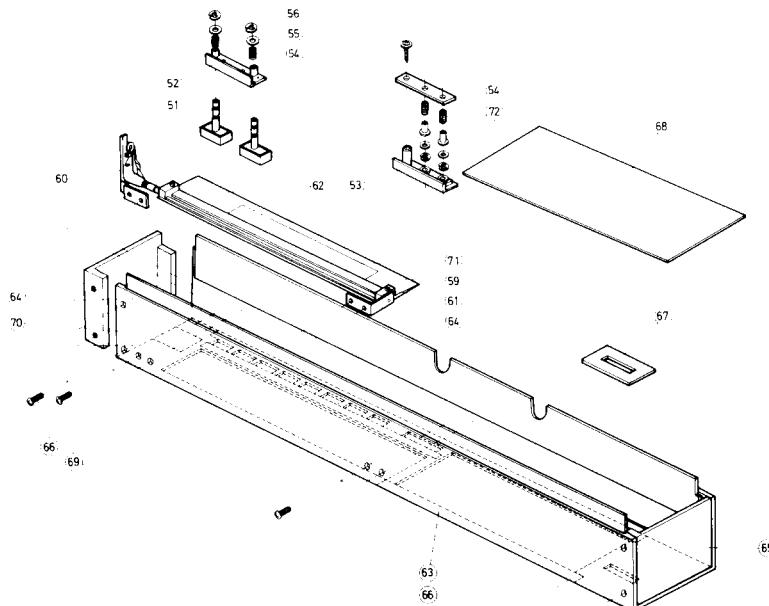FRONT PANEL-EXPLODED VIEW

FRONT PANEL EXPLODED VIEW-PARTS LIST

Ref. No.	Parts No.	Description	Ref. No.	Parts No.	Description
51	28320240	Push switch knob	62	27300105	Support (R)
52	27267028	Push switch guide	63	27210096	Front panel
53	27267029	Push switch guide	64	28125038-1	End cap (R)
54	27180021	Spring	65	28125037-1	End cap (L)
55	87644010	W4+10F (BC)	66	8233006	3S+6FN (CR)
56	893030	E-3, Circlip	67	27267018	Power switch guide
57	27140201	Bracket	68	28191025	Dial glass
58	834130062	3STS+6BQ	69	82113006	3P+6FN
59	28148050	Door	70	28140106	Cushion
60	27300110	Hinge (R)	71	29380041	Label (A)
61	27300106	Support (L)	72	27270017A	Spacer

COMPONENT LOCATION

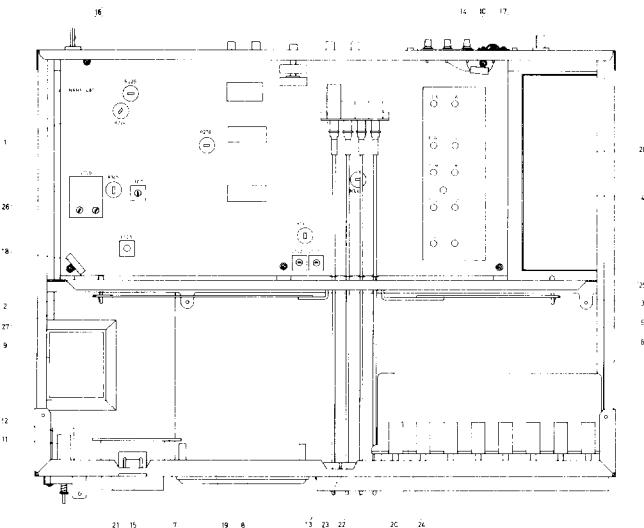

COMPONENT LOCATION-PARTS LIST

Ref. No.	Circuit No.	Parts No.	Description
1		13749587A	NARF-487a, RF/IF and MPX, pc board
2		13752585	NAPS-485, Power supply pc board
3		13752586	NAPS-486, Power supply pc board
4		13752522	NASYN-522, Synthesis pc board
5		13749589A	NADIS-489a, Display pc board
6		13749590A	NACON-490a, Converter pc board
7		13752592	NAPL-492, Meter illumination pc board
8	Q747	212001	5-LT-06, Fluorescent indicator tube
9	T001	230246	NPT-646D, Power transformer
10	T002	233026	NBLN-1, Balun transformer
11	C1	3504012	0.01μF, 125V, UL capacitor
12	S001	25035054	NPS-111-L19P, Power switch
13	S811, S812	25065051	NMS-1202, Microswitch
14		25060021B	NTM-3PUM1, Antenna terminal
15		243088	NIND-0500S88, Signal strength meter
16		253072	Power supply cord
17		25045012	FR3, Coaxial connector
18		25108002	MD2R, Terminal
19	A001	27110057	Front bracket
20	A005	27110060	Front bracket (R)
21	A002	27250015	Lamp case
22	A032	27260014	Shaft
23	A014	27140200	Bracket
24	A033	893020	E-2, Shaft
25	A021	27115032	Side bracket (R)
26	A022	27115033	Side bracket (L)
27	A029	27190009	Holder
28	A036	27150081	Shielded cover

ALIGNMENT PROCEDURES


INSTRUMENTS REQUIRED

1. Stereo Modulator
2. FM Signal Generator with Frequency Counter
3. Frequency Counter
4. Digital DC Voltmeter
5. DC Voltmeter
6. Distortion Analyzer
7. AC V.T.V.M.
8. Oscilloscope

GENERAL ALIGNMENT CONDITION

1. Standard modulation is 1 kHz 100% (FM MONO), pilot 9% sub and main 91% (FM STEREO).
2. Standard knob position
 S1 (DOLBY NR ADAPT) OFF
 S2 (NOISE FILTER) OFF
 S3 (MODE) STEREO
 S4 (MUTING) OFF

CONNECTION DIAGRAM

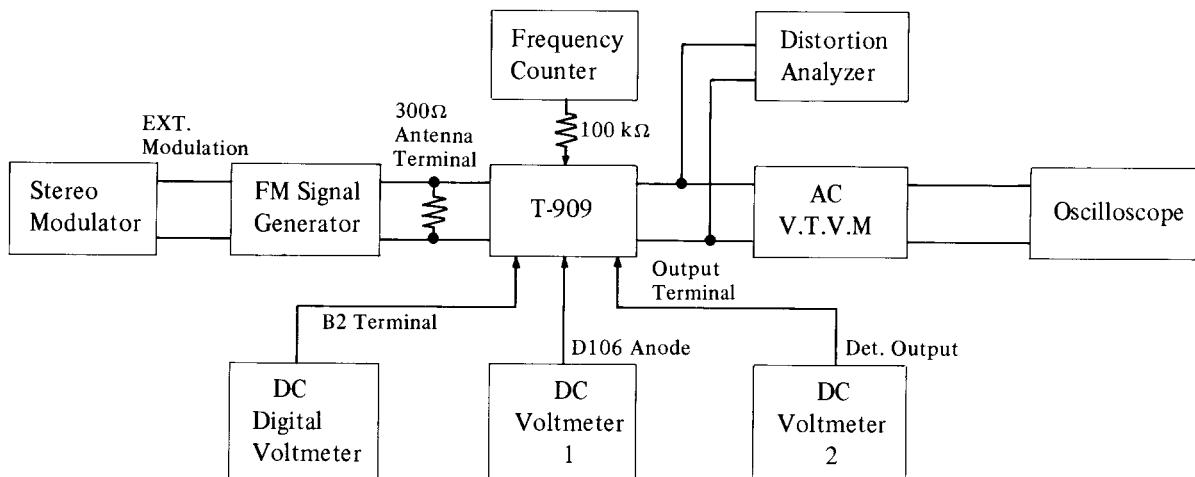

(1) FM ALIGNMENT

Step	FM Signal Generator	Stereo Modulator	Dial to set	Adjust	Output Indicator	Adjust for	Remarks
1	88.1MHz, 65dBf 1kHz 75kHz devi.		88.1MHz	LO	DC Digital Voltmeter	3.6V	Usually not necessary to adjust
2	107.9MHz, 65dBf 1kHz, 75kHz devi.		107.9MHz	TCO		22V	
3	88.1MHz, 25dBf 1kHz, 75kHz devi.		88.1MHz	L001 L004	DC Voltmeter 1	Minimum	Repeat steps 3 and 4 as necessary
4	107.9MHz, 25dBf 1kHz, 75kHz devi.		107.9MHz	TC001 TC004			
5	98.1MHz, 25dBf 1kHz, 75kHz devi.		98.1MHz	L106			
6	98.1MHz, 25dBf 1kHz, 75kHz devi.		98.1MHz	L107 Bottom	DC Voltmeter 2	OV	
				L107 Upper	Distortion Analyzer	Minimum	
7	98.1MHz, 25dBf 1kHz, 75kHz devi		98.1MHz	L105	AC V.T.V.M	Maximum	
8	98.1MHz, 65dBf EXT. Modulation	L+R 68.25kHz devi. Pilot sig. 6.75kHz devi.	98.1MHz	L101 L102	Distortion Analyzer	Minimum	

(2) MULTIPLEX ALIGNMENT


	FM Signal Generator	Stereo Modulator	Dial to set	Adjust	Output Indicator	Adjust for	Remarks
V.C.O	98.1MHz 65 dBf	—	98.1MHz	R224	Frequency Counter	76kHz	Turn off the modulation
Pilot Cancel	98.1MHz 65dBf EXT. Modulation	Pilot Sig. 6.75kHz devi.	98.1MHz	R229	AC V.T.V.M	Minimum	
Separation	Same as above	Reh 68.25kHz devi. Pilot 6.75kHz 6.75kHz	98.1MHz	R278	AC V.T.V.M (Lch)	Minimum	Maximum and same Separation
		Lch 68.25kHz devi. Pilot 6.75kHz devi.			AC V.T.V.M (Rch)	Minimum	

(3) MUTING CIRCUIT

FM Signal Generator	Dial to set	Adjust	Output Indicator	Adjust for	Remarks
98.1MHz. 17dBf	98.1MHz.	R145	Oscilloscope	Signal	Set the muting Switch to ON.
98.1MHz. 16dBf				No Signal	
98.1MHz, 65dBf 1kHz, 75kHz devi.	98.1MHz	R324	DC Voltmeter	Same Voltage	Connect the DC Voltmeter across the gates of Q ₃₂₁

(4) SIGNAL STRENGTH METER CALIBRATION

FM Signal Generator	Dial to set	Adjust	Output Indicator	Adjust for
98.1MHz, 65dBf 1kHz, 75kHz devi.	98.1MHz	R139	Signal Strength Meter	60

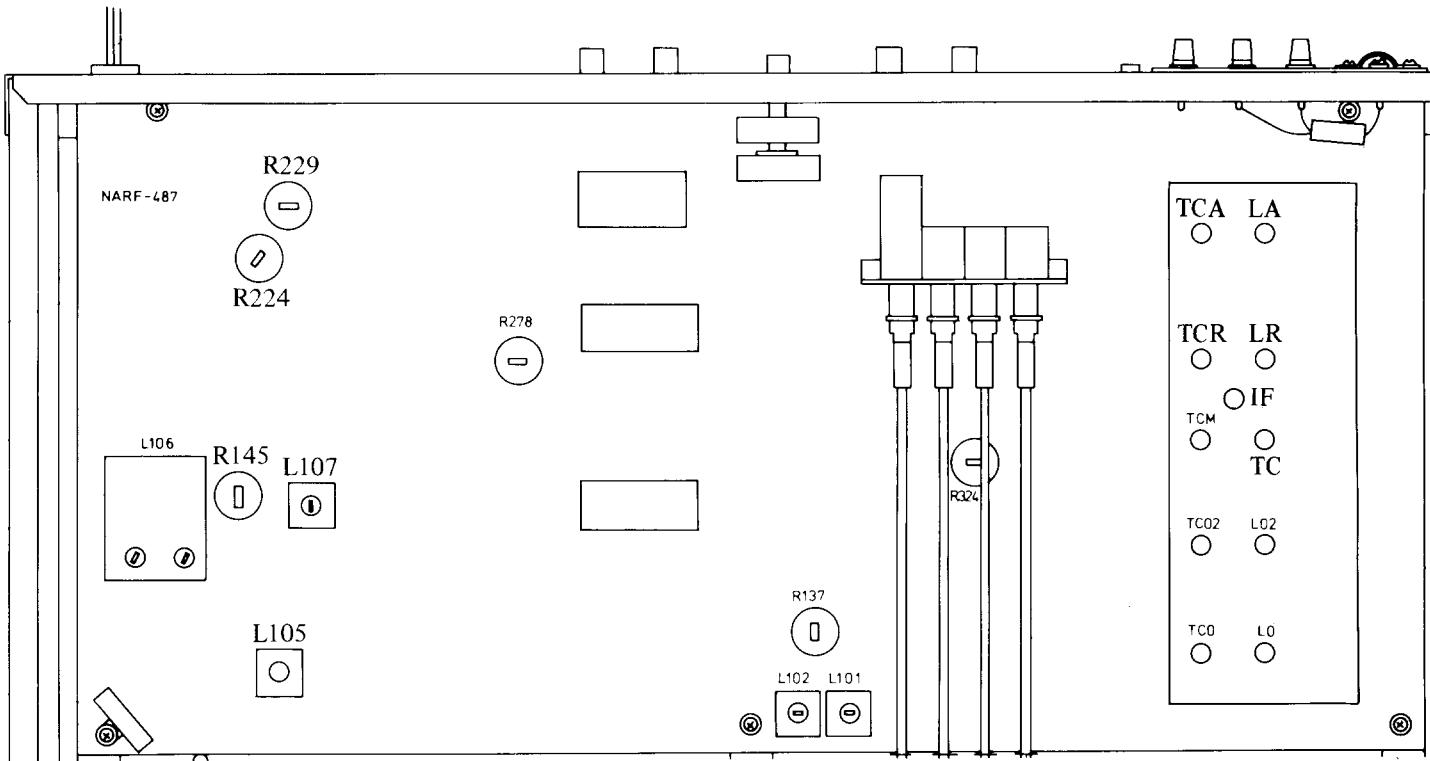

DIGITAL SECTION P.C.B.-PARTS LIST**SYNTHESIS PC BOARD
(NASYN-522)-PARTS LIST**

Circuit No.	Parts No.	Description
ICs		
Q761	222495	HD74S112
Q762	222484	HD74S74
Q763	222493	SN74LS192
Q764, Q765	222494	SN74LS193
Q766	222479 or 222442 or	HD7427 or SN7427 or
Q767	222488 or 222428 or	HD7420 or SN7420 or
Q768, Q769	222491	HD74293
Q770	222501	HD7474
Q771	222477	TCS081
Transistors		
Q772	2211192	2SC380A(O)
Q773, Q774	2210675	2SC1681(GR)
Capacitor		
C761	3500056	1μF, 16V, CA
X'tal		
X801	3010029	XTL-6.4M
Shielded case		
	27225027	

DISPLAY PC BOARD**(NADIS-489a)-PARTS LIST**

Circuit No.	Parts No.	Description
ICs		
Q701-Q705	222478	HD7400
Q706	222481	HD7410
Q707	222487	HD74192
Q708, Q709	222492 or 222504 or	HD74193 or SN74193 or
Q710, Q711	222489	HD7430
Q712	222490 or 222505 or	HD7486 or M53286 or
Q713	222481	HD7410
Q714	222478	HD7400
Q715	222480	HD7432
Q716, Q718	222481	HD7410
Q717, Q719	222478	HD7400
Q720, Q722	222481	HD7410
Q721, Q723	222503 or 222483 or	SN74LS47 or SN7447AN or
Q724, Q725	222475	TC4049
Q726-Q728	222475	TC4049
Q729, Q730	222484	HD7404
Transistors		
Q731-Q740	2211255	2SC1815(GR)
Q745, Q746	2211255	2SC1815(GR)
Fluorescent indicator tube		
Q747	212001	5-TL-06
Diodes		
D701, D702	223105	1S1555
Capacitors		
C701	352722211	220μF, 6.3V, Elect.

Circuit No.	Parts No.	Description
C703	374124735	0.047μF±10%, 50V, DE
C704	352922206	22μF, 6.3V, NP
C705, C706	374122235	0.022μF±10%, 50V, DE
C708	352721011	100μF, 6.3V, Elect.
C713	352732202	22μF, 10V, Elect.
C714	352742201	22μF, 16V, Elect.

**CONVERTER PC BOARD
(NACON-490a)-PARTS LIST**

Circuit No.	Parts No.	Description
ICs		
Q751, Q753	222478	HD7400
Q755	222481	HD7410
Transistors		
Q756, Q757	2211255	2SC1815(GR)
Diodes		
D713, D714	2231031	1N60N(FM)
D716, D717	2231031	1N60N(FM)
D720		
Capacitor		
C731	352734701	47μF, 10V, Elect.
Switch		
	25035074	NPS-822-L39, Memory/Scan

**MEMORY PC BOARD
(NAMEM-491a)-PARTS LIST**

Circuit No.	Parts No.	Description
Diode arrays		
D731-D737	225016	DAN401
D741-D747	225017	DAN601
Switches		
S801-S807	25065044	NDS-8103, DIP

**METER ILLUMINATION PC BOARD
(NAPL-492)-PARTS LIST**

Circuit No.	Parts No.	Description
	210032	0.25A, 6.3V, Pilot lamp
	451731504	15Ω, 2W, MOF resistor

**L.E.D. PC BOARD
(NALE-493a)-PARTS LIST**

Circuit No.	Parts No.	Description
D802-D809	225020	TLR122, L.E.D.

NOTES: Capacitor

CA: Aluminum solid electrolytic capacitor


DE: Non-inductive polyester film capacitor

NP: Non-polar electrolytic capacitor

Resistor

MOF: Metal oxide film resistor

AL SECTION-SCHEMATIC DIAGRAM

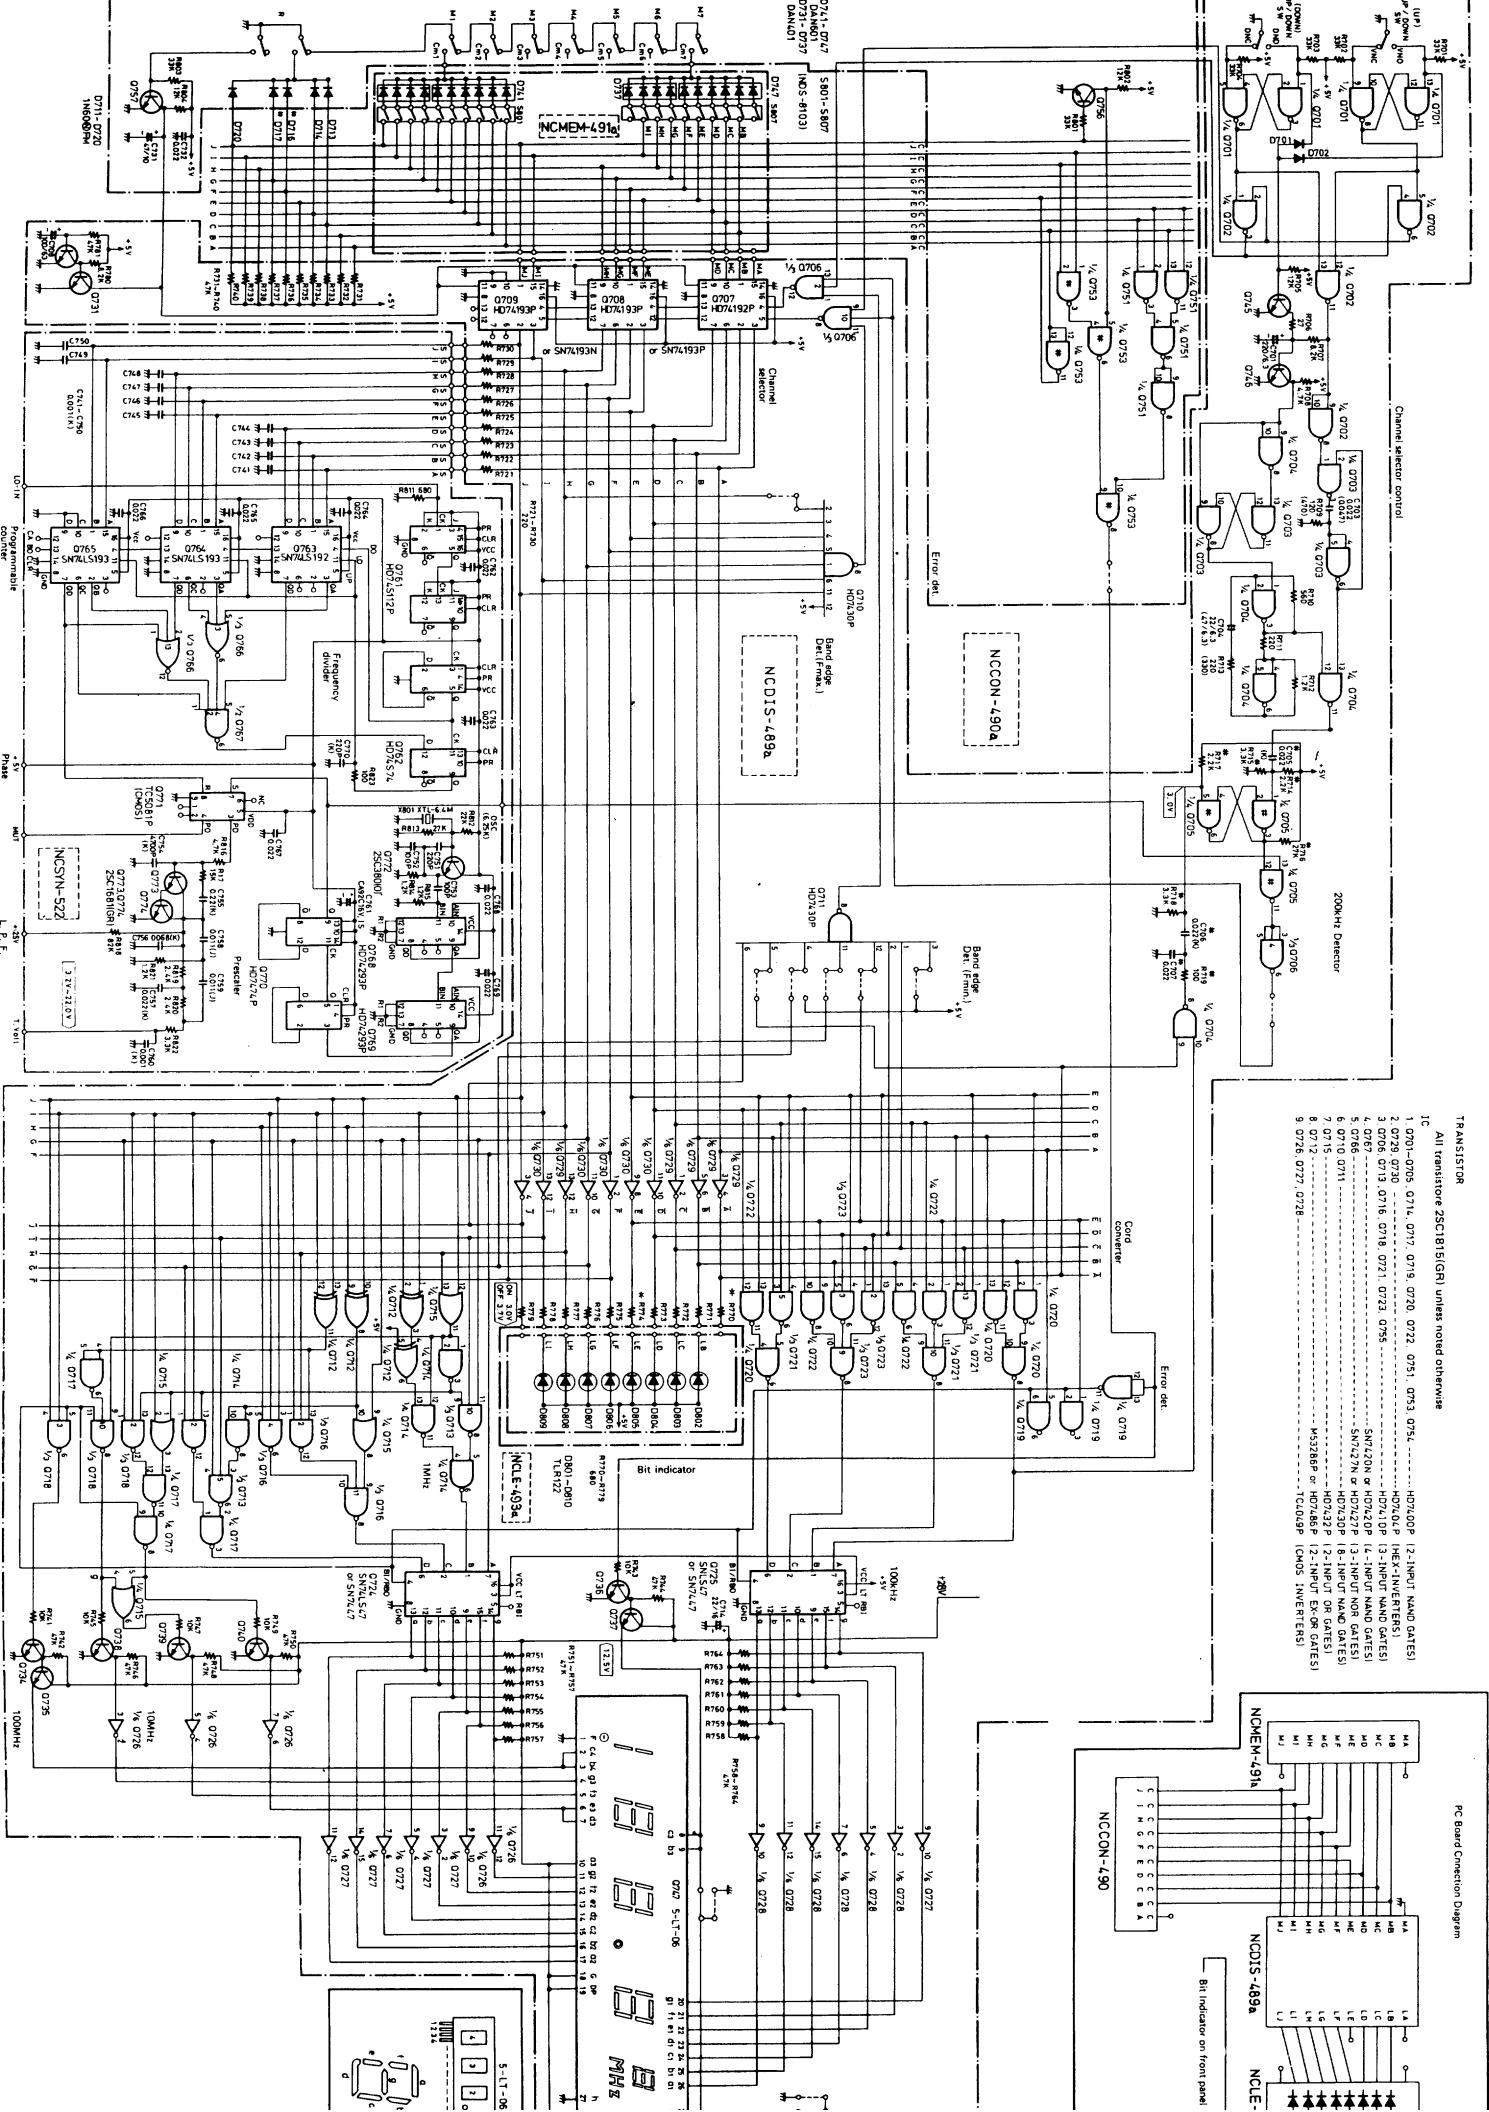


TC5081P Phase Comparator and Amplifier PIN CONNECTION

ARRANGEMENT

DESCRIPTION

The 192 and LS192 circuits are BCD counters and the 193 and LS193 circuits are 4-bits binary counters.

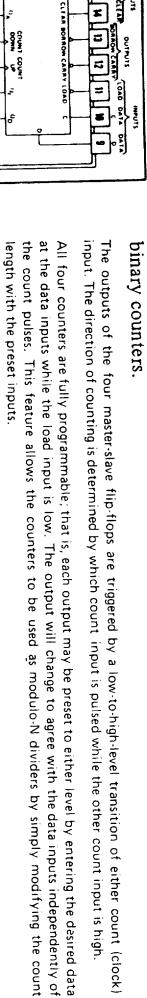

The outputs of the four master-slave flip-flops are triggered by a low-to-high-level transition of either count (clock) input. The direction of counting is determined by which count input is pulsed while the other count input is high. All four counters are fully programmable; that is, each output may be preset to either level by entering the desired data at the data inputs while the load input is low. The output will change to agree with the data inputs independently of the count pulses. This feature allows the counters to be used as modulo-N dividers by simply modifying the count length with the preset inputs.

A clear input has been provided which forces all outputs to the low level when a high level is applied. The clear function is independent of the count and load inputs. The clear, count, and load inputs are buffered to lower the drive requirements. This reduces the number of clock drivers, etc., required for long words. These counters were designed to be cascaded without the need for external circuitry. Both borrow and carry outputs are available to cascade both the up and down-counting functions. The borrow output produces a pulse equal in width to the count-down input when the counter underflows. Similarly, the carry output produces a pulse equal in width to the count-down input when an overflow condition exists. The counters can then be easily cascaded by feeding the borrow and carry outputs to the count-down and count-up inputs respectively of the succeeding counter.

N74LS192 load, and count sequences


below is the following sequence:

Illustrated below is the following sequence:


1. Clear outputs to zero.
2. Load (preset) to BCD seven.
3. Count up to eight, nine, carry, zero, one, and two.
4. Count down to one, zero, borrow, nine, eight, and seven.

HD74193,SN74LS193,SN74193 typical clear, load, and count sequences


Illustrated below is the following sequence:

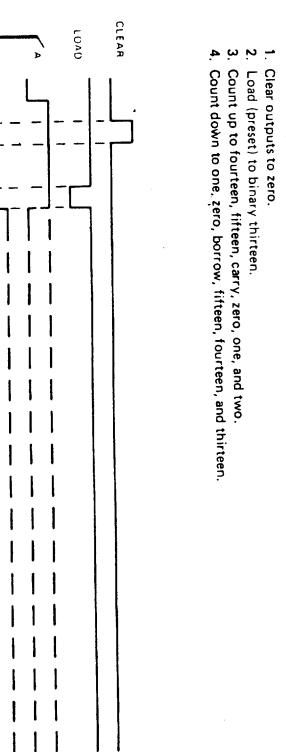

LOGIC DIAGRAM

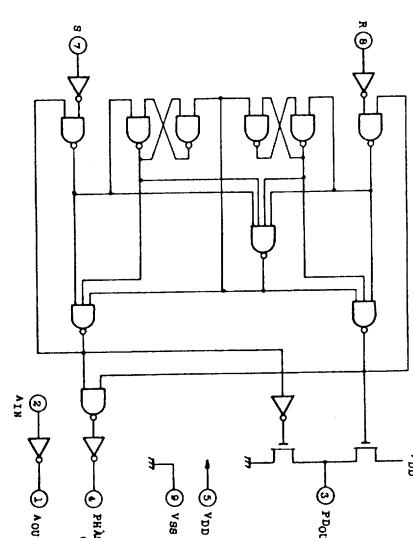

TC4049B Hex Buffer Converter Inverting Type PIN ARRANGEMENT

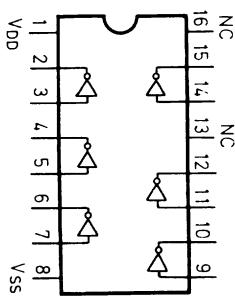



overrides load, data, and count inputs.
when counting up, count-down input must be high; when counting down, count-up input must be high.

NOTES: A. Clear overrides load, data, and count inputs.

B. When counting up, count-down input must be high; when counting down, count-up input must be high.


NER-Schematic Diagram

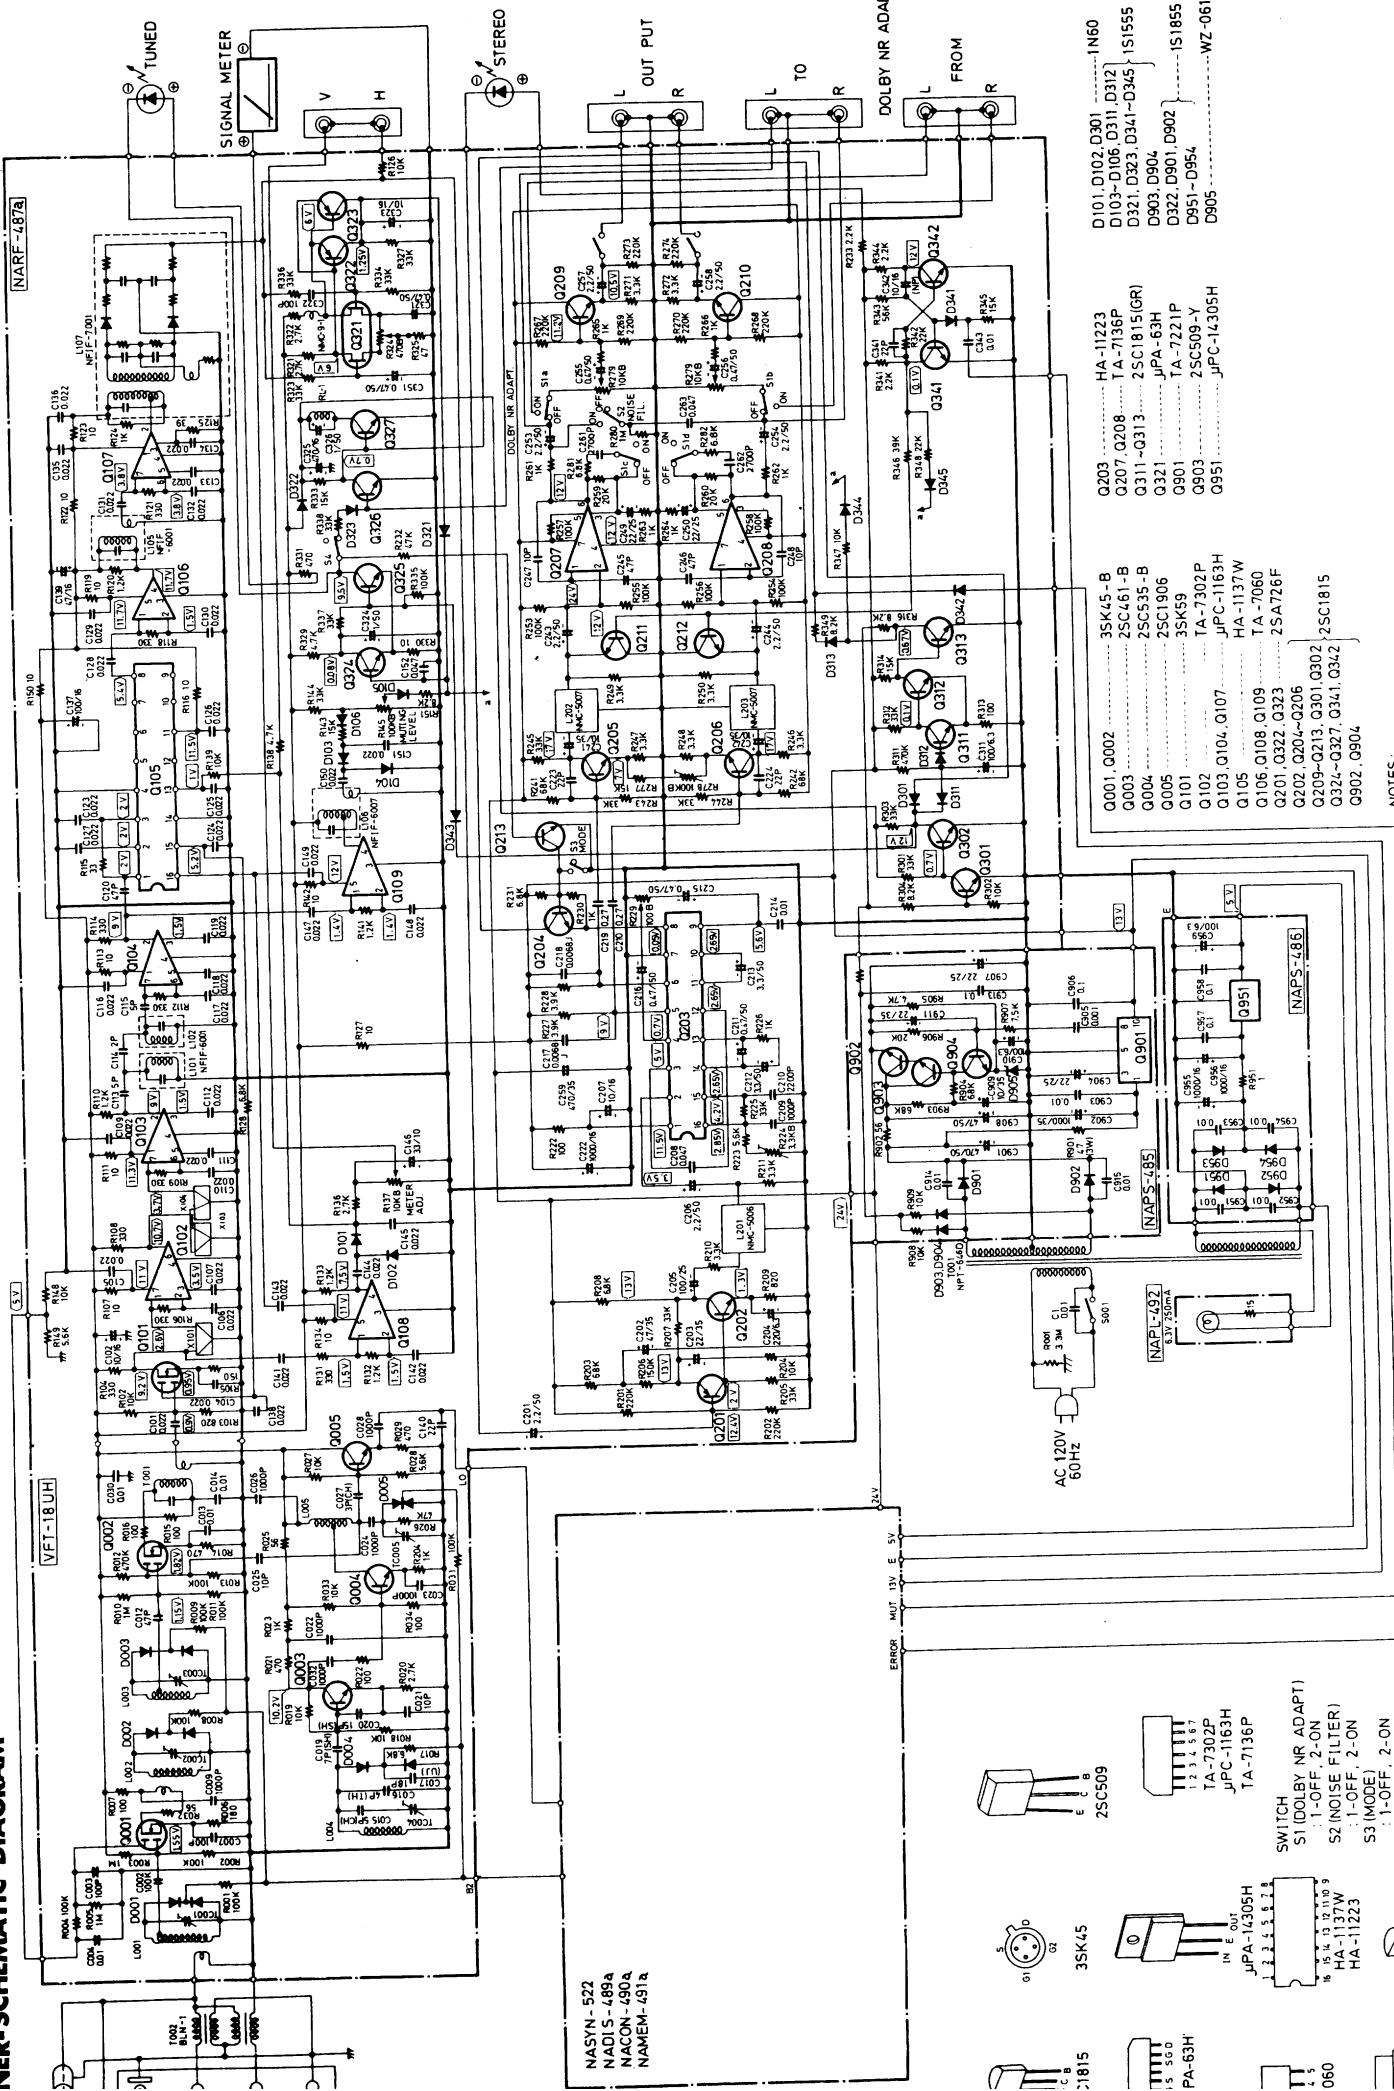

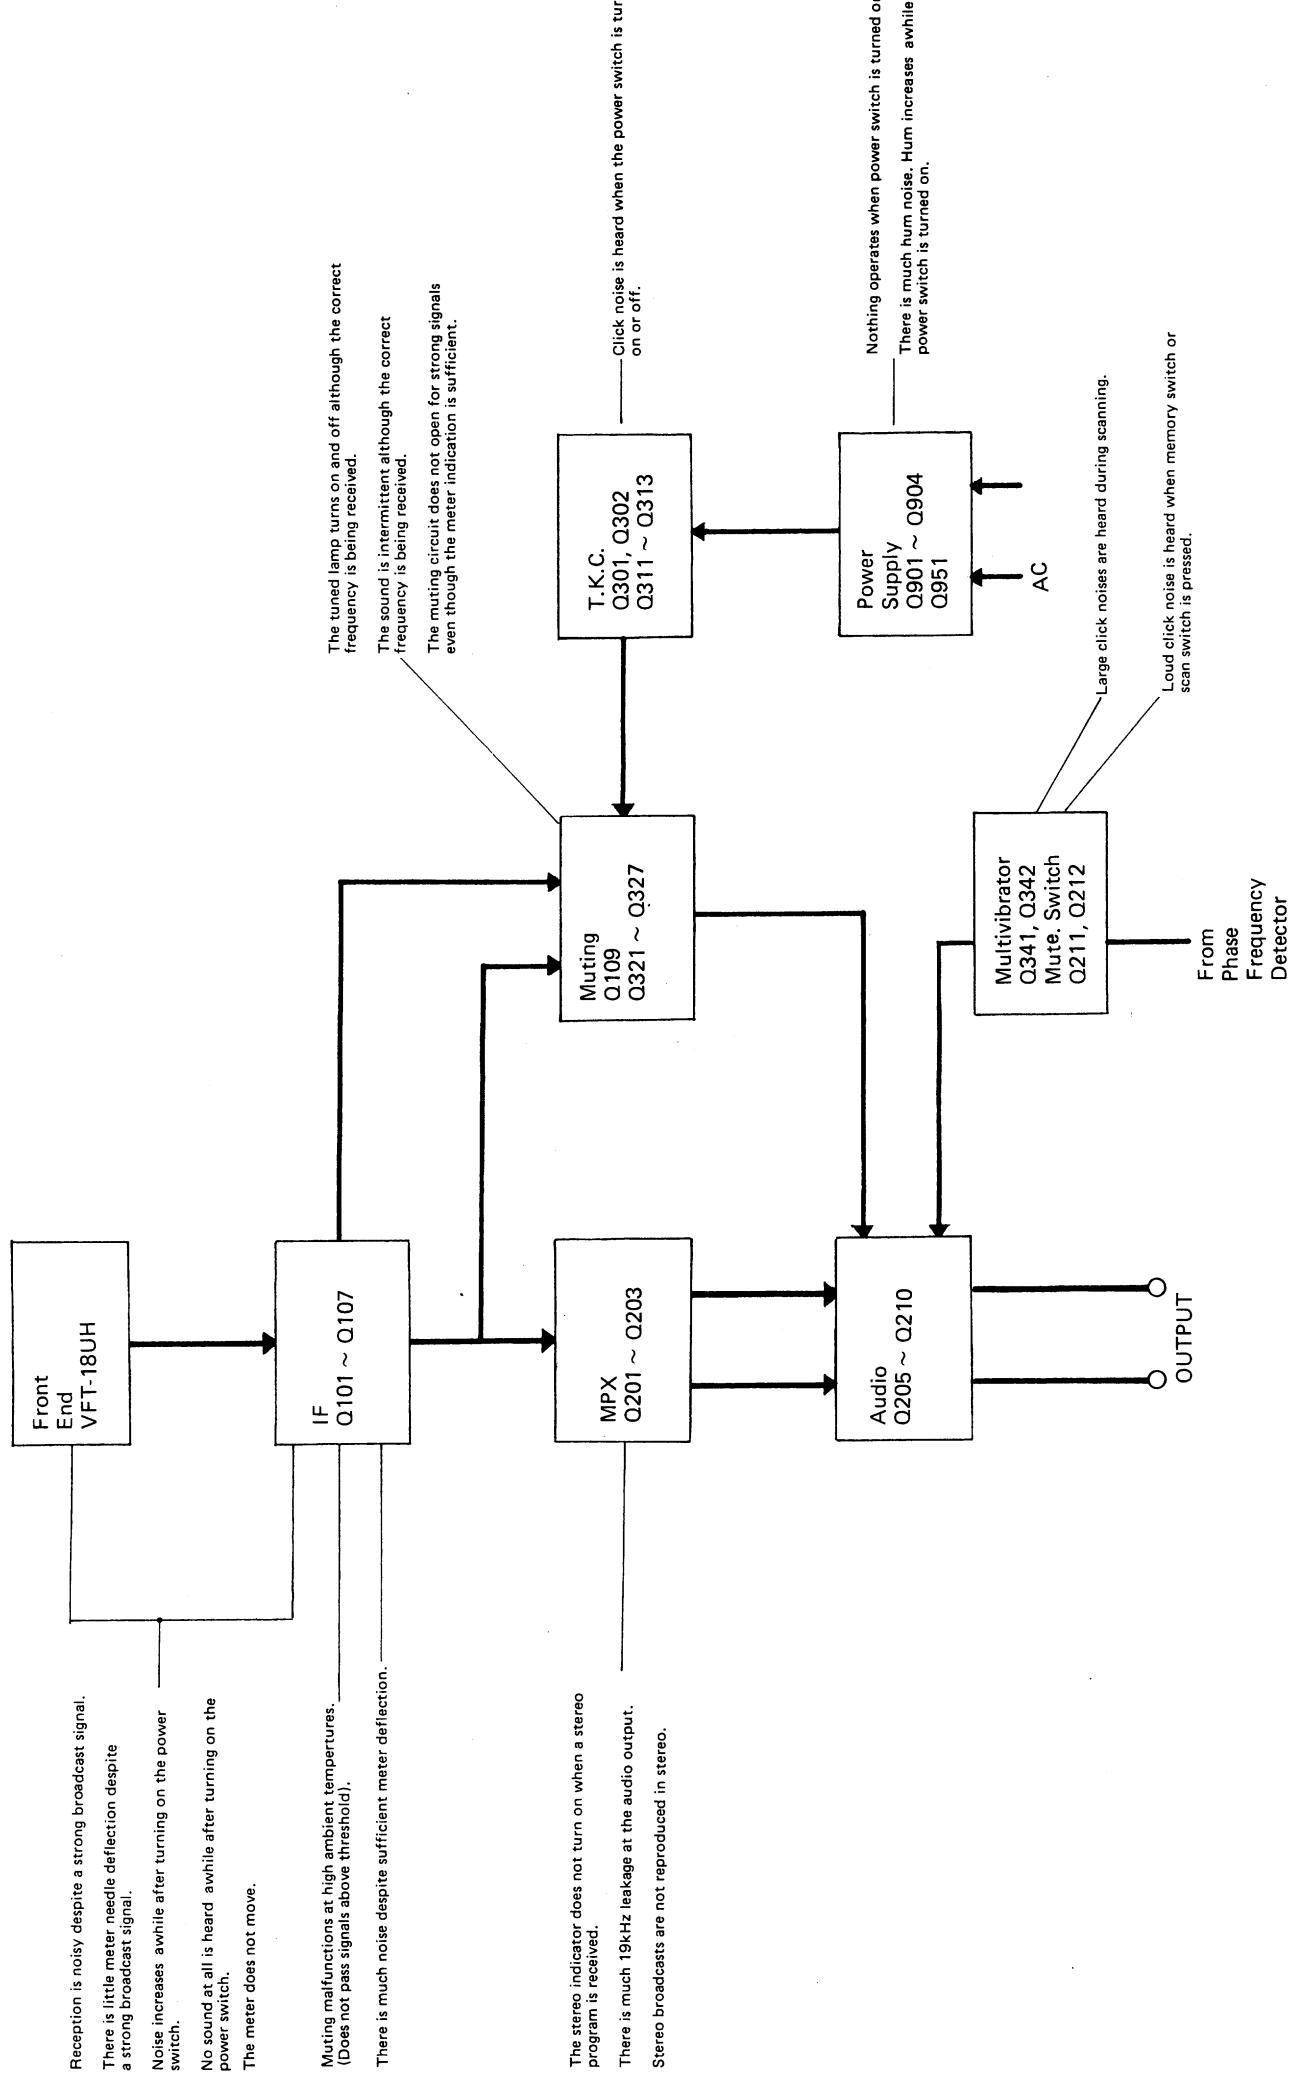

TROUBLE SHOOTING CHART

Model T-909

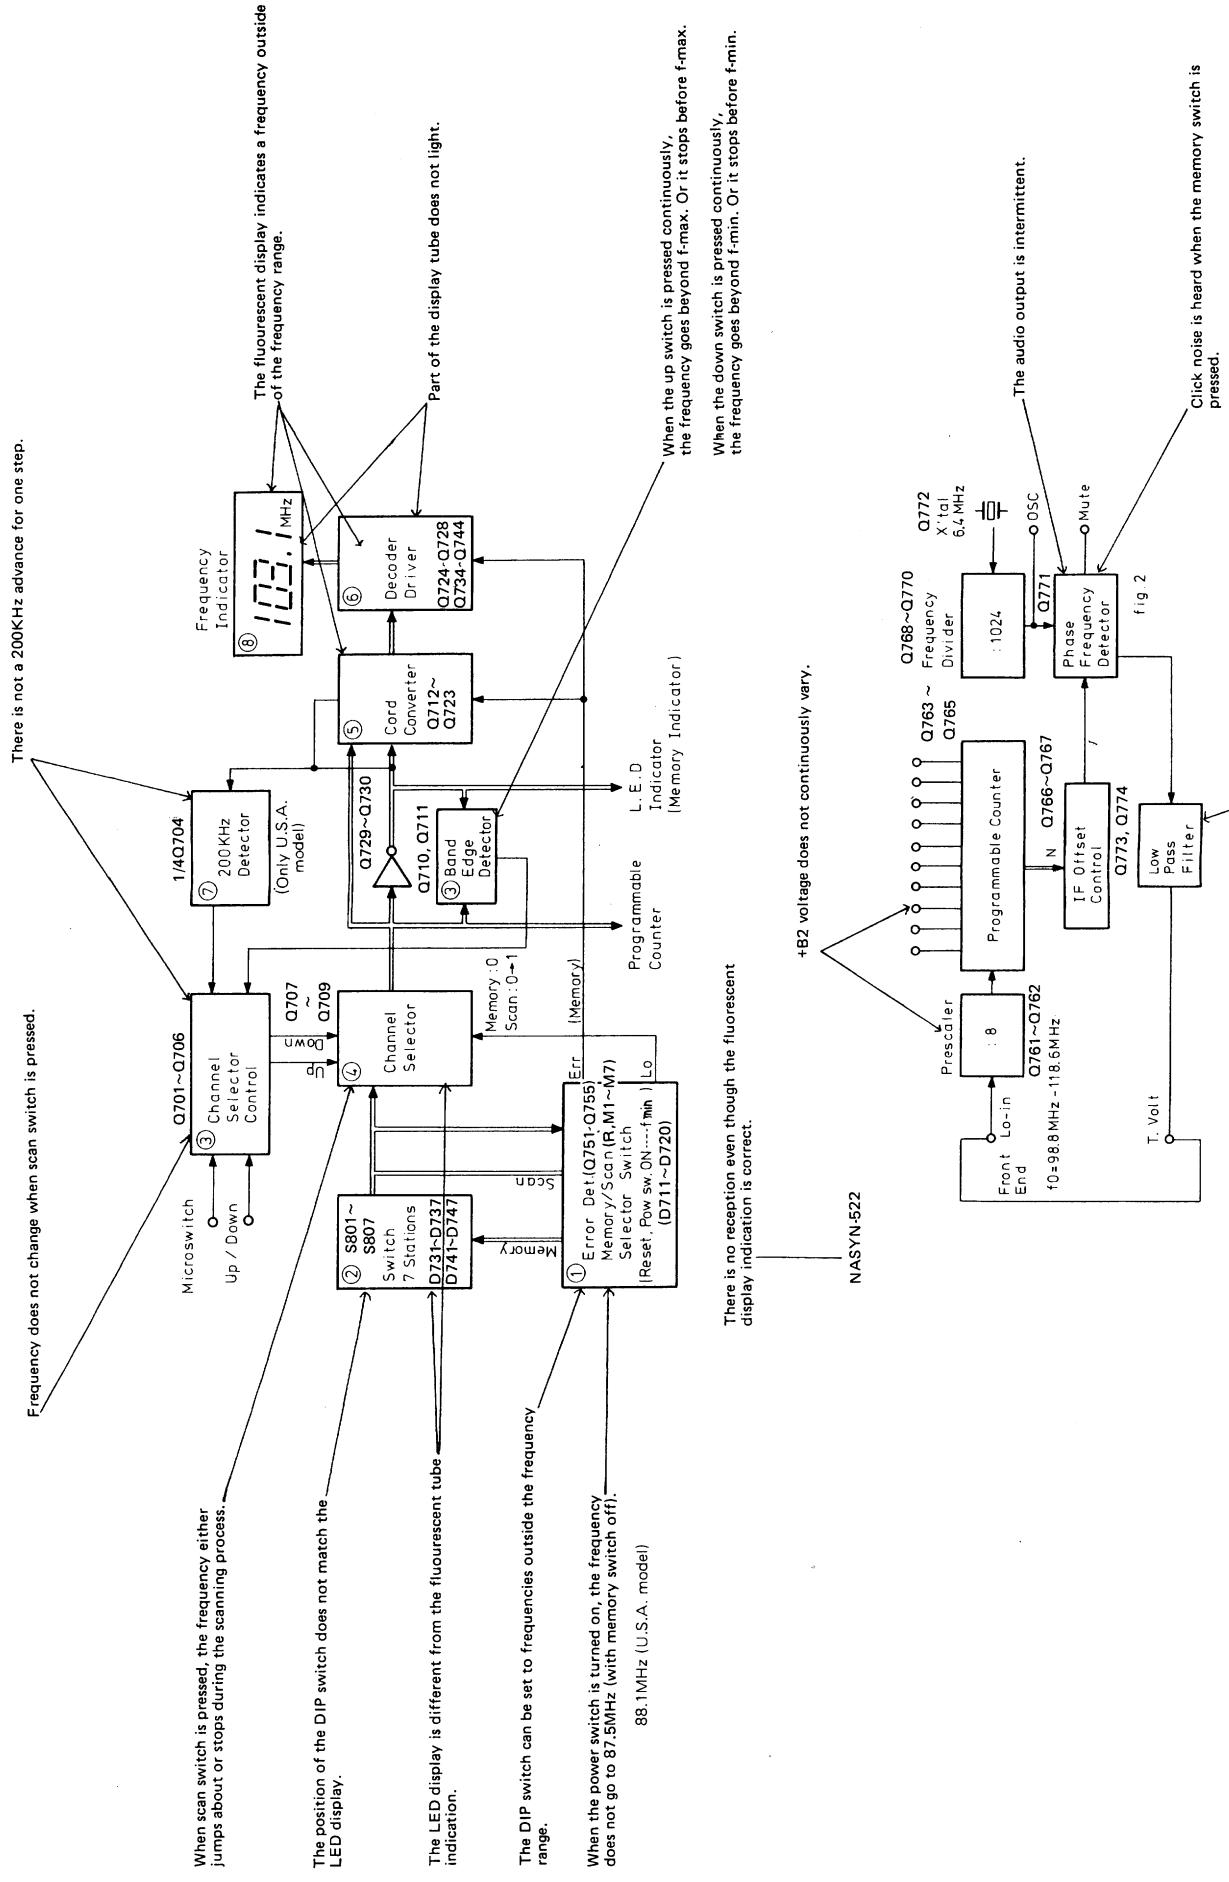

**RF/IF AND MPX. PC BOARD
(NARF-487a)-PARTS LIST**

Circuit No.	Parts No.	Description	Circuit No.	Parts No.	Description
		Front end			
	240039	VFT-18UH	C212, C213	352780331	3.3μF, 50V, Elect
			C215, C216	352784791	0.47μF, 50V, Elect.
			C219, C220	374122747	0.27μF±20%, 50V, DE
			C222	352741021	1,000μF, 16V, Elect.
			C241, C242	352761001	10μF, 35V, Elect.
			C243, C244	352780221	2.2μF, 50V, Elect.
			C249, C250	352752201	22μF, 25V, Elect.
			C253, C254	352780221	2.2μF, 50V, Elect.
			C257, C258	352784791	0.47μF, 50V, Elect.
			C255, C256	352764711	470μF, 35V, Elect
			C259	352721011	100μF, 6.3V, Elect.
			C311	352784791	0.47μF, 50V, Elect.
			C321	352741001	10μF, 16V, Elect.
			C323	352780221	1μF, 50V, Elect.
			C324	352744711	470μF, 16V, Elect.
			C325	352780221	2.2μF, 50V, Elect.
			C326	352941006	10μF, 16V, NP
			C342	352733301	33μF, 10V, Elect.
			C146	352784791	0.47μF, 50V, Elect.
			C351		
				Resistors	
			R137	5225015	N10HR10KBD,SF
			R145	5225016	N10HR100KBD,SF
			R224	5225071	N10HR3.3KBIM,SF
			R229	5225016	N10HR100KBD,SF
			R278	5225016	N10HR100KBD,SF
			R279	5172051	N24RGL10KB15H, Output level control
			R324	5225026	N10HR470BD,SF
			S1-S4	25035073	NPS-422-L38
			P1,P2	25045043	NPJ-4PDBL20
			RL1	25065048	FRL-644D12/2AS
				NOTES:	Capacitor
				ST:	Polystyren film capacitor
				DE:	Non-inductive polyester film capacitor
				NP:	Non-polar electrolytic capacitor
					Resistor
					SF: Semi-fixed variable resistor

NOTES: Capacitor

ST: Polystyren film capacitor

DE: Non-inductive polyester film capacitor

NP: Non-polar electrolytic capacitor

Resistor

SF: Semi-fixed variable resistor

BLOCK DIAGRAM

HA11223 (PLL FM Stereo Demodulator with Pilot Cancel)

Fig. a
Input Pilot
Signal


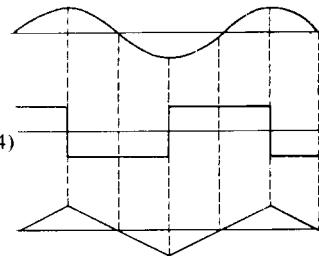


Fig. b
Pin 9 Out
(Unused C214)

Fig. c
Pin 9 Out
(Used C214)

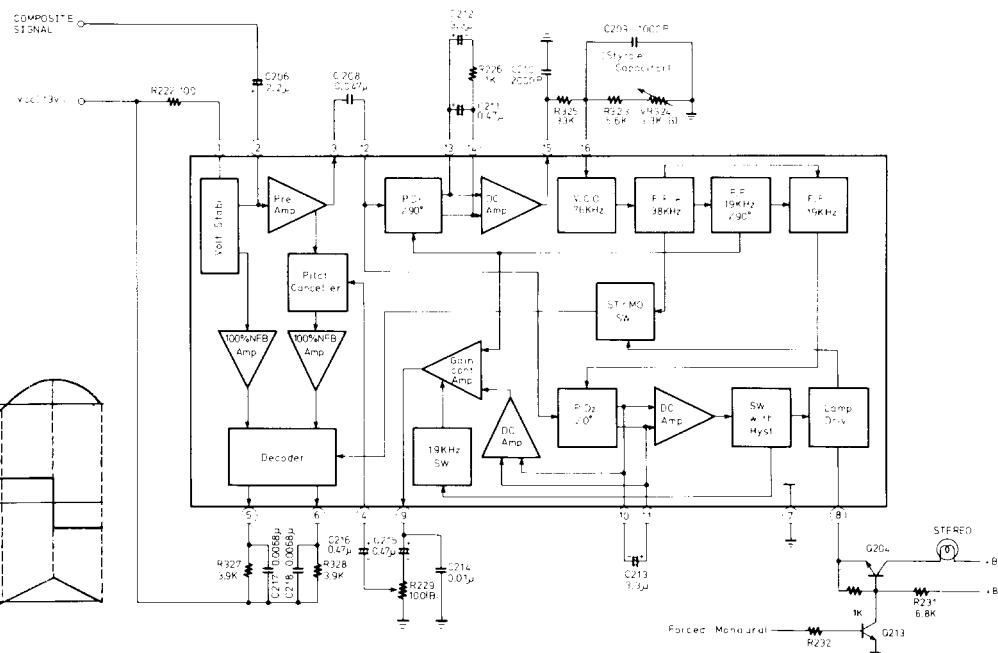

1. Pilot Cancel Circuit Operations

The composite signal inputed from pin 2 is amplified by the Pre-Amp circuit, and then it is outputed to pin 3. This signal is inputed to pin 12 and, one part is inputed to the PLL circuit and the other to the lamp driver circuit. The PLL circuit locks out the pilot signal by the signal which has been inputed to the PLL circuit, and the signal in the PLL circuit gererates three kinds of signals, 76 kHz, 38 kHz, and 19 kHz. The 19 kHz signal whose phase is advancing 90° more than the pilot signal is inputed to the Gain Control Amp.

On the other hand, the signal inputed to the lamp driver circuit is detected synchronously by the 19 kHz signal with the same phase as the pilot signal generated by the PLL circuit, and sent to pin 10 and pin 11 as a DC signal in proportion to the level of the pilot signal.

The DC signal is amplified by DC-Amp, and used as the control signal of the above mentioned Gain Control Amp. Therefore, when there is no load capacity C214 in the output of pin 9 that has been outputed from the Gain Control Amp., a rectangle wave with a phase of 90° advanced as compared with the input pilot signal will appear as indicated in the right figure b.


As a matter of fact, however, since there is C214, a triangular wave that is in the same phase as the input pilot signal will appear as shown in Fig. C. The level of the triangular wave correlates with the input pilot signal level and it disperses due to dispersion of IC within the circuit. Therefore, it is necessary to adjust properly the level by R229 (100 ΩB). This level adjusted triangular wave is inputed to pin 4 and is phase inverted by the transistor into IC, then added to the input pilot signal.

Since the pilot cancel of HA11223 is utilizing the above mentioned triangular wave injection, when the difference between the pilot signal and the fundamental frequency component of the triangular wave is eliminated, the odd high harmonics of the triangular wave will remain.

This high harmonic components are, needless to say, the odd times of 19 kHz, but when this signal is turned on by switching transistors of the decoder, as the 38 kHz rectangular wave, it causes beat with the high harmonics that are the odd times of 38 kHz, and generates a signal of 19 kHz component again.

As a result of this, the signal of 19 kHz component that appears at the output pin becomes easier to be unbalanced at pin 5 and at pin 6. Therefore, for the above mentioned adjustments of R229, it becomes necessary to make each 19 kHz component appearing at pin 5 and at pin 6 the same and to maximize them.

POWER SUPPLY PC BORD VIEW FROM BOTTOM SIDE

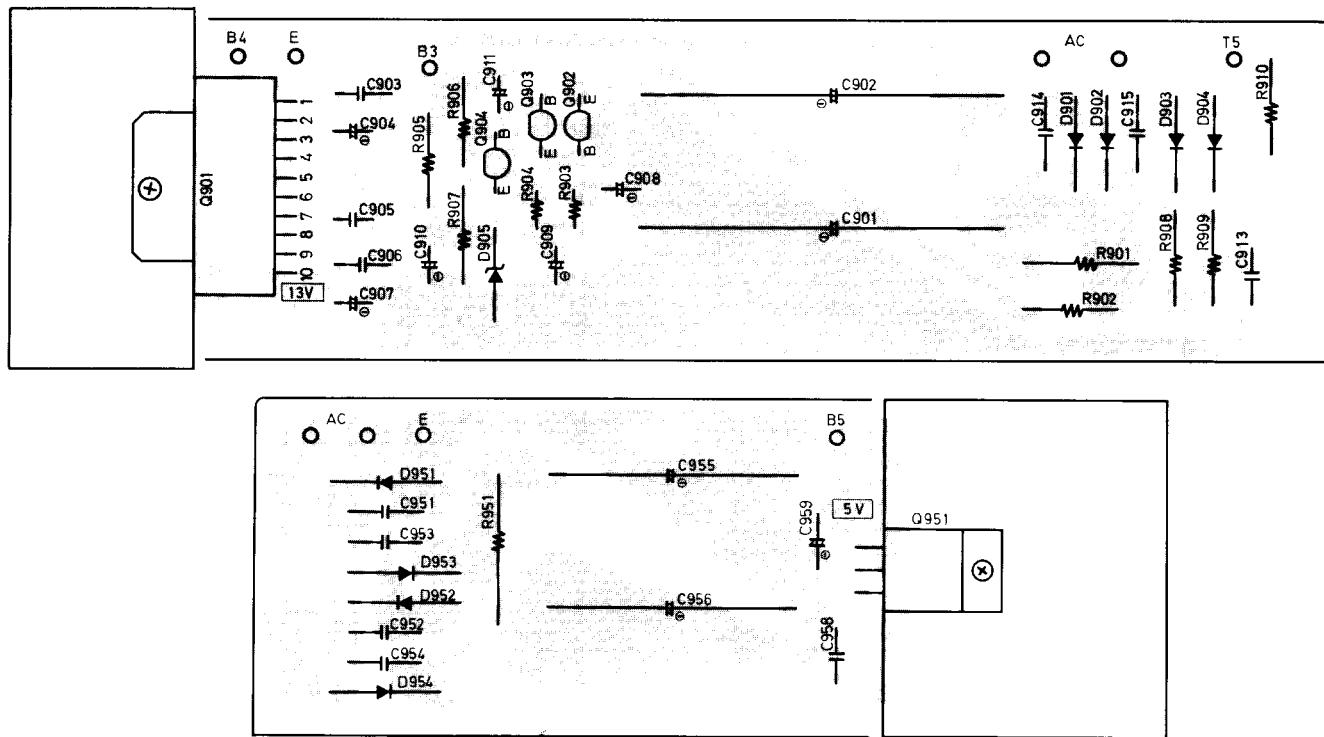POWER SUPPLY PC BOARD
(NAPS-485)-PARTS LIST

Circuit No.	Parts No.	Description
IC		
Q901	222472	TA-7221P
Transistors		
Q902	2210901	2SC509(Y)
Q903, Q904	2211255	2SC1815(GR)
Diodes		
D901-D904	223802	1S1885
D905	223928	WZ-061
Capacitors		
C901	351784711	470μF, 50V, Elect.
C902	351761021	1,000μF, 35V, Elect.
C904	352752201	22μF, 25V, Elect.
C907	352752201	22μF, 25V, Elect.
C908	352784701	47μF, 50V, Elect.
C909	352761001	10μF, 35V, Elect.
C910	352721011	100μF, 6.3V, Elect.
C911	352762201	22μF, 35V, Elect.
Resistor		
R901	441824704	47Ω, 3W, MOF
Radiator		
	27160039	RAD-09

POWER SUPPLY PC BOARD
(NAPS-486)-PARTS LIST

Circuit No.	Parts No.	Description
IC		
Q951	222496	μPC14305H
Diodes		
D951-D954	223802	1S1885
Capacitors		
C955, C956	351741021	1,000μF, 16V, Elect.
C959	325721011	100μF, 6.3V, Elect.
Resistor		
R951	451730104	1Ω, 2W, Metal
Radiator		
	27160038	RAD-08

BLOCK DIAGRAM

