

- IC 1 : AN5556F (A)
- IC 2 : NUM204D-D
- 01, 2 : 2SD637
- 03, 4 : 2SB642
- 05 : 2SC2167 (Y, G)
- D1 ~ 6 : 1S2075A
- D7 ~ 28 : 330-0431-05
- D29 ~ 32 : DSM1A1
- D33 ~ 36, 39 : RD16E1(B)




X11-2110-10 (A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z)	QTY	RESISTANCE	WATTAGE	TYPE
A	1	10K	1/4	RES
B	1	10K	1/4	RES
C	1	10K	1/4	RES
D	1	10K	1/4	RES
E	1	10K	1/4	RES
F	1	10K	1/4	RES
G	1	10K	1/4	RES
H	1	10K	1/4	RES
I	1	10K	1/4	RES
J	1	10K	1/4	RES
K	1	10K	1/4	RES
L	1	10K	1/4	RES
M	1	10K	1/4	RES
N	1	10K	1/4	RES
O	1	10K	1/4	RES
P	1	10K	1/4	RES
Q	1	10K	1/4	RES
R	1	10K	1/4	RES
S	1	10K	1/4	RES
T	1	10K	1/4	RES
U	1	10K	1/4	RES
V	1	10K	1/4	RES
W	1	10K	1/4	RES
X	1	10K	1/4	RES
Y	1	10K	1/4	RES
Z	1	10K	1/4	RES

X07-2210-10 (A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z)	QTY	RESISTANCE	WATTAGE	TYPE
A	1	10K	1/4	RES
B	1	10K	1/4	RES
C	1	10K	1/4	RES
D	1	10K	1/4	RES
E	1	10K	1/4	RES
F	1	10K	1/4	RES
G	1	10K	1/4	RES
H	1	10K	1/4	RES
I	1	10K	1/4	RES
J	1	10K	1/4	RES
K	1	10K	1/4	RES
L	1	10K	1/4	RES
M	1	10K	1/4	RES
N	1	10K	1/4	RES
O	1	10K	1/4	RES
P	1	10K	1/4	RES
Q	1	10K	1/4	RES
R	1	10K	1/4	RES
S	1	10K	1/4	RES
T	1	10K	1/4	RES
U	1	10K	1/4	RES
V	1	10K	1/4	RES
W	1	10K	1/4	RES
X	1	10K	1/4	RES
Y	1	10K	1/4	RES
Z	1	10K	1/4	RES


CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or/and units.

- 25A1123 25C2003
- 25A1733 (A) 25C2320
- 25A954 25C2631
- 25A992 25C945 (A)
- 25A999
- 25A1110 25C2590
- 25A1111 25C2591

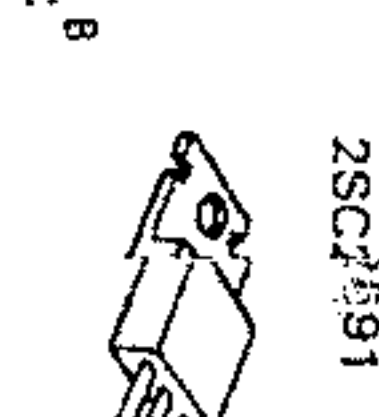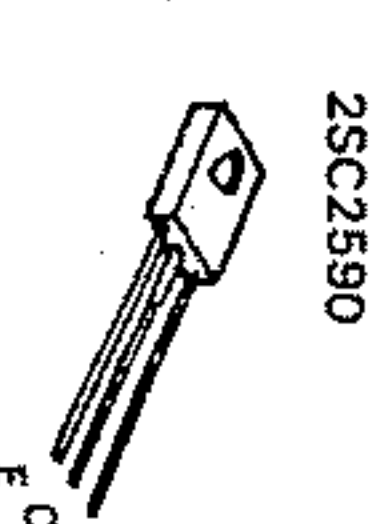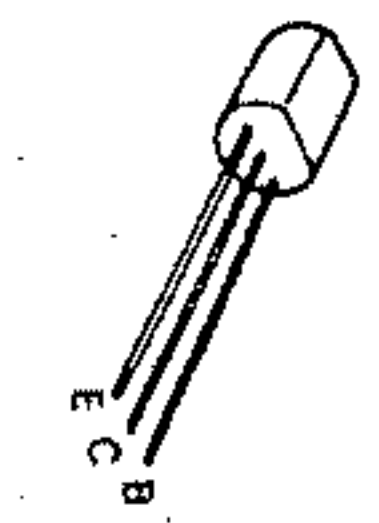




- 25A1123 25C2003
- 25A793 (A) 25C2320
- 25A994 25C2631
- 25A992 25C945 (A)
- 25A999
- 25A1110 25C2590
- 25A1111 25C2591
- 25C2167
- 25A1303*5 25C284*5
- 25B642 25D637
- 25A1215*5 25C2921*5
- NJM2041D-D NJM4558D(A) 5
- PC1237H
- AN6556F
- AN6556F
- M5218P



XI-2110-10(D/9)	0-10	2-71
DESTINATION	K.P.M.U.M.E.	E.T.T.A.
C51-64	NO	12200P
C65-66	NO	33500P
C75-76	NO	33500P
R15-26	JUMPER	IK
R81-82	NO	88

X07-2210-10(C/4)	0-10	2-71
DESTINATION	K.P.M.U.M.E.	E.T.T.A.
D13-14	25C2390(R)	25C2390(R)
D15-16	25A1110(R)	25A1110(R)
D17-18	25C2921(S)	25C2921(S)
D19-20	25A992(S)	25A992(S)
R11-12	88	75
R13-16	56K	47K
R15-16	15K	12K
R34-35	7500P/1V	7500P/53V
C47-48	NO	NO

AN6556F or NJM4558D(A) NJM2041D-D
 25D637 25B642 25C2167 (Y, G)
 1S2076A B30-0431-05 DSM1A1
 RD16E1B)

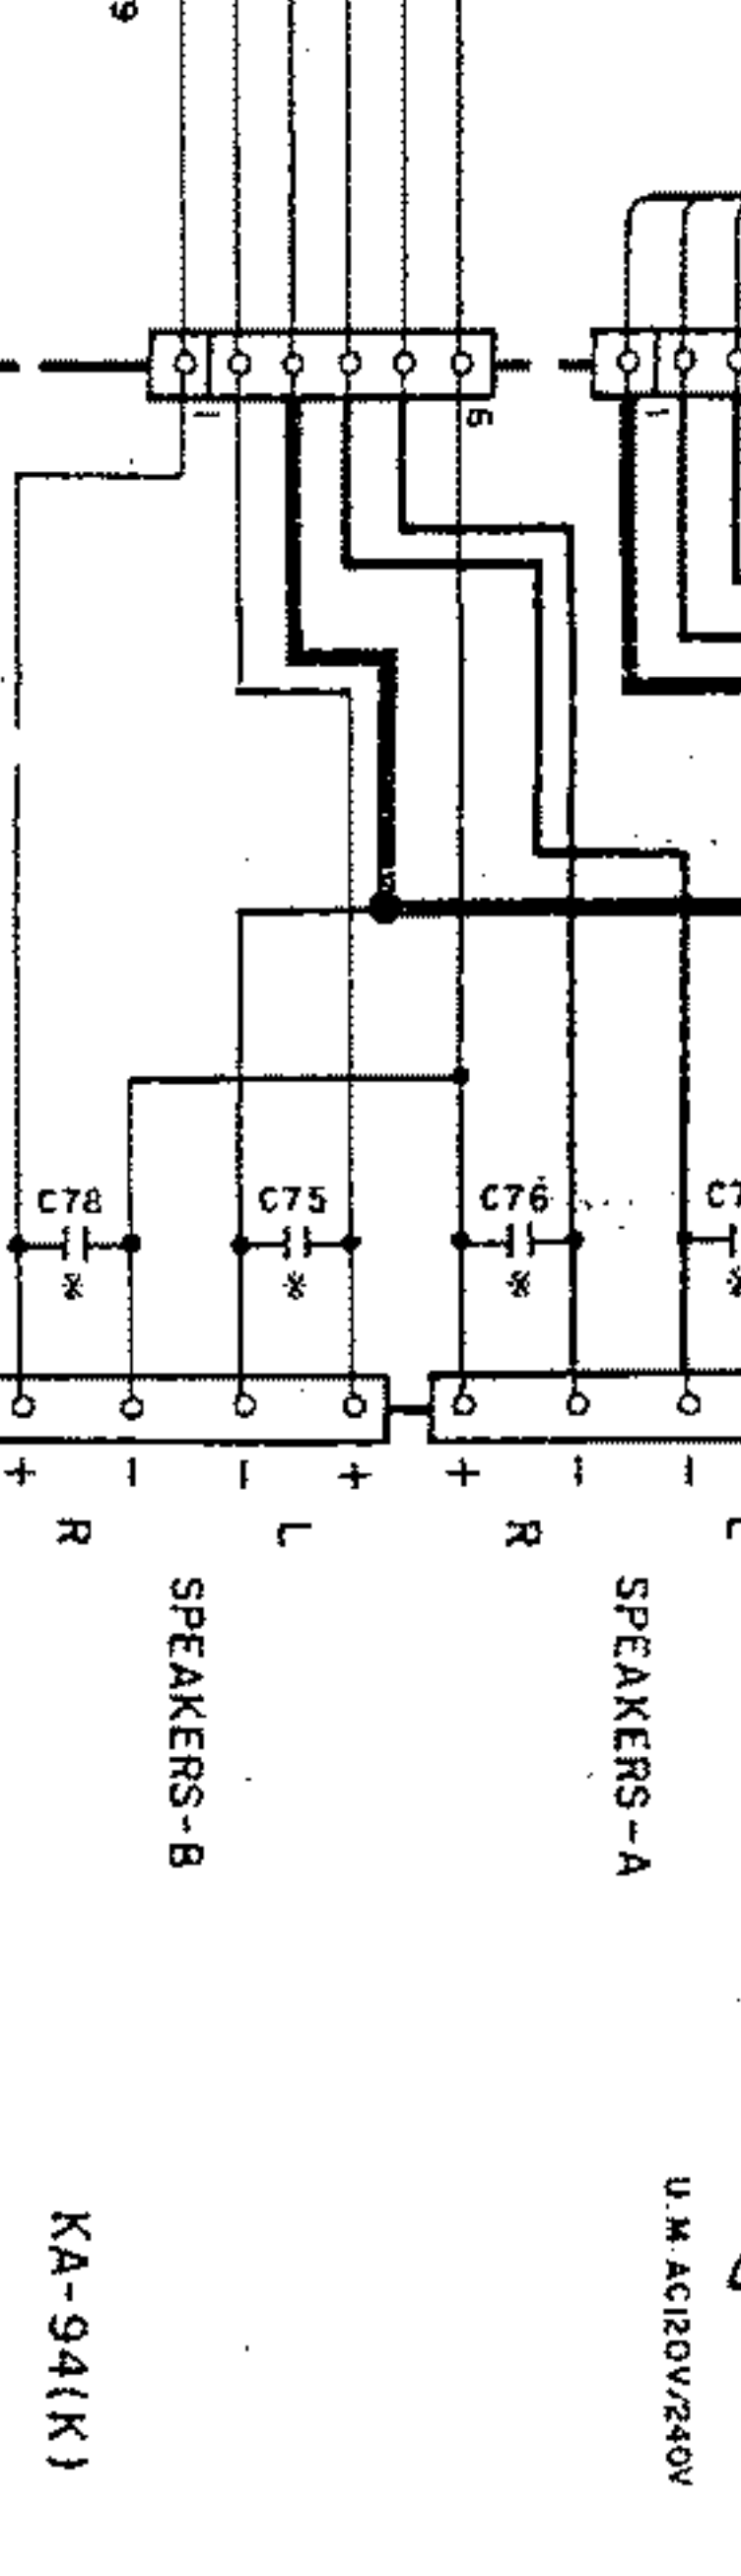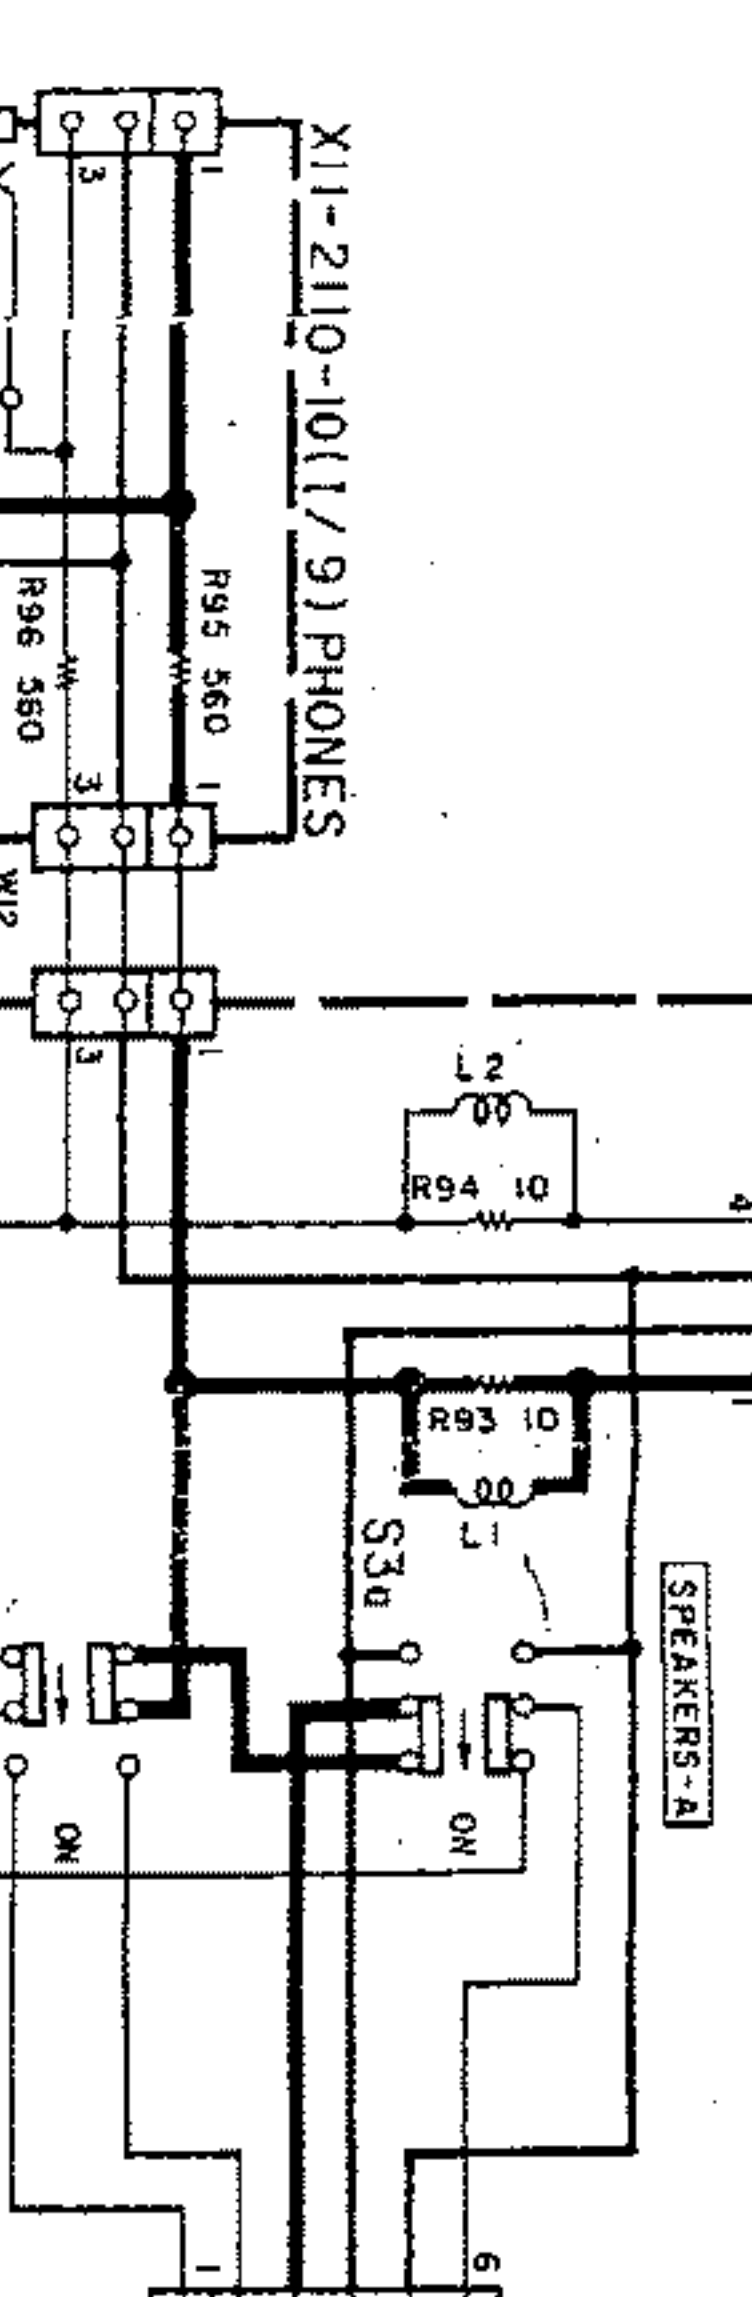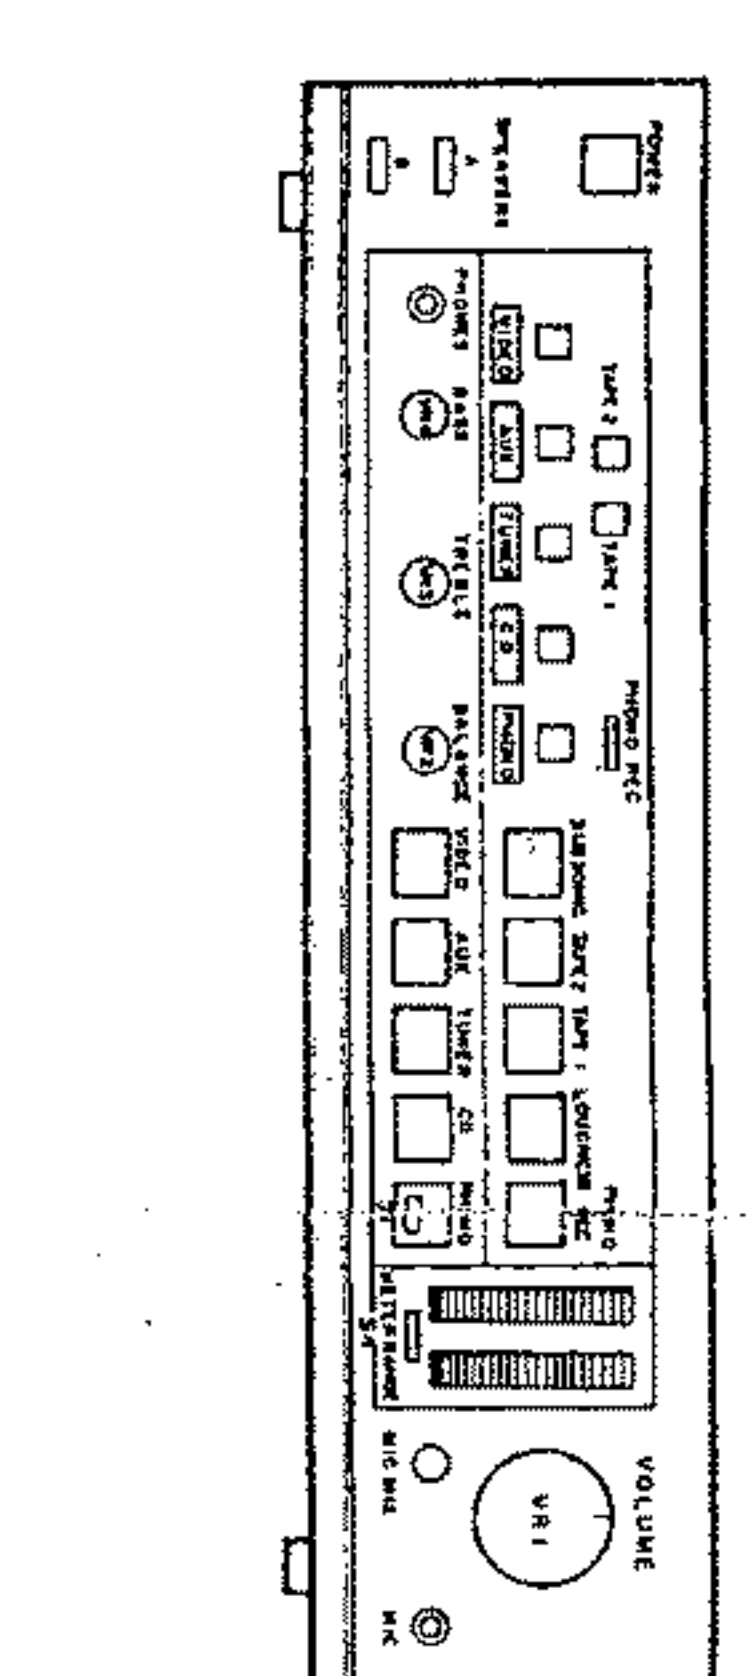


For continued safety, replace safety critical components with manufacturer's recommended parts (preferably insulated from the supply circuit) before the appliance is returned to the customer.

measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or/and units.

Les tensions C.C. doivent être mesurées avec un voltmètre à haute impédance sans signal d'entrée. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser ohne Eingangssignal gemessen. Dabei schwanken die Messwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U.-genügend.

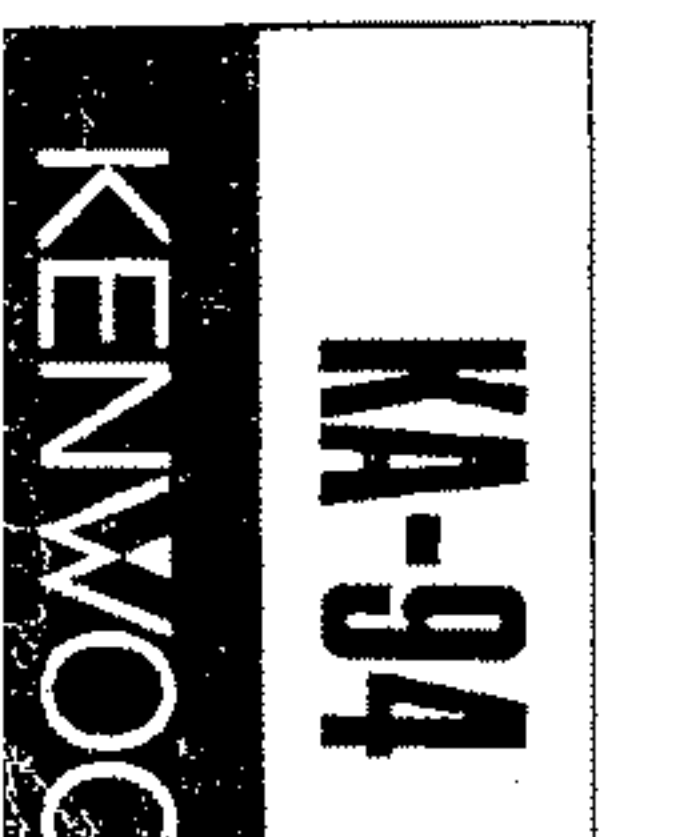

KA-94(K)