

Service
Service
Service



Service Manual

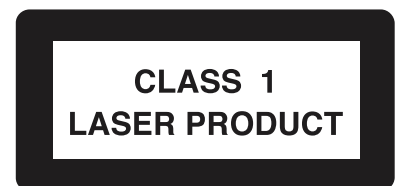


TABLE OF CONTENTS

	Page
Location of PC Boards	1-2
Versions Variation & Package	1-2
Specifications	1-3
Measurement Setup	1-4
Service Aids	1-5
ESD & Safety Instruction	1-6
Pb(Lead) Free Solder	1-7
Setting Procedure & Repair Instructions	2
Disassembly Instructions & Service positions	3
Block & Wiring Diagram	4
Control Board	5
Main Board	6
Power Board	7
DVD loader	8
Exploded View	9

© Copyright 2007 Philips Consumer Electronics B.V. Eindhoven, The Netherlands
 All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise without the prior permission of Philips.

Published by HY-ET0619 Service Audio Printed in The Netherlands Subject to modification




3139 785 32690(05)
 (GB) 3139 785 32720(12)

Version 1.0



PHILIPS

LOCATION OF PCB BOARDS

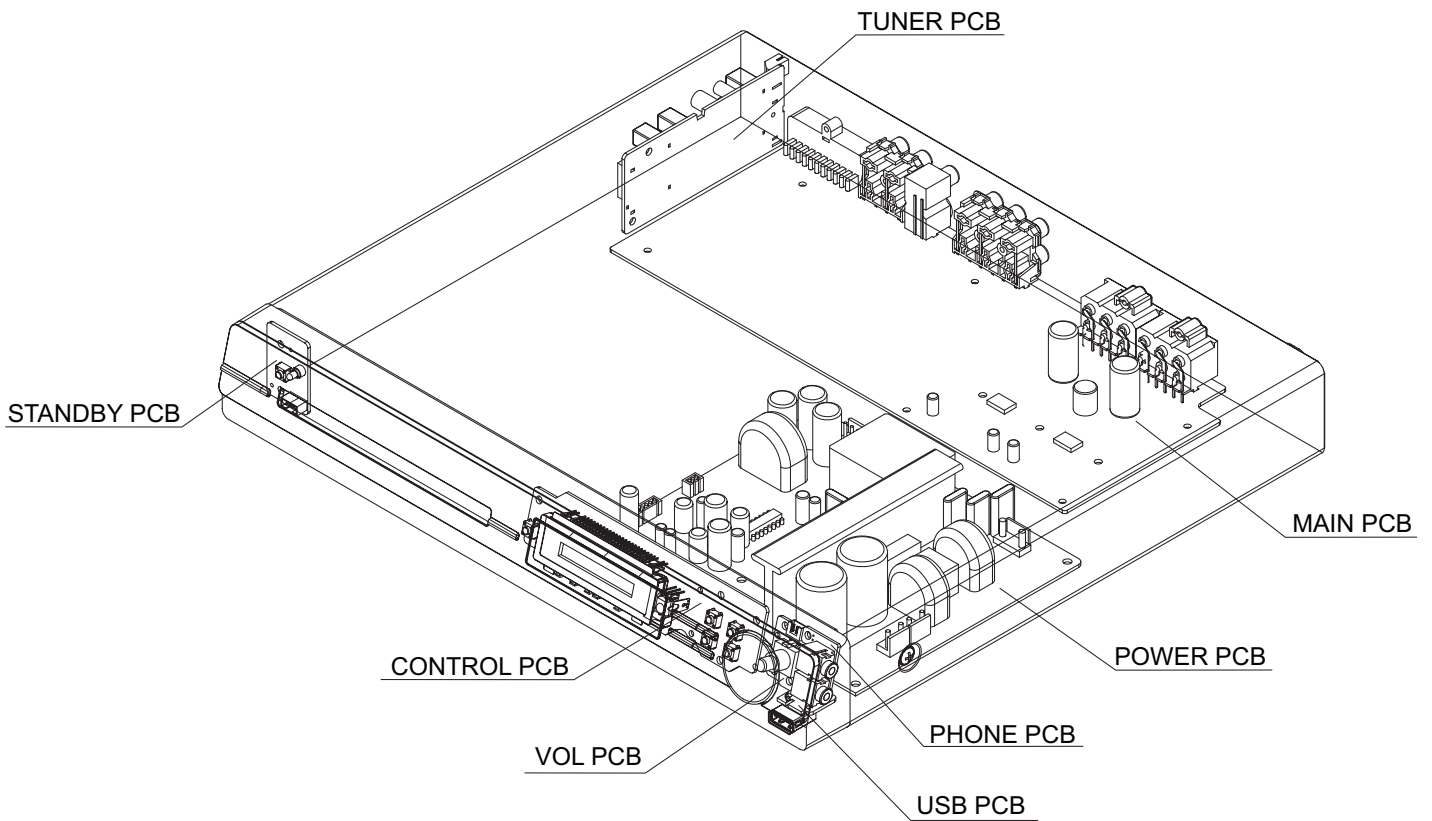

VERSION VARIATION:

Type/Version	HTR3154	
	/12	/05
Feature & Board in used	/12	/05
Main PCB (Power Output 300W)	X	X
Power Voltage (230V)	X	X
WMA	X	X
Scart	X	X

Specifications

AMPLIFIER

Total output power:	300 W RMS
Frequency Response:	180 Hz – 18 kHz / ± 3 dB
Signal-to-Noise Ratio:	>60 dB (A-weighted)
Input Sensitivity	
- AUX In :	500 mV
- TV In:	250 mV
- MP3 Line-In:	500 mV

RADIO

Tuning Range:	FM 87.5–108 MHz (50kHz) MW 531–1602 kHz (9kHz)
26 dB Quietening	
Sensitivity:	FM 22 dBf, MW 5000 μ V/m
IF Rejection Ratio:	FM 60 dB, MW 24 dB
Signal-to-Noise Ratio:	FM 50 dB, MW 30 dB
AM Suppression Ratio:	FM 30 dB
Harmonic Distortion:	FM Mono 3% FM Stereo 3% MW 5%
Frequency Response	FM 180 Hz–10 kHz / ± 6 dB
Stereo Separation	FM 26 dB (1 kHz)
Stereo Threshold	FM 23.5 dB

DISC

Laser Type	Semiconductor
Disc Diametre	12cm / 8cm
Video Decoding	MPEG-1 / MPEG-2 / / DivX 3/4/5/6, Ultra
Video DAC	12 Bits
Signal System	PAL / NTSC
Video Format	4:3 / 16:9
Video S/N	56 dB (minimum)
Audio DAC	24 Bits / 96 kHz
Frequency Response	4 Hz–20 kHz (44.1 kHz) 4 Hz–22 kHz (48 kHz) 4 Hz–44 kHz (96 kHz)
PCM	IEC 60958
Dolby Digital	IEC 60958, IEC 61937
DTS	IEC 60958, IEC 61937

MAIN UNIT

Power Supply Rating:	220~240 V; 50 Hz
Power Consumption:	60 W
Dimensions:	360 x 48.5 x 324.1 (mm) (w x h x d)
Weight:	2.82 kg

FRONT AND REAR SPEAKERS

System:	Full range satellite
Impedance:	4 Ω
Speaker drivers:	3" full range speaker
Frequency response:	150 Hz – 20 kHz
Dimensions:	95.6 x 198.3 x 75 (mm) (w x h x d)
Weight:	0.46 kg/each

CENTRE SPEAKER

System:	Full range satellite
Impedance:	8 Ω
Speaker drivers:	3" full range speaker
Frequency response:	150 Hz – 20 kHz
Dimensions:	240 x 99.5 x 64 (mm) (w x h x d)
Weight:	0.77 kg


SUBWOOFER

Impedance:	8 Ω
Speaker drivers:	165 mm (6.5") woofer
Frequency response:	40 Hz – 150 Hz
Dimensions:	131.2 x 315.5 x 386 (mm) (w x h x d)
Weight:	3.97 kg

Specifications subject to change without prior notice.


Measurement Setup

Tuner FM

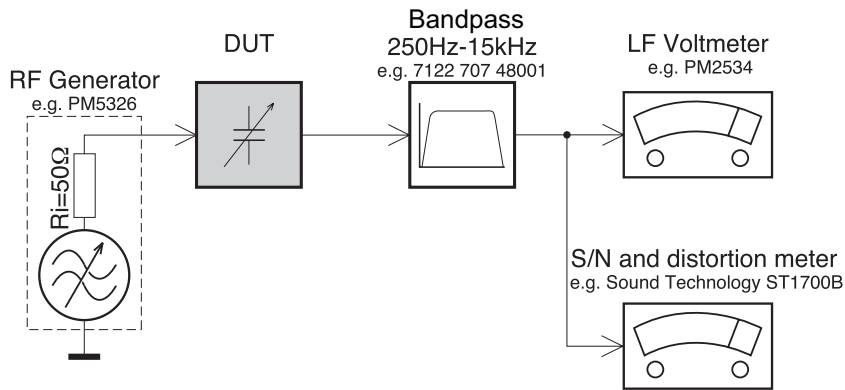

Use a bandpass filter to eliminate hum (50Hz, 100Hz) and disturbance from the pilotone (19kHz, 38kHz).


Tuner AM (MW,LW)

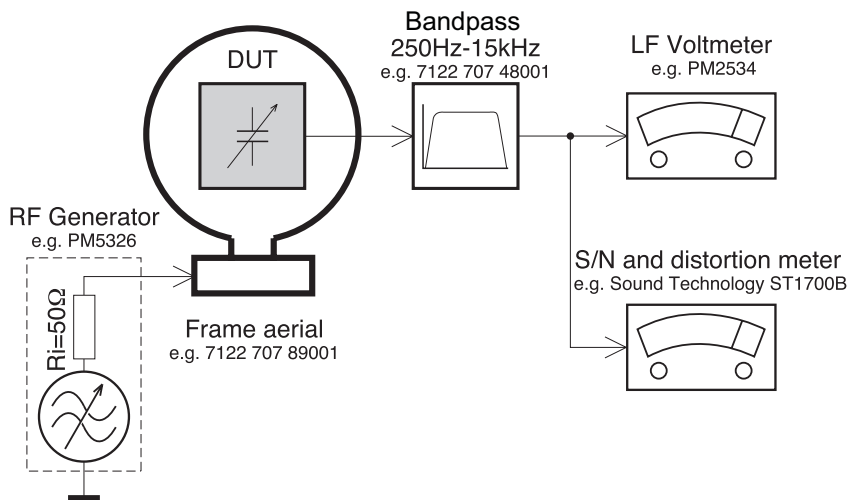

To avoid atmospheric interference all AM-measurements have to be carried out in a Faraday's cage. Use a bandpass filter (or at least a high pass filter with 250Hz) to eliminate hum (50Hz, 100Hz).

CD

Use Audio Signal Disc SBC429 4822 397 30184
(replaces test disc 3)

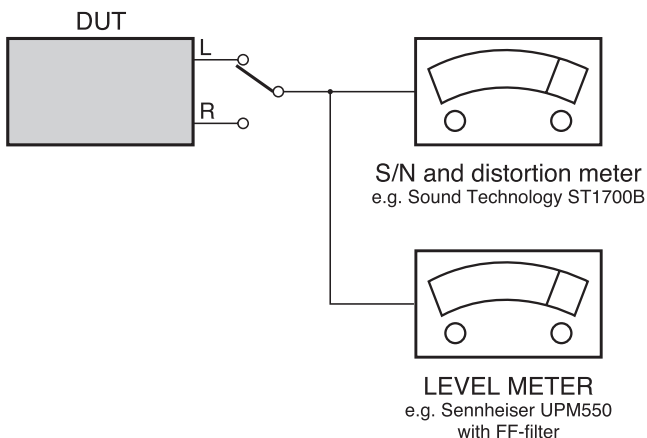

SERVICE AIDS

Service Tools:

Universal Torx driver holder	4822 395 91019
Torx bit T10 150mm	4822 395 50456
Torx driver set T6-T20	4822 395 50145
Torx driver T10 extended	4822 395 50423






Compact Disc:

SBC426/426A Test disc 5 + 5A	4822 397 30096
SBC442 Audio Burn-in test disc 1kHz	4822 397 30155
SBC429 Audio Signals disc	4822 397 30184
Dolby Pro-logic Test Disc	4822 395 10216

ESD Equipment:

Anti-static table mat - large 1200x650x1.25mm	4822 466 10953
anti-static table mat - small 600x650x1.25mm	4822 466 10958
Anti-static wristband	4822 395 10223
Connectorbox (1M Ω)	4822 395 11307
Extension cable (to connect wristband to conn.box)	4822 320 11305
Connecting cable (to connect table mat to conn.box)	4822 320 11306
Earth cable (to Connect product to mat or box) --	4822 320 11308
Complete kit ESD3 (combining all above products)	4822 320 10671
Wristband tester	4822 344 13999

HANDLING CHIP COMPONENTS

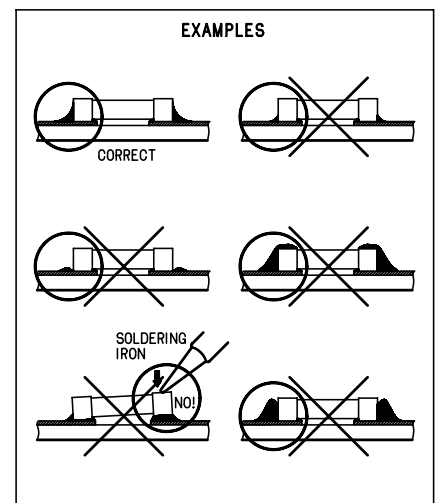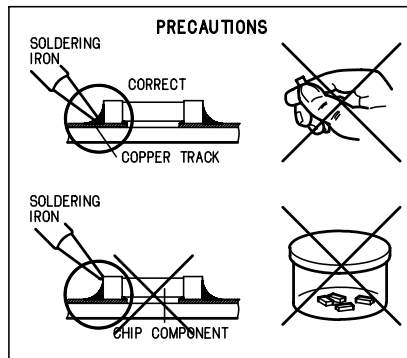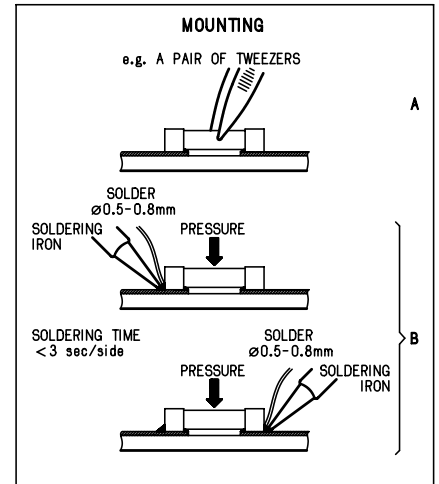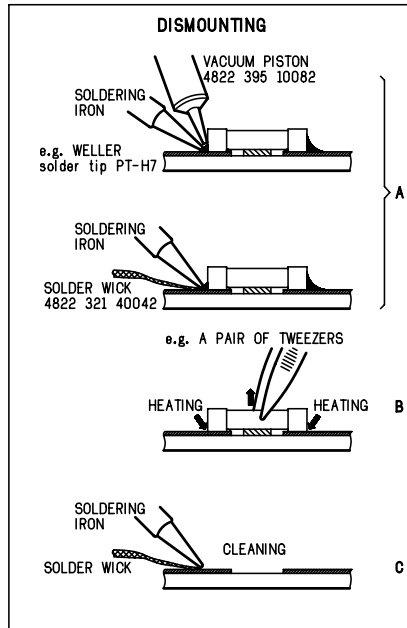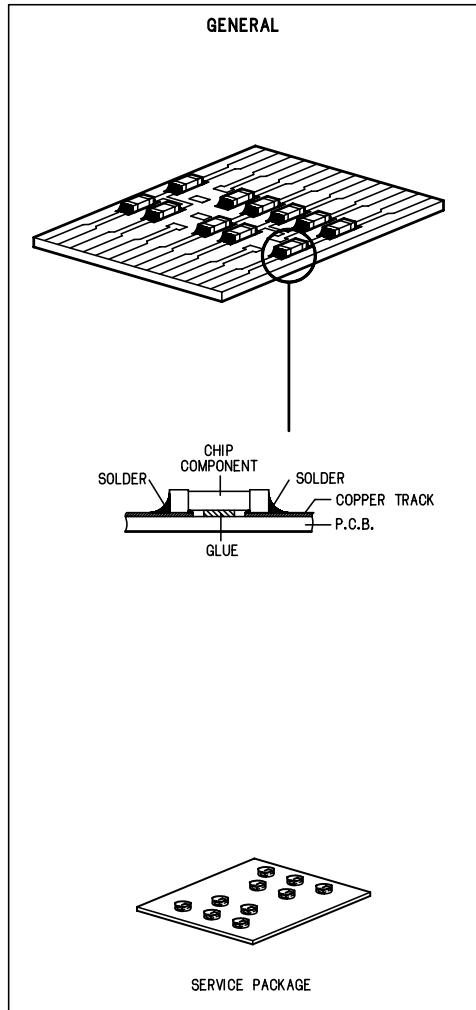

(GB) WARNING

All ICs and many other semi-conductors are susceptible to electrostatic discharges (ESD). Careless handling during repair can reduce life drastically.
When repairing, make sure that you are connected with the same potential as the mass of the set via a wrist wrap with resistance. Keep components and tools also at this potential.

(F) ATTENTION

Tous les IC et beaucoup d'autres semi-conducteurs sont sensibles aux décharges statiques (ESD). Leur longévité pourrait être considérablement écourtée par le fait qu'aucune précaution n'est prise à leur manipulation.
Lors de réparations, s'assurer de bien être relié au même potentiel que la masse de l'appareil et enfiler le bracelet serti d'une résistance de sécurité.
Veiller à ce que les composants ainsi que les outils que l'on utilise soient également à ce potentiel.

(GB)

Safety regulations require that the set be restored to its original condition and that parts which are identical with those specified, be used.

Safety components are marked by the symbol Δ .

(NL)

Veiligheidsbepalingen vereisen, dat het apparaat bij reparatie in zijn oorspronkelijke toestand wordt teruggebracht en dat onderdelen, identiek aan de gespecificeerde, worden toegepast.

De Veiligheidsonderdelen zijn aangeduid met het symbol Δ .

(F)

Les normes de sécurité exigent que l'appareil soit remis à l'état d'origine et que soient utilisés les pièces de rechange identiques à celles spécifiées.

Less composants de sécurité sont marqués Δ .

(D)

Bei jeder Reparatur sind die geltenden Sicherheitsvorschriften zu beachten. Der Originalzustand des Geräts darf nicht verändert werden; für Reparaturen sind Original-Ersatzteile zu verwenden.

Sicherheitsbauteile sind durch das Symbol Δ markiert.

(I)

Le norme di sicurezza esigono che l'apparecchio venga rimesso nelle condizioni originali e che siano utilizzati i pezzi di ricambio identici a quelli specificati.

Componenty di sicurezza sono marcati con Δ .

(GB)

After servicing and before returning set to customer perform a leakage current measurement test from all exposed metal parts to earth ground to assure no shock hazard exist, The leakage current must not exceed 0.5mA.

ESD**(D) WARNUNG**

Alle ICs und viele andere Halbleiter sind empfindlich gegenüber elektrostatischen Entladungen (ESD).
Unsorgfältige Behandlung im Reparaturfall kann die Lebensdauer drastisch reduzieren.
Veranlassen Sie, dass Sie im Reparaturfall über ein Pulsarmband mit Widerstand verbunden sind mit dem gleichen Potential wie die Masse des Gerätes.
Bauteile und Hilfsmittel auch auf dieses gleiche Potential halten.

(GB) ESD PROTECTION EQUIPMENT

Complete Kit ESD3 (small tablemat, wristband, connection box, extension cable and earth cable 4822 310 10671
Wristband tester 4822 344 13999

(NL) WAARSCHUWING

Alle IC's en vele andere halfgeleiders zijn gevoelig voor electrostatische ontladingen (ESD).

Onzorgvuldig behandelen tijdens reparatie kan de levensduur drastisch doen verminderen. Zorg ervoor dat u tijdens reparatie via een polsband met weerstand verbonden bent met hetzelfde potentiaal als de massa van het apparaat.
Houd componenten en hulpmiddelen ook op hetzelfde potentiaal.

(I) AVVERTIMENTO

Tutti IC e parecchi semi-conduttori sono sensibili alle scariche statiche (ESD). La loro longevità potrebbe essere fortemente ridatta in caso di non osservazione della più grande cauzione alla loro manipolazione. Durante le riparazioni occorre quindi essere collegato allo stesso potenziale che quello della massa dell'apparecchio tramite un braccialetto a resistenza.
Assicurarasi che i componenti e anche gli utensili con quali si lavora siano anche a questo potenziale.

**(GB) Warning !**

Invisible laser radiation when open.
Avoid direct exposure to beam.

(S) Varning !

Osynlig laserstrålning när apparaten är öppnad och spårren är urkopplad. Betrakta ej strålen.

(SF) Varoitus !

Avatussa laitteessa ja suojalukituksen ohitettaessa olet alttiina näkymättömälle laserisäteilylle. Älä katso säteeseen!

(DK) Advarse !

Usynlig laserstråling ved åbning når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

(F)

"Pour votre sécurité, ces documents doivent être utilisés par des spécialistes agréés, seuls habilités à réparer votre appareil en panne".

Pb(Lead) Free Solder

When soldering, be sure to use the pb free solder.

IDENTIFICATION:

Regardless of special logo (not always indicated)



one must treat all sets from **1 Jan 2005** onwards, according next rules:

Important note: In fact also products of year 2004 must be treated in this way as long as you avoid mixing solder-alloys (lead-free/ lead-free). So best to always use SAC305 and the higher temperatures belong to this.

Due to lead-free technology some rules have to be respected by the workshop during a repair:

- Use only lead-free solder alloy Philips SAC305 with order code 0622 149 00106. If lead-free solder-paste is required, please contact the manufacturer of your solder-equipment. In general use of solder-paste within workshops should be avoided because paste is not easy to store and to handle.
- Use only adequate solder tools applicable for lead-free solder alloy. The solder tool must be able
 - To reach at least a solder-temperature of 400°C,
 - To stabilize the adjusted temperature at the solder-tip
 - To exchange solder-tips for different applications.
- Adjust your solder tool so that a temperature around 360°C – 380°C is reached and stabilized at the solder joint. Heating-time of the solder-joint should not exceed ~ 4 sec. Avoid temperatures above 400°C otherwise wear-out of tips will rise drastically and flux-fluid will be destroyed. To avoid wear-out of tips switch off unused equipment, or reduce heat.
- Mix of lead-free solder alloy / parts with leaded solder alloy / parts is possible but PHILIPS recommends strongly to avoid mixed solder alloy types (leaded and lead-free).
If one cannot avoid or does not know whether product is lead-free, clean carefully the solder-joint from old solder alloy and re-solder with new solder alloy (SAC305).
- Use only original spare-parts listed in the Service-Manuals. Not listed standard-material (commodities) has to be purchased at external companies.
- Special information for BGA-ICs:
 - Always use the 12nc-recognizable soldering temperature profile of the specific BGA (for de-soldering always use the lead-free temperature profile, in case of doubt)
 - Lead free BGA-ICs will be delivered in so-called 'dry-packaging' (sealed pack including a silica gel pack) to protect the IC against moisture. After opening,

dependent of MSL-level seen on indicator-label in the bag, the BGA-IC possibly still has to be baked dry. (MSL=Moisture Sensitivity Level). This will be communicated via AYS-website.

Do not re-use BGAs at all.

- For sets produced before 1.1.2005 (except products of 2004), containing leaded solder-alloy and components, all needed spare-parts will be available till the end of the service-period. For repair of such sets nothing changes.
- On our website www.atyourservice.ce.Philips.com you find more information to:
 - BGA-de-/soldering (+ baking instructions)
 - Heating-profiles of BGAs and other ICs used in Philips-sets

You will find this and more technical information within the "magazine", chapter "workshop news".

For additional questions please contact your local repair-helpdesk.

System , Region Code , etc. Setting Prochure

1)System Reset

- press "system " button on R/C,TV show "setup"
- select the menu using the ▼ and ► on R/C
- go preference page to do sysytem reset

2)Region Code Change

- press the "stop" button on R/C in open model
- press "7" "3" "4" "4" "6" "6" on R/C,then input desired number to change region code :

- | | |
|---|-----------------------|
| 1 | USA |
| 2 | EU |
| 3 | AP |
| 4 | Australia ,NZ , Latam |
| 5 | Russia , INDIA |
| 6 | CHINA |

3)Version Control Change

- In open model, press "1" "5" "9" on R/C
- press "ok" button to comfirm
- TV will show message as below:

```

Current model  3154-12
Ver 00.15.04-70123-01   region : 2
Servo: OF.60.00.00
8032: 05.00.04.06   RISC:00.00.02.02
IF current model does not match you set use down arrow
key on the remote to change

```

4)Password Change

- press "system " button on R/C,TV show "setup"
 - select the menu using the ▼ and ► on R/C
 - go preference page select "password" to change
- * 000000 is default password supplied.

5)Check on the Sofeware Version

- open the CD Door
- press "display" button on R/C
- TV will show the vision on screen

6)Upgrading new sofeware

- open the CD Door,then insert the CD-R program disc
- close the DOOR
- TV will show:

```

"loading"
pop message"upgrading"
"writhing" about 2 second
"done "








```

* the latest upgraded is in version VER 15.04-70123-01

CAUTION !

This information is confidential and may not be distributed. Only a qualified service person should reprogram the Region Code.

MAIN UNIT REPAIR CHART

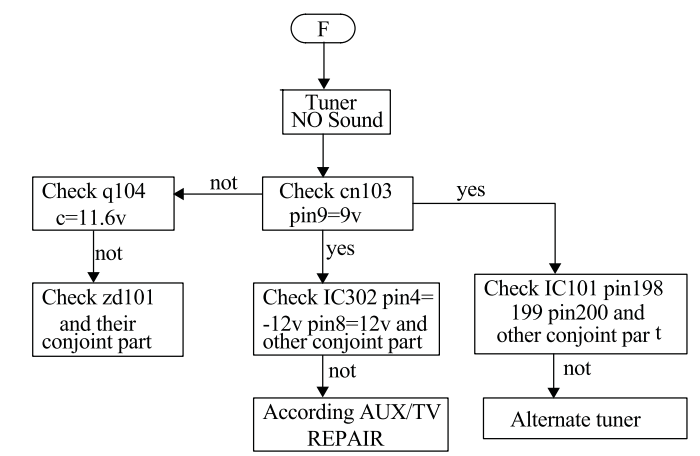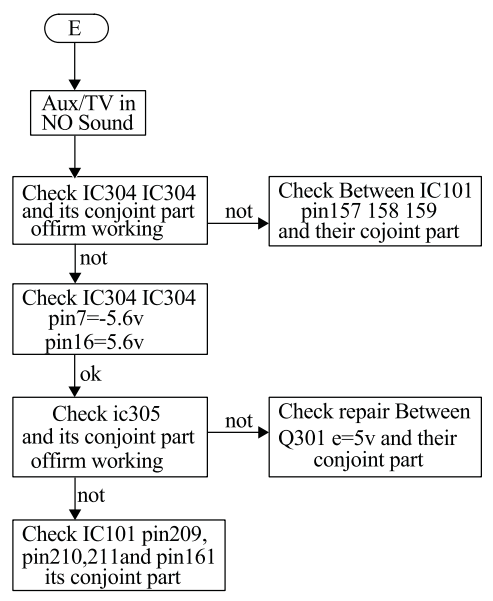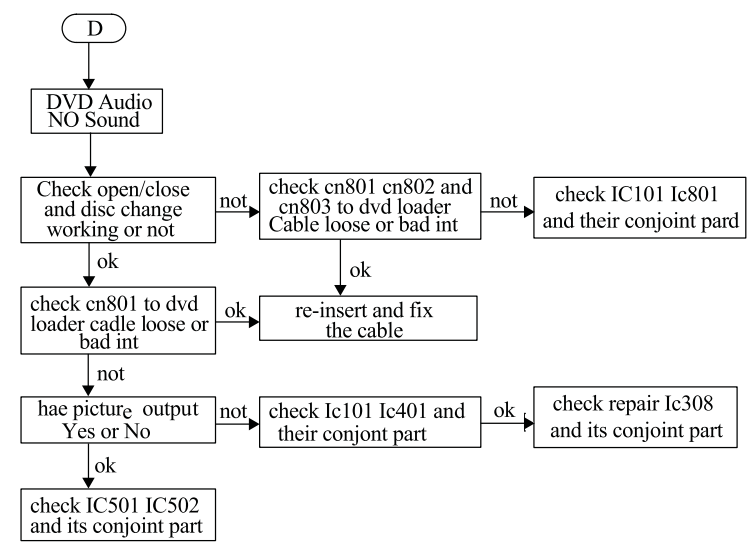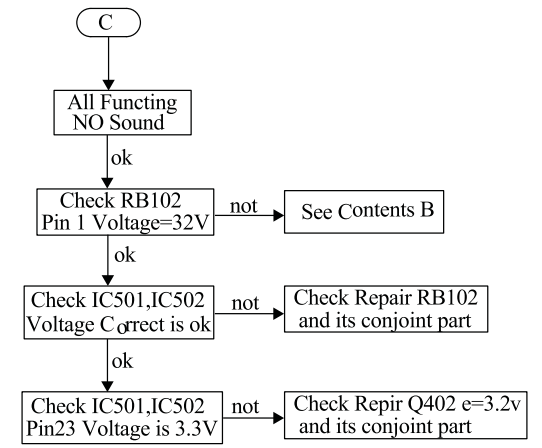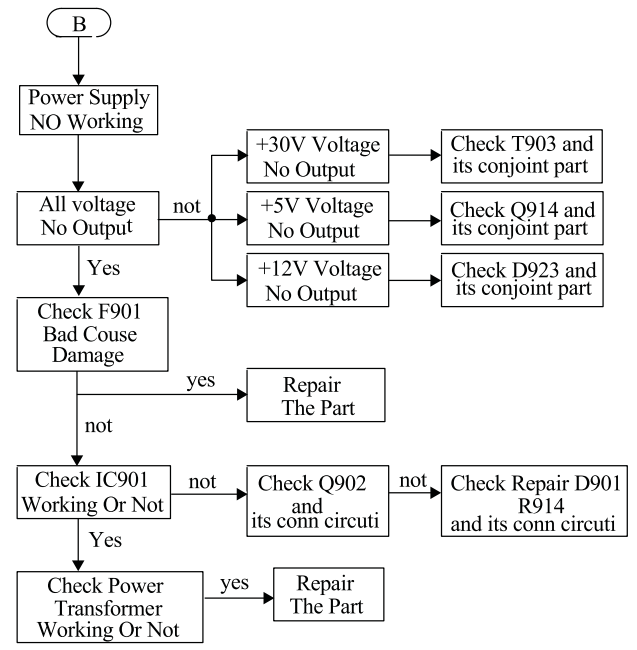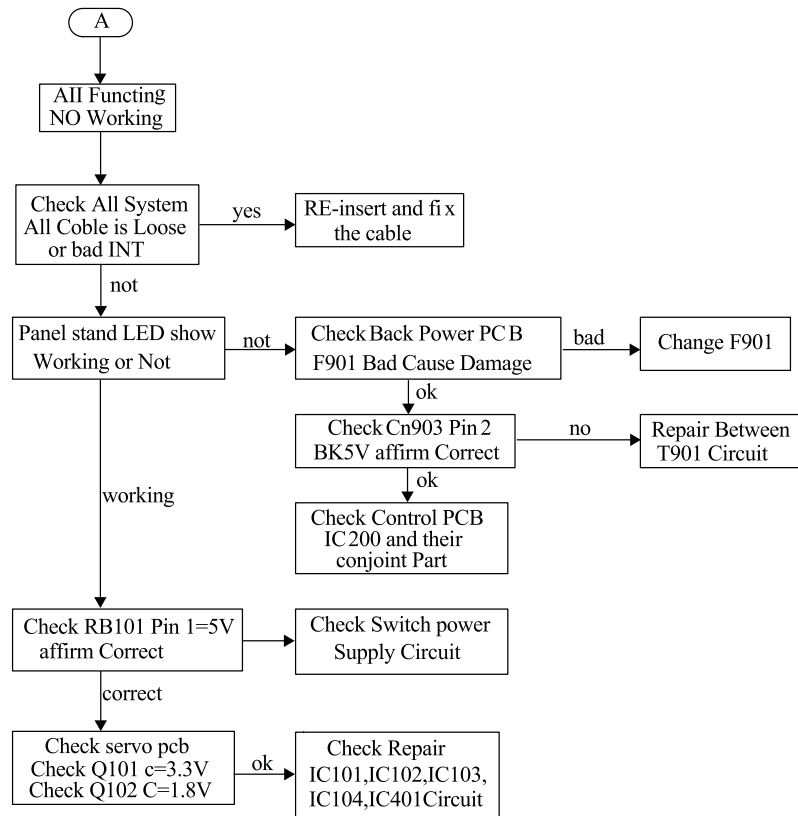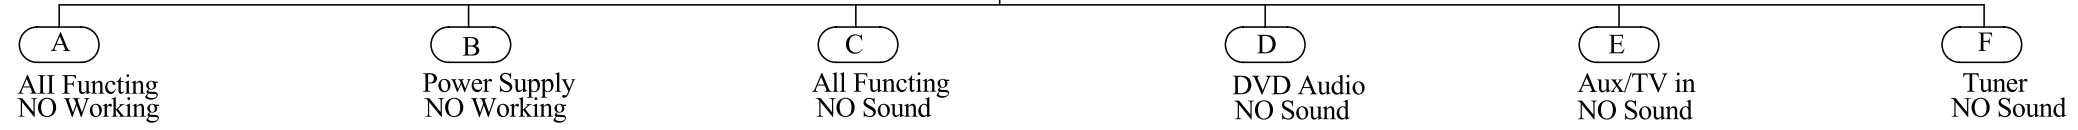

DISASSEMBLY INSTRUCTIONS

Dismantling of the Front Panel Assembly

- 1) Open the DVD Tray by using the Open/Close Button while the Set is ON and disconnect the mains supply after removing the Tray Cover.

Note: If this is not possible, the DVD Tray has to be open manually.

Take a mini screw driver about 2mm diameter and make a marking 24mm from the tip as shown in figure 2 . Place the set on its side, insert the mini screw driver till the marking and slide it towards the right as shown in figure 1 until the Tray moves out of the Front Panel.

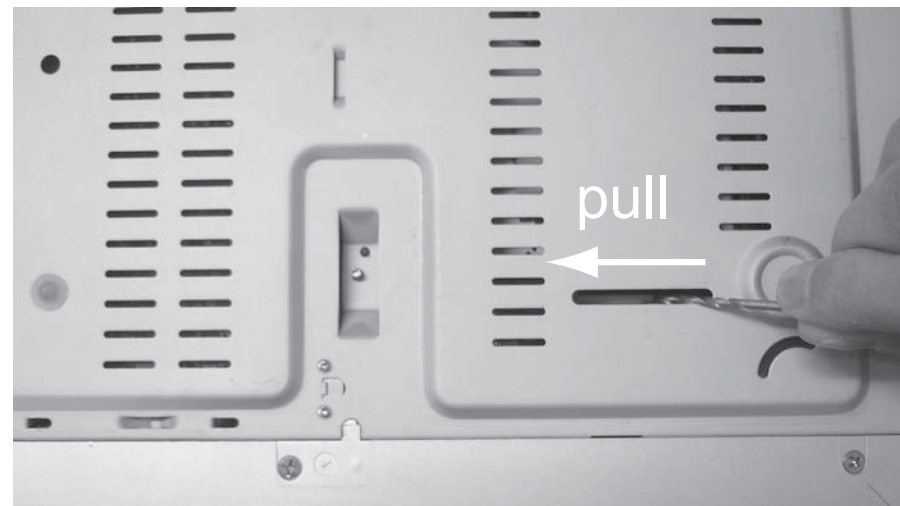


Figure 1



Figure 2

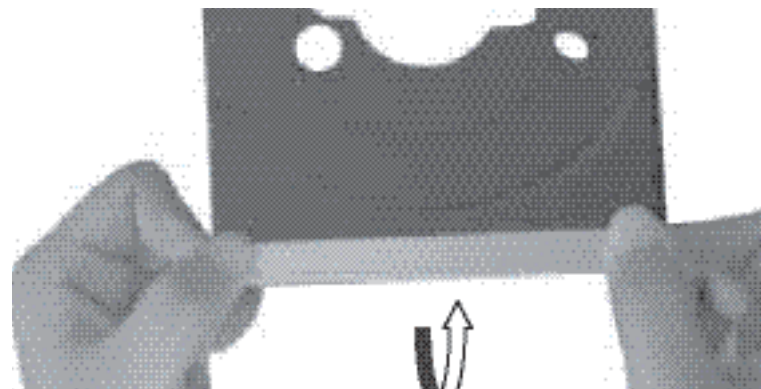


Figure 3

3 - 1

- 2) Return the set to its upright position and remove the Tray Cover as shown in Figure 3 and close the tray manually by pushing it back in.
- 3) Loosen 5 screws and remove the Top Cover by lifting the rear portion upwards before sliding it out towards the rear.
 - 3 screws on the back
 - 1 screws each on the left & right side
- 4) Loosen 6 screws & lift up the top edge of Front Panel assembly to free some catches before sliding it out towards the front.
 - 3 screws on the bottom
 - 1 screw on the inside
 - 1 screw each on the left & right side

Dismantling of the Main PCB

3 - 1

- 1) Loosen 4 screw " A " on the top of main board as shown in figure 4.
- 2) Loosen 5 screw "B" at the back panel as shown in figure 5.

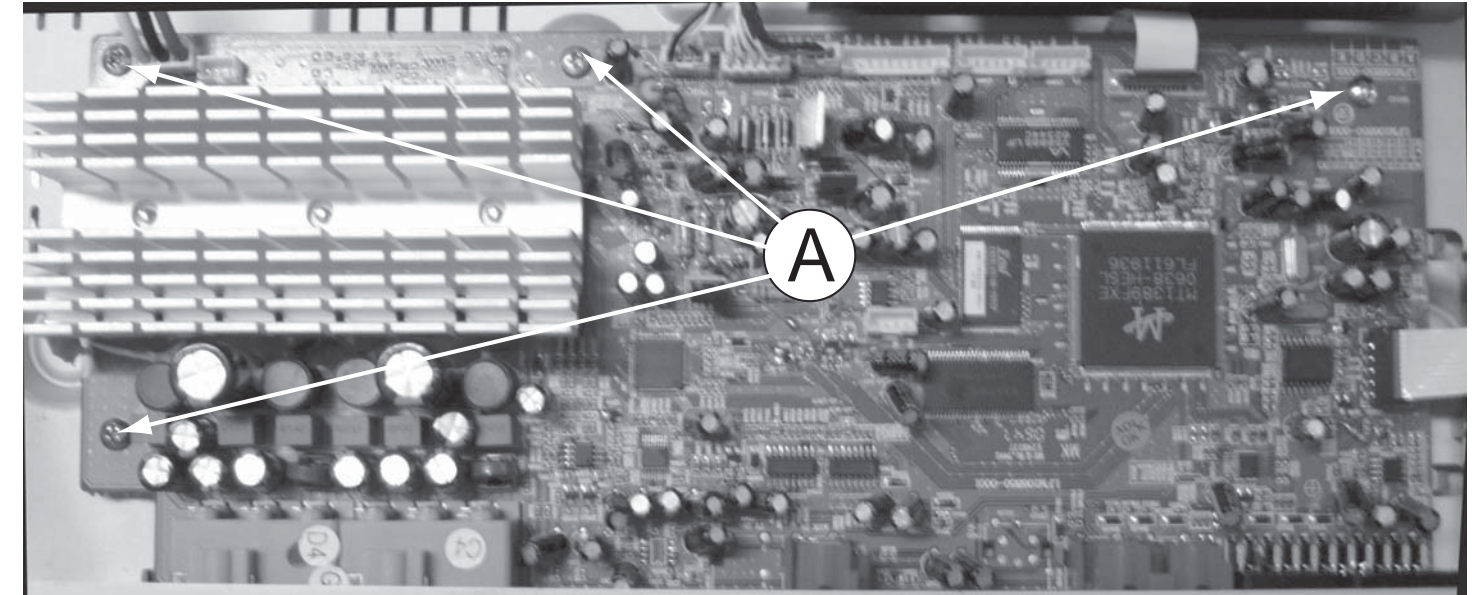


Figure 4

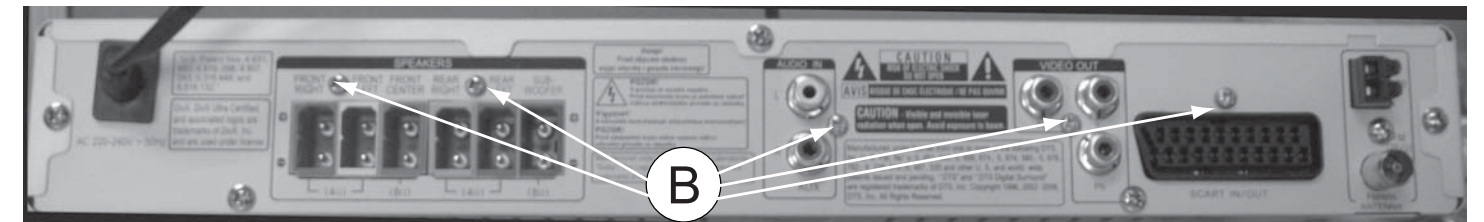


Figure 5

Dismantling of the Control Board

- 1) Loosen 12 screws "C" at the back pancele as shown in figure 6

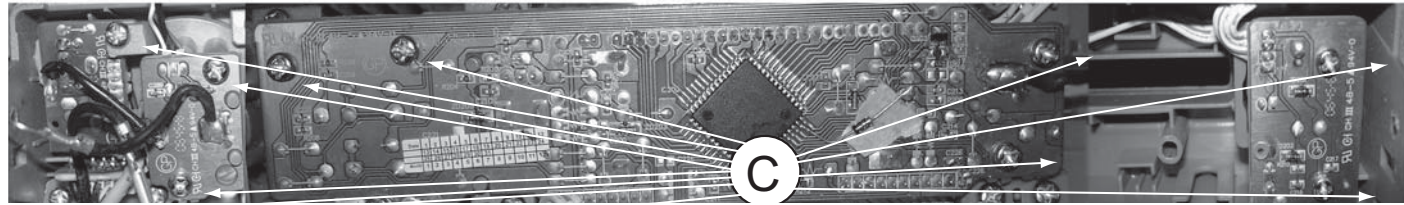


Figure 6

Dismantling of the Power Board

- 1) Loosen 4 screws "D" at the top of the Power Board as shown in figure 7
- 2) Using a noise plier to press the rubber space tightly, then, you can take the power board out from the main unit as shown in figure 8

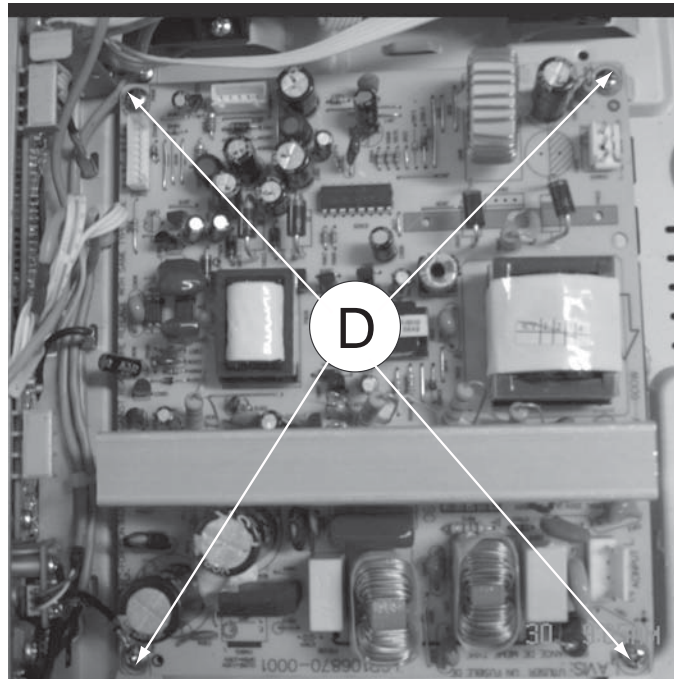


Figure 7

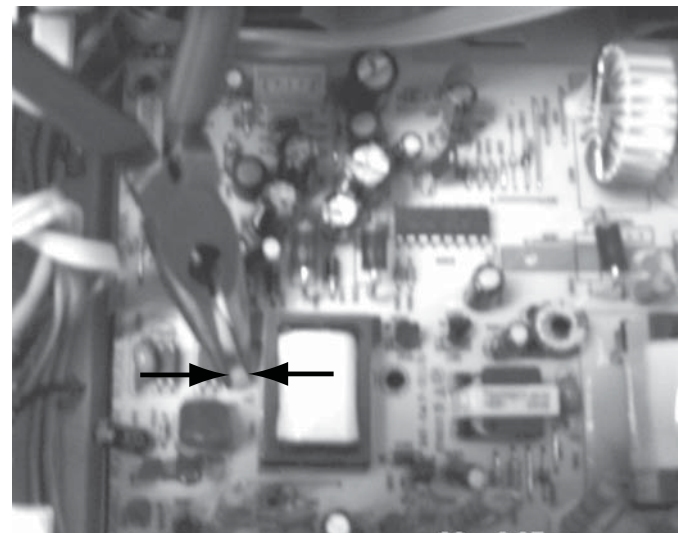


Figure 8

Dismantling of the DVD Module

- 1) Loosen 4 screws "E" to remove the DVD Module as shown in figure 9


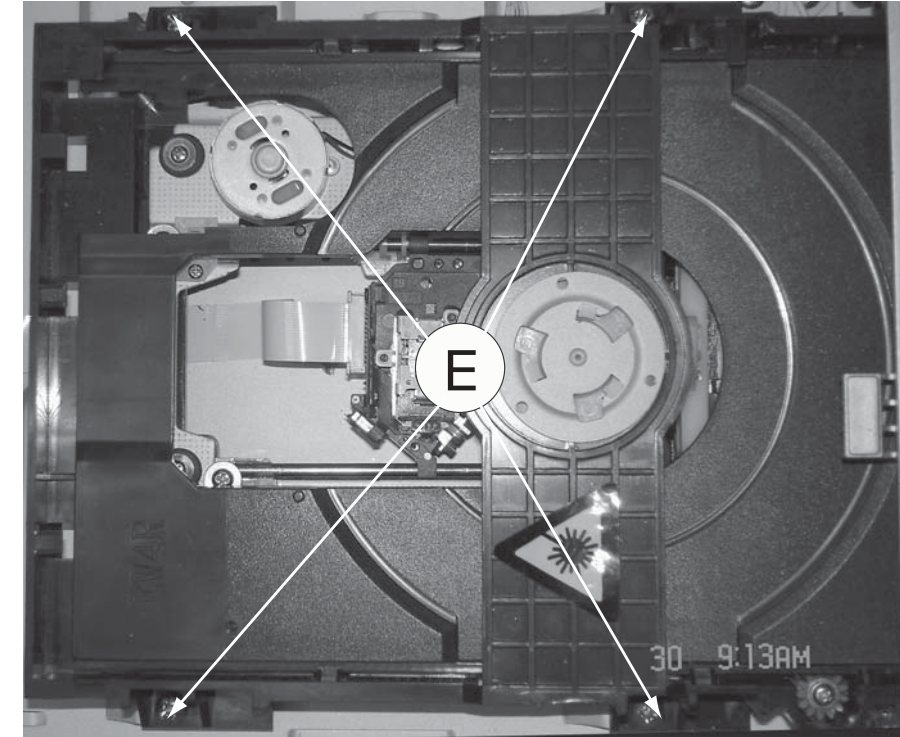



Figure 9

Service Position

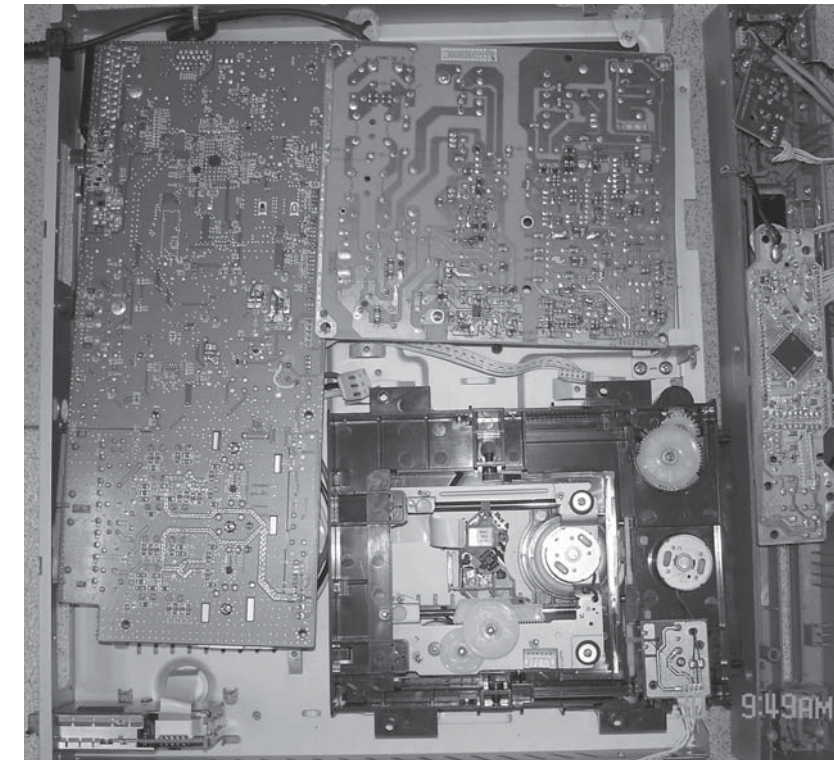

Note: In some service positions the components or copper patterns of one board may risk touching its neighbouring pc boards or metallic parts. To prevent such short-circuit use a piece of hard paper or other insulating material between them.


BLOCK DIAGRAM

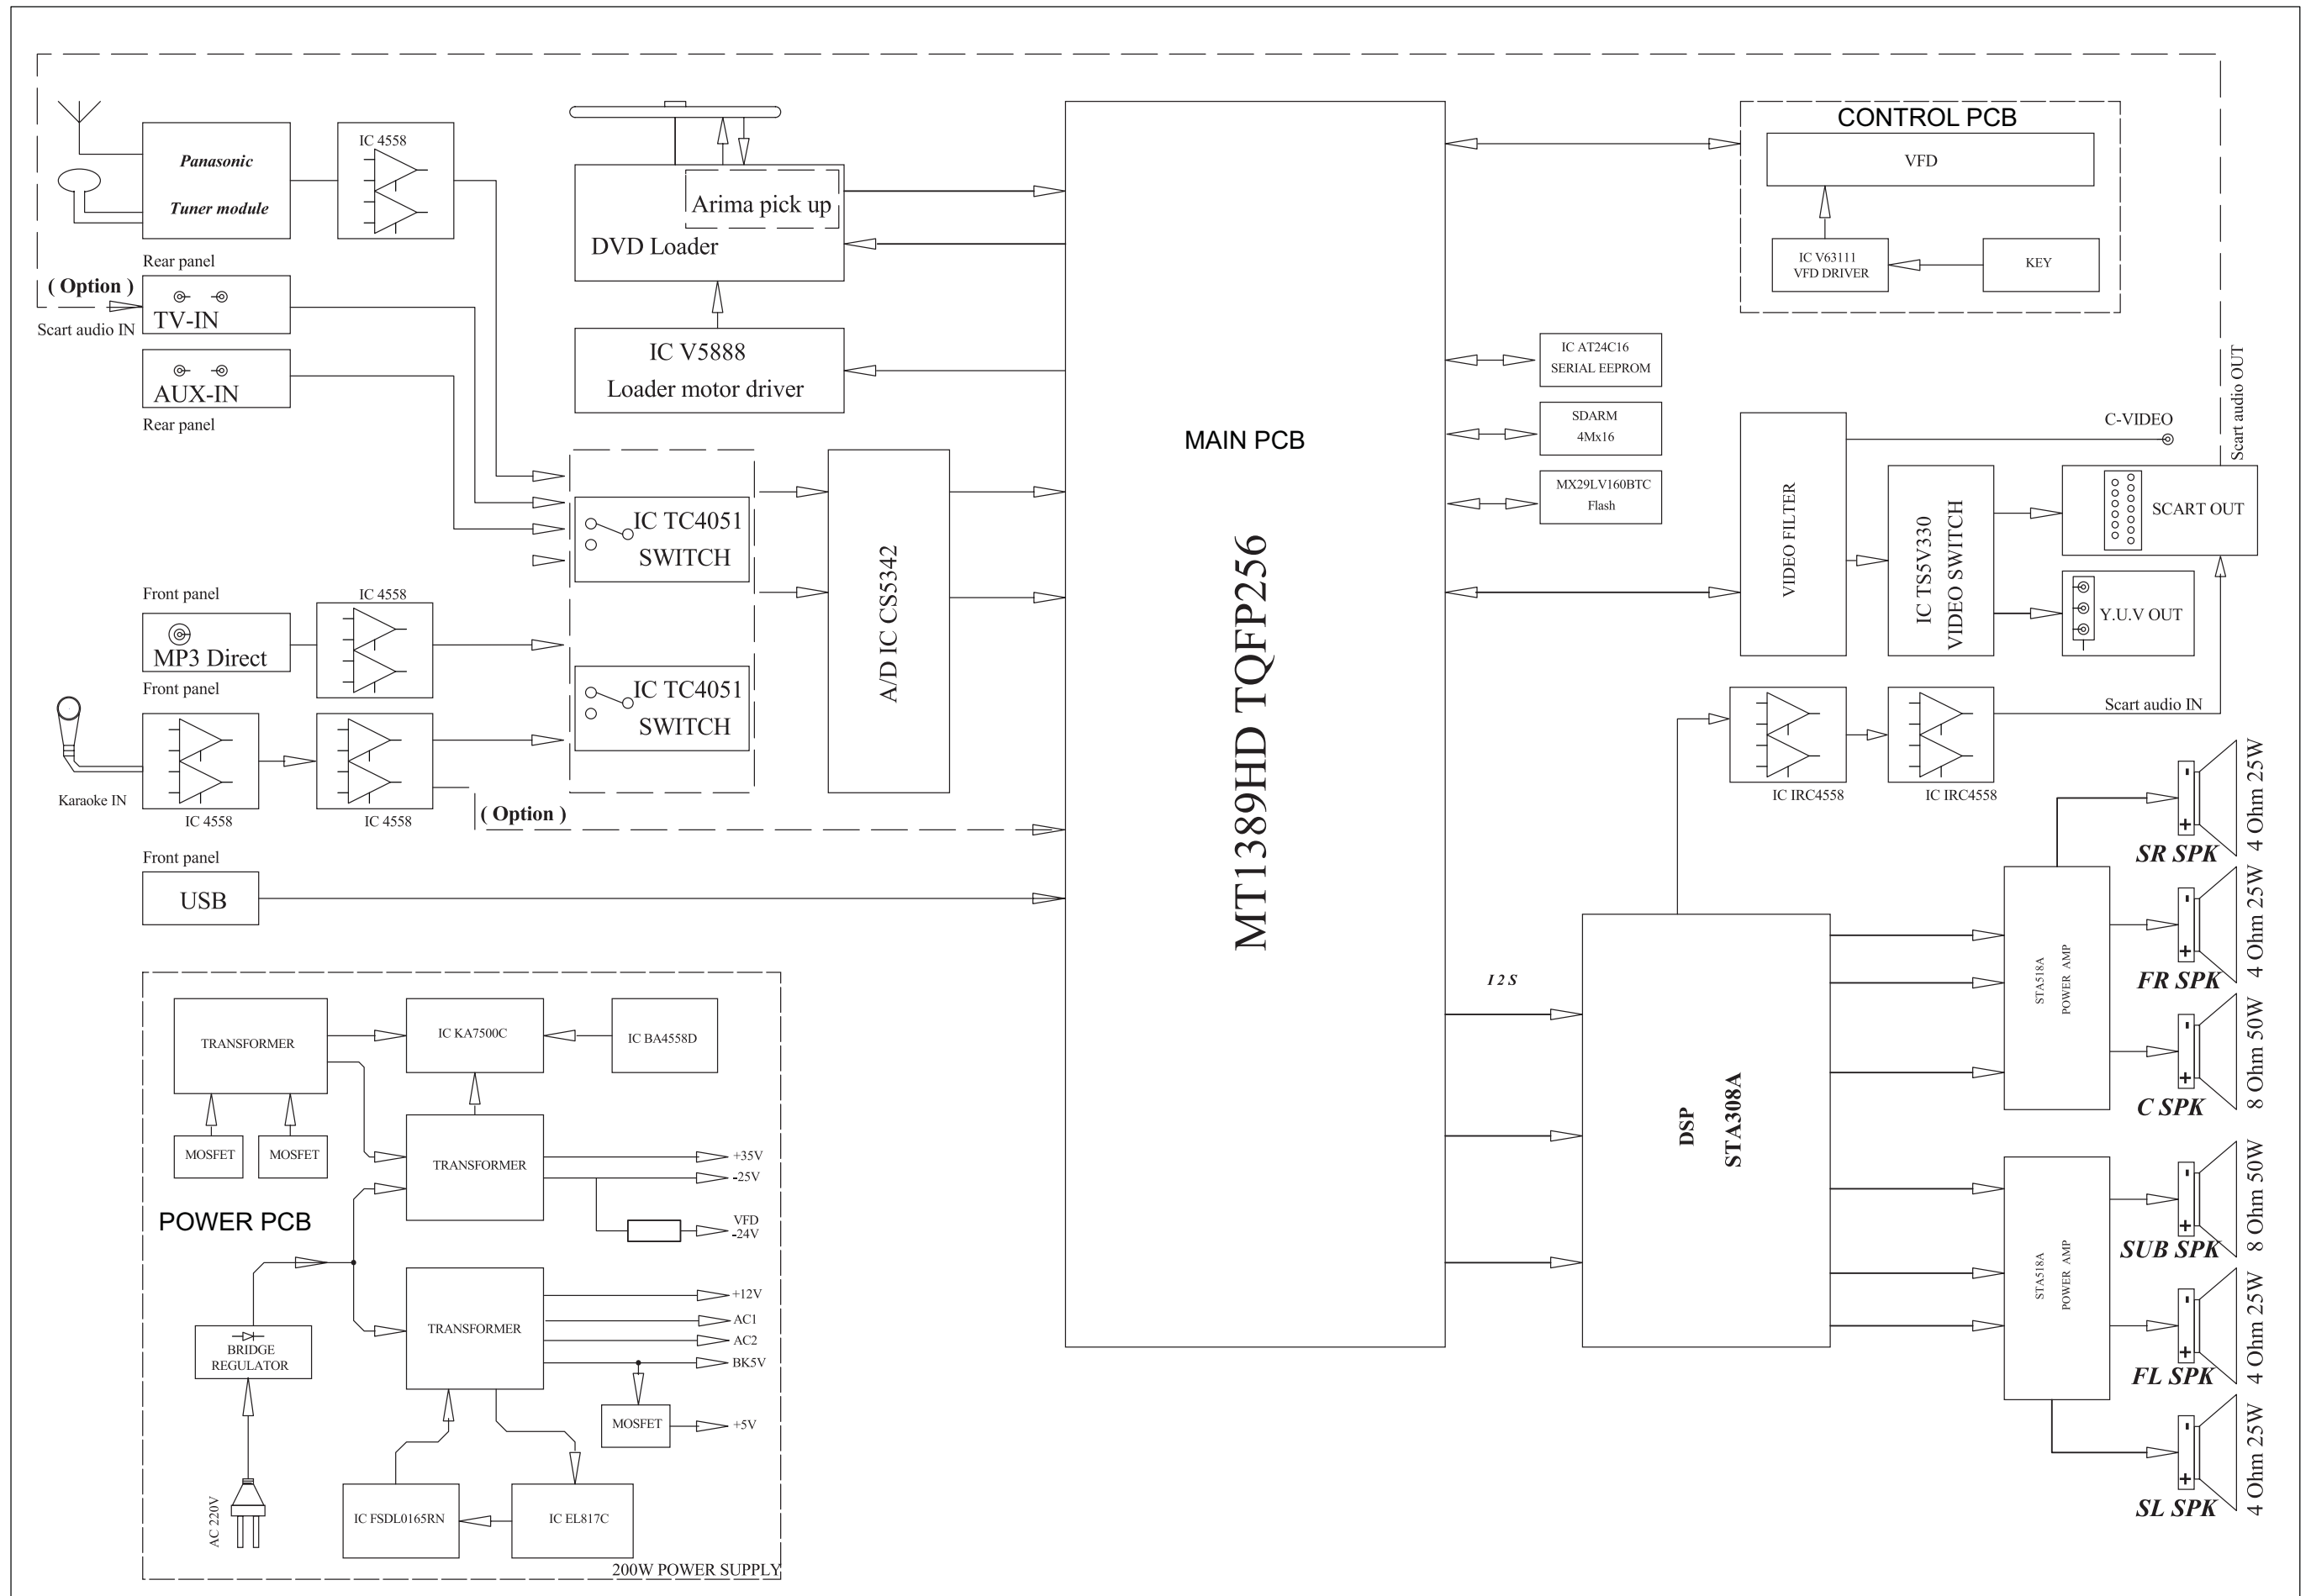

WIRING DIAGRAM

4 - 2


4 - 2

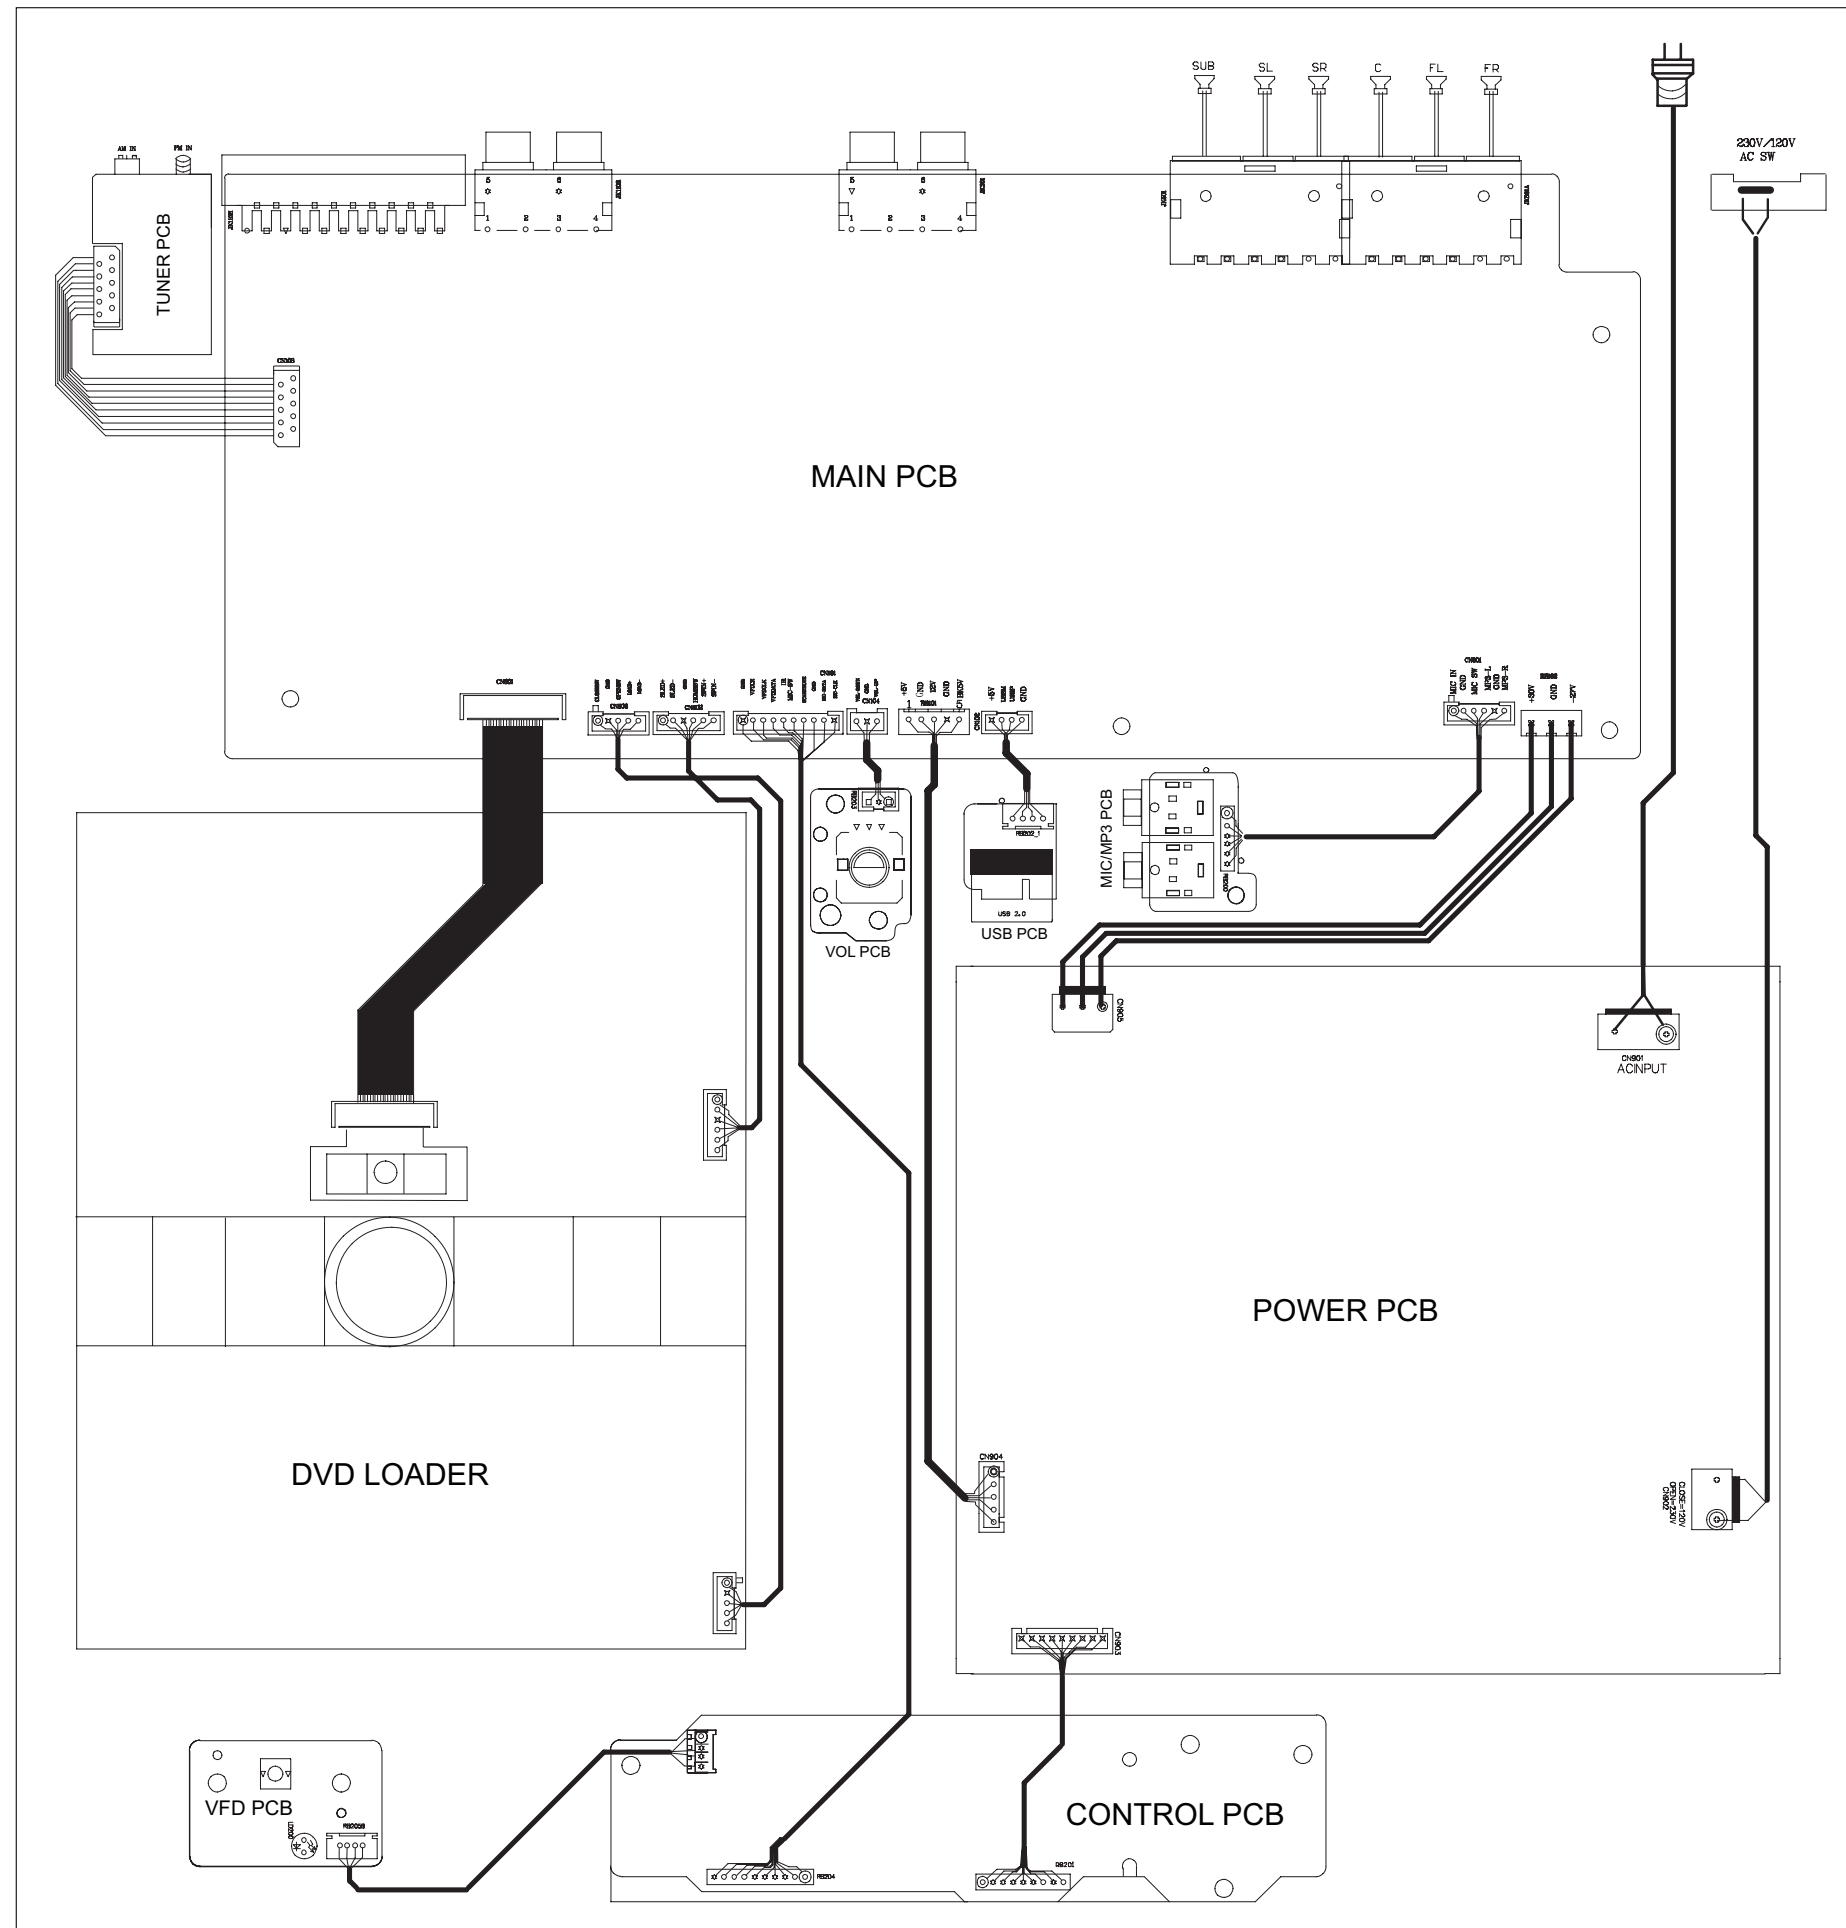

CONTROL BOARD

TABLE OF CONTENTS

FTD Display Pin Assignment..... 5-1
 Voltage 5-2
 Circuit Diagram..... 5-3
 PCB Layout Top & Bottom View..... 5-4
 Electrical Parts List..... 5-5

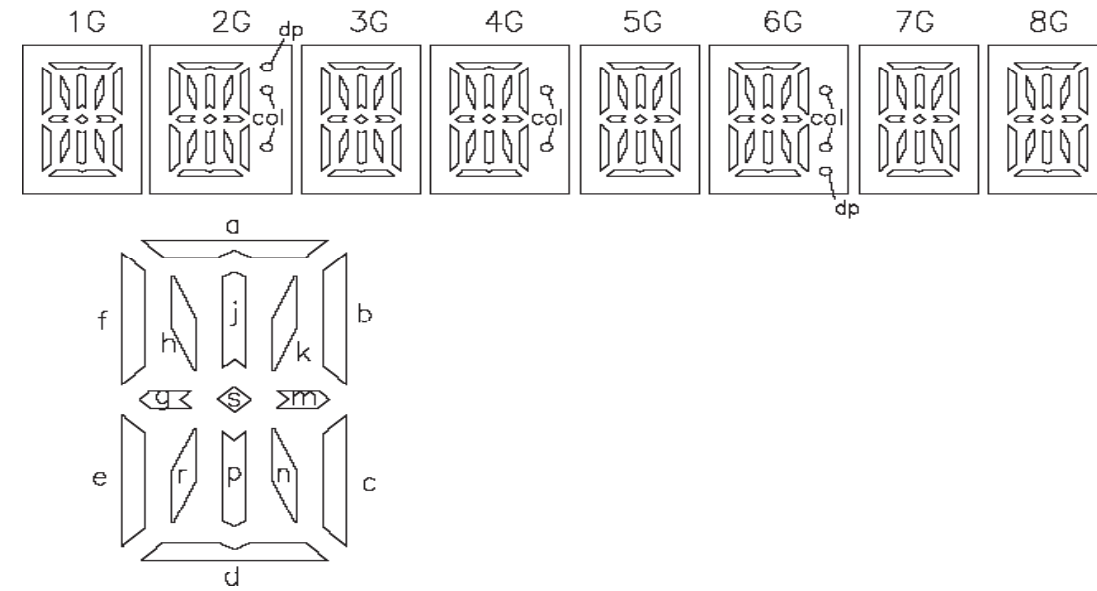

	1G	2G	3G	4G	5G	6G	7G	8G
P1	a	a	a	a	a	a	a	a
P2	j, p	j, p	j, p	j, p	j, p	j, p	j, p	j, p
P3	h	h	h	h	h	h	h	h
P4	k	k	k	k	k	k	k	k
P5	b	b	b	b	b	b	b	b
P6	f	f	f	f	f	f	f	f
P7	m	m	m	m	m	m	m	m
P8	g	g	g	g	g	g	g	g
P9	c	c	c	c	c	c	c	c
P10	e	e	e	e	e	e	e	e
P11	r	r	r	r	r	r	r	r
P12	n	n	n	n	n	n	n	n
P13	d	d	d	d	d	d	d	d
P14	—	dp	—	col	—	col	—	—
P15	s	s	s	s	s	s	s	s
P16	—	col	—	—	—	dp	—	—






PIN CONNECTION

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
CONNECTION	F	F	NP	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
PIN NO.	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
CONNECTION	P13	P14	P15	P16	1G	2G	3G	4G	5G	6G	7G	8G	NP	F	F

Note: F: Filament P: Anode G: Grid NP: No pin

CIRCUIT DIAGRAM


C200 A2	C206 B2	C212 B2	C218 C4	C227 B4	D202 B1	IC200 B1	R202 A2	R208 C1	R214 C2	R226 C3	SN200 B2	TA205 C4	ZD202 C4
C201 A2	C207 B2	C213 C2	C219 C1	C288 A4	D203 C1	JK2 A4	R203 A2	R209 C1	R215 C2	RB200AA4	TA200 C1	USB200B4	ZD203 A2
C202 B2	C208 B2	C214 C2	C220 C1	C289 B4	DP200 A1	LD200 C4	R204 B2	R210 C4	R217 B2	RB201 A3	TA201 C1	VR200 A4	ZD204 A3
C203 A2	C209 B2	C215 C2	C221 C2	CN203 B4	FB200 B4	Q200 C3	R205 B2	R211 B3	R218 C3	RB202 B4	TA202 C1	XL200 B2	ZD205 B2
C204 B2	C210 B2	C216 B2	C225 B3	D200 C1	FB201 B4	R200 A2	R206 C1	R212 B2	R219 C3	RB204 B3	TA203 C1	ZD200 A2	
C205 B2	C211 B2	C217 C4	C226 B3	D201 C1	FB202 B4	R201 A2	R207 C1	R213 C2	R225 C3	RB205AC3	TA204 C1	ZD201 C4	

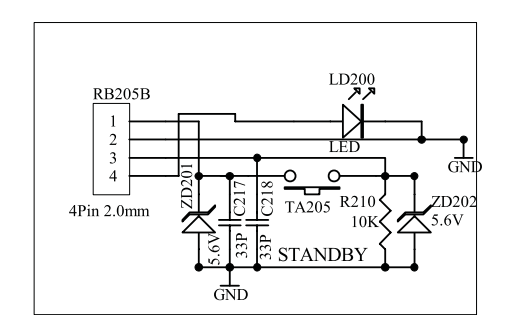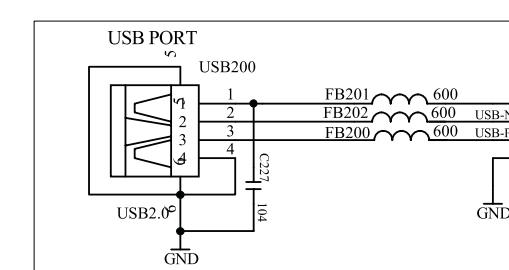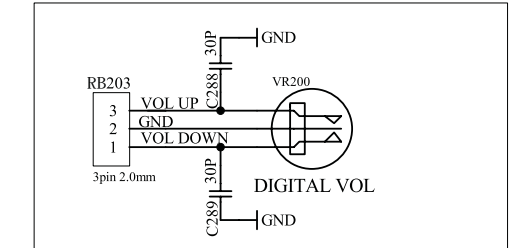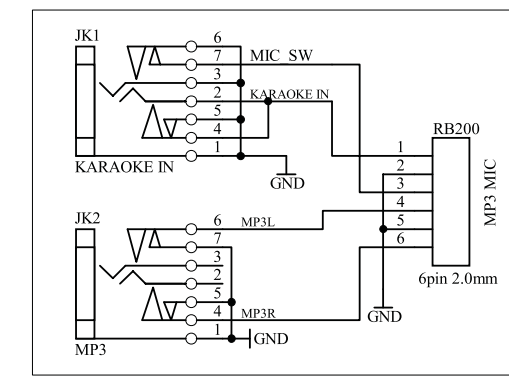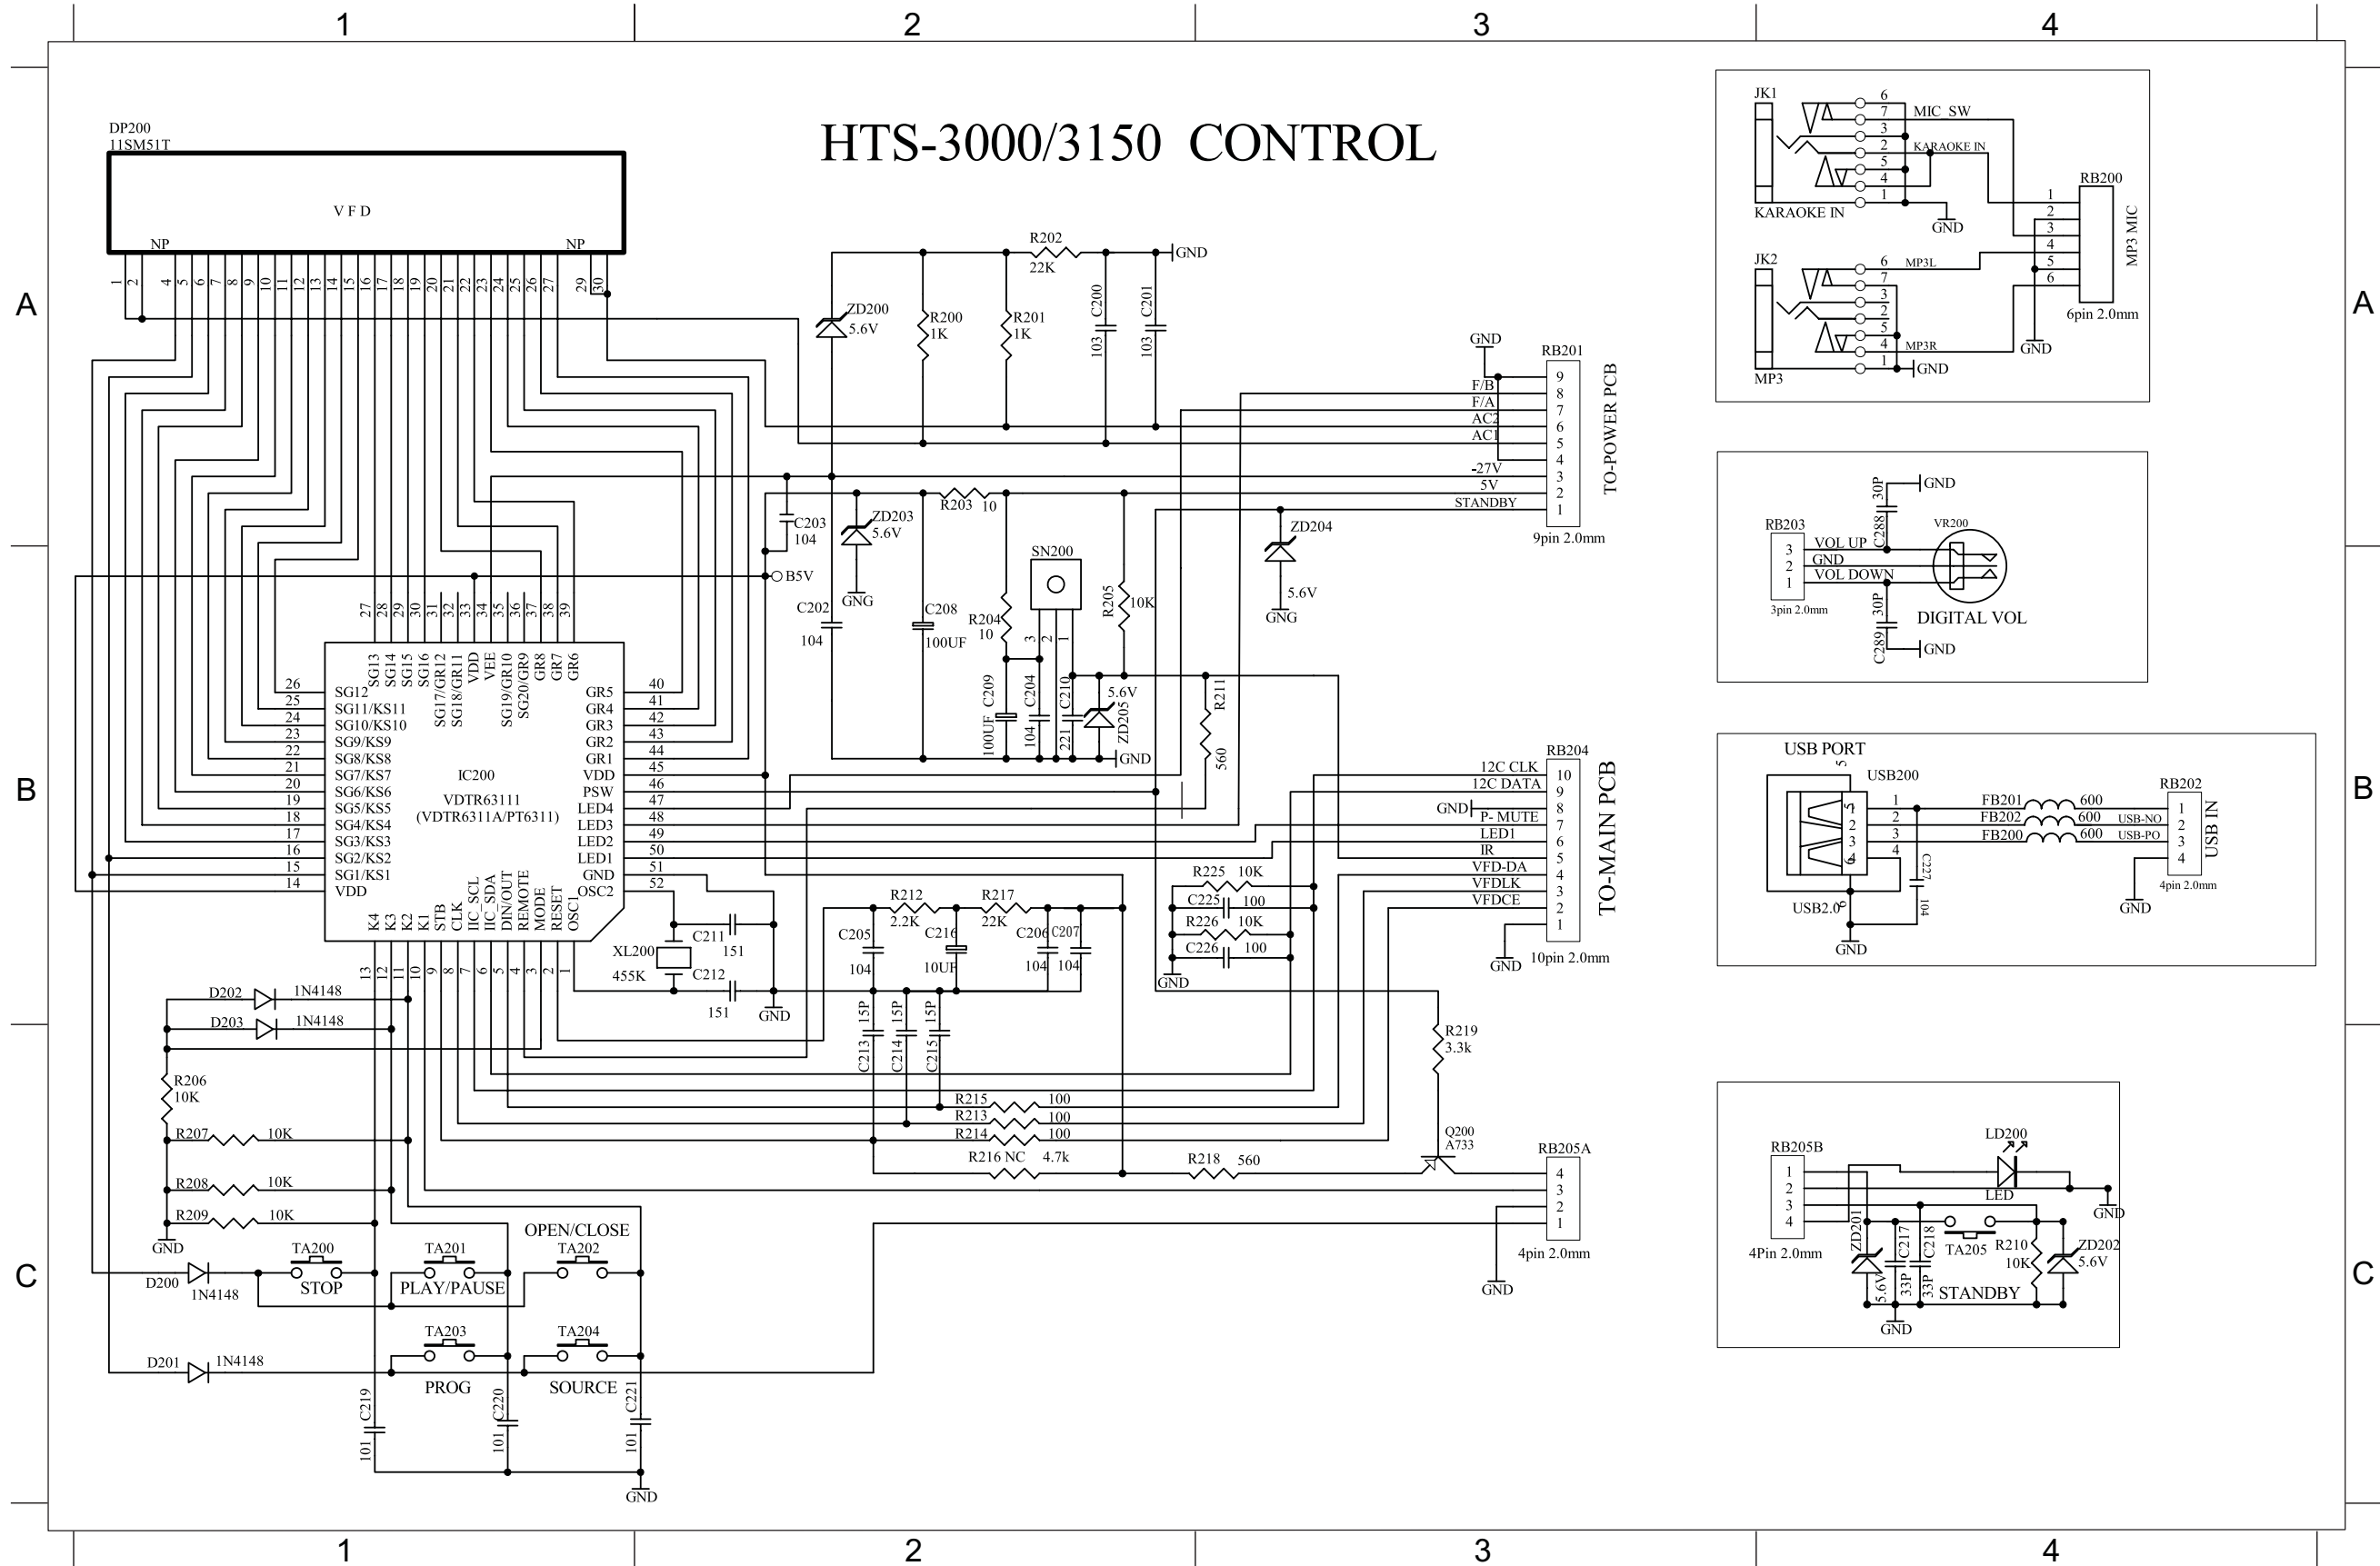


MAIN BOARD

TABLE OF CONTENTS


Internal IC Diagram 6-1
 Circuit Diagram 6-2
 PCB Layout Top View 6-3
 PCB Layout Bottom View 6-4
 Voltage 6-5

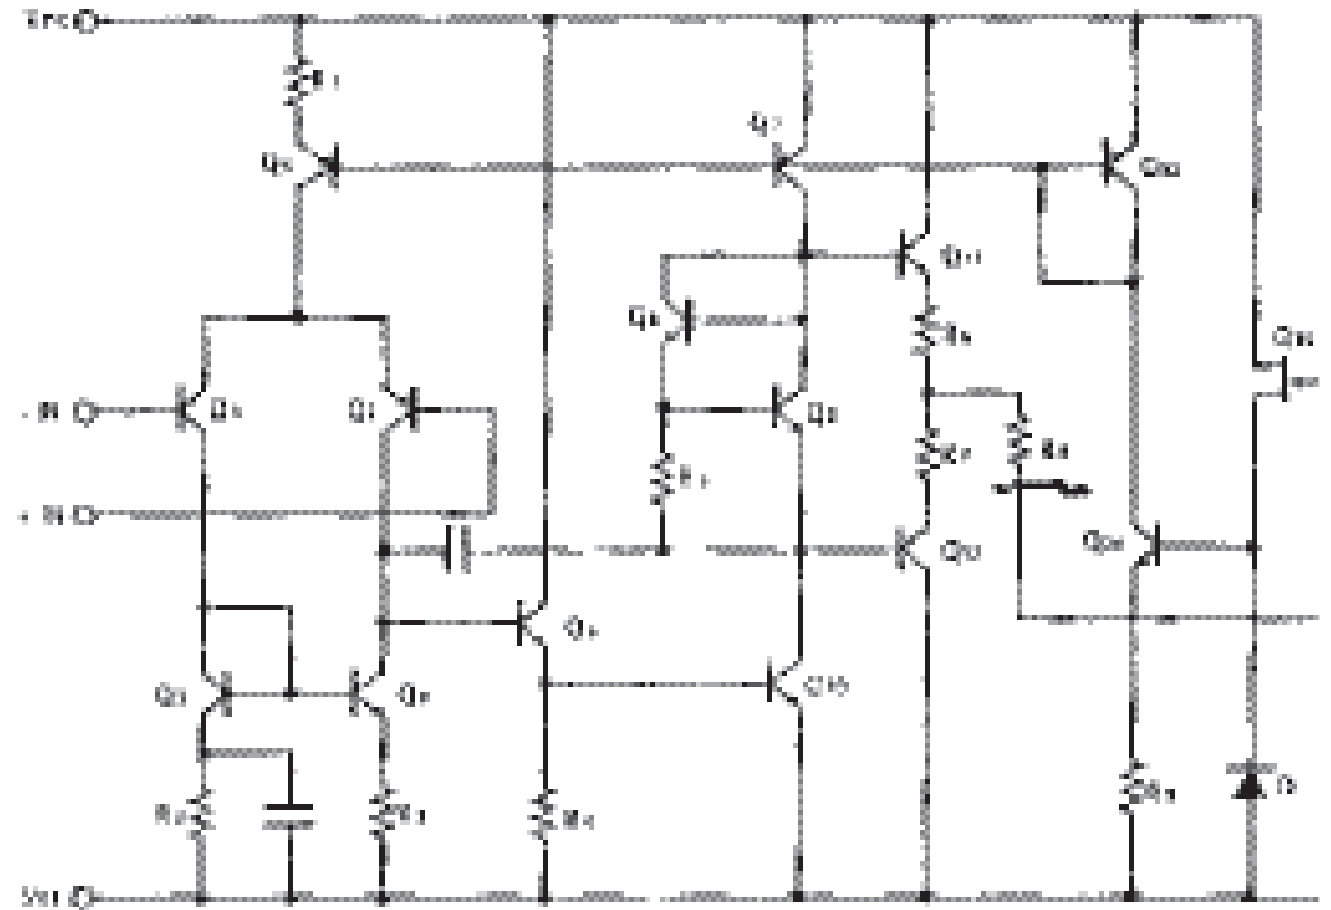

INTERNAL IC DIAGRAM - V5888S HOSP

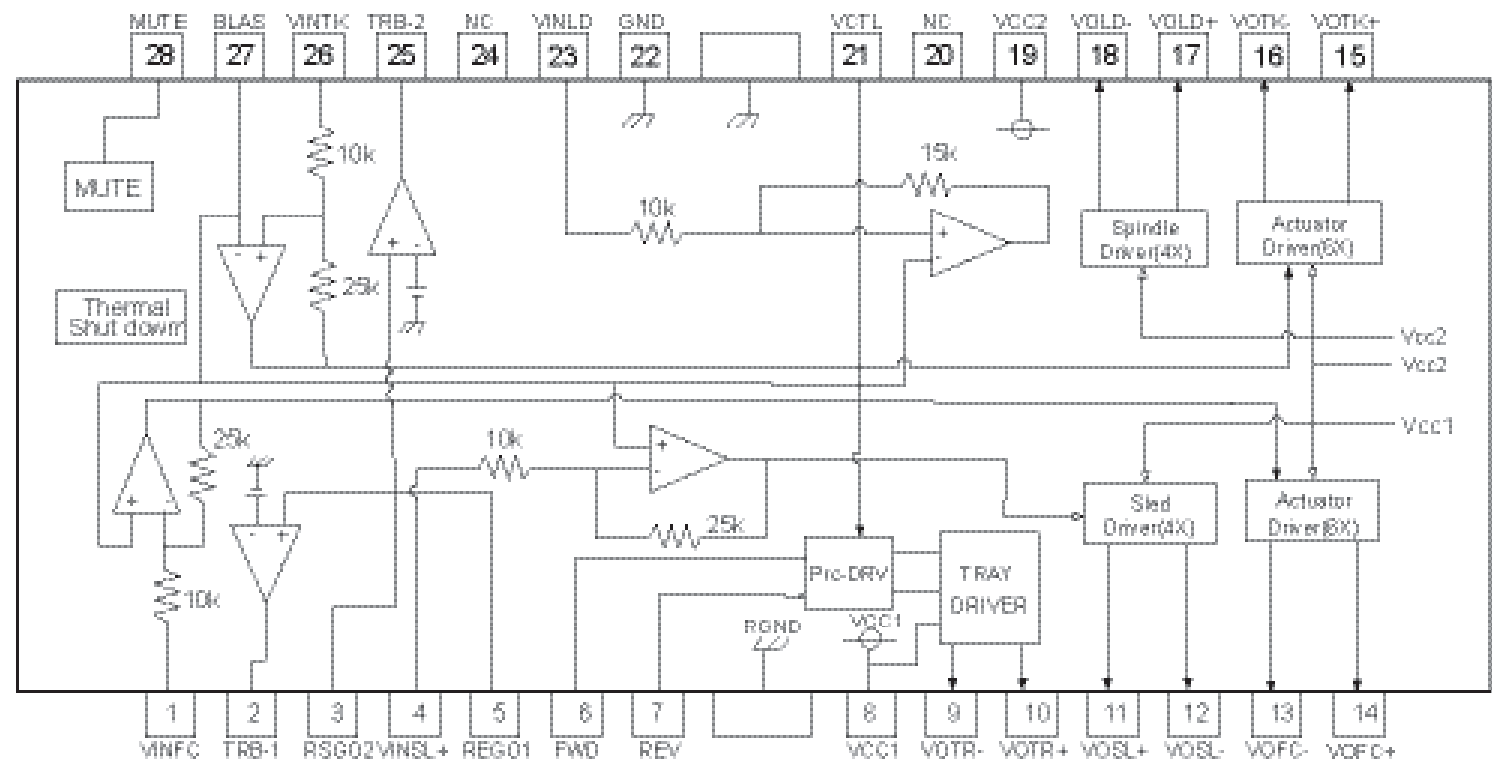


Circuit Diagram

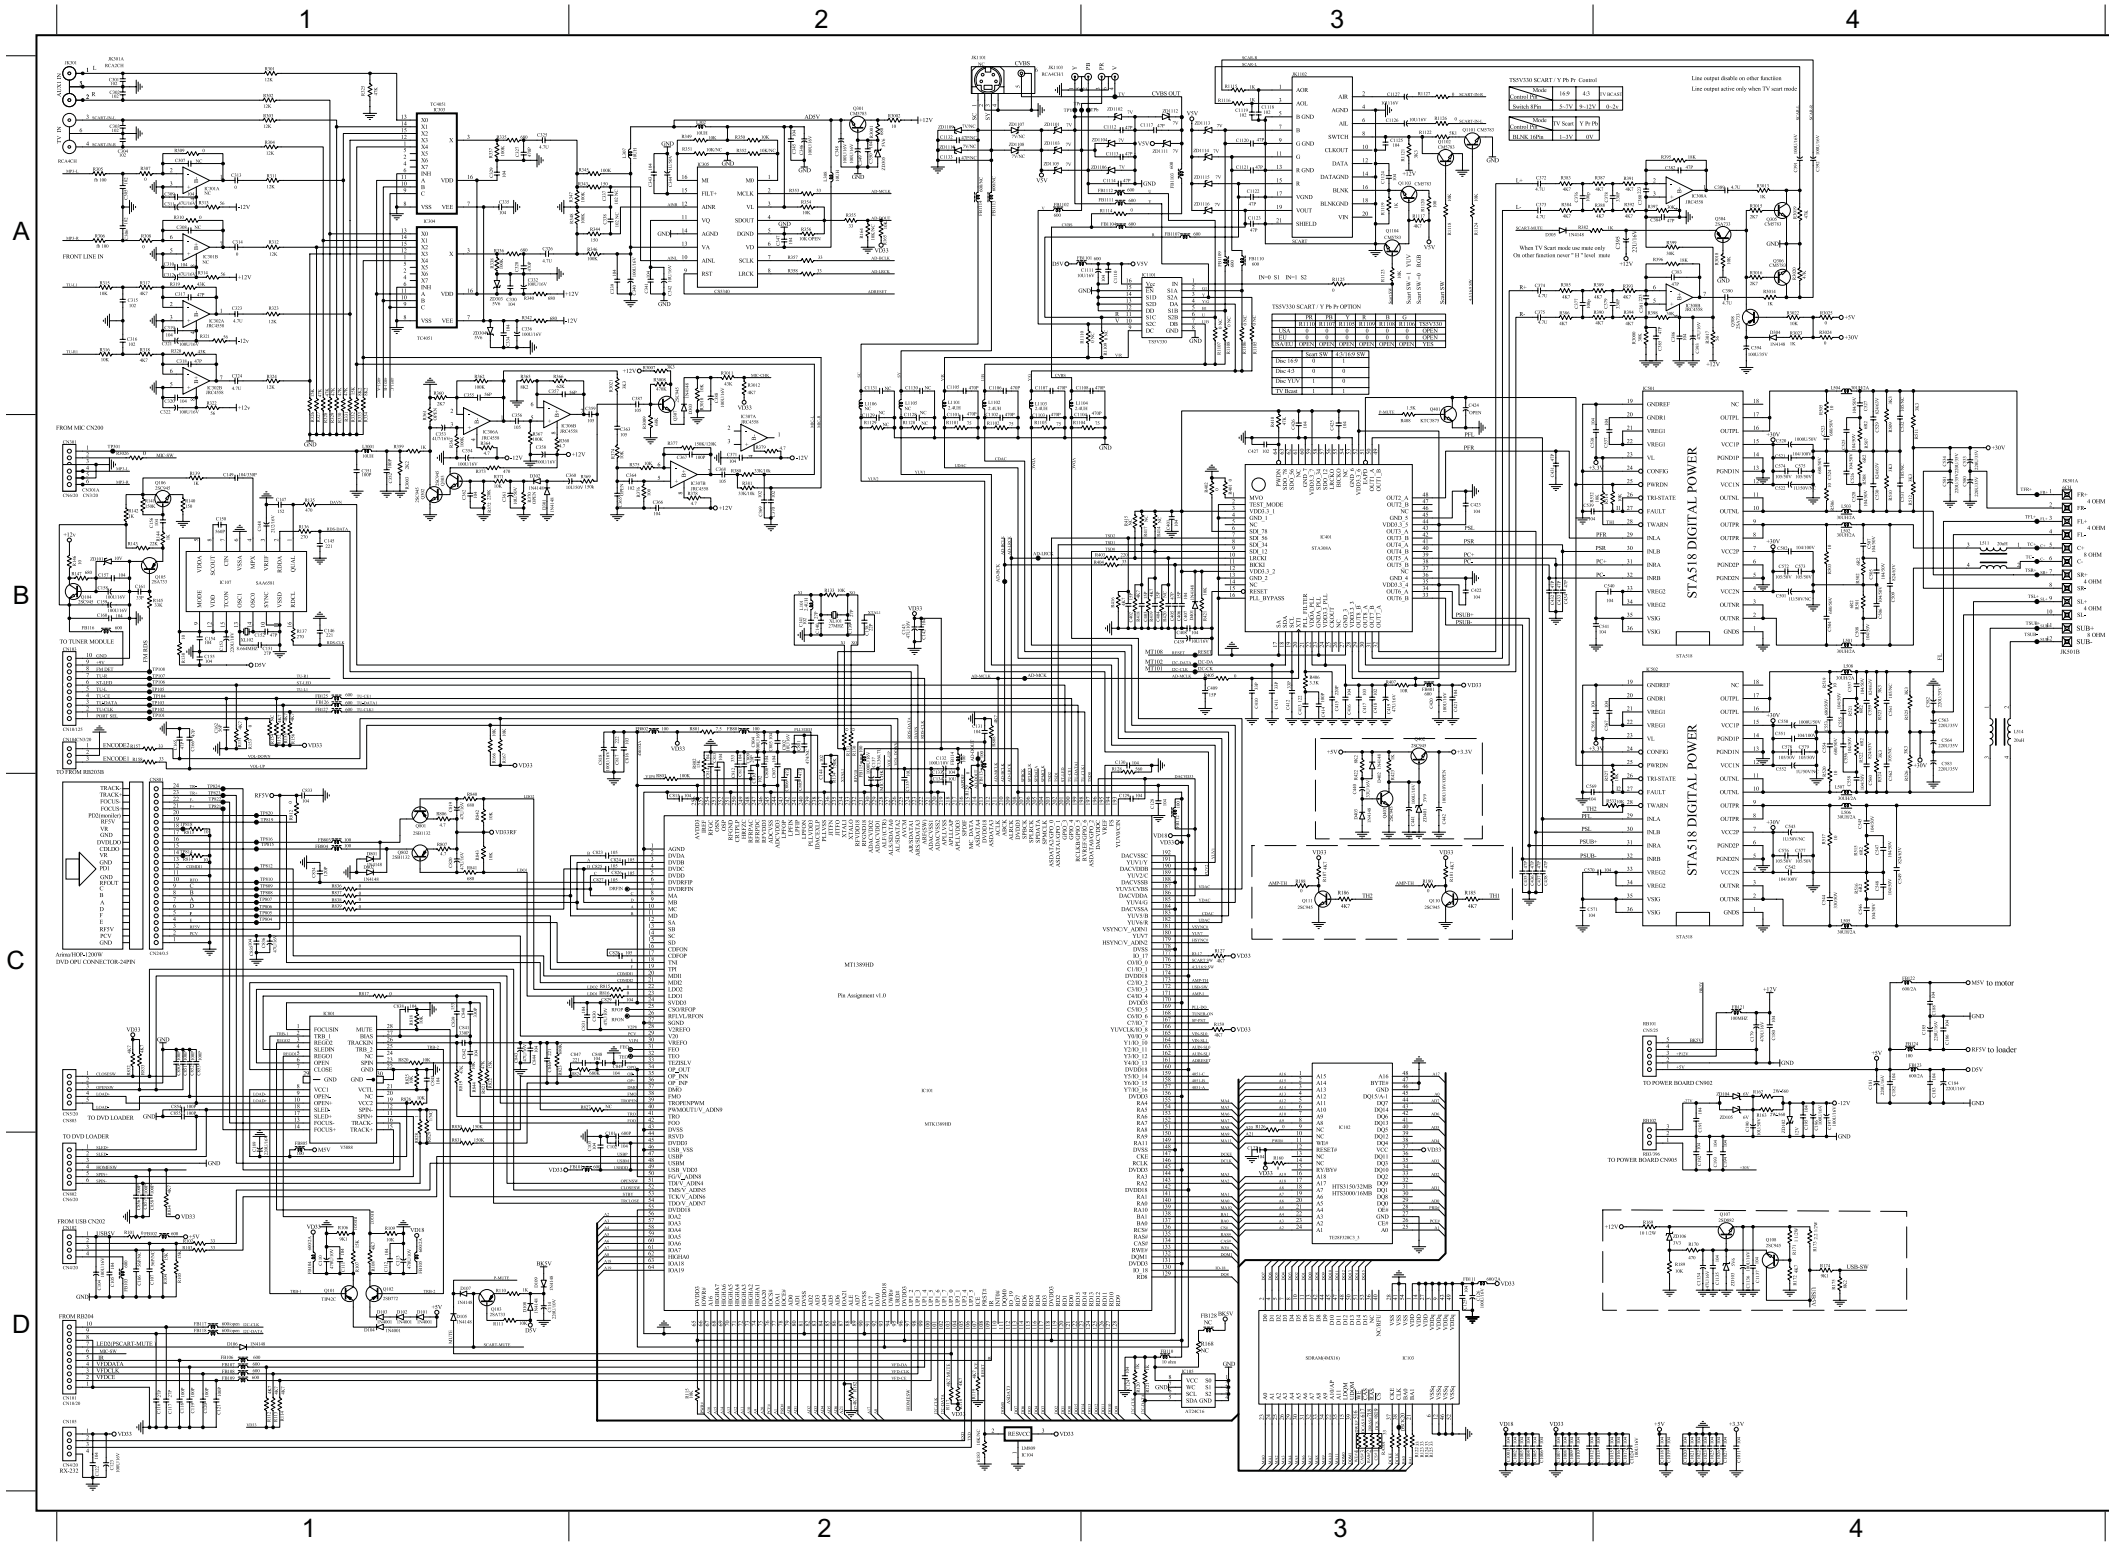

C1001	D3	C139	B2	C372	A3	C547	C4	CN103	B1	L302	A2	R136	B1	R335	A1	R815	C2
C1002	D3	C140	B2	C373	A3	C548	C4	CN104	B1	L307	A2	R137	B1	R336	A1	R816	C2
C1003	D3	C141	B2	C374	A3	C549	C4	CN301AB1	L308	A2	R138	B1	R337	A1	R817	C1	
C1004	D3	C142	B2	C375	A3	C550	B4	CN801	C1	L501	B4	R139	B1	R338	A1	R818	C1
C1005	D3	C143	B2	C376	A3	C551	B4	CN802	D1	L502	B4	R140	B1	R340	A1	R819	C1
C1006	D3	C144	B2	C377	A3	C553	B4	CN803	C1	L503	B4	R141	B1	R342	A1	R820	C1
C1007	D3	C145	B1	C378	A4	C554	B4	D101	D1	L504	A4	R142	B1	R343	A2	R821	C1
C1008	D3	C146	B1	C379	A4	C555	B4	D102	D1	L505	C4	R143	B1	R344	A2	R822	C1
C1009	D3	C147	B1	C380	A4	C556	B4	D103	D1	L506	C4	R144	B1	R345	A2	R823	C1
C101	D2	C148	B1	C381	A4	C557	B4	D104	D1	L507	C4	R145	B1	R346	A2	R824	C2
C1010	D3	C149	B1	C382	A4	C558	C4	D105	D1	L508	B4	R146	B1	R347	A2	R825	C1
C1011	D4	C150	B1	C383	A4	C559	B4	D105	D1	L511	B4	R147	B1	R348	A2	R826	C1
C1012	D3	C151	B1	C384	A4	C560	B4	D106	D1	L514	B4	R151	B1	R349	A2	R828	C1
C1013	D3	C152	B1	C385	A4	C563	B4	D107	D1	Q101	D1	R152	B1	R350	A2	R830	C1
C1015	D4	C153	B1	C386	A4	C564	B4	D108	D1	Q102	D1	R153	B1	R352	A2	R831	D1
C1016	D4	C154	B1	C389	A4	C567	B4	D109	D1	Q103	D1	R155	B1	R354	A2	R832	C1
C1017	D4	C155	B1	C390	A4	C568	B4	D304	A4	Q104	B1	R156	B1	R355	A2	R833	C1
C1018	D4	C156	B1	C391	A4	C569	C3	D305	A3	Q105	B1	R157	B1	R357	A2	R834	D1
C1019	D4	C157	B1	C392	A4	C570	C3	D401	B3	Q106	B1	R158	B1	R358	A2	R836	C1
C102	D2	C158	B1	C393	A4	C571	C3	D402	B3	Q107	D4	R159	C3	R382	A3	R837	C1
C1020	D4	C159	B1	C394	A4	C572	B4	D403	C3	Q108	D4	R160	D3	R383	A3	R838	C1
C1021	D4	C160	B1	C395	A4	C573	B4	D801	C1	Q110	C3	R162	C4	R384	A3	R839	C1
C1022	D4	C161	B1	C401	B3	C401	B3	D802	C1	Q1101	A3	R163	C4	R385	A3	R840	C1
C1023	D4	C162	B1	C402	B3	C575	B4	FB101	D2	Q1102	A3	R165	A2	R386	A3	R841	C1
C1024	D4	C165	B1	C403	B3	C576	C4	FB103	D1	Q1103	A3	R166	B1	R387	A4	R842	C1
C1025	D4	C166	B1	C404	B3	C577	C4	FB104	D1	Q1104	A3	R167	B1	R388	A4	R843	C1
C1026	D4	C179	C4	C405	B3	C578	B4	FB105	D1	Q111	C3	R169	D4	R389	A4	R844	C1
C1027	D4	C180	C4	C406	B3	C579	B4	FB106	D1	Q301	A2	R170	D4	R390	A4	RA101	D3
C103	D2	C181	C4	C407	B3	C580	B4	FB107	D1	Q304	A4	R171	D4	R391	A4	RB101	C4
C104	D1	C182	C4	C408	B3	C581	B4	FB108	D1	Q305	A4	R172	D4	R392	A4	RB102	C4
C105	D1	C183	C4	C409	B3	C582	B4	FB109	D1	Q306	A4	R173	D4	R393	A4	XL101	B2
C110	D1	C184	C4	C410	B3	C583	B4	FB110	D3	Q308	A4	R174	D4	R394	A4	XL102	B1
C1101	B2	C185	C4	C411	B3	C802	B2	FB1101	A3	Q401	A3	R175	D4	R395	A4	ZD101	B1
C1102	B2	C186	C4	C412	B3	C803	B2	FB1102	A2	Q402	B3	R180	C3	R396	A4	ZD102	C4
C1103	B2	C188	C4	C413	B3	C804	B2	FB1103	A3	Q403	C3	R181	C3	R397	A4	ZD103	D4
C1104	B3	C189	D1	C414	B3	C805	C2	FB1104	A3	Q801	C1	R182	D2	R398	A4	ZD104	C4
C1105	A2	C190	C4	C415	B3	C806	C2	FB1107	A3	Q802	C1	R183	D2	R399	A4	ZD105	C4
C1106	A2	C191	C4	C416	B3	C807	B2	FB1109	A3	R102	D1	R186	C3	R401	B3	ZD106	D4
C1107	A2	C193	D4	C417	B3	C808	B2	FB111	D3	R103	D1	R187	C3	R402	B3	ZD1101	A2
C1108	A3	C194	D4	C418	B3	C809	B2	FB1110	A3	R104	D1	R188	C3	R403	B3	ZD1102	A3
C111	D1	C195	C4	C419	B3	C810	C2	FB1111	A3	R105	D1	R189	D4	R404	B3	ZD1103	A2
C1110	A3	C196	C4	C420	B3	C811	B2	FB1112	A3	R106	D1	R3000	A4	R405	B3	ZD1104	A3
C1111	A3	C197	C4	C421	B3	C812	B2	FB112	C3	R107	D1	R3001	A2	R406	B3	ZD1105	A2
C1112	A3	C301	A1	C422	B3	C813	B2	FB113	B2	R108	D1	R3002	A2	R407	B3	ZD1106	A3
C1113	A3	C302	A1	C423	B3	C814	B2	FB114	B2	R109	D1	R301	A1	R408	A3	ZD1111	A3
C1114	A3	C303	A1	C425	B3	C815	C2	FB115	B2	R110	D1	R3013	A4	R410	B3	ZD1112	A3
C1117	A3	C304	A1	C426	B3	C816	B2	FB116	B1	R1101	B2	R3014	A4	R416	B3	ZD1113	A3
C1118	A3	C305	A1	C427	B3	C817	B2	FB121	C4	R1102	B2	R3015	A4	R418	B3	ZD1114	A3
C1119	A3	C306	A1	C431	B3	C818	B2	FB122	C4	R1103	B2	R3016	A4	R419	B3	ZD1115	A3
C112	D1	C309	A1	C432	B3	C819	C1	FB123	C4	R1104	B3	R3017	A4	R421	B3	ZD1116	A3
C1120	A3	C310	A1	C433	B3	C820	C1	FB124	C4	R111	D1	R3018	A4	R422	B3	ZD303	A1
C1121	A3	C311	A1	C434	B3	C823	C2	FB125	B1	R1114	A3	R3019	A4	R423	B3	ZD304	A1
C1122	A3	C312	A1	C435	C3	C824	C2	FB126	B1	R1115	A3	R302	A1	R501	B4	ZD305	A2
C1123	A3	C313	A1	C436	C3	C825	C2	FB127	B1	R1116	A3	R3020	A4	R502	B4	ZD401	C3
C1124	A3	C314	A1	C437	C3	C826	C2	FB128	D3	R1117	A3	R3022	A4	R503	B4		
C1125	A3	C315	A1	C438	C3	C827	C2	FB401	B3	R1118	A4	R3023	A4	R505	A4		
C1126	A3	C316	A1	C439	B3	C828	C2	FB801	B2	R1119	A3	R3024	A4	R506	B4		
C1127	A3	C317	A1	C440	C3	C829	C2	FB802	B2	R112	D1	R303	A1	R507	B4		
C113	D1	C318	A1	C441	C3	C830	C2	FB803	C1	R1120	A3	R304	A1	R508	B4		
C1134	D4	C319	A1	C502	B4	C831	C2	FB804	C1	R1121	A3	R305	A1	R509	B4		
C1135	D4	C320	A1	C504	B4	C833	C1	FB805	D1	R1122	A3	R306	A1	R510	B4		
C1136	D4	C321	A1	C505	B4	C834	C1	IC101	C2	R1123	A3	R307	A1	R511	B4		
C1137	D4	C322	A1	C506	B4	C835	C1	IC102	C3	R1124	A3	R308	A1	R512	B4		
C114	D1	C323	A1	C507	B4	C836	C1	IC103	D3	R1125	A3	R309	A1	R514	B4		
C116	D1	C324	A1	C508	B4	C838	C1	IC104	D2	R1126	A3	R310	A1	R515	C4		
C117	D1	C325	A1	C509	B4	C839	C1	IC105	D3	R1127	A3	R311	A1	R516	C4		
C118	D1	C326	A1	C520	B4	C840	C1	IC107	B1	R113	D1	R312	A1	R517	C4		
C119	D1	C327	A1	C521	B4	C841	C1	IC1101	A3	R114	D1	R313	A1	R519	B4		
C120	D1	C328	A1	C523	B4	C842	C1	IC302	A1	R115	D2	R314	A1	R520	B4		
C121	D1	C329	A1	C524	B4	C843	C1	IC303	A1	R117	D2	R315	A1	R521	B4		
C122	D1	C330	A1	C525	B4	C844	C1	IC304	A1	R118	D2	R316	A1	R522	B4		
C123	D1	C332	A1	C526	B4	C845	C1	IC305	A2	R119	D2	R317	A1	R523	B4		
C124	D3	C334	A1	C527	A4	C846	C1	IC308	A4	R120	D3	R318	A1	R524	B4		
C125	D3	C335	A1	C528	B4	C847	C2	IC401	B3	R121	D3	R319	A1	R525	B4		
C126	D3	C336	A1	C529	B4	C848	C2	IC501	B4	R122	D3	R320	A1	R526	B4		
C127	D3	C339	A2	C530	B4	C849	C2	IC502	B4	R123	D3	R321	A1	R527	C4		
C128	C3	C340	A2	C533	B4	C850	C1	IC801	C1	R124	D3	R322	A1	R532	B4		
C129C3		C341	A2	C534	B4	C851	C1	JK1102	A3	R125	D3	R323	A1	R533	C4		
C130	B3	C342	A2	C537	B4	C852	C1	JK1103	A2	R126	C3	R324	A1	R801	B2		
C131	B2	C343	A2	C538	B4	C853	C1	JK301A1	R127	C3	R325	A1	R802	B2			
C132	B2	C344	A2	C539	B4	C854	C1	JK501	B4	R128	B3	R326	A1	R803	C2		
C133	C2	C345	A2	C540	B4	C855	C1	JK501A	B4	R129	C2	R327	A1	R806	C1		
C134	C2	C346	A2	C541	B4	C856	D1	L101	B2	R130	B2	R328	A1	R807	C1		
C135	C2	C347	A2	C542	C4	C857	D1	L1101	A2	R131	B2	R329	A1	R808	B2		
C136	B2	C348	A2	C544	C4	C858	D1	L1102	A2	R133	B2	R330	A1	R812	C1		
C137	B2	C349	A2	C545	C4	CN101	D1	L1103	A2	R134	B2	R331	A1	R813	C1		
C138	B2	C350	A2	C546	C4	CN102	D1	L1104	A2	R135	B1	R332	A1	R814	C1		

PCB Layout Top View

C1020	B4	C153	B1	C326	A2	C391	A3	C537	B4	C812	B1	CN801	B1	FB1104	A1	IC1101	A1	L508	A4	R106	B2	R136	A1	R175	B2	R314	A3	R349	A3	R405	A3	R818	B1	ZD1101	A1		
C1023	A2	C155	B1	C327	A2	C392	A3	C538	B4	C813	B1	CN802	B2	FB1107	A1	IC302	A1	L511	A4	R107	B2	R137	A1	R180	A2	R315	A1	R350	A3	R406	A4	R819	B2	ZD1103	A1		
C1024	B2	C156	A1	C328	A2	C393	A3	C539	B4	C814	B1	CN803	B2	FB1109	A1	IC303	A2	L514	A3	R108	B2	R138	B1	R181	A2	R316	A1	R353	A3	R407	A3	R820	B2	ZD1105	A1		
C104	B3	C158	B1	C332	A2	C394	A3	C540	B4	C816	B1	D101	B2	FB111	A2	IC304	A2	Q101	B2	R109	B2	R139	A1	R183	A2	R317	A1	R354	A3	R408	B2	R821	B1	ZD1111	A2		
C105	B3	C159	B1	C335	A2	C395	B3	C541	B4	C818	B1	D102	B2	FB1110	A1	IC305	A3	Q102	B2	R110	B2	R140	A1	R186	B3	R318	A1	R355	A3	R416	A2	R823	B1	ZD1113	A1		
C110	B2	C161	A1	C336	A2	C402	A3	C542	B4	C819	B1	D103	B2	FB1111	A1	IC308	A3	Q103	B2	R111	B2	R141	A1	R187	A2	R319	A1	R357	A3	R418	A3	R825	B2	ZD1114	A1		
C1111	A1	C165	B2	C340	A3	C405	A3	C544	B3	C820	B1	D104	B2	FB1112	A1	IC401	A3	Q104	B1	R1114	A1	R142	A1	R188	A2	R320	A1	R358	A3	R419	A3	R826	B2	ZD1115	A1		
C1126	A2	C166	B2	C342	A3	C406	A3	C549	A3	C823	B1	D105	A2	FB112	A1	IC501	B4	Q105	A1	R1115	A3	R143	A1	R3000	A3	R322	A1	R382	B3	R421	A3	R828	B2	ZD1116	A1		
C1127	A2	C179	B3	C344	A3	C409	A3	C550	A4	C824	B1	D105	A2	FB114	A1	IC502	B3	Q106	A1	R1116	A3	R144	A1	R3001	A3	R323	A2	R383	A3	R422	B3	R830	B2	ZD303	A2		
C113	B2	C181	B3	C346	A3	C410	A3	C551	B3	C825	B1	D106	B2	FB115	B1	IC801	B2	Q107	B3	R1117	A1	R145	A1	R3002	A3	R324	A2	R384	A3	R423	B3	R831	B2	ZD304	A2		
C1134	B2	C184	B2	C347	A3	C413	A3	C553	B4	C826	B1	D107	B2	FB116	B1	JK1102	A1	Q108	B2	R1118	A1	R146	B1	R301	A2	R325	A2	R385	A3	R503	B4	R836	B1	ZD305	A3		
C1136	B3	C185	B1	C348	A3	C414	A3	C554	B4	C827	B1	D108	B2	FB121	B3	JK1103	A2	Q110	A2	R1120	A1	R147	B1	R3013	A3	R326	A2	R386	A3	R505	B4	R837	B1	ZD401	B3		
C114	B2	C189	B2	C349	A3	C415	A3	C559	A4	C828	B1	D109	B2	FB122	B2	JK301A	A1	Q1101	A1	R1123	A1	R151	A1	R3014	A3	R327	A3	R387	A3	R506	B4	R838	B1				
C123	A2	C190	B3	C372	A3	C419	B3	C560	A4	C830	B1	D304	A3	FB123	B2	JK501	A3	Q1103	A1	R1124	A1	R152	A1	R3017	A3	R328	A2	R388	A3	R514	B4	R839	B1				
C124	B2	C196	B3	C373	A3	C420	B3	C563	A4	C833	B1	D401	A3	FB124	B1	JK501A	A4	Q1104	A1	R1125	A1	R153	A1	R3018	A3	R329	A2	R389	A3	R517	B3	R840	B1				
C126	A2	C197	A1	C374	A3	C439	A2	C564	A3	C836	B1	D402	B3	FB125	A1	L1101	A1	Q111	A2	R1126	A2	R155	A1	R3019	A3	R330	A2	R390	A3	R519	B4	R841	B1				
C129	A1	C311	A3	C375	A3	C440	B3	C567	B4	C838	B1	D801	B1	FB126	A1	L1102	A1	Q301	A3	R1127	A2	R156	A1	R302	A2	R332	A2	R391	A3	R520	B4	R842	B1				
C130	A1	C312	A3	C376	A3	C441	B3	C568	B4	C839	B1	D802	B1	FB127	A1	L1103	A1	Q304	A3	R115	B2	R157	B2	R3020	A3	R335	A2	R392	A3	R527	B4	R843	B1				
C132	B1	C313	A3	C377	A3	C502	B4	C569	B4	C840	B1	FB103	B3	FB401	A3	L1104	A1	Q305	A3	R120	B2	R158	B2	R3023	A3	R336	A2	R393	A3	R532	B4	RA101	A2				
C137	B1	C314	A3	C378	A3	C504	B4	C570	B3	C841	B2	FB104	B2	FB801	B1	L302	A3	Q306	A3	R121	B2	R162	B3	R3024	A3	R337	A2	R394	A3	R533	B4	RB101	B2				
C138	B1	C315	A1	C379	A3	C509	A4	C571	B3	C842	B2	FB105	B2	FB802	B1	L307	A3	Q401	B3	R122	A2	R163	B3	R303	A2	R338	A2	R395	A3	R801	B1	RB102	B4				
C143	B1	C316	A1	C380	A2	C520	A4	C580	A4	C843	B1	FB106	B2	FB803	B1	L308	A3	Q402	B3	R123	A2	R165	A2	R304	A2	R340	A2	R396	A3	R802	B1	XL101	B1				
C144	B1	C317	A1	C381	A3	C521	B4	C581	A4	C845	B2	FB107	B2	FB804	B1	L501	A4	Q403	B3	R126	B2	R166	B2	R307	A3	R342	A2	R397	A3	R806	B1	XL102	B1				
C145	A1	C318	A1	C382	A3	C523	B4	C582	A4	C846	B1	FB108	B2	FB805	B2	L502	A4	Q801	B1	R128	A1	R167	B2	R308	A3	R343	A2	R398	A3	R807	B1	ZD101	B1				
C146	A1	C321	A1	C383	A3	C524	B4	C583	A3	CN101	B2	FB109	B2	IC101	B1	L503	A4	Q802	B1	R129	A1	R169	B3	R309	A3	R344	A2	R399	A3	R808	A1	ZD102	B3				
C147	A1	C322	A1	C384	A3	C529	A4	C802	B1	CN102	B3	FB110	B2	IC102	B2	L504	A4	R102	B3	R130	B1	R170	B3	R310	A3	R345	A2	R401	A3	R812	B1	ZD103	B2				
C148	A1	C323	A2	C385	A3	C530	A4	C804	B1	CN103	A1	FB1101	A1	IC103	A2	L505	A3	R103	B3	R131	B1	R171	B2	R311	A3	R346	A3	R402	A3	R815	B1	ZD104	B3				
C149	A1	C324	A2	C389	A3	C533	A4	C805	B1	CN104	B2	FB1102	A1	IC104	A2	L506	A3	R104	B3	R134	B1	R173	B3	R312	A3	R347	A2	R403	A3	R816	B2	ZD105	B3				
C150	A1	C325	A2	C390	A3	C534	A3	C806	B1	CN301A	B4	FB1103	A2	IC105	B2	L507	A4	R105	B3	R135	A1	R174	B2	R313	A3	R348	A3	R404	A3	R817	B1	ZD106	B3				

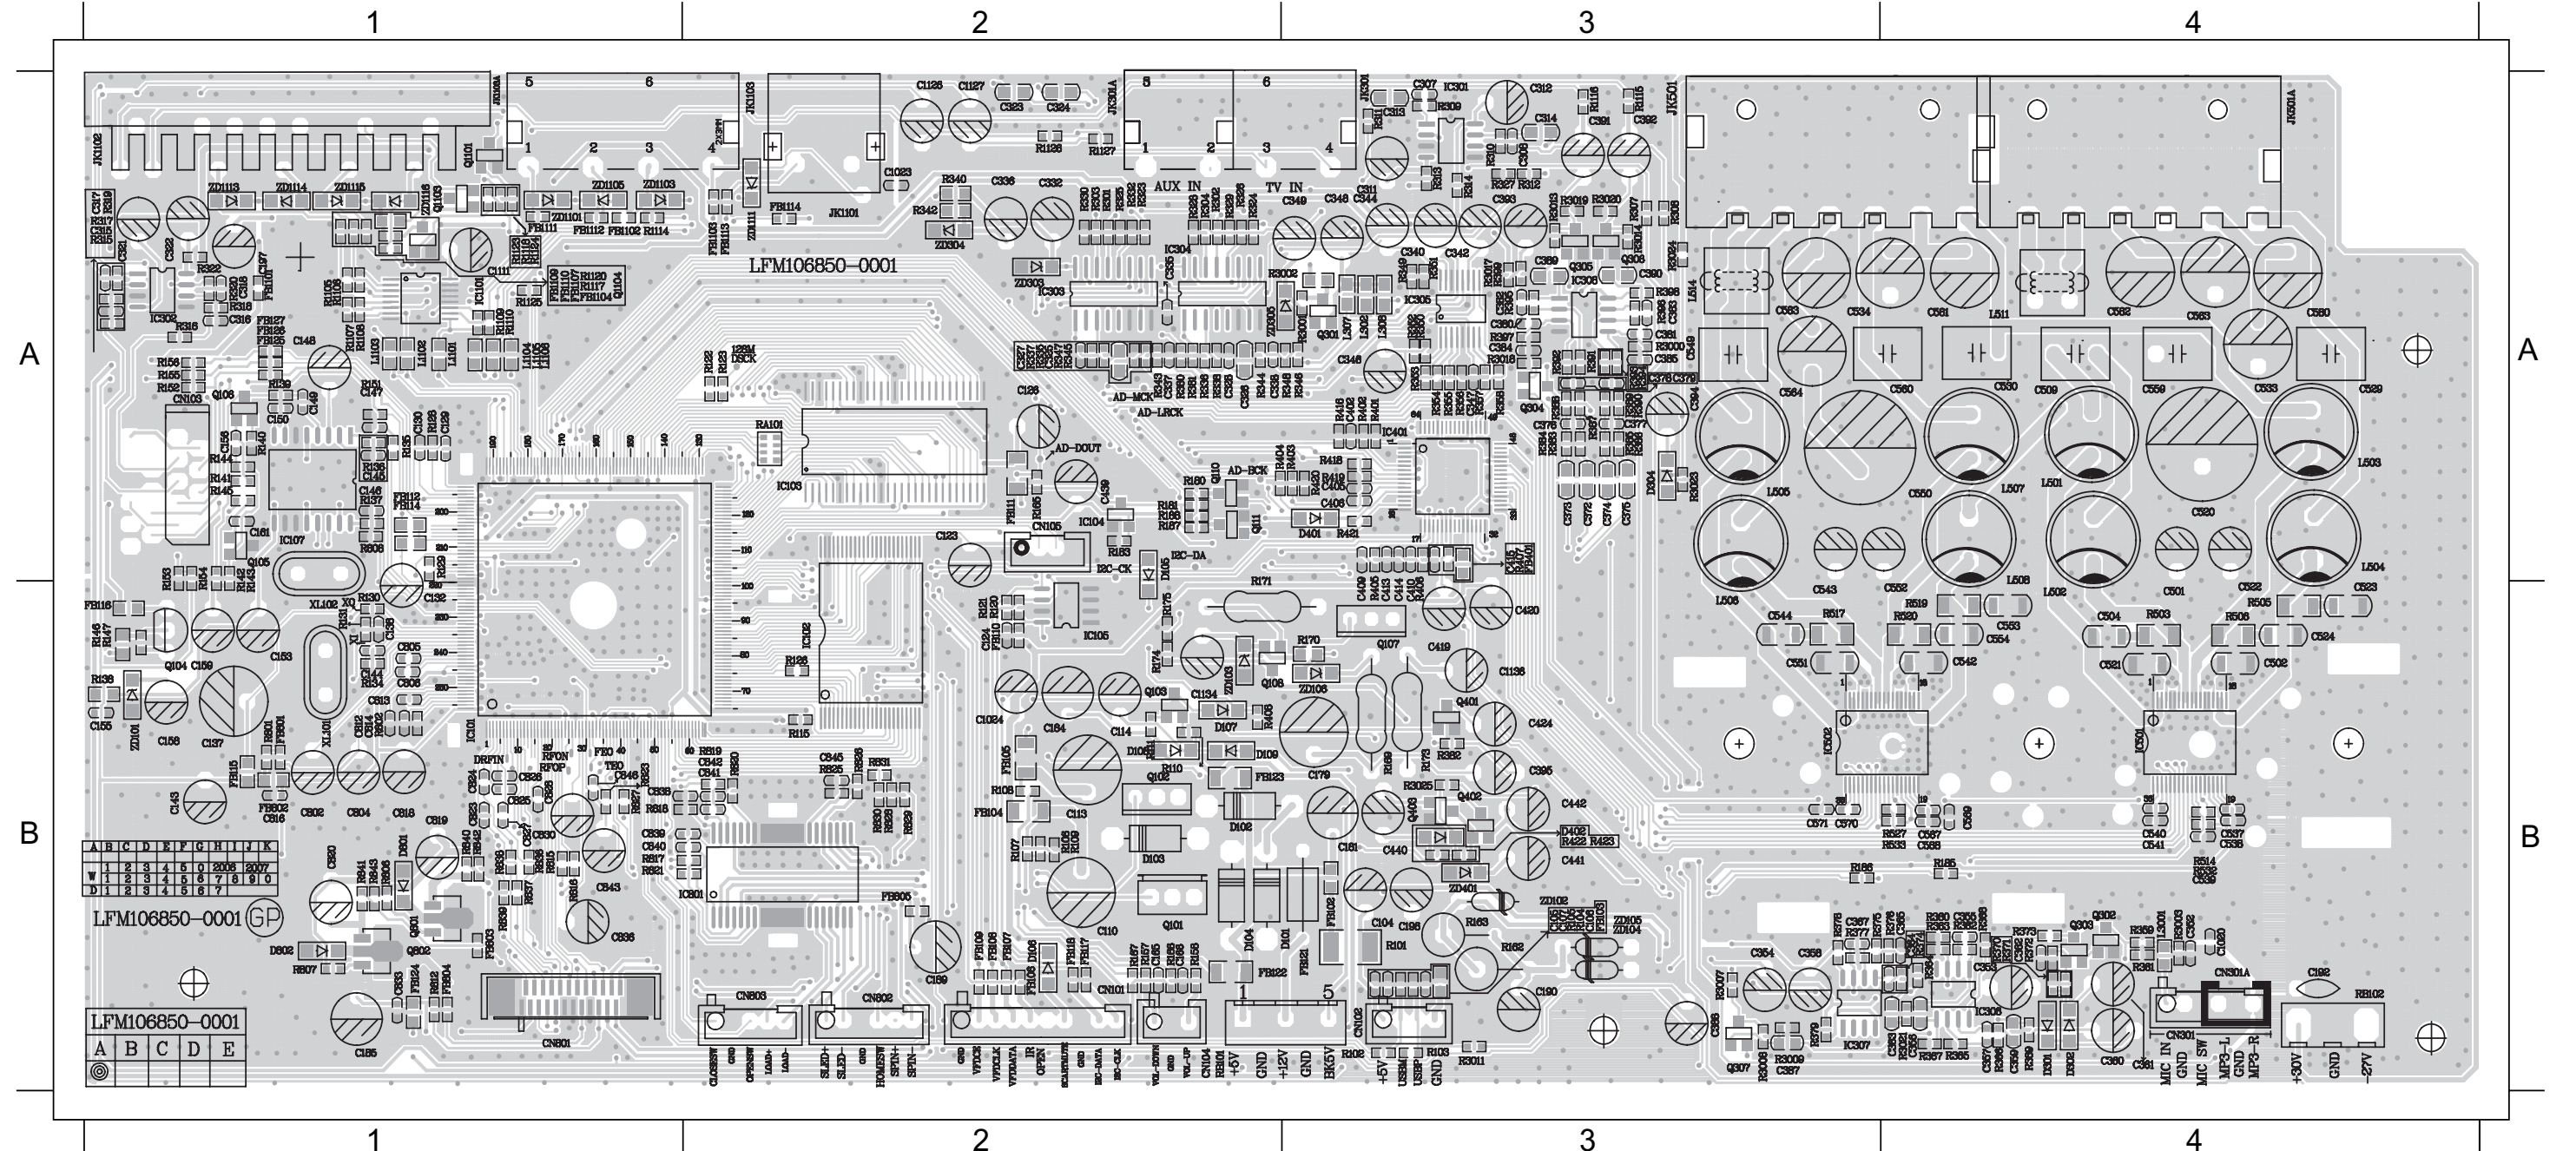


PCB Layout Bottom View

6 - 4

6 - 4

C1001	A4	C1013	A4	C1101	A4	C1117	A3	C117	B3	C136	B4	C183	B3	C309	A2	C401	A2	C425	A2	C507	A1	C558	A1	C810	B4	C851	B3	L101	B4	R117	A3	R3016	A2	R510	A1	R814	B4
C1002	B3	C1015	A4	C1102	A4	C1118	A4	C118	B3	C139	B4	C186	B4	C310	A2	C403	A2	C426	A2	C508	A1	C572	B1	C811	B4	C852	B3	Q1102	A4	R118	A3	R3022	A2	R511	A1	R822	B4
C1003	B3	C1016	A3	C1103	A4	C1119	A4	C119	B3	C140	B4	C188	B3	C319	A4	C404	A2	C427	A2	C525	B1	C573	B1	C815	B4	C853	B3	Q308	A2	R119	A3	R305	B1	R512	A1	R824	B4
C1004	A4	C1017	B3	C1104	A4	C112	B3	C120	B3	C141	B4	C191	B2	C320	A4	C407	A2	C431	B1	C526	A1	C574	B1	C817	B4	C854	B3	R1101	A4	R124	A3	R306	B1	R515	B2	R832	B3
C1005	A4	C1018	B2	C1105	A4	C1120	A4	C121	B3	C142	B4	C193	A1	C329	A3	C408	A3	C432	B1	C527	A1	C575	B1	C829	B4	C855	B3	R1102	A4	R125	A3	R321	A4	R516	A2	R833	B3
C1006	B3	C1019	B4	C1106	A4	C1121	A4	C122	A3	C151	A4	C194	A1	C330	A3	C411	A2	C433	B1	C528	A1	C576	B2	C831	B4	C856	B3	R1103	A4	R127	A4	R331	A2	R521	B1	R844	B4
C1007	B3	C102	B4	C1107	A4	C1122	A4	C125	A3	C152	A4	C195	B2	C334	A3	C412	A2	C434	B1	C545	A2	C577	B2	C834	B4	C857	B3	R1104	A4	R133	B4	R410	A2	R522	A1	ZD1102	A4
C1008	A4	C1021	B1	C1108	A4	C1123	A4	C127	B3	C154	B4	C301	A3	C339	A2	C416	A2	C435	B2	C546	A2	C578	B1	C835	B4	C858	B3	R1119	A4	R159	A4	R501	A1	R523	A1	ZD1104	A4
C1009	B4	C1022	A3	C111	B3	C1124	A4	C128	A4	C157	B4	C302	A3	C341	A2	C417	A2	C436	B2	C547	B2	C579	B1	C844	B4	D305	B2	R112	B3	R160	B3	R502	B1	R524	A1	ZD1106	A4
C101	B4	C1025	A2	C1110	A4	C1125	A4	C131	B4	C160	B4	C303	A3	C343	A2	C418	B2	C437	B2	C548	A2	C803	B4	C847	B4	D403	B2	R1121	A4	R172	B3	R506	A1	R525	A1	ZD1112	A3
C1010	A3	C1026	A4	C1112	A4	C1135	B3	C133	A4	C162	A4	C304	A2	C345	A2	C421	B2	C438	B2	C555	B1	C807	B4	C848	B4	FB101	B3	R1122	A4	R182	B3	R507	A1	R526	A1		
C1011	B1	C1027	A2	C1113	A4	C1137	B2	C134	A4	C180	B2	C305	B1	C350	A2	C422	A2	C505	B1	C556	A1	C808	B4	C849	B4	FB113	B4	R113	B3	R189	B2	R508	A1	R803	B4		
C1012	A3	C103	B4	C1114	A4	C116	B3	C135	B4	C182	B3	C306	B1	C386	A2	C423	A2	C506	A1	C557	A1	C809	B4	C850	B3	FB128	B3	R114	B3	R3015	A2	R509	A1	R813	B4		

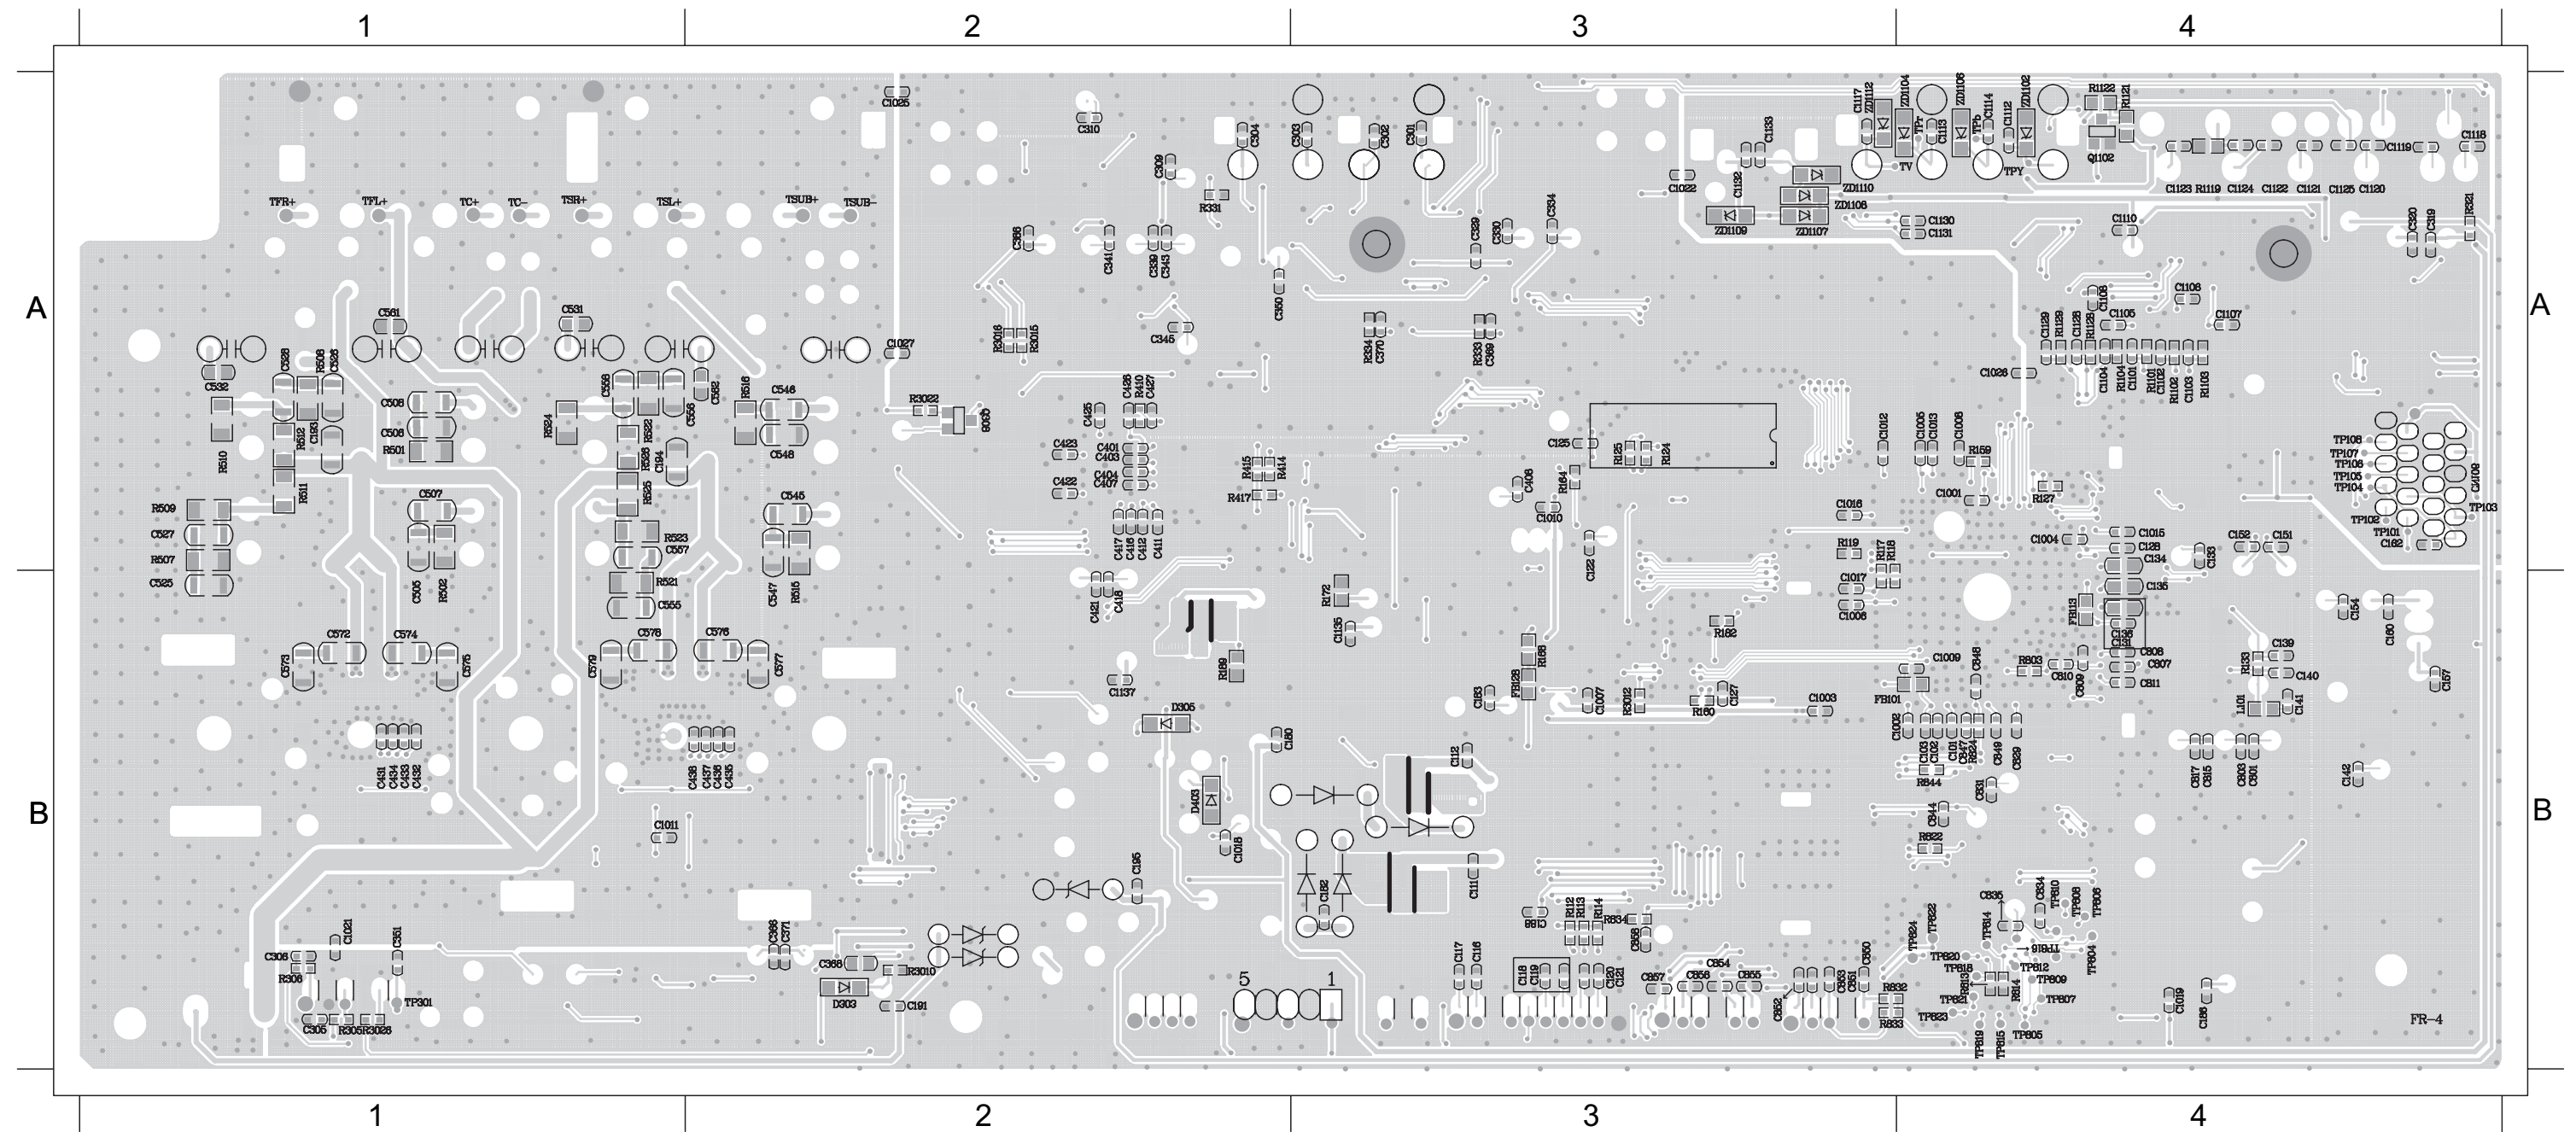

VOLTAGE

POWER BOARD

TABLE OF CONTENTS

Voltage 7-1
 Circuit Diagram..... 7-2
 PCB Layout Top View 7-3
 PCB Layout Bottom View 7-4

IC901(AP3843GMTR-E1)																
Pin NO	1	2	3	4	5	6	7	8								
Voltage	-0.1	-0.1	-0.1	-0.2	-0.1	8	-0.1	-0.1								

IC902																
Pin NO	1	2	3	4												
Voltage	5	4.4	-0.2	-0.1												

IC903																
Pin NO	1	2	3	4												
Voltage	4.6	3.6	-0.2	-0.1												

IC904(AZ431AZ-A)																
Pin NO	1	2	3													
Voltage	3.6	3.6	2.5													

IC904(TL431 TO-92)																
Pin NO	1	2	3													
Voltage	3.6	3.6	2.5													

IC905(AZ7500BP-E1)																
Pin NO	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Voltage	4.8	4.9	3.2	0	1.6	3.4	0	10.9	0.7	0.7	10.9	10.9	4.9	4.9	2.4	0

Q901			
Pin NO	b	c	e
Voltage	-0.8	-0.8	-0.8

Q902			
Pin NO	b	c	e
Voltage	2.8	2.8	2.8

Q903			
Pin NO	b	c	e
Voltage	2.9	-1.9	-6.3

Q904			
Pin NO	b	c	e
Voltage	-0.01	-0.02	-0.01

Q905			
Pin NO	b	c	e
Voltage	0	3.4	0

Q906			
Pin NO	b	c	e
Voltage	0	3.4	0

Q907			
Pin NO	b	c	e
Voltage	-0.5	-1.6	-0.3

Q908			
Pin NO	b	c	e
Voltage	-1.6	-1.8	-1.8

Q909			
Pin NO	b	c	e
Voltage	-1.6	-3.9	-0.2

Q910			
Pin NO	b	c	e
Voltage	0.8	0	0.7

Q911			
Pin NO	b	c	e
Voltage	0.8	0	0.7

Q912			
Pin NO	b	c	e
Voltage	-0.2	-0.08	-0.25


Q913			
Pin NO	b	c	e
Voltage	0.2	0.8	-0.02

Q914			
Pin NO	b	c	e
Voltage	34.8	34.8	5

Q915			
Pin NO	b	c	e
Voltage	4.7	0	0

CIRCUIT DIAGRAM

BD901	A1	C913	C1	C925	D3	C937	C2	C949	A3	C962	C3	C975	C4	D906	A2	D919	C3	IC905	B4	Q902	C1	Q914	C3	R911	C4	R924	D2	R936	C2	R948	D4	R960	A4	R972	A3	R984	D2	ZD907	B4
C901	D1	C914	C2	C926	D3	C938	C3	C950	A2	C963	C3	C976	C4	D907	B3	D922	C3	L901	C1	Q903	D1	Q915	D4	R912	B1	R925	D3	R937	C2	R949	A2	R961	C4	R973	A3	R985	C3	ZD908	A4
C902	D1	C915	C1	C927	C3	C939	C2	C951	A3	C964	C4	C977	D2	D908	B3	D923	C3	L902	B1	Q904	D2	R901	D1	R914	B1	R926	B3	R938	C3	R950	A2	R962	C3	R974	A3	T901	A2	ZD909	A4
C903	D1	C916	C1	C928	C3	C940	D3	C952	A2	C965	C3	C978	B1	D909	B3	D925	A3	L903	D4	Q905	D3	R902	C1	R915	A1	R927	D2	R939	C3	R951	A2	R963	B3	R975	A3	T902	B2	ZD910	A4
C904	A1	C917	B1	C929	C3	C941	C2	C954	D3	C966	B3	CN901	D1	D910	B3	D926	A3	L904	C3	Q906	C4	R903	C1	R916	A1	R928	D2	R940	C2	R952	D3	R964	B3	R976	A3	T903	C2	ZD911	D2
C905	A1	C918	B1	C930	B4	C942	C2	C955	C3	C967	B3	CN903	D4	D911	A3	D927	C4	L905	C3	Q907	D2	R904	C1	R917	A1	R929	D2	R941	B2	R953	D3	R965	B3	R977	D4	TVR901	C1	ZD913	A3
C906	D1	C919	B1	C931	C3	C943	B2	C956	C3	C968	A3	CN904	C4	D912	A4	F901	C1	L906	B3	Q908	C2	R905	C1	R918	A1	R930	C2	R942	B2	R954	D3	R966	B3	R978	D4	ZD901	D1		
C907	D1	C920	A1	C932	C3	C944	A2	C957	A3	C969	A3	CN905	A4	D914	A4	GT902	C1	L907	B3	Q909	C2	R906	C2	R919	D3	R931	C2	R943	B2	R955	D3	R967	B3	R979	C4	ZD902	C2		
C908	D1	C921	A1	C933	C2	C945	A2	C958	A4	C971	A3	D902	D2	D915	C3	IC901	C1	L908	A3	Q910	B3	R907	C2	R920	C2	R932	C2	R944	A2	R956	D3	R968	B3	R980	C4	ZD903	B2		
C909	D1	C922	D2	C934	C2	C946	A2	C959	C3	C972	A3	D903	C2	D916	C2	IC902	D2	L909	D4	Q911	B3	R908	C1	R921	D2	R933	C2	R945	A3	R957	D3	R969	B4	R981	B4	ZD904	A2		
C910	D1	C923	D3	C935	C3	C947	C3	C960	C3	C973	C4	D904	C2	D917	C3	IC903	D2	NTC901	C1	Q912	B2	R909	A4	R922	D3	R934	C2	R946	C2	R958	D3	R970	A4	R982	A4	ZD905	A3		
C911	C1	C924	D3	C936	B2	C948	C3	C961	C3	C974	B4	D905	B2	D918	C2	IC904	D3	Q901	D1	Q913	A2	R910	C4	R923	C4	R935	C2	R947	D4	R959	D3	R971	A3	R983	D2	ZD906	C4		

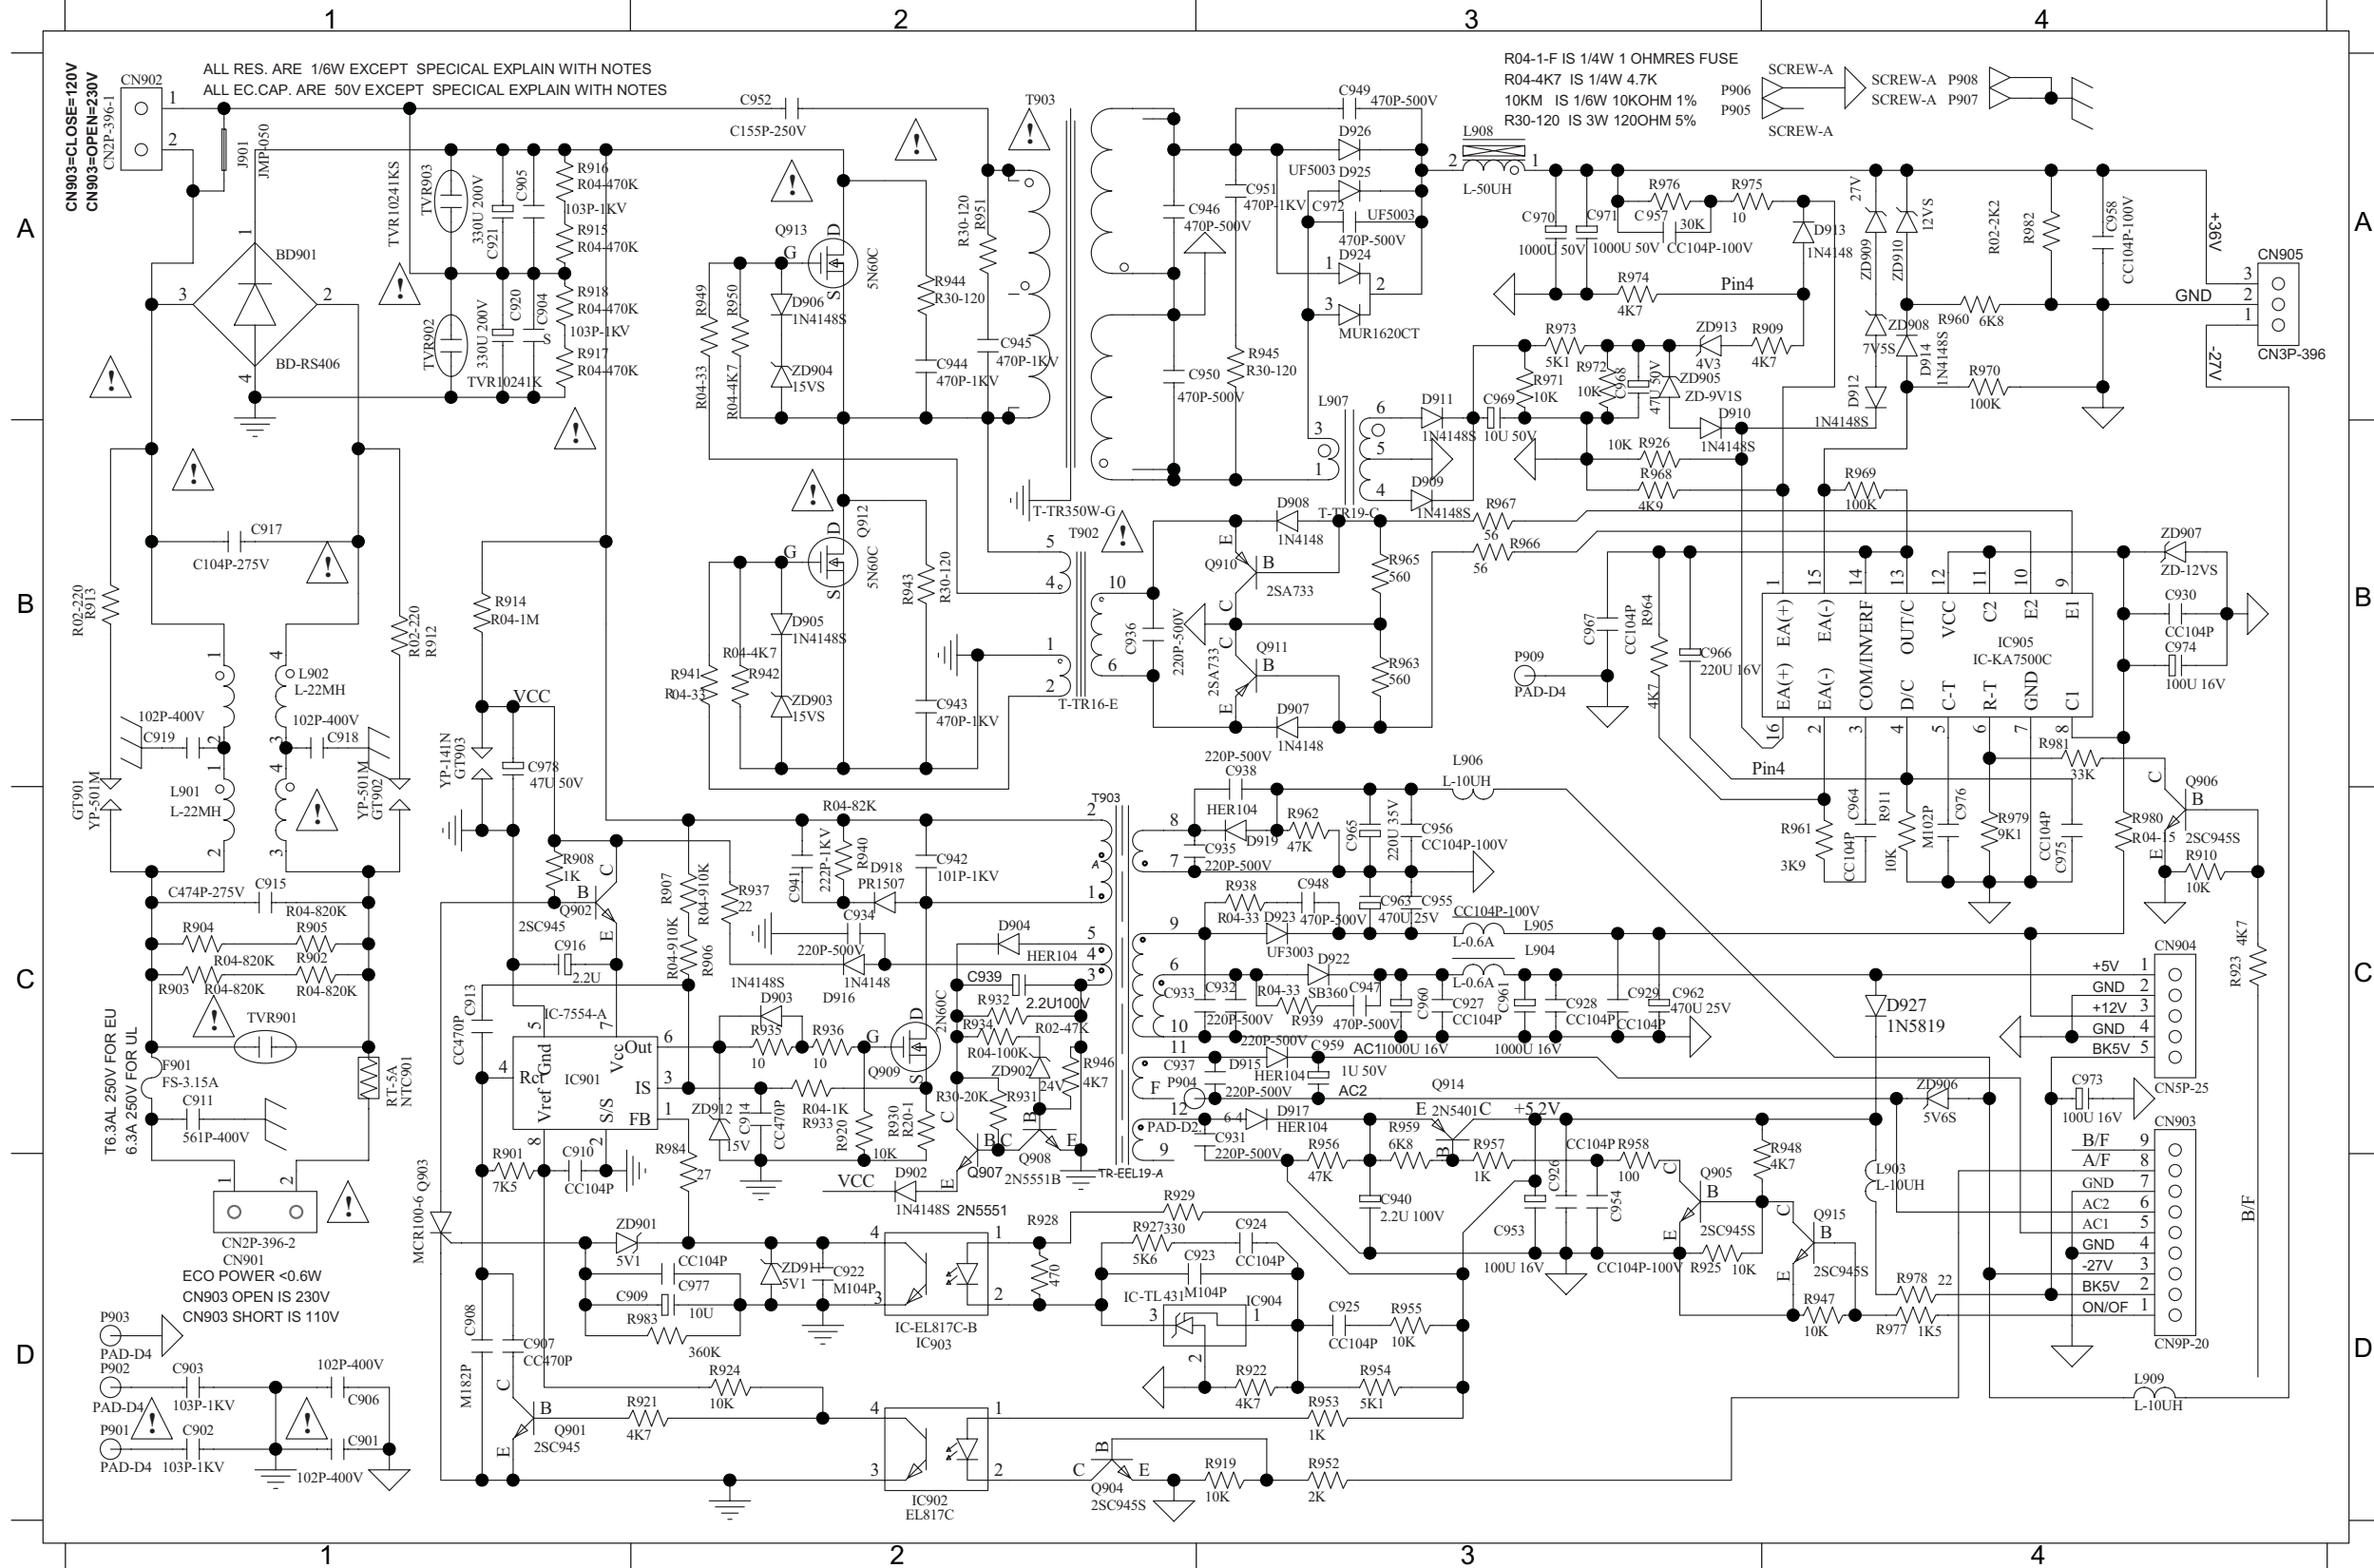


PCB LAYOUT - TOP VIEW

7 - 3


7 - 3

BD901 A1	C909 A2	C922 A2	C961 B3	C974 B3	D907 B2	D926 C3	J903 A1	J912 B2	J921 B3	J930 B3	L908 C3	Q911 B2	R930 A2	R948 A3	R980 A3	ZD906 A3
C901 B2	C911 C1	C923 A3	C962 A3	C975 B3	D908 B2	D927 A3	J904 A1	J913 B2	J922 B3	J931 A1	L909 A3	Q912 B2	R931 B2	R949 B2	R982 C3	ZD913 B3
C902 C2	C915 C1	C939 B2	C963 A3	C976 B3	D915 A3	F901 C1	J905 A1	J914 B2	J923 B3	L901 B1	NTC901C1	Q913 B2	R932 B2	R951 C2	R984 A2	
C903 A1	C916 A2	C940 A3	C965 A3	C978 A2	D917 A3	GT902 C1	J906 B1	J915 A3	J924 B3	L902 B1	Q902 A2	Q914 A3	R934 B2	R952 A3	T901 A2	
C904 A1	C917 B1	C941 A2	C966 B3	CN901 C1	D918 A2	IC902 A2	J907 A2	J916 A3	J925 B3	L903 A3	Q903 A2	Q915 A1	R940 A2	R964 B3	T902 B2	
C905 B1	C918 B1	C945 C2	C968 B3	CN903 A3	D919 A3	IC903 A2	J908 A2	J917 A3	J926 B3	L904 B3	Q907 B2	R912 C1	R941 B2	R966 B3	T903 C2	
C906 A2	C919 B1	C952 B1	C969 B2	CN904 A3	D922 B3	IC904 A3	J909 A2	J918 A3	J927 B3	L905 A3	Q908 B2	R914 A1	R943 B2	R967 B3	TVR901C1	
C907 A2	C920 A1	C959 A3	C971 C3	CN905 C3	D923 A3	IC905 B3	J910 A2	J919 A3	J928 A3	L906 A3	Q909 A2	R923 B3	R944 B2	R968 B3	ZD901 A2	
C908 A2	C921 A1	C960 B3	C973 A3	D904 B2	D925 C3	J902 A1	J911 B3	J920 A3	J929 A3	L907 B2	Q910 B2	R924 A2	R945 C2	R975 B3	ZD904 B2	

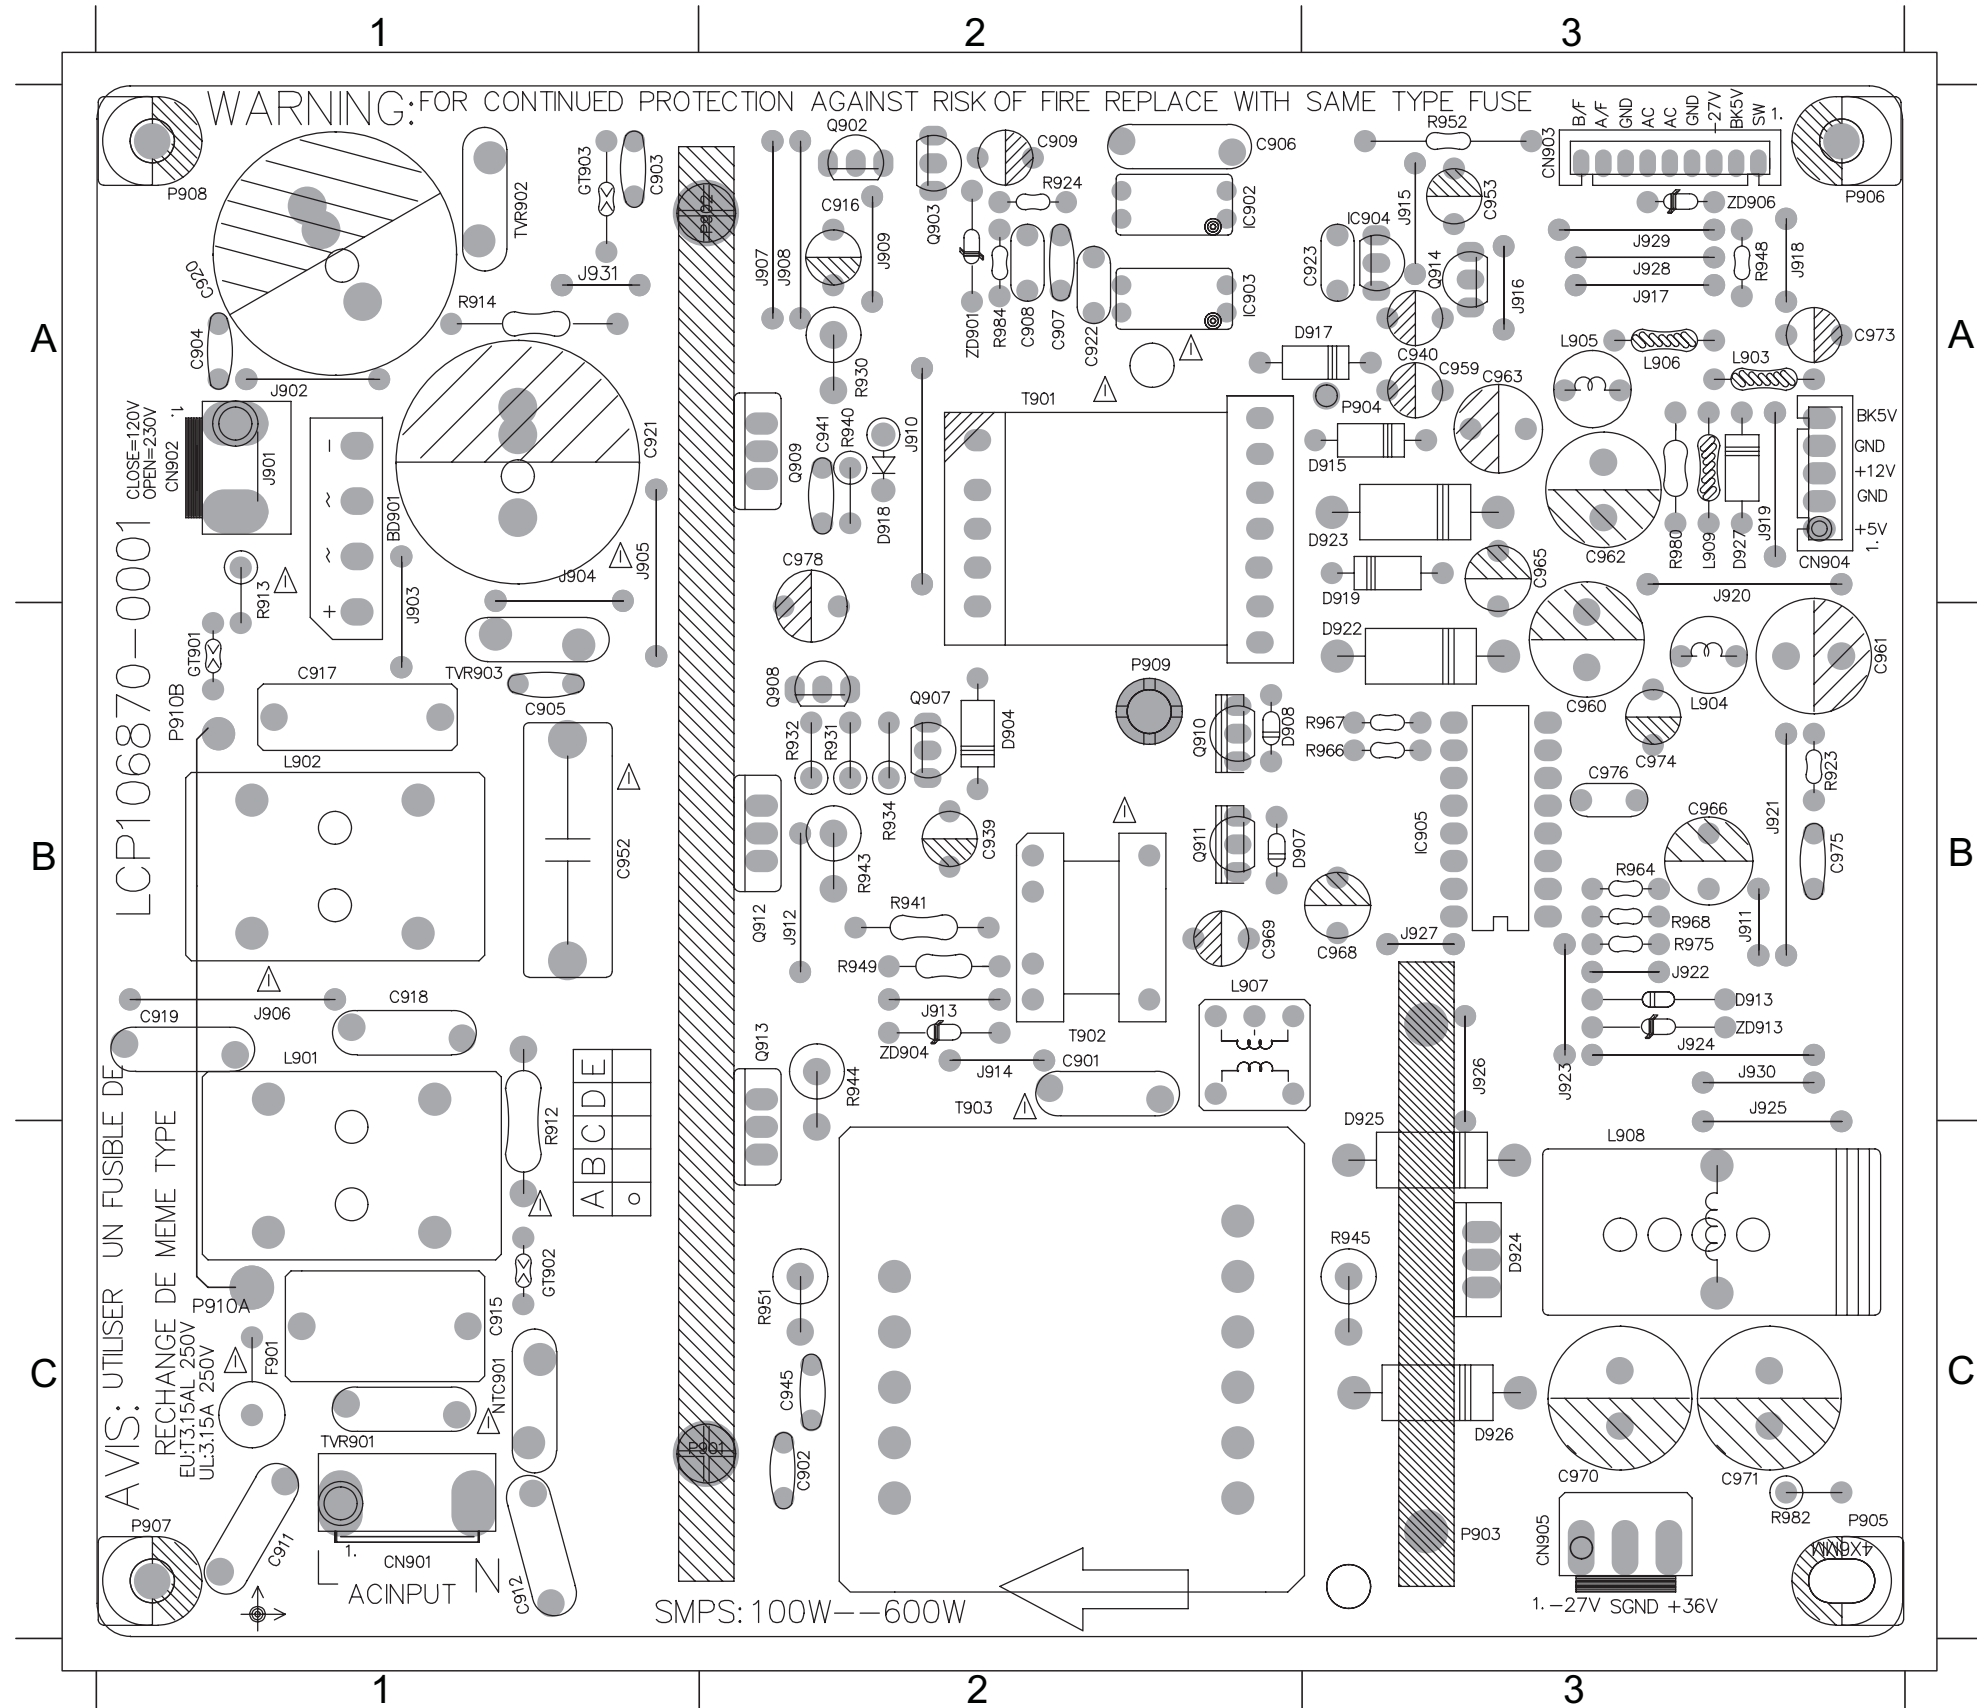

PCB LAYOUT - BOTTOM VIEW


C910 A2	C927 B1	C934 A2	C944 B2	C954 A1	C972 C1	D910 B1	Q904 A2	R905 C3	R915 A3	R922 A1	R935 A2	R947 A1	R958 A1	R969 B1	R977 A1	ZD903 B2
C913 A2	C928 A1	C935 A2	C946 C1	C955 A1	C977 A2	D911 B2	Q905 A1	R906 A2	R916 A3	R925 A1	R936 A2	R950 B2	R959 A1	R970 B1	R978 A1	ZD905 B1
C914 A2	C929 A1	C936 B2	C947 B1	C956 A1	D902 B2	D912 B1	Q906 B1	R907 A2	R917 A3	R926 B1	R937 A2	R953 A2	R960 B1	R971 B2	R979 B1	ZD907 B1
C915 A1	C930 B1	C937 A1	C948 A1	C957 B1	D903 A2	D914 B1	R901 A2	R908 A2	R918 A3	R927 A1	R938 A1	R954 A1	R961 B1	R972 B1	R981 B1	ZD908 B1
C924 A2	C931 A2	C938 A1	C949 C1	C958 C1	D905 B2	D916 A2	R902 C3	R909 B1	R919 A2	R928 A2	R939 B1	R955 A1	R962 B1	R973 B1	R983 A2	ZD909 B1
C925 A1	C932 B2	C942 A2	C950 C1	C964 B1	D906 B2	IC901 A2	R903 C3	R910 B1	R920 A2	R929 A2	R942 B2	R956 A1	R963 B1	R974 B1	R985 A1	ZD910 B1
C926 A1	C933 A2	C943 B2	C951 C1	C967 B1	D909 B2	Q901 A2	R904 C3	R911 B1	R921 A2	R933 A2	R946 B2	R957 A1	R965 B1	R976 B1	ZD902 B2	ZD911 A2

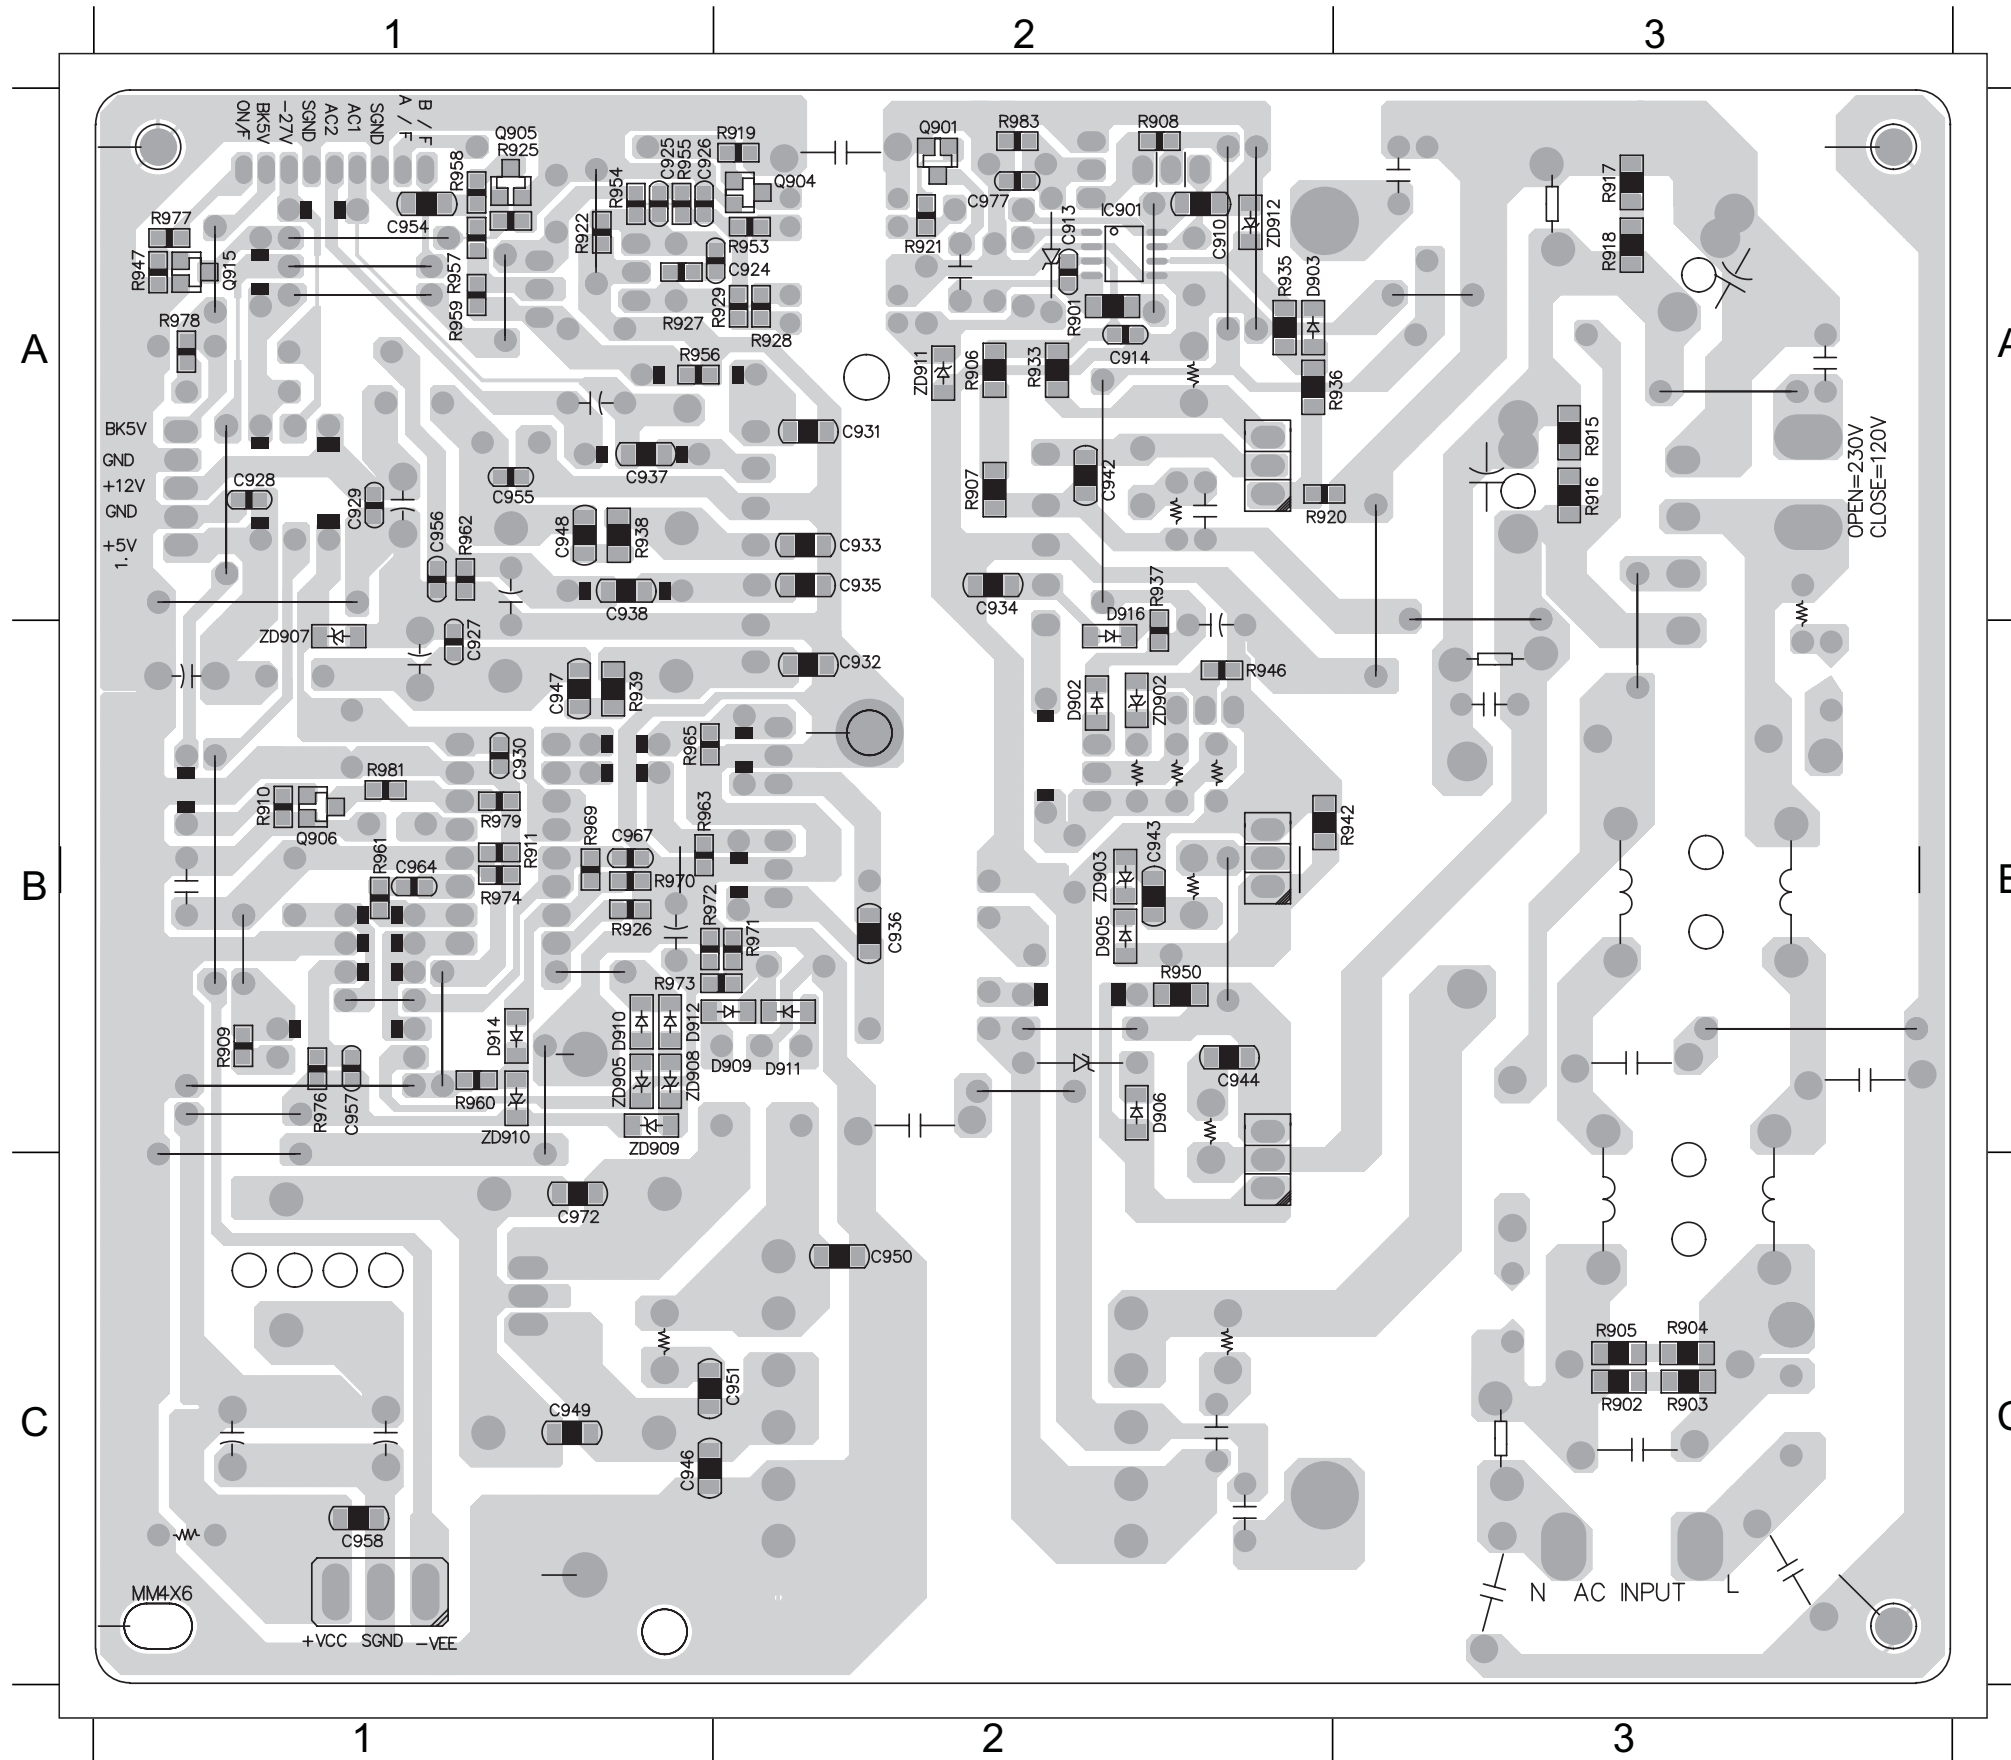

DVD BOARD

TABLE OF CONTENTS	
EXPLORER VIEW	8-2
MECHANICAL PART LIST	8-3

EXPLORER VIEW

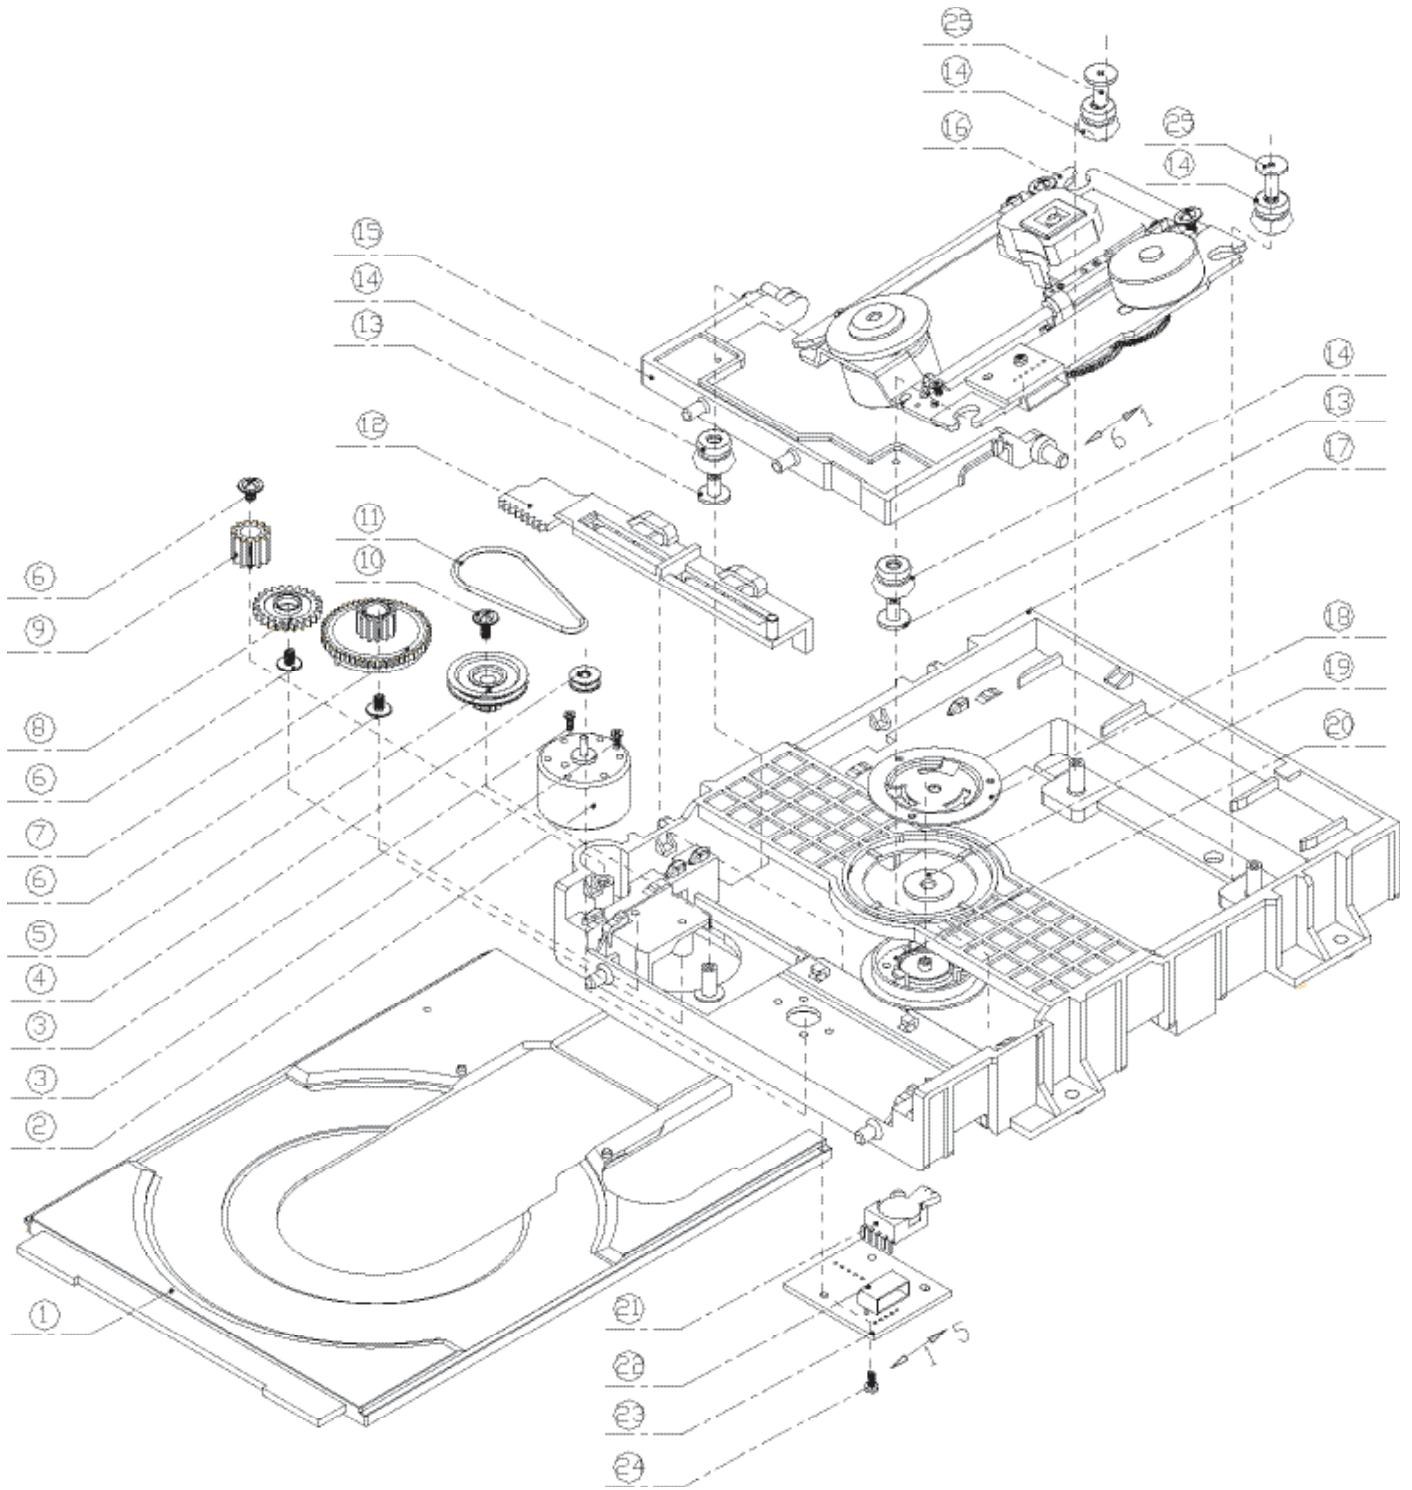


MECHANICAL PART LIST

Loc.	Part No.	Description
1	BPM206009-0202	TRAY
2	FMT020202-XXXX	TRAY MOTOR
3	HSP243174-1030	SCREW
4	BPG206006-0001	GEAR-G POM
5	BPG206014-0001	GEAR PULLER POM
6	HSW258064-1040	SCREW
7	BPG206026-0001	GEAR TRAY1
8	BPG206027-0001	GEAR TRAY - 2
9	BPG206028-0001	GEAR TRAY - 3
10	HSW248004-1060	SCREW
11	BRW206004-0001	RUBB BELT
12	BPH206028-0101	CAM
13	HSW150024-1060	SCREW
14	DRP040004-XXXX	RUBBER DAMPER
15	BPH206027-0101	FRAME
16	ASL2HRT13-00XX	DVD TRAVERSE ASS'Y
17	BPB206010-0202	BASE
18	GSE206003-0001	CLAMPER TOP SECC
19	GMA260000-0001	MAGNET
20	BPG206012-0001	CLAMPER DOWN
21	MSW007001-0030	DETECTOR SW
22	LNC260230-0001	PCB FR-1 CONTROL BOADER
23	CCN200000-0505	CONNECTOR
24	HSP258004-1050	SCREW
25	HSW140024-1111	SCREW

Mechanical Exploded View

9-1

9-1

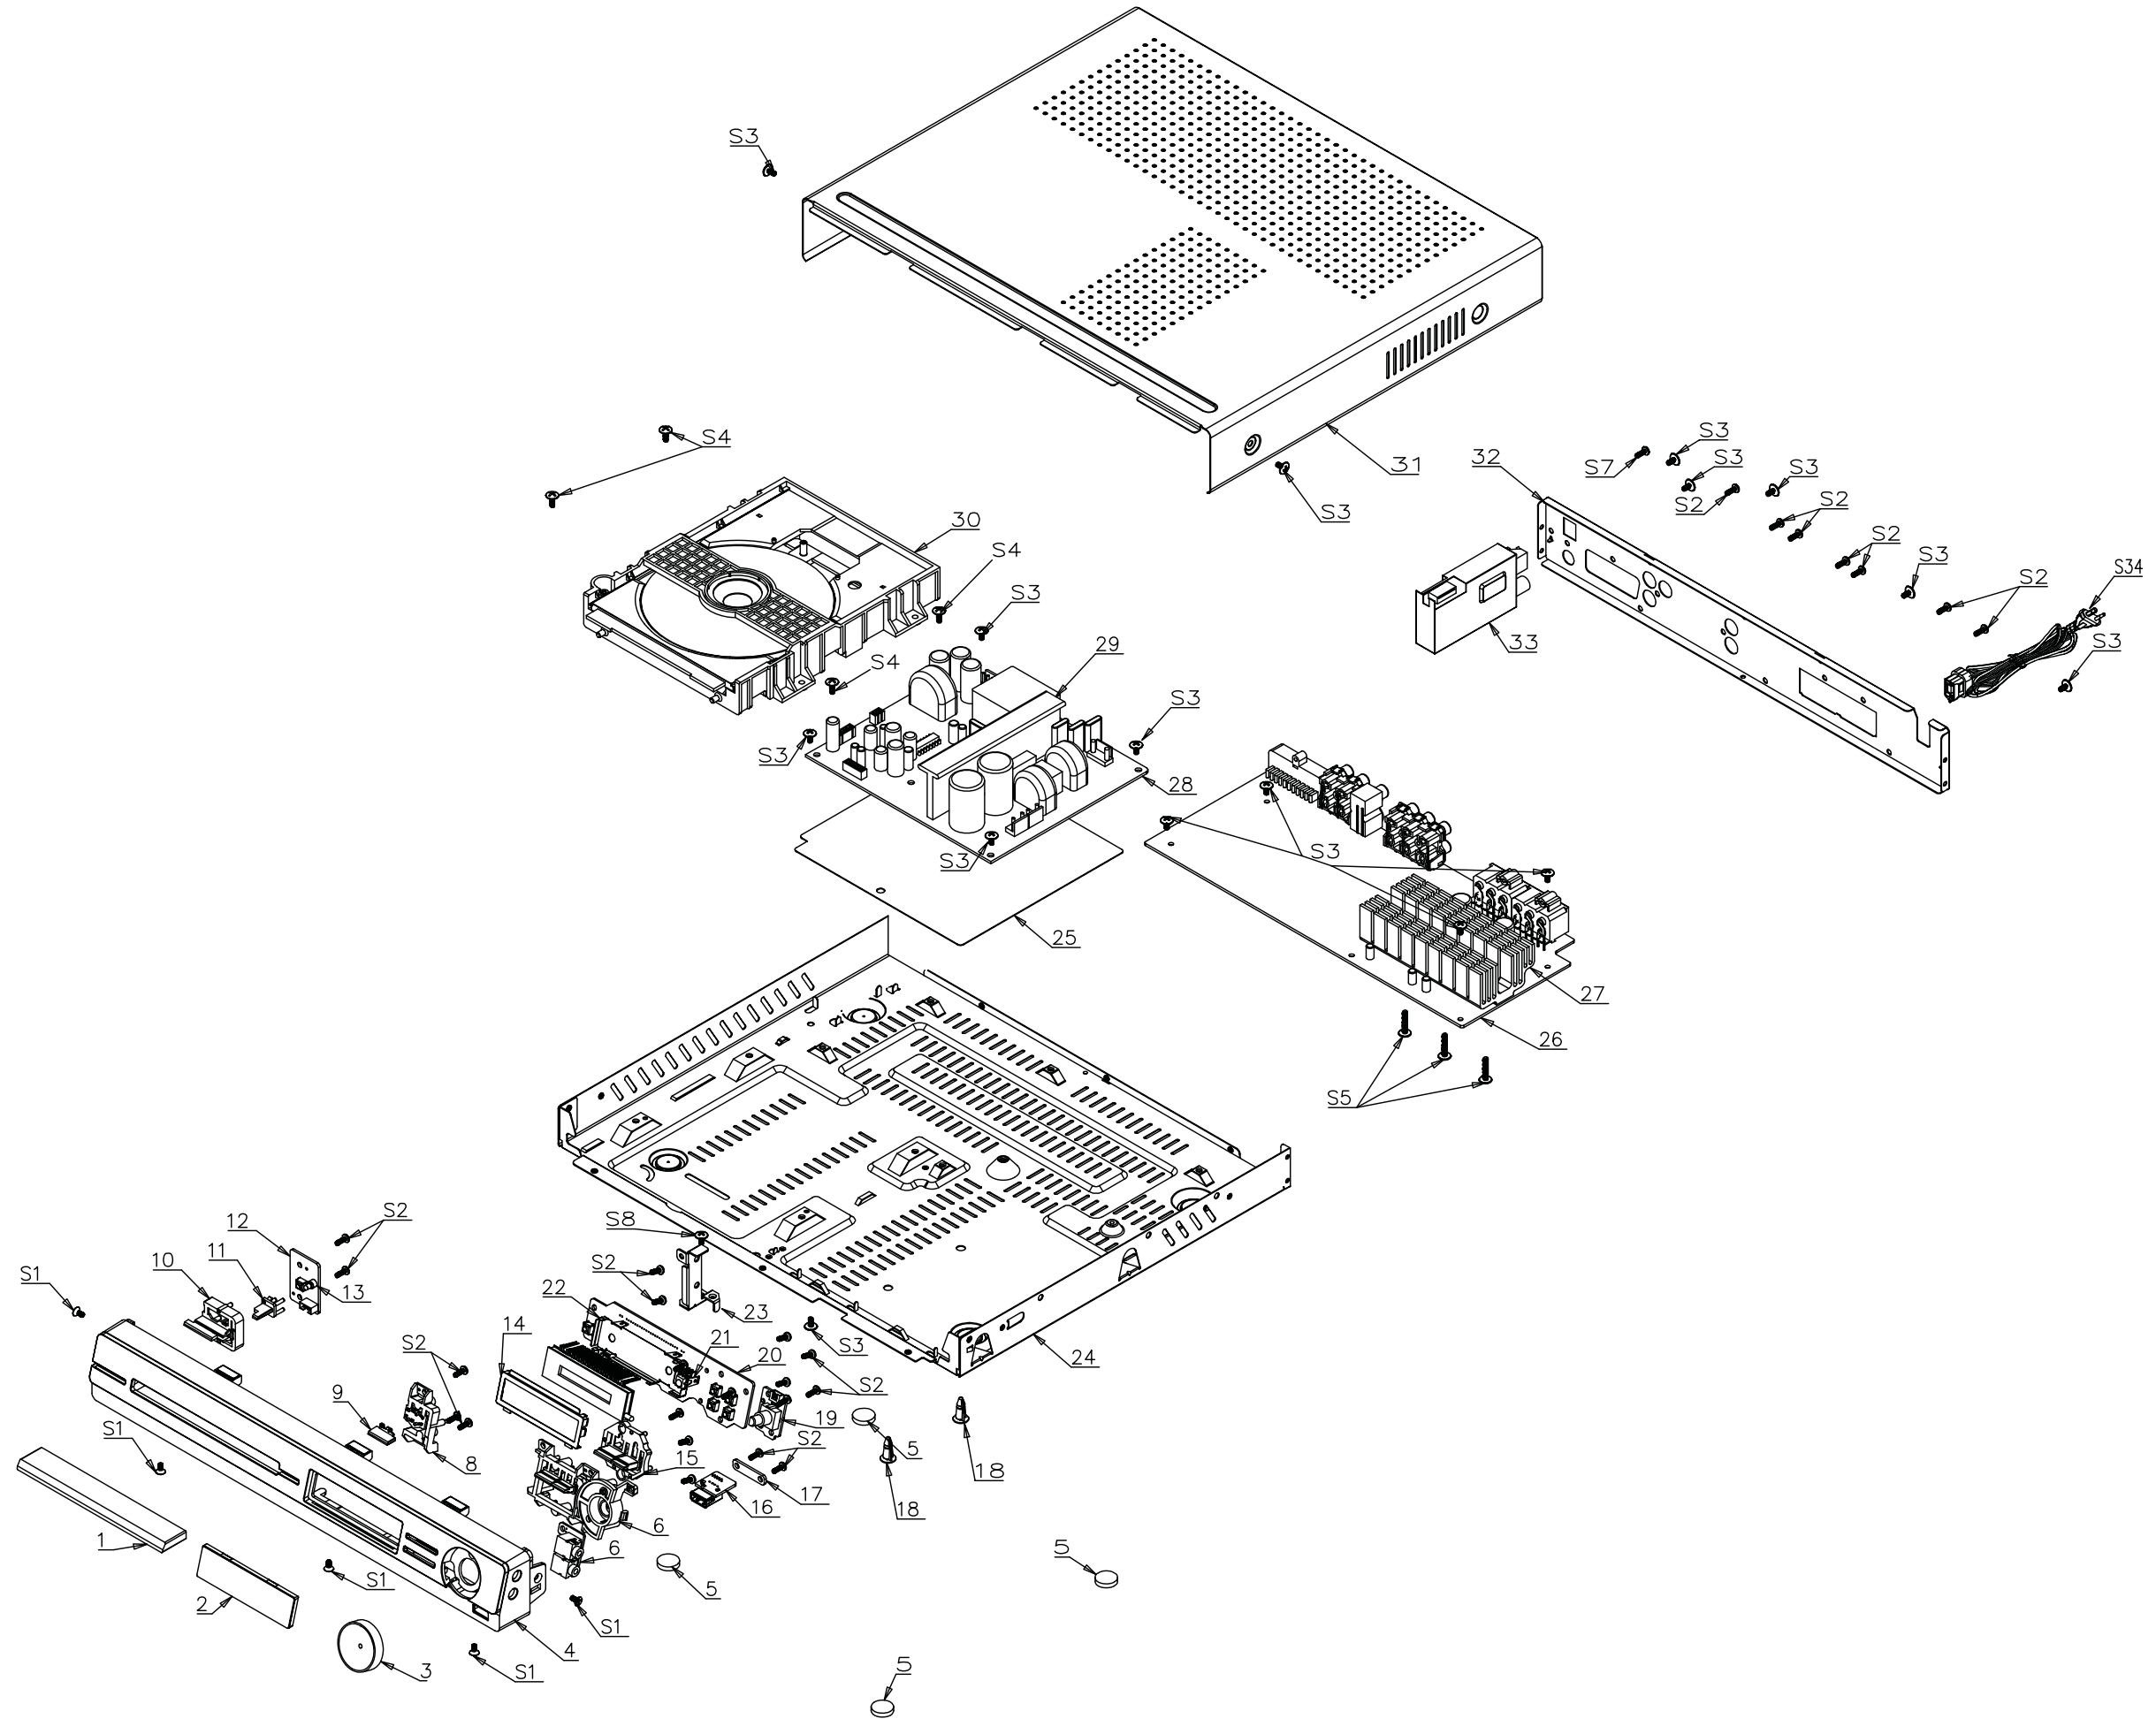

Loc.	Part No.	Description
1	996510001639	DVD DOOR
2	996510001640	DISPLAY LENS
3	996510001641	VOL KNOB
4	996510001642	FRONT CABINET
5	994000005305	RUBBER FOOT
6	996510001631	PHONE JACK PCB
7	996510001643	FUNCTION KEY BASE
8	996510001644	EJECT BUTTON BASE
9	996510001645	EJECT BUTTON
10	996510001646	STANDBY BUTTON
11	996510001258	STANDBY LED LENS
12	996510001632	STANDBY PCB
15	996510001647	FUNCTION KEY
16	996510001633	USB PCB
19	996510001634	VOL PCB
20	996510001635	VFD PCB
25	996510001648	POWER PCB PC
26	996510001636	MAIN PCB
28	996510001637	POWER PCB
30	996510001630	DVD LOADER MODULE
33	996510001607	TUNER PACK
34	996510001638	POWER CORD (for/12)
34	996510002665	POWER CORD (for/05)
AM	996510001621	LOOP ANT
CN103	996510001623	FFC CABLE 10P 60MM
CN801	996510001651	FFC CABLE 24P 160MM
FM	996500023583	FM ANTENNA
RC	996510001649	REMOTE CONTROL
Scart	996510001650	SCART CABL
Stereo	996510001598	STEREO CABLE
SPEAKER		
SPKC	996510001652	SPEAKER BOX -CENTER
RFC	996510001599	RUBBER FOOT -CENTER
SPKFL	996510001653	SPEAKER BOX -FRONT LEFT
SPKFR	996510001654	SPEAKER BOX - FRONT RIGHT
SPKRL	996510001655	SPEAKER BOX- REAR LEFT
SPKRR	996510001656	SPEAKER BOX- REAR RIGHT
RFF	996510001600	RUBBER FOOT-FRONT
RFR	996510001601	RUBBER FOOT - REAR
SUBW	996510002666	SUBWOOFER
RFS	996500028375	RUBBER FOOT -SUB