


2SA978
2SC2385

2SA733A 2SC945
2SA912 2SC1885

HA-1457



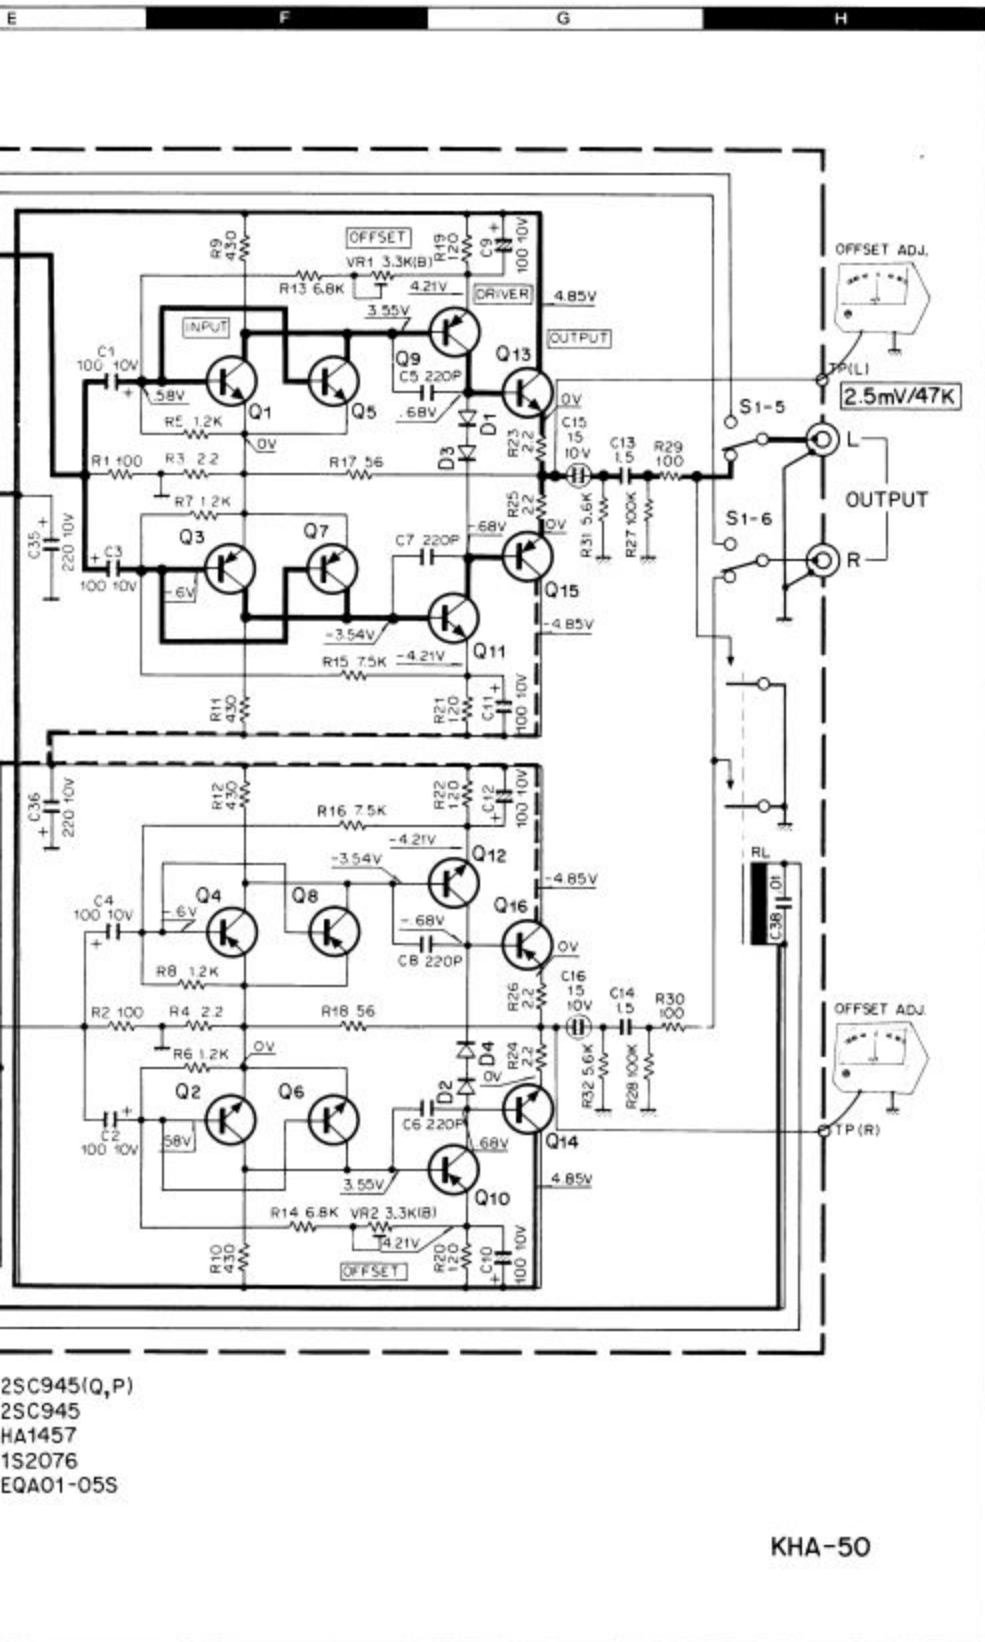

2SC945(Q,P)
 2SC945
 HA1457
 1S2076
 EQA01-055

KHA-50



SPECIFICATIONS

- Input Sensitivity and Impedance**
 PHONO (MC) 0.1 mV, 100 ohms
- Output Level and Impedance**
 Rated Output 2.5 mV at 100 ohms
 Maximum Output 1.5 V
- Frequency Response**
 From 5 Hz to 2 MHz, +0 dB, -3 dB
- Total Harmonic Distortion**
 0.005% at Maximum Output
 from 20 Hz to 20 kHz
- Signal to Noise Ratio (IHF-A)**
 75 dB at rated output
- Equivalent Input Noise Level (IHF-A)**
 -155 dBV
- Maximum Input Level for PHONO (MC)**
 60 mV (RMS), T.H.D. 0.005% at 1 kHz
- Transient Response**
 Rise Time.. 0.12 μ s (less than 2 V peak to peak)
 Slew Rate ± 40 V/ μ s
- Power Supply (AC Adaptor)**
(For U.S.A.)
 Model 28A-4105
 Input AC 120 V, 60 Hz 5 W
 Output DC 12 V, 200 mA
- (For Europe)**
 Model KHA-50PS
 Input AC 220 V \sim , 50/60 Hz 6 VA
 Output DC 12 V \approx 200 mA
 Protector T500 mA
 Supplied Accessory 1 Connecting Cord

Note:
 Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.