KENWOOD

SURROUND SONIC QUADRIX AMPLIFIER

KN-7044

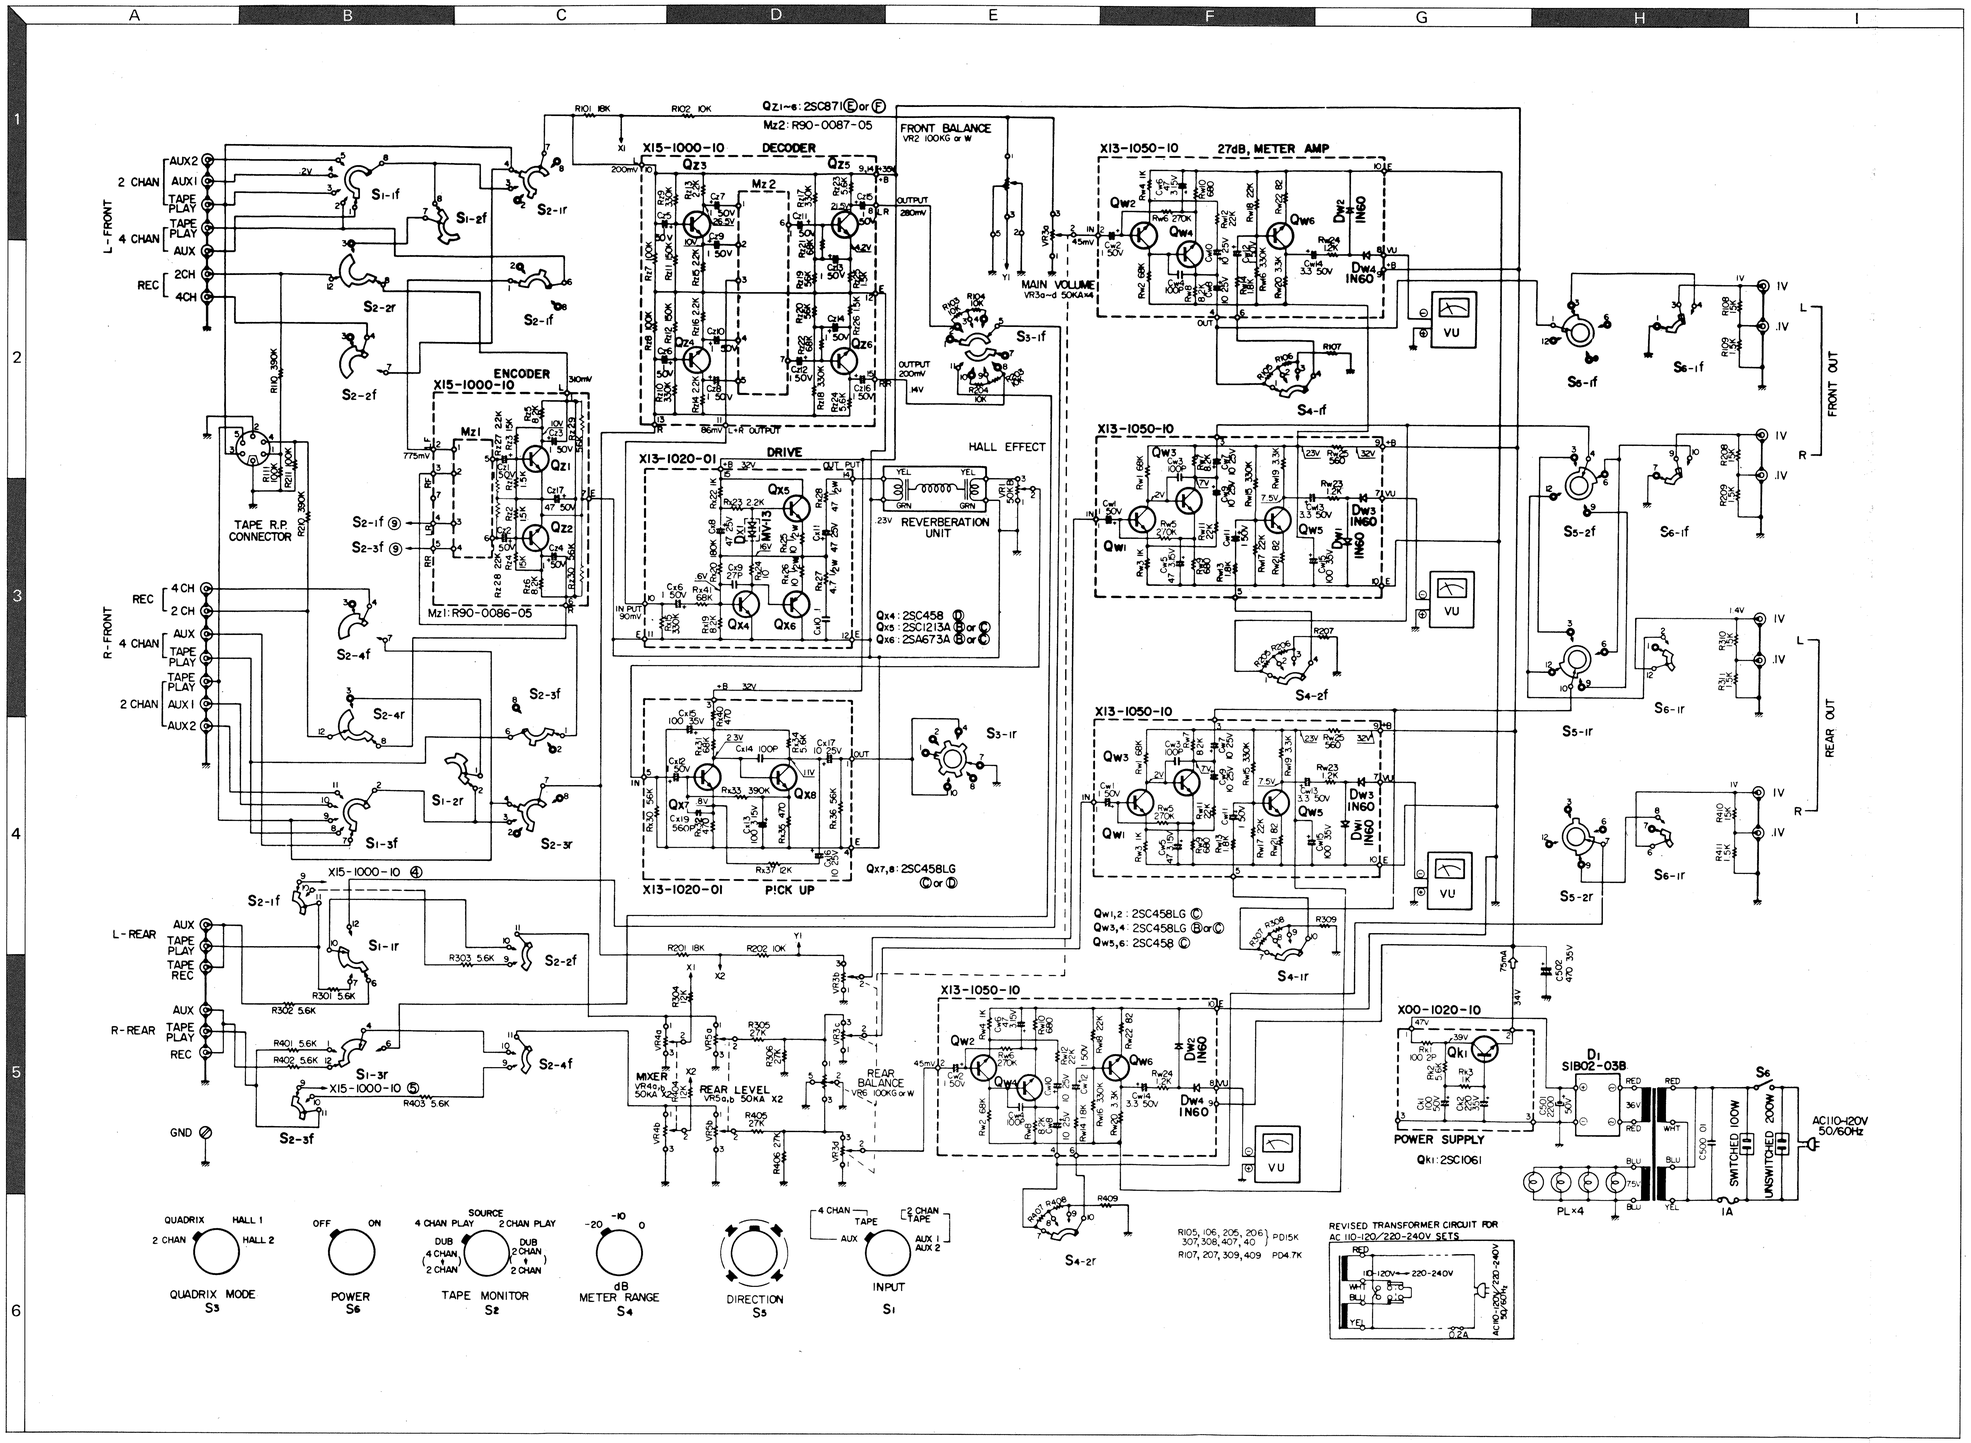

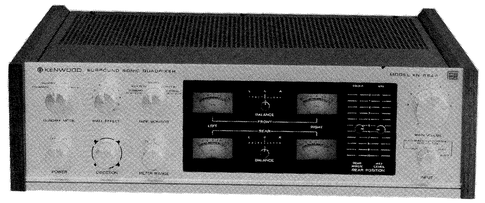

SPECIFICATIONS

SENSITIVITY:
Rated input (at 0 VU)
2 Channel
AUX, TAPE: 200mV
4 Channel
AUX, TAPE: 200mV
Maximum input
2 Channel
AUX, TAPE: 4V
4 Channel
AUX, TAPE: 4V

INPUT IMPEDANCE: (at 1,000 Hz)
2 Channel
AUX, TAPE: 30kΩ
4 Channel
AUX, TAPE: 30kΩ

OUTPUT LEVEL:
Rated output (at 0 VU)
LOW: 0.1V
HIGH: 1V
Maximum output
HIGH: 4.5V

FREQUENCY RESPONSE:
2 Channel
FRONT: 20 Hz to 20,000 Hz ±1dB
REAR: 20 Hz to 20,000 Hz +1, −2dB
4 Channel
FRONT: 20 Hz to 20,000 Hz +0, −1dB
REAR: 20 Hz to 20,000 Hz +0, −1dB

SIGNAL TO NOISE RATIO: (below rated output)
2 Channel
FRONT: 75dB
REAR: 70dB
4 Channel
FRONT: 75dB
REAR: 75dB

DELAY TIME:
0 to 2.3 sec.

POWER SUPPLY:
* AC 110 ~ 120 volts 50/60 Hz
AC 110 ~ 120/220 ~ 230 volts 50/60 Hz

POWER CONSUMPTION:
20 watts

DIMENSIONS:
(not including control knobs):
width 19-1/2", Height 5-3/8", Depth 10-11/16"

WEIGHT:
15.2 lbs.

* Only North America