

STEREO PRE-AMPLIFIER  
**SPEC-1**  
KCU

*Service Manual*




## CONTENTS

1. SPECIFICATIONS .....	2
2. FRONT PANEL FACILITIES .....	3
3. CONNECTION DIAGRAM .....	5
4. CIRCUIT DESCRIPTION .....	
4.1 Equalizer Amplifier .....	7
4.2 Input Buffer Amplifier .....	8
4.3 Tone Amplifier .....	8
4.4 Filter Circuit .....	9
4.5 Output Buffer Amplifier .....	10
4.6 Mic Mixing Circuit .....	10
4.7 Mixing Circuit .....	10
5. BLOCK DIAGRAM .....	11
6. LEVEL DIAGRAM .....	13
7. DISASSEMBLY .....	14
8. PARTS LOCATION .....	18
9. EXPLODED VIEWS .....	23
10. SCHEMATIC DIAGRAMS, P.C. BOARD PATTERNS AND PARTS LIST .....	
10.1 Schematic Diagram and Miscellaneous Parts .....	29
10.2 Input Circuit Assembly (AWF-017) .....	33
10.3 Power Supply Circuit Assembly (AWR-004) .....	38
10.4 Mixing Amplifier Assembly (AWM-083) .....	41
10.5 Filter Amplifier Assembly (AWM-082) .....	45
10.6 Fuse Board Assembly (AWX-091) .....	51
10.7 Tone Amplifier Assembly (AWG-035) .....	53
11. PACKING .....	60
12. PARTS LIST OF EXPLODED VIEWS .....	61

## 1. SPECIFICATIONS


<b>Semiconductors</b>		<b>Furnished Parts</b>	
Transistors	50	Connection Cord with pin plug	1
Diodes	33	Operating Instructions	1 copy
		Note, search used for feature VOLUME knob	1
<b>Preamplifier</b>			
<b>Circuitry</b>		<b>NOTE:</b>	
Equalizer amplifier	3 stage, direct-coupled class A SEPP with 10-stage differential amplifier.	Specifications are the design subject to possible modification without notice due to improvements.	
Control amplifier	3 stage, direct-coupled class A SEPP with 10-stage differential amplifier.		
<b>Input (Sensitivity/Impedance)</b>			
PHONO 1	2.5mV/50kohms		
PHONO 2	2.5mV to 10mV/50kohms		
MIC	2.5mV/100kohms		
TUNER	150mV/100kohms		
AUX 1	150mV/100kohms		
AUX 2	150mV/100kohms		
TAPE PLAY 1	150mV/100kohms		
TAPE PLAY 2	150mV/100kohms		
<b>PHONO Output Level (I.E.C. 0.5%)</b>			
PHONO 1	500mV (11,000Hz)		
PHONO 2	500mV to 1,000mV (11,000Hz)		
<b>Output Level (Impedance)</b>			
TAPE REC 1	150mV/2,2kohms		
TAPE REC 2	150mV/2,2kohms		
OUTPUT 1, 2 (R <sub>L</sub> = 50kohms)	2V/600ohms		
<b>Total Harmonic Distortion (20Hz to 20,000Hz)</b>			
	No more than 0.02% (TV output)		
	No more than 0.05% (TV output)		
<b>Frequency Response</b>			
PHONO (RIAA Equalization)	30Hz to 15,000Hz, ±0.2dB		
TUNER, AUX, TAPE PLAY	30Hz to 20,000Hz, ±1.0dB		
<b>Tone Control (1.5dB step)</b>			
BASS	MAIN 17.5dB (100Hz)		
	SUB 14.5dB (100Hz)		
TREBLE	MAIN 17.5dB (10,000Hz)		
	SUB 14.5dB (10,000Hz)		
<b>Filter</b>			
LOW	18Hz, 30Hz (12dB/oct)		
HIGH	12,000Hz, 18,000Hz (12dB/oct)		
<b>Hum and Noise (SHF, short-circuited, A Network)</b>			
PHONO	70dB		
TUNER, AUX, TAPE PLAY	90dB		
Attenuator	-16dB, -30dB		
<b>Miscellaneous</b>			
Power Requirements	AC 120V, 60Hz		
Power Consumption	17 watts		
Dimensions	480(W) x 186.5(H) x 365(D) mm		
	18.7(W) x 7.35(H) x 14.38(D) in.		
Weight (Without package)	11.2kg, 24 to 10 lb		

## 2. FRONT PANEL FACILITIES

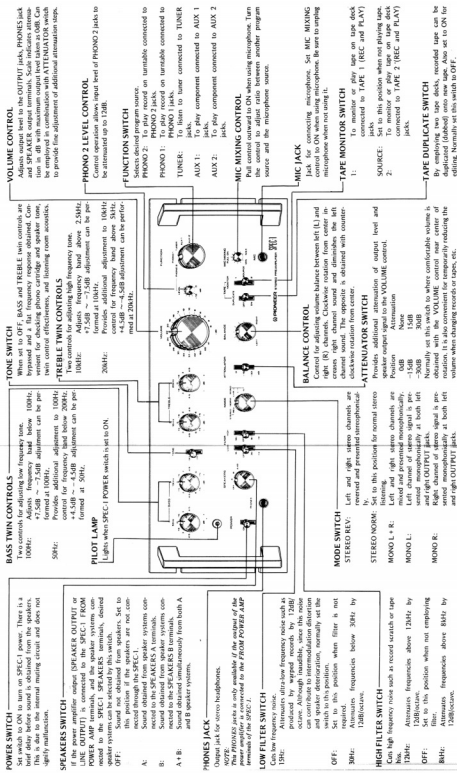



### 3. CONNECTION DIAGRAM

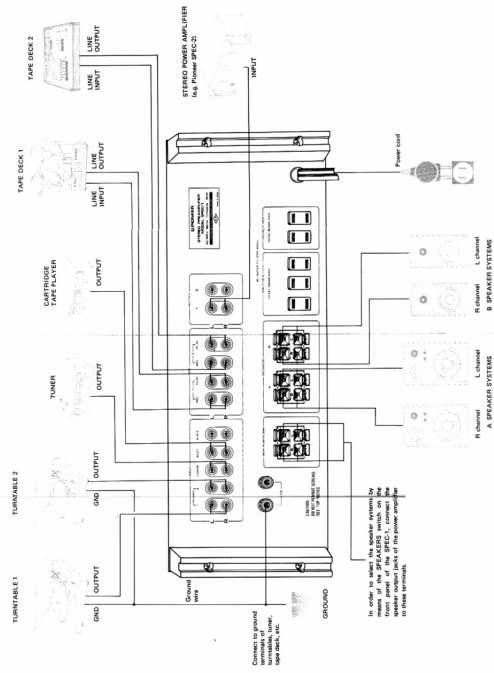

#### 4. CIRCUIT DESCRIPTION

##### 4.1 EQUALIZER AMPLIFIER

The equalizer amplifier circuit employs a differential amplifier first stage, SEPP (single-ended push-pull) final stage, balanced power supply, 3 stages direct coupled NFB (negative feedback) system. Its circuit diagram is shown in Fig. 1.

Q1 and Q2 comprise the differential amplifier. The input signal is fed to Q1 and NFB is applied from the output stage to Q2 base. Q1 output is voltage amplified at Q3 and Q2 drives the Q4 & Q5 SEPP circuit. Since a bootstrap circuit (R13, R21, C13) is inserted at the Q2 load, its AC load impedance is large and a large voltage gain can be obtained.

Fig. 2 shows an equivalent circuit to this AC bootstrap. In the absence of C13, the load impedance becomes the composite impedance of the Q4 & Q5 SEPP circuit and the parallel R13 & R21.

With C13 inserted, the positive feedback is nearly same as Q3 output is applied to point A from the output terminal through C13. The result is, the potential difference across the resistor R21 becomes small. The Q3 output signal then flows in the Q4 & Q5 SEPP circuit without flowing through R21. This resistor becomes effectively non-existent and consequently, the Q3 load becomes the SEPP circuit input impedance, giving a high load impedance compared to the above case. R11, R13, R15, C13 and VR1a in Fig. 1

compose the NFB circuit. 100% DC NFB from the output terminal passes through R13 & R15 and is applied to Q2 base; a design which stabilizes DC balance. AC NFB, determined by R13, R15, C13, C15, R11 and VR1a, is applied to Q2 base (VR1a is included only when the FUNCTION switch is in the PHONO 2 position, and is shorted in the PHONO 1 position). The RIAA curve is derived from the AC NFB, and for the elements which govern the RIAA response is obtained (R11, R13, C13, C15). 1% tolerance metallized film resistors and 2% tolerance styrol capacitors are employed. RIAA deviation in the range 200Hz to 15,000Hz is suppressed to within  $\pm 0.5$ dB of the standard value. At the same time, high reliability is obtained with respect to thermal variations and aging.

With the FUNCTION switch in the PHONO 2 position, gain adjustment is available in the range 0 to -12dB. The first 6dB adjustment is performed by varying the amount of NFB in the NFB circuit using VR1a, and the subsequent 6dB by attenuating the output with VR1b in the output circuit. This method possesses the advantage of not impairing high frequency RIAA deviation or stability, while increasing the acceptable input to a maximum of 6dB. Consequently, when the gain is reduced more than 6dB, 1 Vrms (at 1kHz) acceptable input is available.




Fig. 1 Circuit Diagram of Equalizer Amplifier




Fig. 2 Equivalent Circuit of Bootstrap

#### 4.2 INPUT BUFFER AMPLIFIER

This is a balanced power supply, pure complementary SEPP Class A operational buffer amplifier. Although the circuit gain is essentially 0dB, high TUNER and AUX jack input impedance can be obtained. The low output impedance permits a low resistance VOLUME control to be employed in the following stage, eliminating observable high frequency deterioration due to VOLUME control position. Since the power supply uses an extremely high +48V push pull arrangement, inclusion of this circuit does not impact dynamic range. The circuit is shown in Fig. 3.

The input signal passes through C1 & C3 and is applied to both Q10 & Q11.

#### 4.3 TONE AMPLIFIER

The SPEC1 tone control amplifier employs a twin control system consisting of switch selected NFB type main tone controls and CR network type sub tone controls. The operational section is a differential amplifier and SEPP circuit combination,




Fig. 3 Circuit Diagram of Input Buffer Amplifier

with a balanced power supply, 3 stage direct coupled amplifier and 1 stage buffer amplifier. The circuit is illustrated in Fig. 4.

#### 1. Main Tone Controls

Q12 - Q16 make up the main tone control amplifier. Although the basic operation is the same as the equalizer amplifier, the NFB circuit differs. Fig. 5 shows a simplification of this circuit. S1 is for main bass control and S10 for main treble control. These perform CR selection and control the amplifier frequency response by varying the NFB frequency response.

#### • Bass Boost and Cut

Fig. 6a shows the equivalent circuit during bass boost. The composite impedance of R25, C6 and R6 in the equivalent circuit becomes high at low frequencies. NFB is therefore reduced and amplifier gain increases at low frequencies.

The equivalent circuit during bass cut is illustrated in Fig. 6b. In this case the composite impedance of R6, C6 and C7B becomes high at low frequencies, and NFB increases, thereby reducing amplifier gain.

#### • Treble Boost and Cut

Fig. 6c shows the equivalent circuit during treble boost. The combined impedance of R6, C6, R6 and C7B becomes low at high frequencies, reducing NFB and increasing amplifier gain.

The equivalent circuit during treble cut is shown in Fig. 6d. C6 and R6 impedance becomes low at high frequencies, increasing NFB and reducing amplifier gain.




Fig. 4 Circuit Diagram of Tone Amplifier

\* Tone Control Flat and TONE Switch OFF  
The OFF circuit becomes the same during both tone control flat and TONE switch OFF modes. See Fig. 4. It can be therefore seen that level and frequency response differences are absent in both conditions.

2. Sub Tone Controls

In the sub tone control circuit, the signal passes through a CB network, where bass and treble are relatively enhanced or attenuated. Fig. 10 shows a simplification of this circuit.

S11 is for sub treble control and S12 for sub bass control, and these provide CB selection and control circuit frequency response. S13 is the TONE switch. When set to OFF, the output is determined by the dividing ratio between R131 and R133, while with the tone controls flat it is decided by the ratio between R37 and R38. Since the voltage dividing resistors in both these cases have the same values, level and frequency response differences are absent.




Fig. 5 Circuit Diagram of Main Tone Control

Note: \*R22 and \*R23 indicate NFB loop during tone control flat.




Fig. 6 Equivalent Circuit of Tone Control Flat and TONE Switch OFF

4.4 FILTER CIRCUIT

The circuit shown in Fig. 7 has a steep characteristic of 12dB/oct, and is effective in removing noise. The low cut-off filter can be switched to the three positions of 10Hz, OFF and 100Hz. Change-over of this cut-off frequency is achieved by changing over C1 and C2. The high cut-off filter can be switched to the three positions of 12kHz, OFF and 8kHz, and this is achieved by the change-over of C3 and C4.




Fig. 7 Circuit Diagram of Filter Circuit




Fig. 8 Equivalent Circuit of Bass Boost and Cut




Fig. 9 Equivalent Circuit of Treble Boost and Cut




Fig. 10 Circuit Diagram of Sub Tone Control

#### 4.5 OUTPUT BUFFER AMPLIFIER

The output buffer amplifier is of equivalent composition to the input buffer amplifier. As this circuit is intended to reduce output impedance, even when a 600 ohm low impedance circuit is connected, ample output with excellent frequency and distortion response can be assured.

#### 4.6 MIC MIXING CIRCUIT

A 2 stage direct coupled NFB type MIC amplifier is employed, while the mixing amplifier uses a PNP-NPN transistor 2 stage direct coupled circuit. The MIC mixing circuit is indicated in Fig. 11. When a microphone plug is inserted into the MIC jack, and mixing switch (S2) set to ON, current flows in the mixing relay, connecting the mixing and main circuits. However, with only S2 set to ON, or MIC plug inserted (not both), circuit connection is not completed.




Fig. 11 Block Diagram of MIC Mixing Circuit




Fig. 12 Circuit Diagram of Muting Circuit

#### 4.7 MUTING CIRCUIT

This opens the output circuit for 6 to 8 seconds after the POWER switch has been set to ON and immediately after the POWER switch is set to OFF, blocking unpleasant noise. The circuit is shown in Fig. 12.

##### 1. POWER Switch ON Muting


Immediately after the POWER switch is set to ON, delayed operation is provided by R88 and C51 in the Q23 base circuit. The delay time is determined by the time constant of R88 and C51. When the POWER switch is turned ON Q23 is reverse biased by -R3 from D1 and it switches OFF. At this time, +E1 passes through R58 to charge C51. Therefore, point A potential rises as C51 charges.

Q23 is in the OFF state at this time. Q23 & Q24 comprise a Schmitt circuit and with Q23 OFF, Q24 maintains the ON condition. Consequently, current does not flow through the relay coil and the relay remains in the OFF position. When C51 is fully charged, point A potential is determined by R58 & R59 voltage dividing ratio. Forward bias is applied to Q23 base, switching Q23 ON and Q24 OFF. Therefore current flows in the relay coil, switching the relay ON to close the signal circuit and begin normal operation.


##### 2. POWER Switch OFF Muting

During normal operation +E1 from R30 passes through R52. Since it flows to -E2, Q23 base is at cut-off potential. The small capacity of C53 in the -E2 circuit causes it to be discharged immediately by +E1 passing through R50 & R52. After discharge, +E1 passing through R50 is applied to Q23 base, switching this transistor ON. Point A potential decreases rapidly, switching Q23 OFF and Q24 ON. Bias current flows in the relay, switching the relay OFF and opening the signal output circuit.

5. BLOCK DIAGRAM

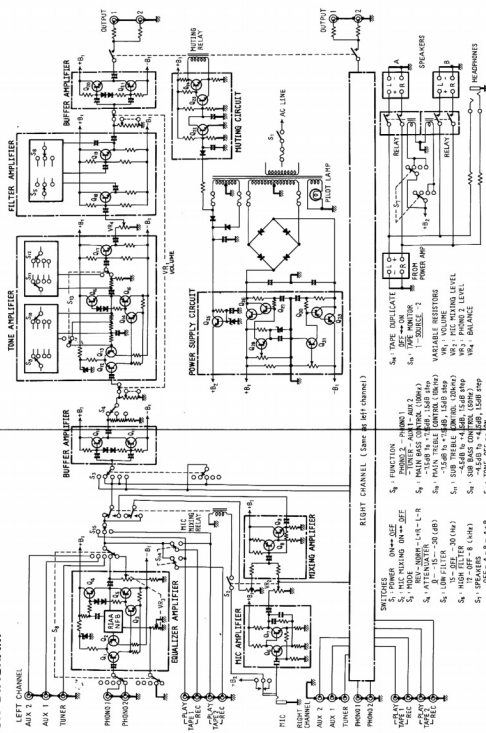


**6. LEVEL DIAGRAM**

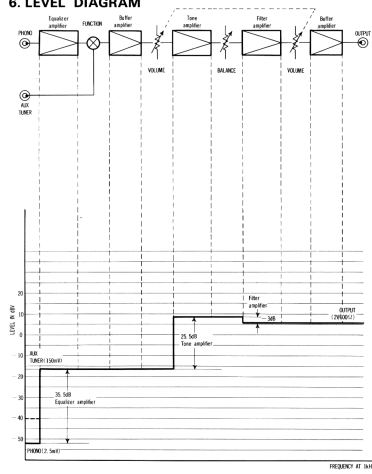

## 7. DISASSEMBLY


### 1. Removing the Top Cover

Remove the 12 screws (A) to detach the top cover.



### 2. Removing the Bottom Plate


Remove the 12 screws (B) to detach the bottom plate.






**3. Removing the Front Panel Assembly**


- (1) Remove all control knobs by pulling them out. For the VOLUME control knob, loosen the set screws with a hexagonal wrench before removing it. Remove the BASS, VOLUME, and MODE switch shafts nuts and washers (C).
- (2) Remove the 8 screws (D) to detach the front panel assembly.

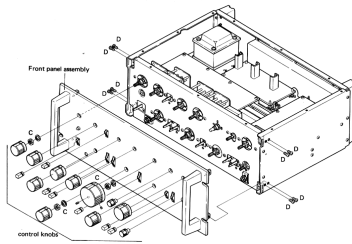


- 4. Removing the Input Circuit Assembly**  
 (1) Remove the top cover and front panel.  
 (2) Remove the 7 screws (E) which mount the printed circuit board on the chassis.




- 5. Removing the Tone Amplifier Assembly**  
 (1) Remove the top cover and front panel.  
 (2) Remove the 9 screws (F) which mount the printed circuit board on the chassis.



- 6. Removing the Filter Amplifier Assembly**  
(1) Remove the bottom plate and front panel.  
(2) Remove the 8 screws (G) which mount the printed circuit board on the chassis.




- 7. Removing the Mixing Amplifier Assembly**  
(1) Remove the bottom plate and front panel.  
(2) Remove the 5 screws (H) which mount the printed circuit board on the chassis.




## 8. PARTS LOCATION


### 1. Front Panel View

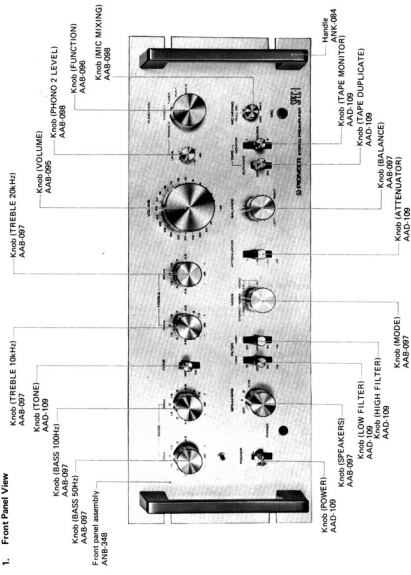


2. Front View with Panel Removed

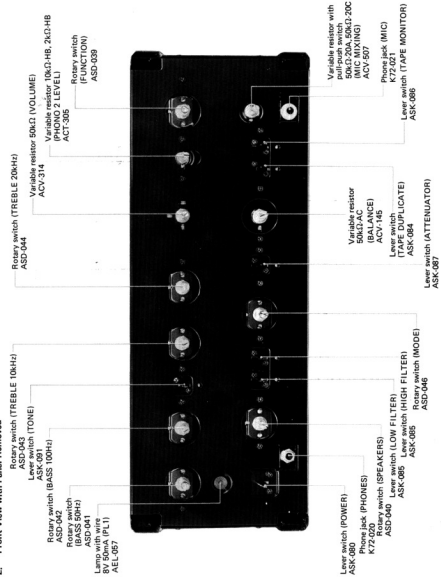


3. Top View

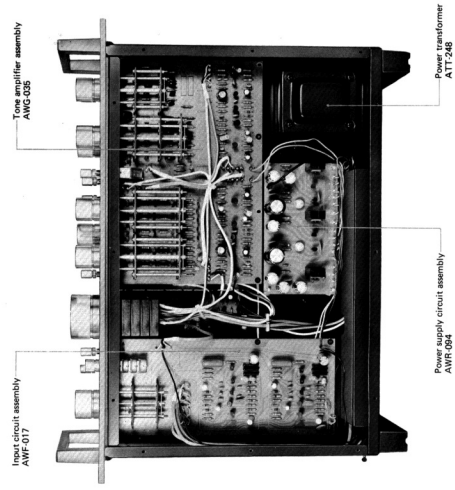


4. Bottom View

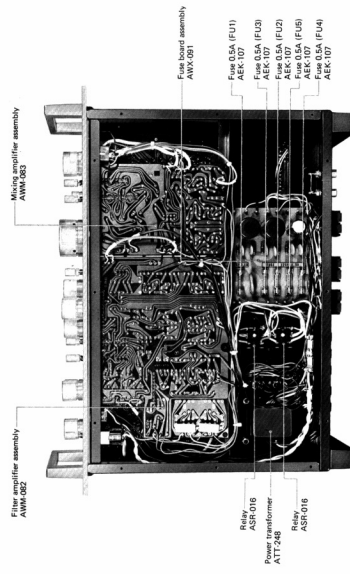



5. Rear View

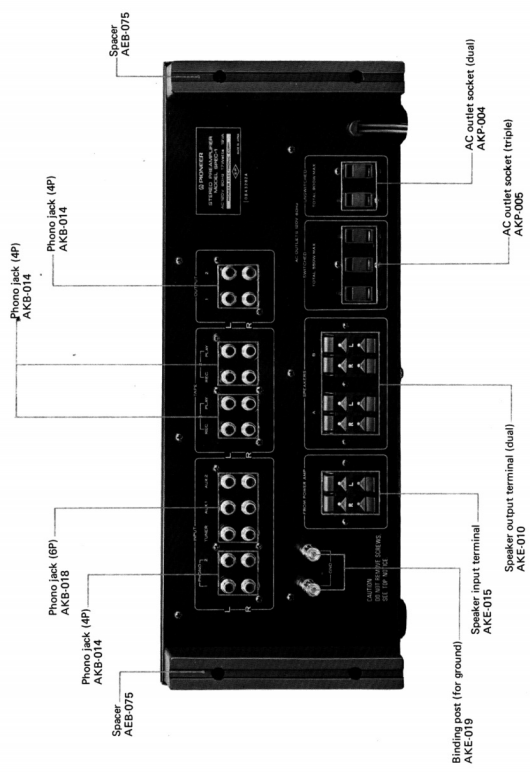




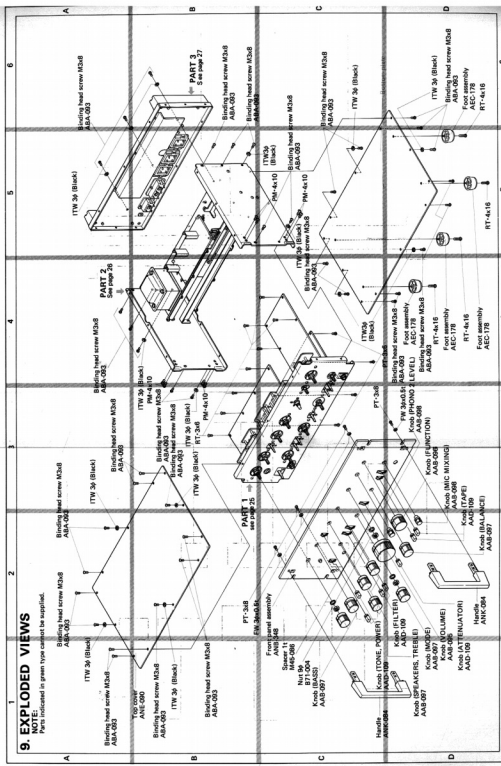

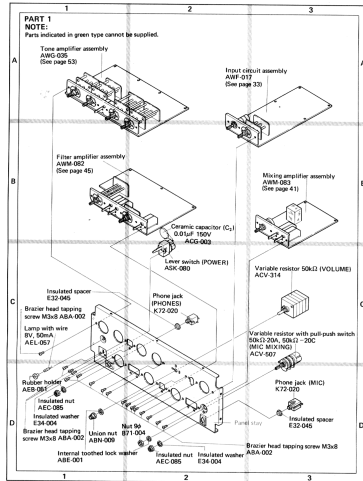

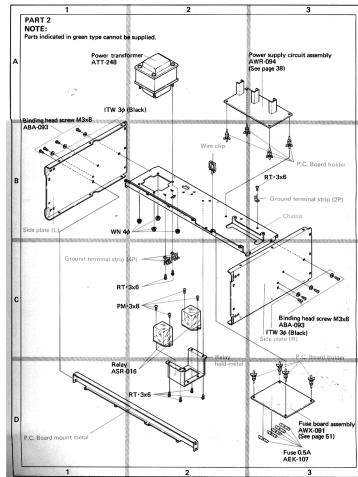

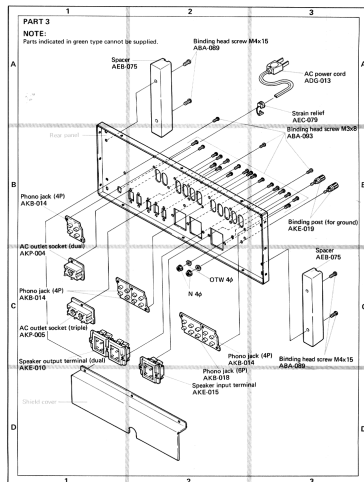


**NOMENCLATURE OF SCREWS, WASHERS AND NUTS**

The following symbols stand for screws, washers and nuts as shown in exploded view.

Symbol	Description	Shape	Symbol	Description	Shape
RT	Braker head tapping screw		EW	E type washer	
FT	Flat head tapping screw		FW	Flat washer	
BT	Blind head tapping screw		SW	Spring lock washer	
CT	Countersunk head tapping screw		N	Nut	
TT	Truss head tapping screw		WN	Washer faced nut	
OCT	Oral countersunk head tapping screw		ITW	Internal lockhead lock washer	
FW	Pin head machine screw		OTW	External lockhead lock washer	
CM	Countersunk head machine screw		SC	Stirred set screw (Cone point)	
OCM	Oral countersunk head machine screw		SF	Stirred set screw (Flat point)	
TM	Truss head machine screw		HG	Hexagon socket headless set screw	
BM	Blind head machine screw		OCW	Oral countersunk head wood screw	
PSA	Pin head screw with spring lock washer		DW	Countersunk head wood screw	
PSB	Pin head screw with spring lock washer and flat washer		RR	Round head wood screw	
RF	Pin head screw with flat washer				

**EXAMPLE**



Symbol	Description	Part No.
C1	Capacitor 0.001 50V	CD17-012 50
C2	Capacitor 0.01 100V	AC05-08
C3	Capacitor 0.001 50V	CD17V-012 50
C4	Electrolytic 1,000 25V	CEA 100-25

## 10. SCHEMATIC DIAGRAMS, P. C. BOARD PATTERNS AND PARTS LIST

### 10.1 SCHEMATIC DIAGRAM AND MISCELLANEOUS PARTS

#### Miscellaneous Parts List

NOTE:  
 • Dimensions in µF unless otherwise noted p.p.F.  
 • Resistors in Ω, K, M unless otherwise noted & Ω, K, M, Ω.

#### CAPACITORS

Symbol	Description	Part No.
C1	Capacitor 0.001 50V	CD17-012 50
C2	Capacitor 0.01 100V	AC05-08
C3	Capacitor 0.001 50V	CD17V-012 50
C4	Electrolytic 1,000 25V	CEA 100-25

#### RESISTORS AND POTENTIOMETERS

Symbol	Description	Part No.
R1	Wire wound 150 ΩW	RT5B 151C
R2	Wire wound 150 ΩW	RT5B 151C
VR1	Variable resistor 50K (WOLFRAM)	ACV-314
VR2	Variable resistor with potentiometer 50K (50K-200 (MFC MIXING))	ACV-927

#### SEMICONDUCTORS

Symbol	Description	Part No.
D1	Diode	2SB104
D2	Diode	2SB104

#### FUSES AND LAMP

Symbol	Description	Part No.
F11	Fuse 0.5A	AGC-107
F12	Fuse 0.5A	AGC-107
F13	Fuse 0.5A	AGC-107
F14	Fuse 0.5A	AGC-107
F15	Fuse 0.5A	AGC-107
F16	Fuse 0.5A	AGC-107
PL1	Lamp with base EY 50w-6	AGL-027

#### OTHERS

Symbol	Description	Part No.
T1	Power transformer	ATT-240
R1	Power switch (PCWELL)	AGR-008
R11	Relay	AGR-016
R12	Relay	AGR-016

2SA726  
 2SC1313  
 2SC869  
 2SA628A



2SC1775A  
 2SC945



2SC1885  
 2SA912




2SC1166




2SD313P  
 2SB507




**FUNCTION (S9)**




**MODE (S3)**





**BASS 100Hz (S10)**





**TREBLE 10kHz (S11)**





**BASS 50Hz (S13)**



**TREBLE 20kHz (S12)**




**SPEAKERS (S7)**





Schematic Diagram

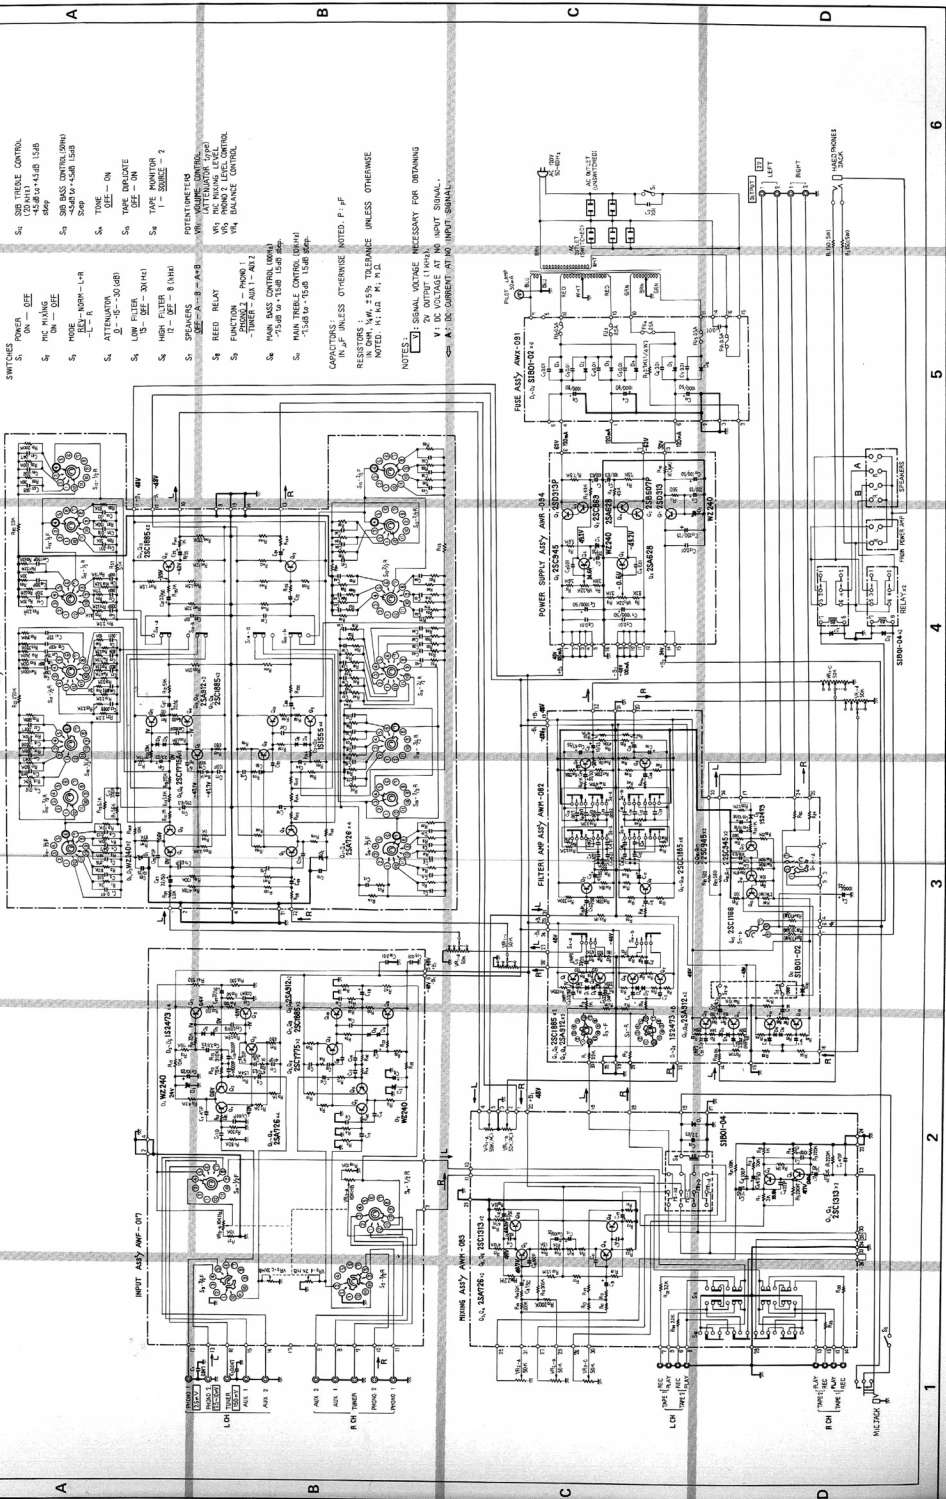



- SWITCHES**
- S<sub>1</sub> POWER OFF
  - S<sub>2</sub> MC RANGE
  - S<sub>3</sub> MODE
  - S<sub>4</sub> ATTENUATOR
  - S<sub>5</sub> LOW FILTER
  - S<sub>6</sub> HIGH FILTER
  - S<sub>7</sub> SPREAD
  - S<sub>8</sub> REED RELAY
  - S<sub>9</sub> FUNCTION
  - S<sub>10</sub> TUNING
  - S<sub>11</sub> TUNING
  - S<sub>12</sub> MAIN TUNING
- POTENTIOMETERS**
- P<sub>1</sub> MAIN TUNING CONTROL
  - P<sub>2</sub> MC RANGE LEVEL CONTROL
  - P<sub>3</sub> MODE LEVEL CONTROL
  - P<sub>4</sub> ATTENUATOR CONTROL
  - P<sub>5</sub> LOW FILTER CONTROL
  - P<sub>6</sub> HIGH FILTER CONTROL
  - P<sub>7</sub> SPREAD CONTROL
  - P<sub>8</sub> REED RELAY CONTROL
  - P<sub>9</sub> FUNCTION CONTROL
  - P<sub>10</sub> TUNING CONTROL
  - P<sub>11</sub> TUNING CONTROL
  - P<sub>12</sub> MAIN TUNING CONTROL

**CONDUCTORS**  
 "N.C." UNLESS OTHERWISE NOTED. P.F.F.  
 IN OHM, MW, 25% TOLERANCE UNLESS OTHERWISE NOTED. P.F.F. 1%.

**RESISTORS**  
 IN OHM, MW, 25% TOLERANCE UNLESS OTHERWISE NOTED. P.F.F. 1%.

**NOTES**  
 1. SIGNAL VOLTAGE NECESSARY FOR OBTAINING V<sub>1</sub> IN VOLTAGE AT NO INPUT SIGNAL.  
 2. A: IS CURRENT AT NO INPUT SIGNAL.

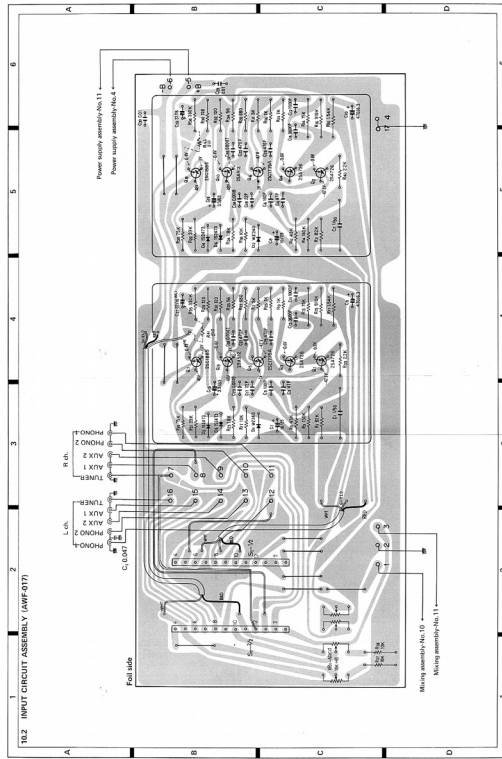

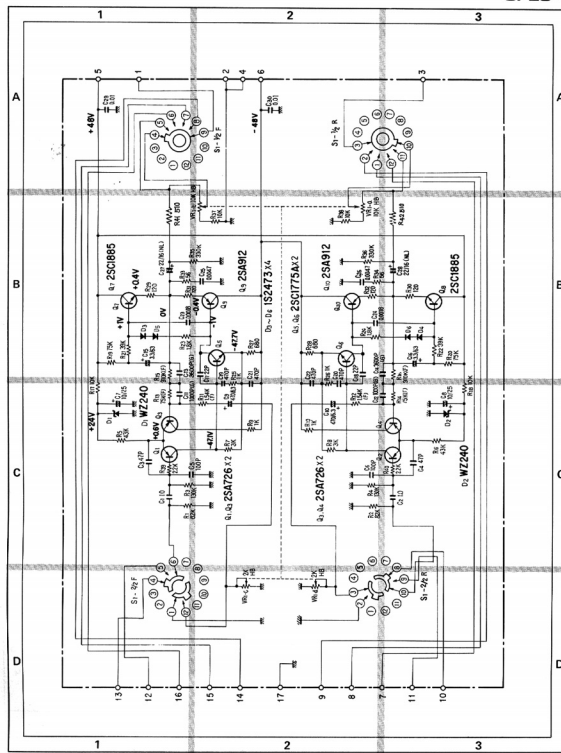

Parts List of Input Circuit Assembly (AWF-017)

CAPACITORS

Symbol	Description	Part No.	Symbol	Description	Part No.
C1	Polymer	1 50V CGEA 100K 50	R16	Met-Film	9108 1W
C2	Polymer	1 50V CGEA 100K 50	R17	Carbon Film	106
C3	Ceramic	470 50V CCGSL 470K 50	R18	Carbon Film	104
C4	Ceramic	470 50V CCGSL 470K 50	R19	Carbon Film	76
C5	Ceramic	1000 50V CCGSL 101K 50	R20	Carbon Film	754
C6	Ceramic	1000 50V CCGSL 101K 50	R21	Carbon Film	394
C7	Electrolytic	10 25V CGA 100P 25	R22	Carbon Film	394
C8	Electrolytic	10 25V CGA 100P 25	R23	Carbon Film	1.84
C9	Electrolytic	470 6.3V CGA 471P 63	R24	Carbon Film	1.84
C10	Electrolytic	470 6.3V CGA 471P 63	R25	Carbon Film	14
C11	Super	0.001 50V CGSA 100C 50	R26	Carbon Film	14
C12	Super	0.001 50V CGSA 100C 50	R27	Carbon Film	880
C13	Super	0.0005 50V CGSA 100C 50	R28	Carbon Film	480
C14	Super	0.0005 50V CGSA 100C 50	R29	Carbon Film	120
C15	Electrolytic	3.3 63V CGA 330P 63	R30	Carbon Film	120
C16	Electrolytic	3.3 63V CGA 330P 63	R31	Carbon Film	120
C17	Ceramic	220 50V CCGSL 220K 50	R32	Carbon Film	120
C18	Ceramic	220 50V CCGSL 220K 50	R33	Carbon Film	56
C19	Ceramic	4700 50V CKDVB 471K 50	R34	Carbon Film	56
C20	Ceramic	4700 50V CKDVB 471K 50	R35	Carbon Film	3304
C21	Ceramic	4700 50V CKDVB 471K 50	R36	Carbon Film	3304
C22	Ceramic	4700 50V CKDVB 471K 50	R37	Carbon Film	104
C23	Metal	0.0018 50V CGMA 180K 50	R38	Carbon Film	104
C24	Metal	0.0018 50V CGMA 180K 50	R39	Carbon Film	2.26
C25	Metal	0.0047 50V CGMA 470K 50	R40	Carbon Film	2.26
C26	Super	0.0047 50V CGMA 470K 50	R41	Carbon Film	510
C27	Electrolytic	22 16V CEANL 220P 16	R42	Carbon Film	510
C28	Electrolytic	22 16V CEANL 220P 16	V11	Variable Inductor 10k-0, 2k-0 (PHONO 2 LEVEL)	ACT-305
C29	Ceramic	0.01 50V CKDVB 101K 50			
C30	Ceramic	0.01 50V CKDVB 101K 50			

RESISTORS AND POTENTIOMETERS


Symbol	Description	Part No.
R1	Carbon Film	82k RDUPE 82J
R2	Carbon Film	82k RDUPE 82J
R3	Carbon Film	150k RDUPE 154J
R4	Carbon Film	150k RDUPE 154J
R5	Carbon Film	43k RDUPE 43J
R6	Carbon Film	43k RDUPE 43J
R7	Carbon Film	34 RDUPE 30J
R8	Carbon Film	24 RDUPE 20J
R9	Carbon Film	14 RDUPE 10J
R10	Carbon Film	14 RDUPE 10J
R11	Met-Film	1.54k 1W RNL08 1541F
R12	Met-Film	1.54k 1W RNL08 1541F
R13	Met-Film	1k 1W RNL08 1000F
R14	Met-Film	75k 1W RNL08 7500F
R15	Met-Film	910k 1W RNL08 9100F


SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor	2SA750-F or G
Q2	Transistor	2SA41-GH or BL
Q3	Transistor	2SA750-F or G
Q4	Transistor	2SA750-F or G
Q5	Transistor	2SA41-GH or BL
Q6	Transistor	2BC1750A-E or F
Q7	Transistor	2BC1750A-E or F
Q8	Transistor	2SC1865-B, E or G
Q9	Transistor	2SA874-B, E or G
Q10	Transistor	2SA872-B, E or G
Q11	Diode	WZ240
Q12	Diode	WZ240

Part No.	Description	Part No.
03	Circle	112470
04	Circle	112471
05	Circle	112472
06	Circle	112473
07	Circle	112474
08	Circle	112475

Part No.	Description	Part No.
09	Primary Control FUNCTION	445-039

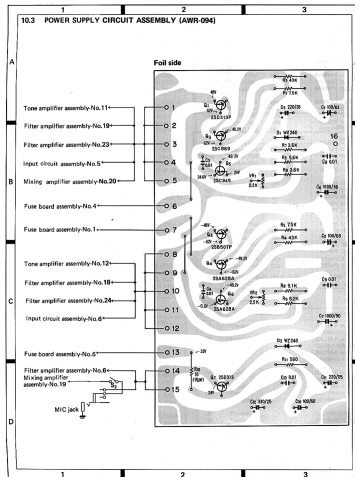

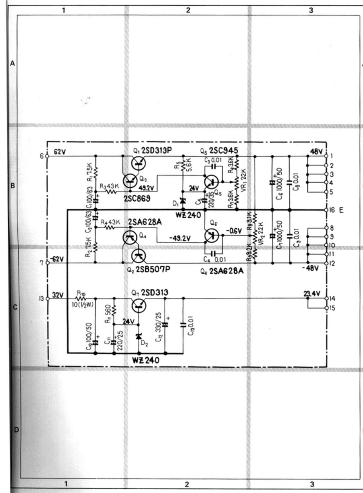

Parts List of Power Supply Circuit Assembly (AWR-094)

CAPACITORS

Symbol	Description	Part No.	Symbol	Description	Part No.
C1	Electrolytic 100 60V	CEA 101P 63	Z1	Zener diode	WZ40
C2	Electrolytic 100 60V	CEA 101P 63	Z2	Zener diode	WZ40
C3	Generic 0.01 50V	CKDYF 1022 50			
C4	Generic 0.01 50V	CKDYF 1022 50			
C5	Electrolytic 220 35V	CEA 221P 35			
C6	Electrolytic 1000 60V	CEA 103P 60			
C7	Electrolytic 1000 60V	CEA 103P 60			
C8	Generic 0.01 50V	CKDYF 1022 50			
C9	Generic 0.01 50V	CKDYF 1022 50			
C10	Electrolytic 100 50V	CEA 101P 50			
C11	Electrolytic 220 25V	CEA 221P 25			
C12	Electrolytic 220 25V	CEA 221P 25			
C13	Generic 0.01 50V	CKDYF 1022 50			


RESISTORS AND POTENTIOMETERS


Symbol	Description	Part No.
R1	Carbon Film 7.5k	RD4P 752
R2	Carbon Film 7.5k	RD4P 752
R3	Carbon Film 43k	RD4P 432
R4	Carbon Film 43k	RD4P 432
R5	Carbon Film 50k	RD4P 502
R6	Carbon Film 3.9k	RD4P 392
R7	Carbon Film 3.9k	RD4P 392
R8	Carbon Film 9.1k	RD4P 912
R9	Carbon Film 8.2k	RD4P 822
R10	Carbon Film 10 1W	RD4P 102
R11	Carbon Film 560	RD4P 562
VR1	Semi fixed 2.2k-8	ACR 202
VR2	Semi fixed 2.2k-8	ACR 202

SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor 2N3033-P or E	2N3033-P or E
Q2	Transistor 2N3033-P or E	2N3033-P or E
Q3	Transistor 2N3033-P or E	2N3033-P or E
Q4	Transistor 2N4264-A or D	2N4264-A or D
Q5	Transistor 2N4264-A or D	2N4264-A or D
Q6	Transistor 2N4264-A or D	2N4264-A or D
Q7	Transistor 2N3033-D	2N3033-D



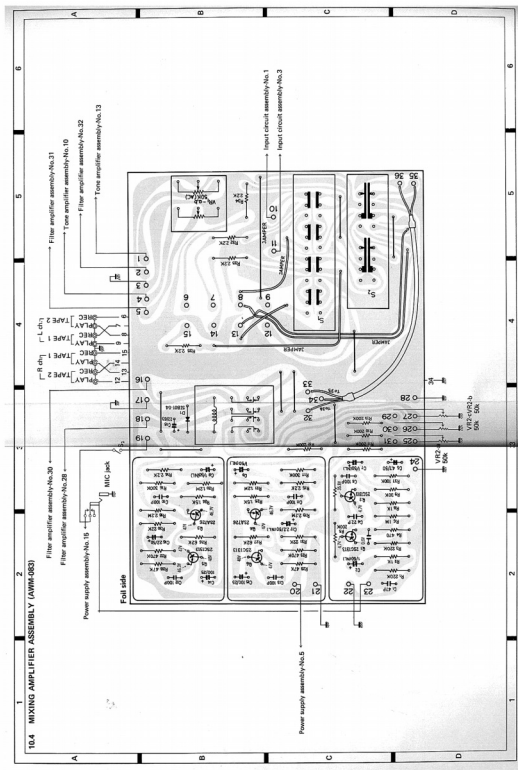

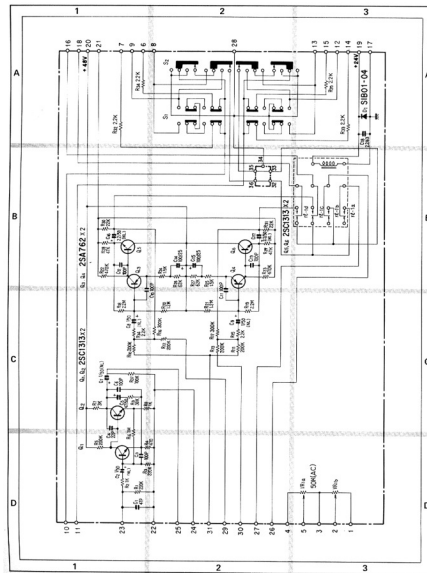

Parts List of Mixing Amplifier Assembly (AWM-083)

CAPACITORS

Symbol	Description	Part No.	Symbol	Description	Part No.
C1	Ceramic	47µ	50V	CCDL 470K 50	
C2	Electrolytic	1000	50V	CEALN 010P 50	R18
C3	Ceramic	1000	50V	CCDL 100K 50	R19
C4	Ceramic	25µ	50V	CCDL 250K 50	R20
C5	Electrolytic	4.7	50V	CEA 400P 50	R21
C6	Ceramic	1000	50V	CCDL 100K 50	R22
C7	Electrolytic	1	50V	CEALN 010P 50	R23
C8	Electrolytic	1	50V	CEALN 010P 50	R24
C9	Electrolytic	1	50V	CEALN 010P 50	R25
C10	Ceramic	1000	50V	CCDL 100K 50	R26
C11	Ceramic	1000	50V	CCDL 100K 50	R27
C12	Ceramic	1000	50V	CCDL 100K 50	R28
C13	Ceramic	1000	50V	CCDL 100K 50	R29
C14	Electrolytic	100	25V	CEA 100P 25	R30
C15	Electrolytic	100	25V	CEA 100P 25	R31
C16	Electrolytic	2.2	50V	CEALN 200P 50	R32
C17	Electrolytic	2.2	50V	CEALN 200P 50	R33
C18	Electrolytic	2.2	50V	CEA 200P 50	R34
				VR1	Variable resistor 50K A, C (WALWAGE)
					ACV-146

RESISTORS AND POTENTIOMETERS


Symbol	Description	Part No.
R1	Carbon Film	220k
R2	Carbon Film	1k
R3	Carbon Film	220k
R4	Carbon Film	470
R5	Carbon Film	200k
R6	Carbon Film	1M
R7	Carbon Film	1k
R8	Carbon Film	1k
R9	Carbon Film	30k
R10	Carbon Film	200k
R11	Carbon Film	200k
R12	Carbon Film	200k
R13	Carbon Film	20k
R14	Carbon Film	2.2k
R15	Carbon Film	2.2k
R16	Carbon Film	300k
R17	Carbon Film	300k
R18	Carbon Film	2.2k
R19	Carbon Film	2.2k
R20	Carbon Film	1.2M
R21	Carbon Film	1.2M
R22	Carbon Film	470k
R23	Carbon Film	470k
R24	Carbon Film	1.5k
R25	Carbon Film	1.5k


SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor	2SC1313 G or H (2SC1803 G or H)
Q2	Transistor	2SC1313 G or H (2SC1803 G or H)
Q3	Transistor	2SA726F or G (2SA811 G or H)
Q4	Transistor	2SA726F or G (2SA811 G or H)
Q5	Transistor	2SC1313 G or H (2SC1803 G or H)
Q6	Transistor	2SC1313 G or H (2SC1803 G or H)
Q7	Diode	5B8-01-04

OTHERS

Symbol	Description	Part No.
S1	Low switch (FAPE DUPLICATOR)	ASX-084
S2	Low switch (FAPE MONITOR)	ASX-086
	Falcy	ASR-012

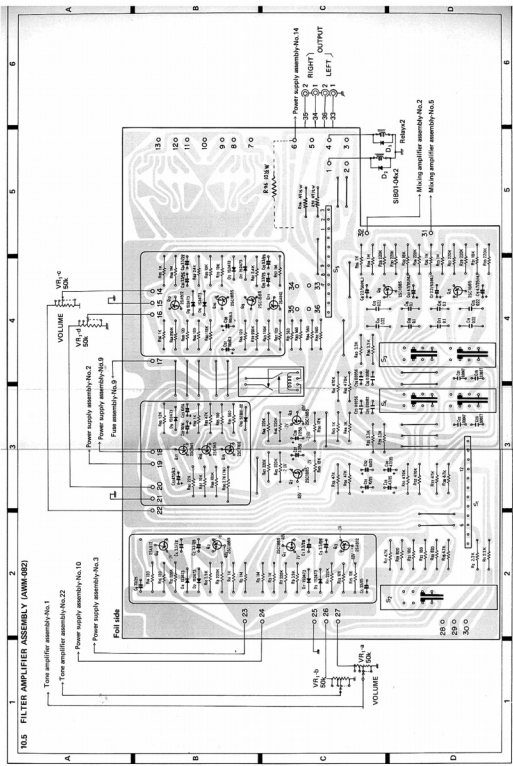

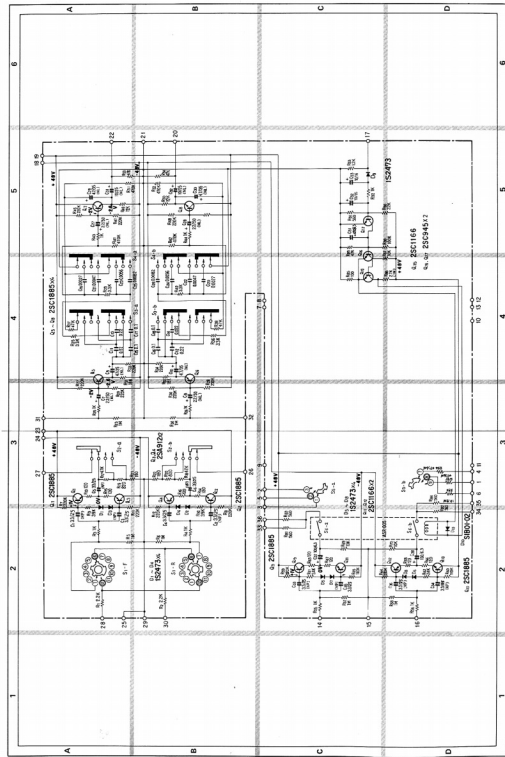

Parts List of Filter Amplifier Assembly (AWM-082)

CAPACITORS

Symbol	Description	Part No.
C1	Electrolytic 3.3 25V ACH-202	
C2	Electrolytic 3.3 25V ACH-202	
C3	Electrolytic 3.3 25V ACH-202	
C4	Electrolytic 3.3 25V ACH-202	
C5	Electrolytic 33 25V CEA 200M 200P	
C6	Electrolytic 33 25V CEA 200M 200P	
C7	Electrolytic 2.2 50V CEANL 20P 50	
C8	Electrolytic 2.2 50V CEANL 20P 50	
C9	Electrolytic 4.7 35V CEANL 40P 35	
C10	Electrolytic 4.7 35V CEANL 40P 35	
C11	Mylar 0.22 50V CGMA 22M 50	
C12	Mylar 0.22 50V CGMA 22M 50	
C13	Mylar 0.22 50V CGMA 22M 50	
C14	Mylar 0.22 50V CGMA 22M 50	
C15	Mylar 0.1 50V CGMA 10M 50	
C16	Mylar 0.1 50V CGMA 10M 50	
C17	Mylar 0.1 50V CGMA 10M 50	
C18	Mylar 0.1 50V CGMA 10M 50	
C19	Mylar 0.0027 50V CGMA 27J 50	
C20	Mylar 0.0027 50V CGMA 27J 50	
C21	Mylar 0.0047 50V CGMA 47J 50	
C22	Mylar 0.0047 50V CGMA 47J 50	
C23	Mylar 0.0056 50V CGMA 56J 50	
C24	Mylar 0.0056 50V CGMA 56J 50	
C25	Mylar 0.0082 50V CGMA 82J 50	
C26	Mylar 0.0082 50V CGMA 82J 50	
C27	Electrolytic 2.2 50V CEANL 20P 50	
C28	Electrolytic 2.2 50V CEANL 20P 50	
C29	Electrolytic 4.7 35V CEANL 40P 35	
C30	Electrolytic 4.7 35V CEANL 40P 35	
C31	Electrolytic 10 25V CEANL 10P 25	
C32	Electrolytic 10 25V CEANL 10P 25	
C33	Electrolytic 3.3 25V ACH-202	
C34	Electrolytic 3.3 25V ACH-202	
C35	Electrolytic 3.3 25V ACH-202	
C36	Electrolytic 3.3 25V ACH-202	
C37	Electrolytic 100 8.3V CEA 100P 8R3	
C38	Electrolytic 100 8.3V CEA 100P 8R3	
C39	.....	
C40	.....	
C41	.....	
C42	.....	
C43	.....	
C44	.....	
C45	.....	
C46	.....	
C47	.....	
C48	.....	

Symbol	Description	Part No.
C49	.....	
C50	.....	
C51	Electrolytic 470 6.3V CEA 470P 6R3	
C52	Electrolytic 10 10V CEA 100P 1R	
C53	Electrolytic 10 10V CEA 100P 1R	


RESISTORS

Symbol	Description	Part No.
R1	Carbon film 30K	RDUPS 221
R2	Carbon film 5.1K	RDUPS 222
R3	Carbon film 1K	RDUPS 223
R4	Carbon film 1K	RDUPS 224
R5	Carbon film 1M	RDUPS 225
R6	Carbon film 1M	RDUPS 226
R7	Carbon film 20K	RDUPS 227
R8	Carbon film 20K	RDUPS 228
R9	Carbon film 3.9K	RDUPS 229
R10	Carbon film 3.9K	RDUPS 230
R11	Carbon film 200K	RDUPS 231
R12	Carbon film 200K	RDUPS 232
R13	Carbon film 100	RDUPS 233
R14	Carbon film 100	RDUPS 234
R15	Carbon film 100	RDUPS 235
R16	Carbon film 100	RDUPS 236
R17	Carbon film 4.7K	RDUPS 237
R18	Carbon film 4.7K	RDUPS 238
R19	Carbon film 820	RDUPS 239
R20	Carbon film 820	RDUPS 240
R21	Carbon film 180	RDUPS 18-1
R22	Carbon film 180	RDUPS 18-1
R23	Carbon film 180	RDUPS 18-1
R24	Carbon film 1K	RDUPS 18-1
R25	Carbon film 1K	RDUPS 18-1
R26	Carbon film 1K	RDUPS 18-1
R27	Carbon film 20K	RDUPS 20A
R28	Carbon film 20K	RDUPS 20A
R29	Carbon film 20K	RDUPS 20A
R30	Carbon film 20K	RDUPS 20A
R31	Carbon film 39K	RDUPS 39A
R32	Carbon film 39K	RDUPS 39A
R33	Carbon film 20K	RDUPS 20A
R34	Carbon film 20K	RDUPS 20A
R35	Carbon film 3.3K	RDUPS 33A
R36	Carbon film 47K	RDUPS 47A
R37	Carbon film 47K	RDUPS 47A
R38	Carbon film 3.3K	RDUPS 33A
R39	Carbon film 3.3K	RDUPS 33A
R40	Carbon film 3.3K	RDUPS 33A
R41	Carbon film 470K	RDUPS 470A
R42	Carbon film 470K	RDUPS 470A
R43	Carbon film 1K	RDUPS 100A


Symbol	Description	Part No.	Symbol	Description	Part No.
R44	Carbon Film	1k	ROPS 1022		
R45	Carbon Film	220k	ROPS 2242	O1	Transistor
R46	Carbon Film	220k	ROPS 2242	O2	Transistor
R47	Carbon Film	220k	ROPS 2242	O3	Transistor
R48	Carbon Film	220k	ROPS 2242	O4	Transistor
R49	Carbon Film	220k	ROPS 2242	O5	Transistor
R49	Carbon Film	12k	ROPS 1232	O6	Transistor
R50	Carbon Film	12k	ROPS 1232		
R51	Carbon Film	470k	ROPS 4742	O7	Transistor
R52	Carbon Film	470k	ROPS 4742	O8	Transistor
R53	Carbon Film	47k	ROPS 4732	O9	Transistor
R54	Carbon Film	47k	ROPS 4732		
R55	Carbon Film	1k	ROPS 1022	O10	Transistor
R56	Carbon Film	1k	ROPS 1022	O11	Transistor
R57	Carbon Film	10k	ROPS 1042	O12	Transistor
R58	Carbon Film	10k	ROPS 1042	O13	Transistor
R59	Carbon Film	220k	ROPS 2242	O14	Transistor
R60	Carbon Film	220k	ROPS 2242		
R61	Carbon Film	2.2k	ROPS 2222	O15	Transistor
R62	Carbon Film	2.2k	ROPS 2222		
R63	Carbon Film	110k	ROPS 1142	O16	Transistor
R64	Carbon Film	110k	ROPS 1142		
R65	Carbon Film	10k	ROPS 1022		
R66	Carbon Film	120	ROPS 1212	O17	Transistor
R67	Carbon Film	120	ROPS 1212		
R68	Carbon Film	10k	ROPS 1022	O18	Diode
R69	Carbon Film	10k	ROPS 1022	O19	Diode
R70	Carbon Film	10k	ROPS 1022	O20	Diode
R71	.....	.....	.....	O21	Diode
R72	.....	.....	.....	O22	Diode
R73	.....	.....	.....	O23	Diode
R74	.....	.....	.....	O24	Diode
R75	.....	.....	.....	O25	Diode
R76	.....	.....	.....	O26	Diode
R77	.....	.....	.....	O27	Diode
R78	.....	.....	.....	O28	Diode
R79	.....	.....	.....	O29	Diode
R80	.....	.....	.....	O30	Diode
R81	Carbon Film	660	ROPS 6612	O31	Diode
R82	Carbon Film	660	ROPS 6612	O32	Diode
R83	Carbon Film	660	ROPS 6612	O33	Diode
R84	Carbon Film	660	ROPS 6612	O34	Diode
R85	Carbon Film	100	ROPS 1012	O35	Diode
R86	Metal oxide	2.7k	RS1P 272K	O36	Diode
R87	Carbon Film	10k	ROPS 1022		
R88	Carbon Film	180k	ROPS 1842		
R89	Carbon Film	47k	ROPS 4732		
R90	Carbon Film	22k	ROPS 2222		
R91	Carbon Film	660	ROPS 6612	S1	Resistor (SMD)
R92	Carbon Film	1k	ROPS 1022	S2	Low noise ATTENUATORS
R93	Carbon Film	1.2k	ROPS 1222	S3	Low noise LOW FILTERS
R94	Carbon Film	47	ROPS 4702	S4	Low noise HIGH FILTERS
R95	Carbon Film	47	ROPS 4702	S5	Resistor SPEAKERS
R96	Carbon Film	10	ROPS 1002	S6	Resistor SMUTTERS

**SEMICONDUCTORS**

**OTHERS**

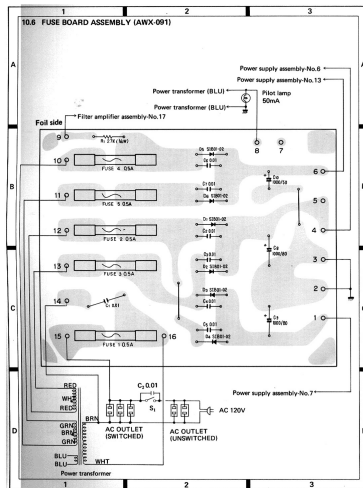





Parts List of Fuse Board Assembly (AWX-091)

**CAPACITORS**


Symbol	Description	Part No.
C1	Ceramic 0.01 100V ACS-003	
C2	Ceramic 0.01 100V ACS-004	
C3	Ceramic 0.01 100V ACS-004	
C4	Ceramic 0.01 100V ACS-004	
C5	Ceramic 0.01 100V ACS-004	
C6	Ceramic 0.01 100V ACS-004	
C7	Ceramic 0.01 100V ACS-004	
C8	Electrolytic 1,000 80V ACI-003	
C9	Electrolytic 1,000 80V ACI-003	
C10	Electrolytic 1,000 80V CEA 100P 50	


**SEMICONDUCTORS**

Symbol	Description	Part No.
D1	Diode	15091-02
D2	Diode	15091-02
D3	Diode	15091-02
D4	Diode	15091-02
D5	Diode	15091-02
D6	Diode	15091-02

**RESISTOR**

Symbol	Description	Part No.
R1	Carbon Film 2-75	RC24P 2723

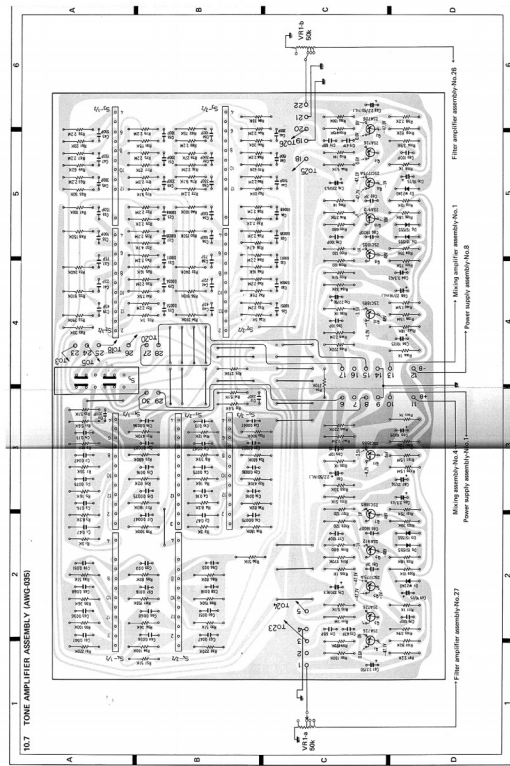

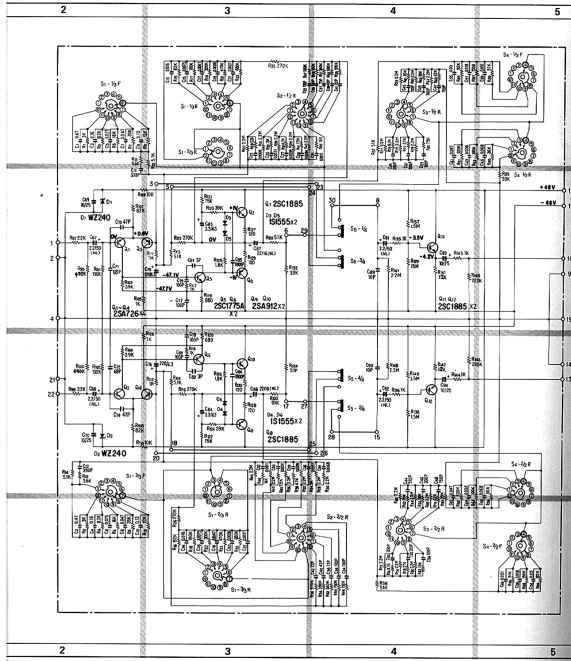

Parts List of Tone Amplifier Assembly (AWG-035)

CAPACITORS

Symbol	Description	Part No.	Symbol	Description	Part No.	
C1	Mylar	0.1 50V	CGMA 4146 50	C48	Sprial	10k 50V
C2	Mylar	0.47 50V	CGMA 4146 50	C49	Sprial	30k 50V
C3	Mylar	0.15 50V	CGMA 1641 50	C50	Sprial	20k 50V
C4	Mylar	0.15 50V	CGMA 1641 50	C51	Sprial	200k 50V
C5	Mylar	0.075 50V	CGMA 1641 50	C52	Sprial	200k 50V
C6	Mylar	0.075 50V	CGMA 1641 50	C53	Sprial	100k 50V
C7	Mylar	0.047 50V	CGMA 4731 50	C54	Sprial	100k 50V
C8	Mylar	0.1 50V	CGMA 1641 50	C55	Mylar	0.03 50V
C9	Mylar	0.1 50V	CGMA 1641 50	C56	Mylar	0.03 50V
C10	Mylar	0.1 50V	CGMA 1641 50	C57	Mylar	0.018 50V
C11	Sprial	300k 50V	CGSA 2011 50	C58	Mylar	0.018 50V
C12	Sprial	300k 50V	CGSA 2011 50	C59	Mylar	0.021 50V
C13	Mylar	0.018 50V	CGMA 1631 50	C60	Mylar	0.021 50V
C14	Mylar	0.018 50V	CGMA 1631 50	C61	Mylar	0.041 50V
C15	Mylar	0.0075 50V	CGMA 1631 50	C62	Mylar	0.041 50V
C16	Mylar	0.0075 50V	CGMA 1631 50	C63	Mylar	0.028 50V
C17	Mylar	0.0047 50V	CGMA 4731 50	C64	Mylar	0.028 50V
C18	Mylar	0.0047 50V	CGMA 4731 50	C65	Mylar	0.008 50V
C19	Mylar	0.0036 50V	CGMA 3621 50	C66	Mylar	0.008 50V
C20	Mylar	0.0036 50V	CGMA 3621 50	C67	Mylar	0.008 50V
C21	Mylar	0.0027 50V	CGMA 2721 50	C68	Electrolytic	2.2 50V
C22	Mylar	0.0027 50V	CGMA 2721 50	C69	Electrolytic	2.2 50V
C23	Mylar	0.0026 50V	CGMA 2621 50	C70	Electrolytic	10 25V
C24	Mylar	0.0026 50V	CGMA 2621 50	C71	Electrolytic	10 25V
C25	Mylar	0.0021 50V	CGMA 2121 50	C71	Ceramic	8p 50V
C26	Mylar	0.0021 50V	CGMA 2121 50	C72	Ceramic	8p 50V
C27	Mylar	0.0018 50V	CGMA 1821 50	C73	Ceramic	47p 50V
C28	Mylar	0.0018 50V	CGMA 1821 50	C74	Ceramic	47p 50V
C29	Mylar	0.0014 50V	CGMA 1421 50	C75	Electrolytic	220 6.3V
C30	Mylar	0.0014 50V	CGMA 1421 50	C76	Electrolytic	220 6.3V
C31	Mylar	0.0011 50V	CGMA 1121 50	C77	Ceramic	100k 50V
C32	Mylar	0.0011 50V	CGMA 1121 50	C78	Ceramic	100k 50V
C33	Sprial	100k 50V	CGSA 1011 50	C79	Ceramic	100k 50V
C34	Sprial	100k 50V	CGSA 1011 50	C80	Ceramic	100k 50V
C35	Sprial	100k 50V	CGSA 1011 50	C81	Ceramic	3p 50V
C36	Sprial	100k 50V	CGSA 1011 50	C82	Ceramic	3p 50V
C37	Sprial	75k 50V	CGSA 1011 50	C83	Electrolytic	3.3 50V
C38	Sprial	75k 50V	CGSA 1011 50	C84	Electrolytic	3.3 50V
C39	Sprial	42k 50V	CGSA 4201 50	C85	Electrolytic	0.0018 50V
C40	Sprial	42k 50V	CGSA 4201 50	C86	Ceramic	0.0018 50V
C41	Sprial	42k 50V	CGSA 4201 50	C87	Electrolytic	22 15V
C42	Sprial	42k 50V	CGSA 4201 50	C88	Electrolytic	22 15V
C43	Sprial	0.15 50V	CGSA 1641 50	C89	Ceramic	10p 50V
C44	Sprial	0.15 50V	CGSA 1641 50	C90	Ceramic	10p 50V
C45	Sprial	0.075 50V	CGMA 1641 50	C91	Electrolytic	2.2 50V
C46	Sprial	0.075 50V	CGMA 1641 50	C92	Electrolytic	2.2 50V
C47	Sprial	0.03 50V	CGMA 1631 50	C93	Electrolytic	10 25V
				C94	Electrolytic	10 25V

**RESISTORS**

Part No.	Description	Part No.	Part No.	Description	Part No.
R01	Carbon Film 1k	RDUPS 3022	R01	Carbon Film 240k	RDUPS 2444
R02	Carbon Film 2k	RDUPS 3022	R02	Carbon Film 240k	RDUPS 2444
R03	Carbon Film 5.1k	RDUPS 8221	R03	Carbon Film 240k	RDUPS 2444
R04	Carbon Film 8.2k	RDUPS 8221	R04	Carbon Film 240k	RDUPS 2444
R05	Carbon Film 10k	RDUPS 1021	R05	Carbon Film 810k	RDUPS 8144
R06	Carbon Film 15k	RDUPS 1521	R06	Carbon Film 910k	RDUPS 9144
R07	Carbon Film 20k	RDUPS 2021	R07	Carbon Film 91k	RDUPS 9131
R08	Carbon Film 30k	RDUPS 3021	R08	Carbon Film 91k	RDUPS 9131
R09	Carbon Film 40k	RDUPS 4021	R09	Carbon Film 2.2M	RDUPS 2221
R10	Carbon Film 50k	RDUPS 5021	R10	Carbon Film 2.2M	RDUPS 2221
R11	Carbon Film 60k	RDUPS 6021	R11	Carbon Film 2.2M	RDUPS 2221
R12	Carbon Film 6.8k	RDUPS 6821	R12	Carbon Film 2.2M	RDUPS 2221
R13	Carbon Film 8.2k	RDUPS 8221	R13	Carbon Film 2.2M	RDUPS 2221
R14	Carbon Film 10k	RDUPS 1021	R14	Carbon Film 2.2M	RDUPS 2221
R15	Carbon Film 12k	RDUPS 1221	R15	Carbon Film 2.2M	RDUPS 2221
R16	Carbon Film 15k	RDUPS 1521	R16	Carbon Film 2.2M	RDUPS 2221
R17	Carbon Film 18k	RDUPS 1821	R17	Carbon Film 2.2M	RDUPS 2221
R18	Carbon Film 20k	RDUPS 2021	R18	Carbon Film 2.2M	RDUPS 2221
R19	Carbon Film 22k	RDUPS 2221	R19	Carbon Film 2.2M	RDUPS 2221
R20	Carbon Film 24k	RDUPS 2421	R20	Carbon Film 2.2M	RDUPS 2221
R21	Carbon Film 27k	RDUPS 2721	R21	Carbon Film 2.2M	RDUPS 2221
R22	Carbon Film 30k	RDUPS 3021	R22	Carbon Film 2.2M	RDUPS 2221
R23	Carbon Film 33k	RDUPS 3321	R23	Carbon Film 2.2M	RDUPS 2221
R24	Carbon Film 36k	RDUPS 3621	R24	Carbon Film 2.2M	RDUPS 2221
R25	Carbon Film 39k	RDUPS 3921	R25	Carbon Film 2.2M	RDUPS 2221
R26	Carbon Film 43k	RDUPS 4321	R26	Carbon Film 2.2M	RDUPS 2221
R27	Carbon Film 47k	RDUPS 4721	R27	Carbon Film 2.2M	RDUPS 2221
R28	Carbon Film 51k	RDUPS 5121	R28	Carbon Film 2.2M	RDUPS 2221
R29	Carbon Film 56k	RDUPS 5621	R29	Carbon Film 2.2M	RDUPS 2221
R30	Carbon Film 62k	RDUPS 6221	R30	Carbon Film 2.2M	RDUPS 2221
R31	Carbon Film 68k	RDUPS 6821	R31	Carbon Film 2.2M	RDUPS 2221
R32	Carbon Film 75k	RDUPS 7521	R32	Carbon Film 2.2M	RDUPS 2221
R33	Carbon Film 82k	RDUPS 8221	R33	Carbon Film 2.2M	RDUPS 2221
R34	Carbon Film 91k	RDUPS 9121	R34	Carbon Film 2.2M	RDUPS 2221
R35	Carbon Film 100k	RDUPS 1021	R35	Carbon Film 2.2M	RDUPS 2221
R36	Carbon Film 110k	RDUPS 1121	R36	Carbon Film 2.2M	RDUPS 2221
R37	Carbon Film 120k	RDUPS 1221	R37	Carbon Film 2.2M	RDUPS 2221
R38	Carbon Film 130k	RDUPS 1321	R38	Carbon Film 2.2M	RDUPS 2221
R39	Carbon Film 150k	RDUPS 1521	R39	Carbon Film 2.2M	RDUPS 2221
R40	Carbon Film 180k	RDUPS 1821	R40	Carbon Film 2.2M	RDUPS 2221
R41	Carbon Film 200k	RDUPS 2021	R41	Carbon Film 2.2M	RDUPS 2221
R42	Carbon Film 220k	RDUPS 2221	R42	Carbon Film 2.2M	RDUPS 2221
R43	Carbon Film 240k	RDUPS 2421	R43	Carbon Film 2.2M	RDUPS 2221
R44	Carbon Film 270k	RDUPS 2721	R44	Carbon Film 2.2M	RDUPS 2221
R45	Carbon Film 300k	RDUPS 3021	R45	Carbon Film 2.2M	RDUPS 2221
R46	Carbon Film 330k	RDUPS 3321	R46	Carbon Film 2.2M	RDUPS 2221
R47	Carbon Film 360k	RDUPS 3621	R47	Carbon Film 2.2M	RDUPS 2221
R48	Carbon Film 390k	RDUPS 3921	R48	Carbon Film 2.2M	RDUPS 2221
R49	Carbon Film 430k	RDUPS 4321	R49	Carbon Film 2.2M	RDUPS 2221
R50	Carbon Film 470k	RDUPS 4721	R50	Carbon Film 2.2M	RDUPS 2221
R51	Carbon Film 510k	RDUPS 5121	R51	Carbon Film 2.2M	RDUPS 2221
R52	Carbon Film 560k	RDUPS 5621	R52	Carbon Film 2.2M	RDUPS 2221
R53	Carbon Film 620k	RDUPS 6221	R53	Carbon Film 2.2M	RDUPS 2221
R54	Carbon Film 680k	RDUPS 6821	R54	Carbon Film 2.2M	RDUPS 2221
R55	Carbon Film 750k	RDUPS 7521	R55	Carbon Film 2.2M	RDUPS 2221
R56	Carbon Film 820k	RDUPS 8221	R56	Carbon Film 2.2M	RDUPS 2221
R57	Carbon Film 910k	RDUPS 9121	R57	Carbon Film 2.2M	RDUPS 2221
R58	Carbon Film 1M	RDUPS 1021	R58	Carbon Film 2.2M	RDUPS 2221
R59	Carbon Film 1.1M	RDUPS 1121	R59	Carbon Film 2.2M	RDUPS 2221
R60	Carbon Film 1.2M	RDUPS 1221	R60	Carbon Film 2.2M	RDUPS 2221
R61	Carbon Film 1.3M	RDUPS 1321	R61	Carbon Film 2.2M	RDUPS 2221
R62	Carbon Film 1.5M	RDUPS 1521	R62	Carbon Film 2.2M	RDUPS 2221
R63	Carbon Film 1.8M	RDUPS 1821	R63	Carbon Film 2.2M	RDUPS 2221
R64	Carbon Film 2M	RDUPS 2021	R64	Carbon Film 2.2M	RDUPS 2221
R65	Carbon Film 2.2M	RDUPS 2221	R65	Carbon Film 2.2M	RDUPS 2221
R66	Carbon Film 2.4M	RDUPS 2421	R66	Carbon Film 2.2M	RDUPS 2221
R67	Carbon Film 2.7M	RDUPS 2721	R67	Carbon Film 2.2M	RDUPS 2221
R68	Carbon Film 3M	RDUPS 3021	R68	Carbon Film 2.2M	RDUPS 2221
R69	Carbon Film 3.3M	RDUPS 3321	R69	Carbon Film 2.2M	RDUPS 2221
R70	Carbon Film 3.6M	RDUPS 3621	R70	Carbon Film 2.2M	RDUPS 2221
R71	Carbon Film 3.9M	RDUPS 3921	R71	Carbon Film 2.2M	RDUPS 2221
R72	Carbon Film 4.3M	RDUPS 4321	R72	Carbon Film 2.2M	RDUPS 2221
R73	Carbon Film 4.7M	RDUPS 4721	R73	Carbon Film 2.2M	RDUPS 2221
R74	Carbon Film 5.1M	RDUPS 5121	R74	Carbon Film 2.2M	RDUPS 2221
R75	Carbon Film 5.6M	RDUPS 5621	R75	Carbon Film 2.2M	RDUPS 2221
R76	Carbon Film 6.2M	RDUPS 6221	R76	Carbon Film 2.2M	RDUPS 2221
R77	Carbon Film 6.8M	RDUPS 6821	R77	Carbon Film 2.2M	RDUPS 2221
R78	Carbon Film 7.5M	RDUPS 7521	R78	Carbon Film 2.2M	RDUPS 2221
R79	Carbon Film 8.2M	RDUPS 8221	R79	Carbon Film 2.2M	RDUPS 2221
R80	Carbon Film 9.1M	RDUPS 9121	R80	Carbon Film 2.2M	RDUPS 2221
R81	Carbon Film 10M	RDUPS 1021	R81	Carbon Film 2.2M	RDUPS 2221
R82	Carbon Film 11M	RDUPS 1121	R82	Carbon Film 2.2M	RDUPS 2221
R83	Carbon Film 12M	RDUPS 1221	R83	Carbon Film 2.2M	RDUPS 2221
R84	Carbon Film 13M	RDUPS 1321	R84	Carbon Film 2.2M	RDUPS 2221
R85	Carbon Film 15M	RDUPS 1521	R85	Carbon Film 2.2M	RDUPS 2221
R86	Carbon Film 18M	RDUPS 1821	R86	Carbon Film 2.2M	RDUPS 2221
R87	Carbon Film 20M	RDUPS 2021	R87	Carbon Film 2.2M	RDUPS 2221
R88	Carbon Film 22M	RDUPS 2221	R88	Carbon Film 2.2M	RDUPS 2221
R89	Carbon Film 24M	RDUPS 2421	R89	Carbon Film 2.2M	RDUPS 2221
R90	Carbon Film 27M	RDUPS 2721	R90	Carbon Film 2.2M	RDUPS 2221
R91	Carbon Film 30M	RDUPS 3021	R91	Carbon Film 2.2M	RDUPS 2221
R92	Carbon Film 33M	RDUPS 3321	R92	Carbon Film 2.2M	RDUPS 2221
R93	Carbon Film 36M	RDUPS 3621	R93	Carbon Film 2.2M	RDUPS 2221
R94	Carbon Film 39M	RDUPS 3921	R94	Carbon Film 2.2M	RDUPS 2221
R95	Carbon Film 43M	RDUPS 4321	R95	Carbon Film 2.2M	RDUPS 2221
R96	Carbon Film 47M	RDUPS 4721	R96	Carbon Film 2.2M	RDUPS 2221
R97	Carbon Film 51M	RDUPS 5121	R97	Carbon Film 2.2M	RDUPS 2221
R98	Carbon Film 56M	RDUPS 5621	R98	Carbon Film 2.2M	RDUPS 2221
R99	Carbon Film 62M	RDUPS 6221	R99	Carbon Film 2.2M	RDUPS 2221
R100	Carbon Film 68M	RDUPS 6821	R100	Carbon Film 2.2M	RDUPS 2221

Symbol	Description	Part No.
R101	Carbon film 150K	RDJPS 134J
R102	Carbon film 150K	RDJPS 134J
R103	Carbon film 3.5K	RDJPS 382J
R104	Carbon film 2.5K	RDJPS 382J
R105	Carbon film 1K	RDJPS 102J
R106	Carbon film 1K	RDJPS 102J
R107	Carbon film 82K	RDJPS 82J
R108	Carbon film 62K	RDJPS 82J
R109	Carbon film 10K	RDJPS 102J
R110	Carbon film 10K	RDJPS 102J
R111	Carbon film 1M	RDJPS 106J
R112	Carbon film 1M	RDJPS 106J
R113	Carbon film 5.1K	RDJPS 612J
R114	Carbon film 5.1K	RDJPS 612J
R115	Carbon film 270K	RDJPS 274J
R116	Carbon film 1K	RDJPS 102J
R117	Carbon film 5K	RDJPS 102J
R118	Carbon film 620	RDJPS 101J
R119	Carbon film 620	RDJPS 101J
R120	Carbon film 75K	RDJPS 75J
R121	Carbon film 75K	RDJPS 75J
R122	Carbon film 28K	RDJPS 28J
R123	Carbon film 39K	RDJPS 39J
R124	Carbon film 2.2K	RDJPS 22J
R125	Carbon film 120	RDJPS 121J
R126	Carbon film 120	RDJPS 121J
R127	Carbon film 120	RDJPS 121J
R128	Carbon film 120	RDJPS 121J
R129	Carbon film 120	RDJPS 121J
R130	Carbon film 120	RDJPS 121J
R131	Carbon film 51K	RDJPS 51J
R132	Carbon film 51K	RDJPS 51J
R133	Carbon film 33K	RDJPS 33J
R134	Carbon film 33K	RDJPS 33J
R135	Carbon film 1K	RDJPS 102J
R136	Carbon film 1K	RDJPS 102J
R137	Carbon film 1.5M	RDJPS 150J
R138	Carbon film 1.5M	RDJPS 150J
R139	Carbon film 1.5M	RDJPS 150J
R140	Carbon film 1.5M	RDJPS 150J
R141	Carbon film 12K	RDJPS 12J
R142	Carbon film 12K	RDJPS 12J
R143	Carbon film 1K	RDJPS 102J
R144	Carbon film 1K	RDJPS 102J
R145	Carbon film 220K	RDJPS 224J
R146	Carbon film 22K	RDJPS 224J
R147	Carbon film 2.2M	RDJPS 225J
R148	Carbon film 2.2M	RDJPS 225J

**SEMICONDUCTORS**

Symbol	Description	Part No.
Q1	Transistor	2SA736-F, G
Q2	Transistor	2SA736-F, G
Q3	Transistor	2SA736-F, G
Q4	Transistor	2SA736-F, G
Q5	Transistor	2SC1773A-E, F
Q6	Transistor	2SC1773A-E, F
Q7	Transistor	2SC1885-N, S or G
Q8	Transistor	2SC1885-N, S or G
Q9	Transistor	2SA4124-N, S or G
Q10	Transistor	2SA4124-N, S or G
Q11	Transistor	2SC1885-N, S or G
Q12	Transistor	2SC1885-N, S or G
Q1	Zener diode	WZ560
Q2	Zener diode	WZ560
Q3	Diode	1N347B
Q4	Diode	1N347B
Q5	Diode	1N347B
Q6	Diode	1N347B

**SWITCHES**

Symbol	Description	Part No.
S1	Rotary switch (4ASD 100H)	ASD-040
S2	Rotary switch (7TELE 124H)	ASD-040
S3	Rotary switch (7TELE 204H)	ASD-040
S4	Rotary switch (4ASD 500H)	ASD-041
S5	Limit switch (TONE)	ASD-051

Symbol	Description	Part No.
R101	Carbon film 100k	RDJPS 134
R102	Carbon film 1.2M	RDJPS 134
R103	Carbon film 2.2k	RDJPS 292
R104	Carbon film 2.2k	RDJPS 292
R105	Carbon film 1k	RDJPS 102
R106	Carbon film 1k	RDJPS 102
R107	Carbon film 82k	RDJPS 822
R108	Carbon film 82k	RDJPS 822
R109	Carbon film 10k	RDJPS 102
R110	Carbon film 10k	RDJPS 102
R111	Carbon film 1M	RDJPS 106
R112	Carbon film 1M	RDJPS 106
R113	Carbon film 5.1k	RDJPS 512
R114	Carbon film 5.1k	RDJPS 512
R115	Carbon film 270k	RDJPS 274
R116	Carbon film 270k	RDJPS 274
R117	Carbon film 1k	RDJPS 102
R118	Carbon film 1k	RDJPS 102
R119	Carbon film 680	RDJPS 681
R120	Carbon film 680	RDJPS 681
R121	Carbon film 75k	RDJPS 752
R122	Carbon film 75k	RDJPS 752
R123	Carbon film 20k	RDJPS 202
R124	Carbon film 20k	RDJPS 202
R125	Carbon film 2.2k	RDJPS 222
R126	Carbon film 2.2k	RDJPS 222
R127	Carbon film 120	RDJPS 121
R128	Carbon film 120	RDJPS 121
R129	Carbon film 150	RDJPS 151
R130	Carbon film 150	RDJPS 151
R131	Carbon film 61k	RDJPS 612
R132	Carbon film 61k	RDJPS 612
R133	Carbon film 25k	RDJPS 252
R134	Carbon film 33k	RDJPS 332
R135	Carbon film 1k	RDJPS 102
R136	Carbon film 1k	RDJPS 102
R137	Carbon film 1.5M	RDJPS 152
R138	Carbon film 1.5M	RDJPS 152
R139	Carbon film 1.5M	RDJPS 152
R140	Carbon film 1.5M	RDJPS 152
R141	Carbon film 15k	RDJPS 152
R142	Carbon film 15k	RDJPS 152
R143	Carbon film 1k	RDJPS 102
R144	Carbon film 1k	RDJPS 102
R145	Carbon film 22k	RDJPS 222
R146	Carbon film 22k	RDJPS 222
R147	Carbon film 22k	RDJPS 222
R148	Carbon film 2.2M	RDJPS 224
R149	Carbon film 2.2M	RDJPS 224

SEMICONDUCTORS

Symbol	Description	Part No.
Q1	Transistor 2SA76P-G	2SA76P-G
Q2	Transistor 2SA441-G or 8L1	2SA441-G
Q3	Transistor 2SA76P-G	2SA76P-G
Q4	Transistor 2SA76P-G	2SA76P-G
Q5	Transistor 2SC773A-E, F	2SC773A-E, F
Q6	Transistor 2SC773A-E, F	2SC773A-E, F
Q7	Transistor 2SC1885-N, S or G	2SC1885-N, S or G
Q8	Transistor 2SC1885-N, S or G	2SC1885-N, S or G
Q9	Transistor 2SA413B, S or G	2SA413B, S or G
Q10	Transistor 2SC1885-N, S or G	2SC1885-N, S or G
Q11	Transistor 2SC1413P or G1	2SC1413P or G1
Q12	Transistor 2SC1885-N, S or G	2SC1885-N, S or G
D1	Zener diode WZ240	WZ240
D2	Zener diode WZ240	WZ240
D3	Diode 1N5705	1N5705
D4	Diode 1N5705	1N5705
D5	Diode 1N5705	1N5705
D6	Diode 1N5705	1N5705

SWITCHES

Symbol	Description	Part No.
S1	Rotary switch (BASE 100k)	AGD-042
S2	Rotary switch (TREBLE 100k)	AGD-043
S3	Rotary switch (TREBLE 200k)	AGD-044
S4	Rotary switch (BASS 100k)	AGD-041
S5	Rotary switch (TONE)	AGD-045