






- 25A992
 - 25C945 (A)
 - 25C1685
 - 25C1841
 - 25C1845
 - 25C2320
-
- 25A1110
 - 25C2690
-
- 25D613
-
- 25A1103
 - 25C2578
-
- LA6459 (S)
 - LB1



KENCO 298-2400

INTEGRATED AMPLIFIER

KA-100

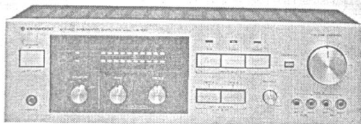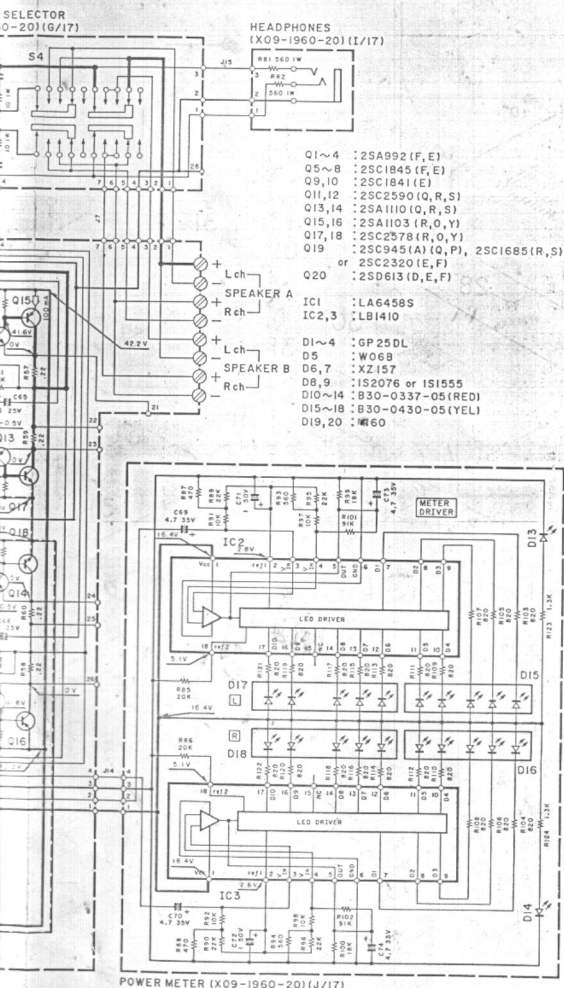

SPECIFICATIONS

- Both Channels Driven.....60 + 60 watts 8 ohms at 1,000 Hz
- Dynamic Power Output at 8 ohms.....170 watts
- Total Harmonic Distortion.....0.03% at 1/2 rated power into 8 ohms
- AUX Input to SPEAKER Output (40 Hz ~ 20 kHz).....0.1% at rated power into 8 ohms
- (40 Hz ~ 20 kHz).....0.09% at 1/2 rated power into 8 ohms
- PHONO Input to SPEAKER Output (1 kHz).....0.055% at rated power with VOLUME - 20 dB
- Intermodulation Distortion.....0.03% at rated power into 60 Hz/7 kHz = 4:1 8 ohms
- Damping Factor.....20 Hz to 40,000 Hz at 0.2% T.H.D.
- Power Bandwidth.....20 Hz to 70 kHz, +0 dB, -3 dB
- Frequency Response.....10 Hz to 70 kHz, +0 dB, -3 dB
- Speaker Impedance.....Accept 8 ohms to 16 ohms
- Input Sensitivity/Impedance.....2.5 mV/50 k ohms
- PHONO.....150 mV/30 k ohms
- TUNER, AUX, TAPE.....102 dB for 150 mV input
- Signal-to-Noise Ratio (IHF, A).....73 dB for 2.5 mV input
- PHONO.....79 dB for 5.0 mV input
- TUNER, AUX, TAPE.....190 mV (RMS), T.H.D. 0.05% at 1,000 Hz
- Maximum Input Level for Phono.....150 mV/1.5 k ohms
- Output Level/Impedance.....220 VdV
- Tape REC (Pin).....RIIA standard curve ± 0.2 dB (20 Hz to 20,000 Hz)
- Frequency Response for Phono.....4 ± 10 dB at 100 Hz
- Tone Control.....4 ± 10 dB at 100 Hz
- Bass.....4 ± 10 dB at 100 Hz
- Treble.....4 ± 10 dB at 100 Hz
- Loudness Control (at -30 dB VOLUME Level).....4 ± 8 dB at 200 Hz
- GENERAL
- Power Requirements.....50/60 Hz, 110-120V/220 VdV
- Power Consumption.....220 W at rated output power into 8 ohms
- A.C. Outlet.....Switched 2, Unswitched 1
- Dimensions.....W 440 mm (17-5/16") H 139 mm (5-9/16") D 260 mm (11-1/32")
- Net Weight.....6 kg (13.2 lb)

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

- DC voltages are measured by a VOM of 20 k Ω /V input impedance.
- Les tensions de courant continu sont mesurées par un multimètre d'une impédance d'entrée de 20 k Ω /V.
- Die Gleichstrom-Spannungen werden durch ein Vielfachmeßgerät von 20 k Ω /V Eingangs-Impedanz gemessen.

LB1410 10



KA-100 (K)