


TA-F35

For Service Manuals Contact
 MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@mauritron.co.uk

US Model
 Canadian Model
 AEP Model
 UK Model

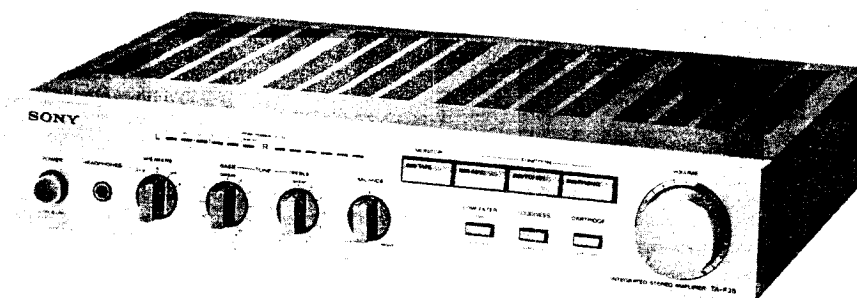

INTEGRATED STEREO AMPLIFIER

SPECIFICATIONS

POWER AMPLIFIER SECTION

Power Output and Total Harmonic

Distortion: With 8Ω loads, both channels driven, from
 (US, Canadian 20 – 20,000 Hz; rated 40 watts per channel
 model) minimum RMS power, with no more than
 0.015% total harmonic distortion from
 250 mW to rated output.

Continuous RMS power output:

(Less than 0.015% THD, both channels
 driven simultaneously) 40 + 40 watts (8 ohms)
 According to DIN 45500
 (AEP, UK model) 40 + 40 watts (8 ohms)

Power bandwidth (IHF): 20 Hz – 20 kHz

Dynamic headroom: 1.8 dB*

Harmonic distortion: Less than 0.015% at rated output
 Less than 0.01% at 20 W output

Intermodulation (IM) distortion:

(60 Hz : 7 kHz = 4 : 1) Less than 0.015% at rated output
 Less than 0.01% at 20 W output

Frequency response : PHONO RIAA equalization curve ±0.2 dB

TUNER

AUX 5 Hz – 60 kHz ± 0 dB

TAPE

Residual noise : Less than 180 μV (8 ohms, network A)

Damping factor: 50 (8 ohms, 1 kHz)

– Continued on page 2 –

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK
 ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED
 VIEWS AND IN THE PARTS LIST ARE CRITICAL TO
 SAFE OPERATION. REPLACE THESE COMPONENTS
 WITH SONY PARTS WHOSE PART NUMBERS APPEAR
 AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS
 PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!

LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET
 UNE MARQUE ⚠ SUR LES DIAGRAMMES SCHÉ-
 MATIQUES, LES VUES EXPLOSÉES ET LA LISTE
 DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ
 DE FONCTIONNEMENT. NE REMPLACER CES
 COMPOSANTS QUE PAR DES PIÈCES SONY DONT
 LES NUMÉROS SONT DONNÉS DANS CE MANUEL
 OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.

SONY[®]
 SERVICE MANUAL

TA-F35

Inputs :

	Sensitivity	Impedance	Maximum input capability (1 kHz)	S/N (weighting network, input level)
PHONO (MM)	2.5 mV	50 kΩ	150 mV	88 dB 79 dB* (A, 2.5 mV)
PHONO (MC)	0.17 mV	100 Ω	11 mV	73 dB 73 dB* (A, 0.25 mV)
TUNER AUX TAPE	150 mV	50 kΩ	—	101 dB 78 dB* (A, 150 mV)

* '78 IHF

Measured with rated output power into 8-ohm loads (both channels driven simultaneously) at 1 kHz

Outputs :

REC OUT
Voltage 150 mV
Impedance 4.7 kilohms
SPEAKER A, B
Accepts speakers of 8 - 16 ohms.
HEADPHONES
Accepts low and high impedance headphones.

Tone controls :

BASS
±10 dB at 100 Hz (turnover frequency 500 Hz)
TREBLE
±10 dB at 25 kHz (turnover frequency 5 kHz)

Loudness (att. 30 dB)
Low filter :

+10 dB at 100 Hz, +3 dB at 10 kHz
6 dB/octave attenuation below 15 Hz

General

System:

Preamplifier section : low-noise NF type equalizer amp.; NF type tone control
Power amplifier section : pure-complementary SEPP dc power amplifier with all stages direct coupled

Power Requirements:

US, Canadian model: 120V ac, 60 Hz
UK model: 240V ac (or 220V ac adjustable by authorized Sony personnel), 50 Hz
AEP model: 220V ac (or 240V ac adjustable by authorized Sony personnel), 50 Hz

Power Consumption:

UK model: 250W
AEP model: 240W
US model: 90W
Canadian model: 140W

Dimensions:


Approx. 430 × 80 × 335 mm (w/h/d)
(17 × 3 1/4 × 13 1/4 inches)
including projecting parts and controls
Approx. 6.2 kg (13 lbs 11 oz) net
Approx. 7.2 kg (15 lbs 14 oz) in shipping carton

Weight :

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel: 01844-351694 Fax: 01844-352554
Email: enquiries@mauritron.co.uk


MODEL IDENTIFICATION

Specification Label

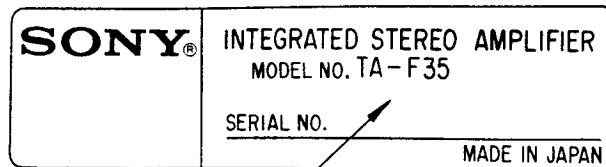

US model : AC 120V 60Hz 90W
Canadian model : AC 120V 60Hz 140W
AEP model : AC 220V ~50/60Hz 240W
UK model : AC 240V ~50/60Hz 250W



SECTION 1
BLOCK DIAGRAM

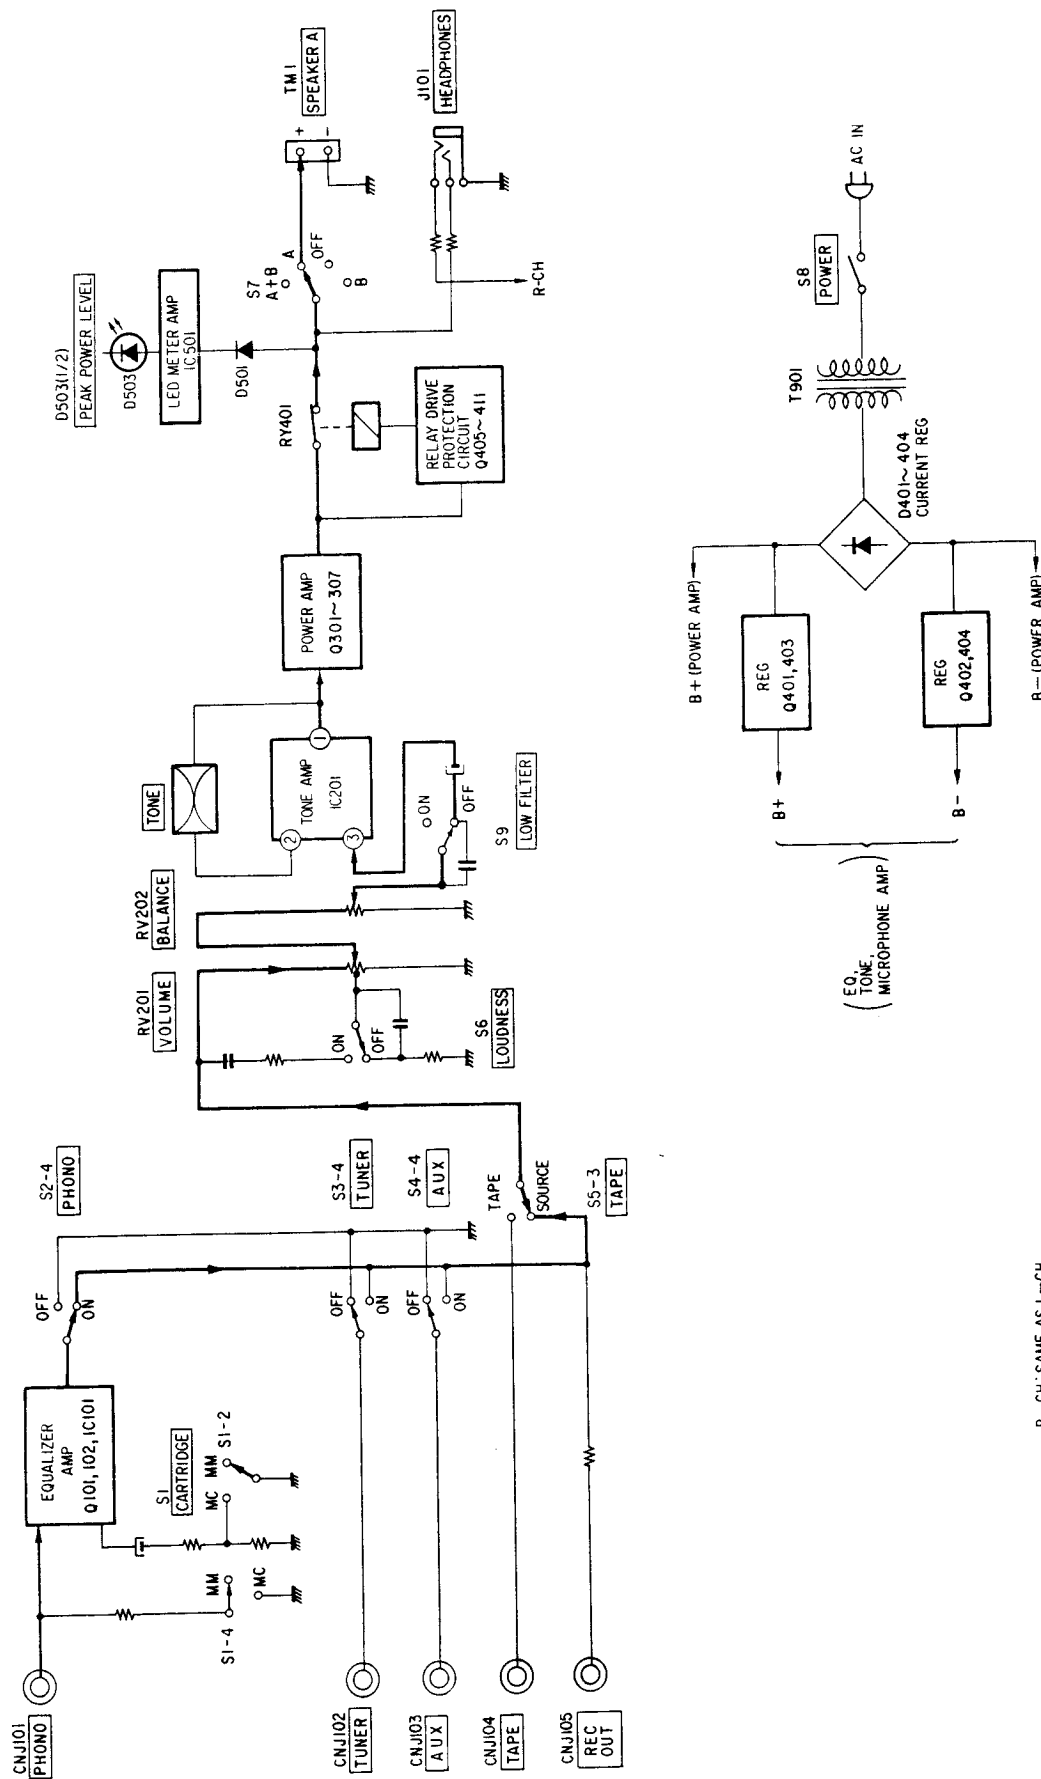

R-CH: SAME AS L-CH

**SECTION 2
DISASSEMBLY**

- Follow the disassembly procedure in the numerical order given.

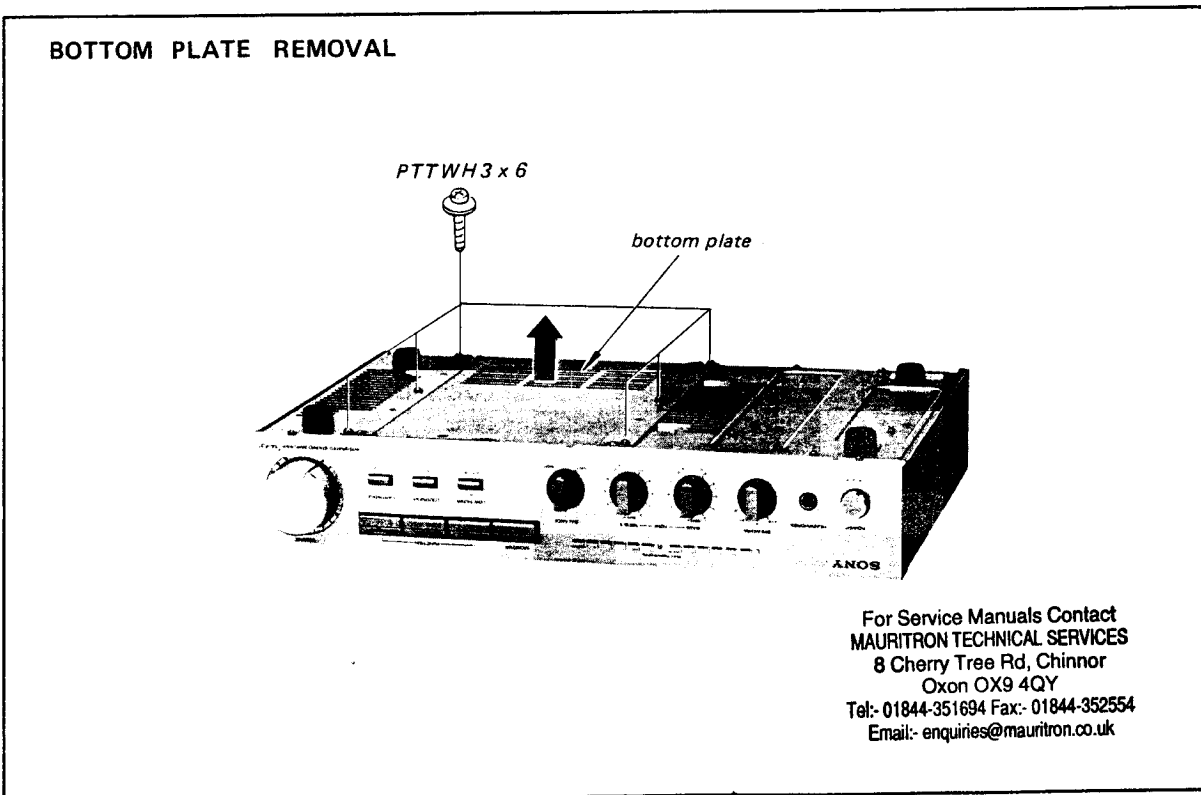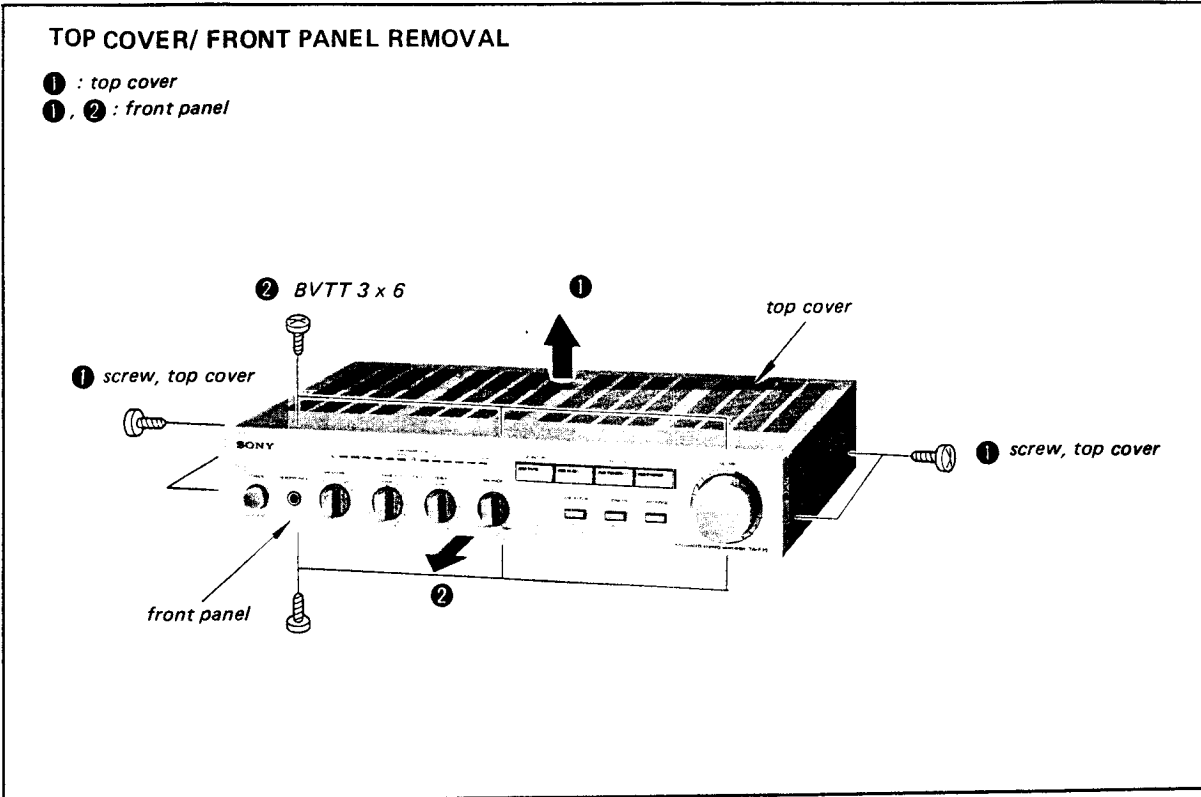


SECTION 3
ADJUSTMENTS

NOTE:

1. DC BIAS and DC BALANCE adjustments should be made about several minutes later after the POWER switch is turned on.
2. Make the DC BIAS adjustment first.
3. Repeat DC BIAS and DC BALANCE adjustments two or three times.
4. After replacing the power transistors, DC BIAS and DC BALANCE adjustments should be performed.

Indicator Sensitivity Adjustment

Procedure:

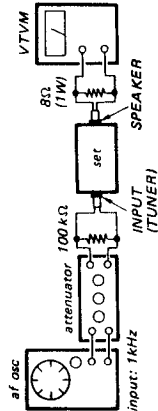



1. Turn the VOLUME control fully clockwise.
2. Adjust the input level of the set for 1W (2.5V) reading on the VTVM.
3. Adjust RT501 (L-CH) and RT551 (R-CH) so that the PEAK POWER LEVEL indicators of 1W and less light up.



DC Bias Adjustment

Procedure: Adjust RV302 (L-CH) and RV352 (R-CH) for 15mV readings with no signal input.


Adjustment Location:

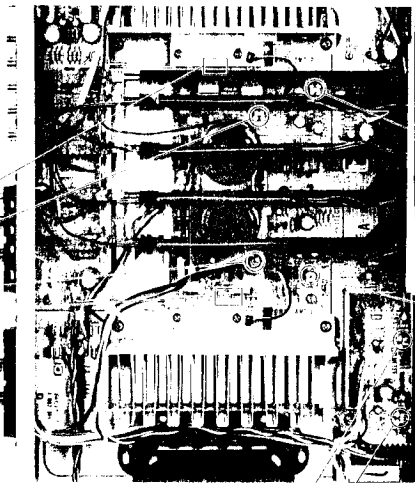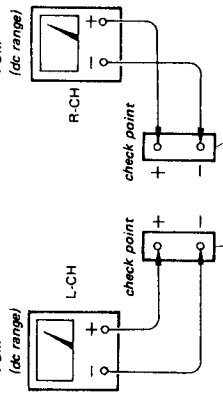

DC Balance Adjustment

Procedure: Adjust RV301 (L-CH) and RV351 (R-CH) for 0V readings with no signal input.

Adjustment Location:

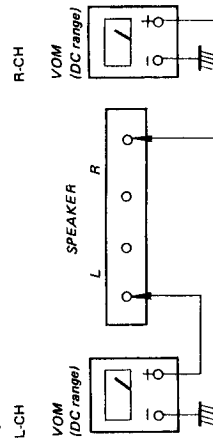


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk

SECTION 4
DIAGRAMS

4-1. MOUNTING DIAGRAM



- Conductor Side -

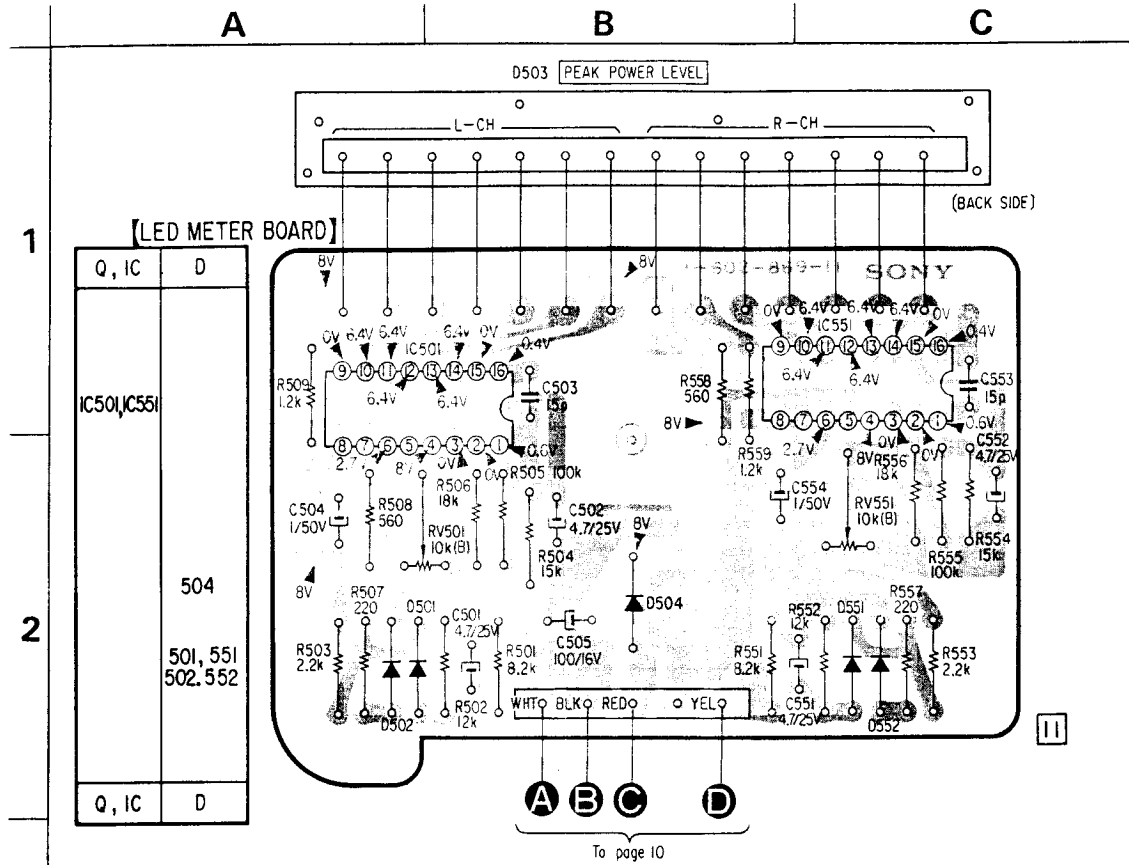

3


Semiconductor Lead Layouts

LB1405

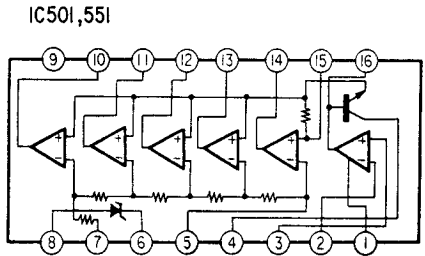

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel: 01844-351694 Fax: 01844-352554
Email: enquiries@mauritron.co.uk


NJM4559D




2SA733
2SB647
2SB647A



2SA771




2SA798




2SA1027
2SA1027R



2SB731




2SC900
2SC1362
2SC1364
2SD666



2SC945
2SC1400
2SC2240




2SC1986



2SC2291



2SD809




1T22AM
1S188AN
1S1555
1SS53




10E2
IN4002
RD6.2E
RD6.2EB




30D2



SV04S



U05G



A B C D

1

Q	IC	D
356	306	401 404 406 407
		402 403
	101	
354	304	
	102	
	IC101	
355	152	410
	305	
	151	
357	307	
		352 302
		408
353	303	
	405	
	407	
	302 301	409
352	351	
	406	
	409 408	
		411
3	410	351 301
	411	
	404 402	
	403 401	405
	IC201	



2

3

4

5


[AUDIO BOARD]

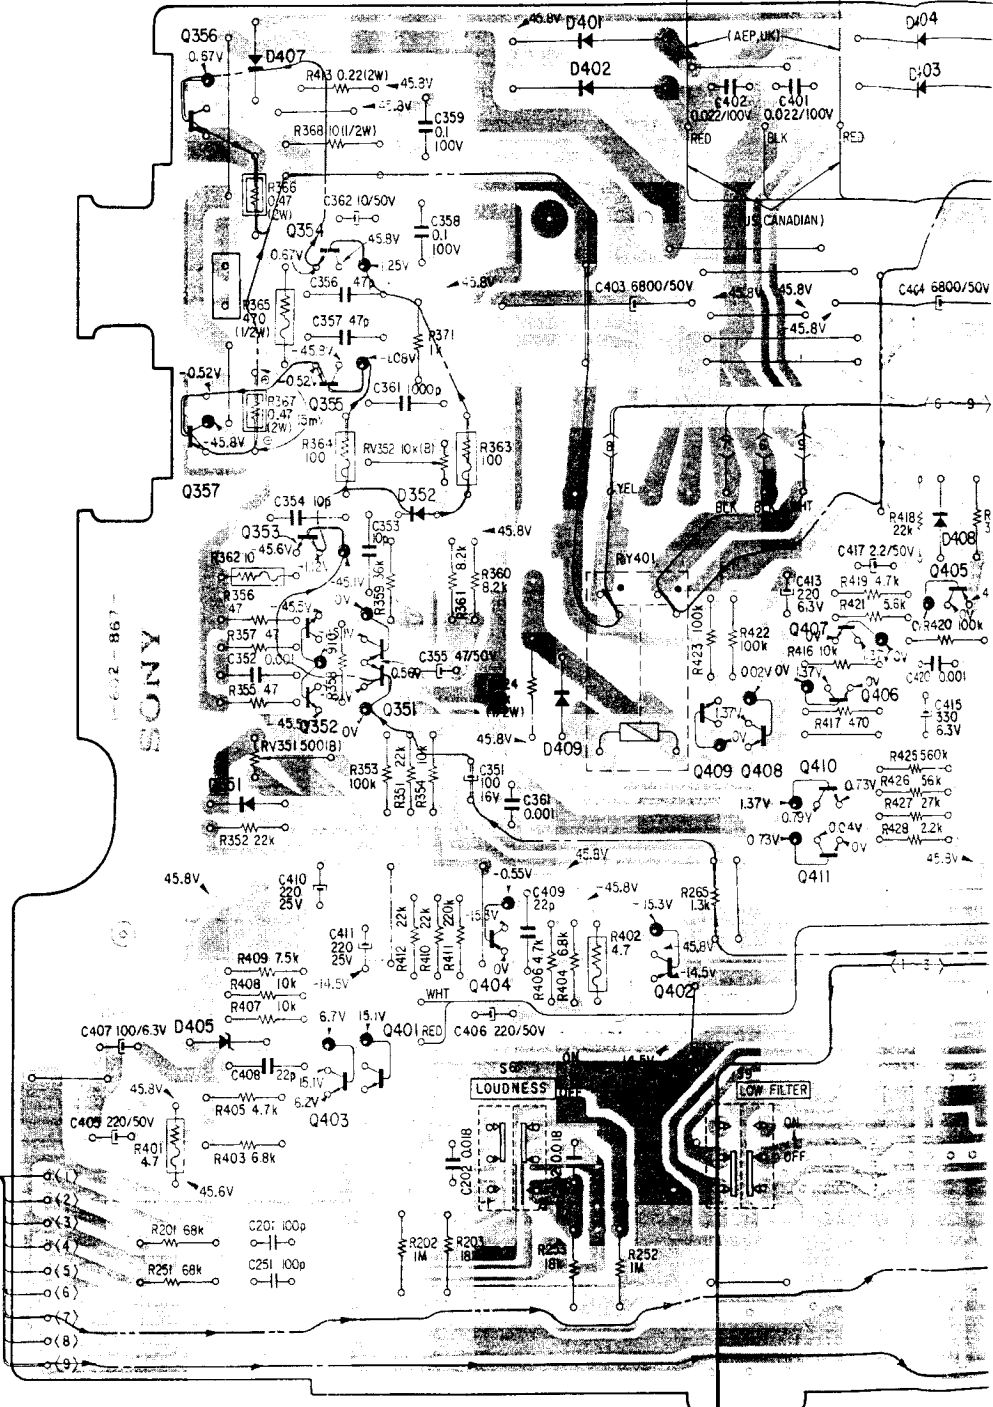

[VOLUME BOARD]

- — : parts extracted from the component side.
- : B + pattern

- : signal path
- : L-CH signal path
- : R-CH signal path

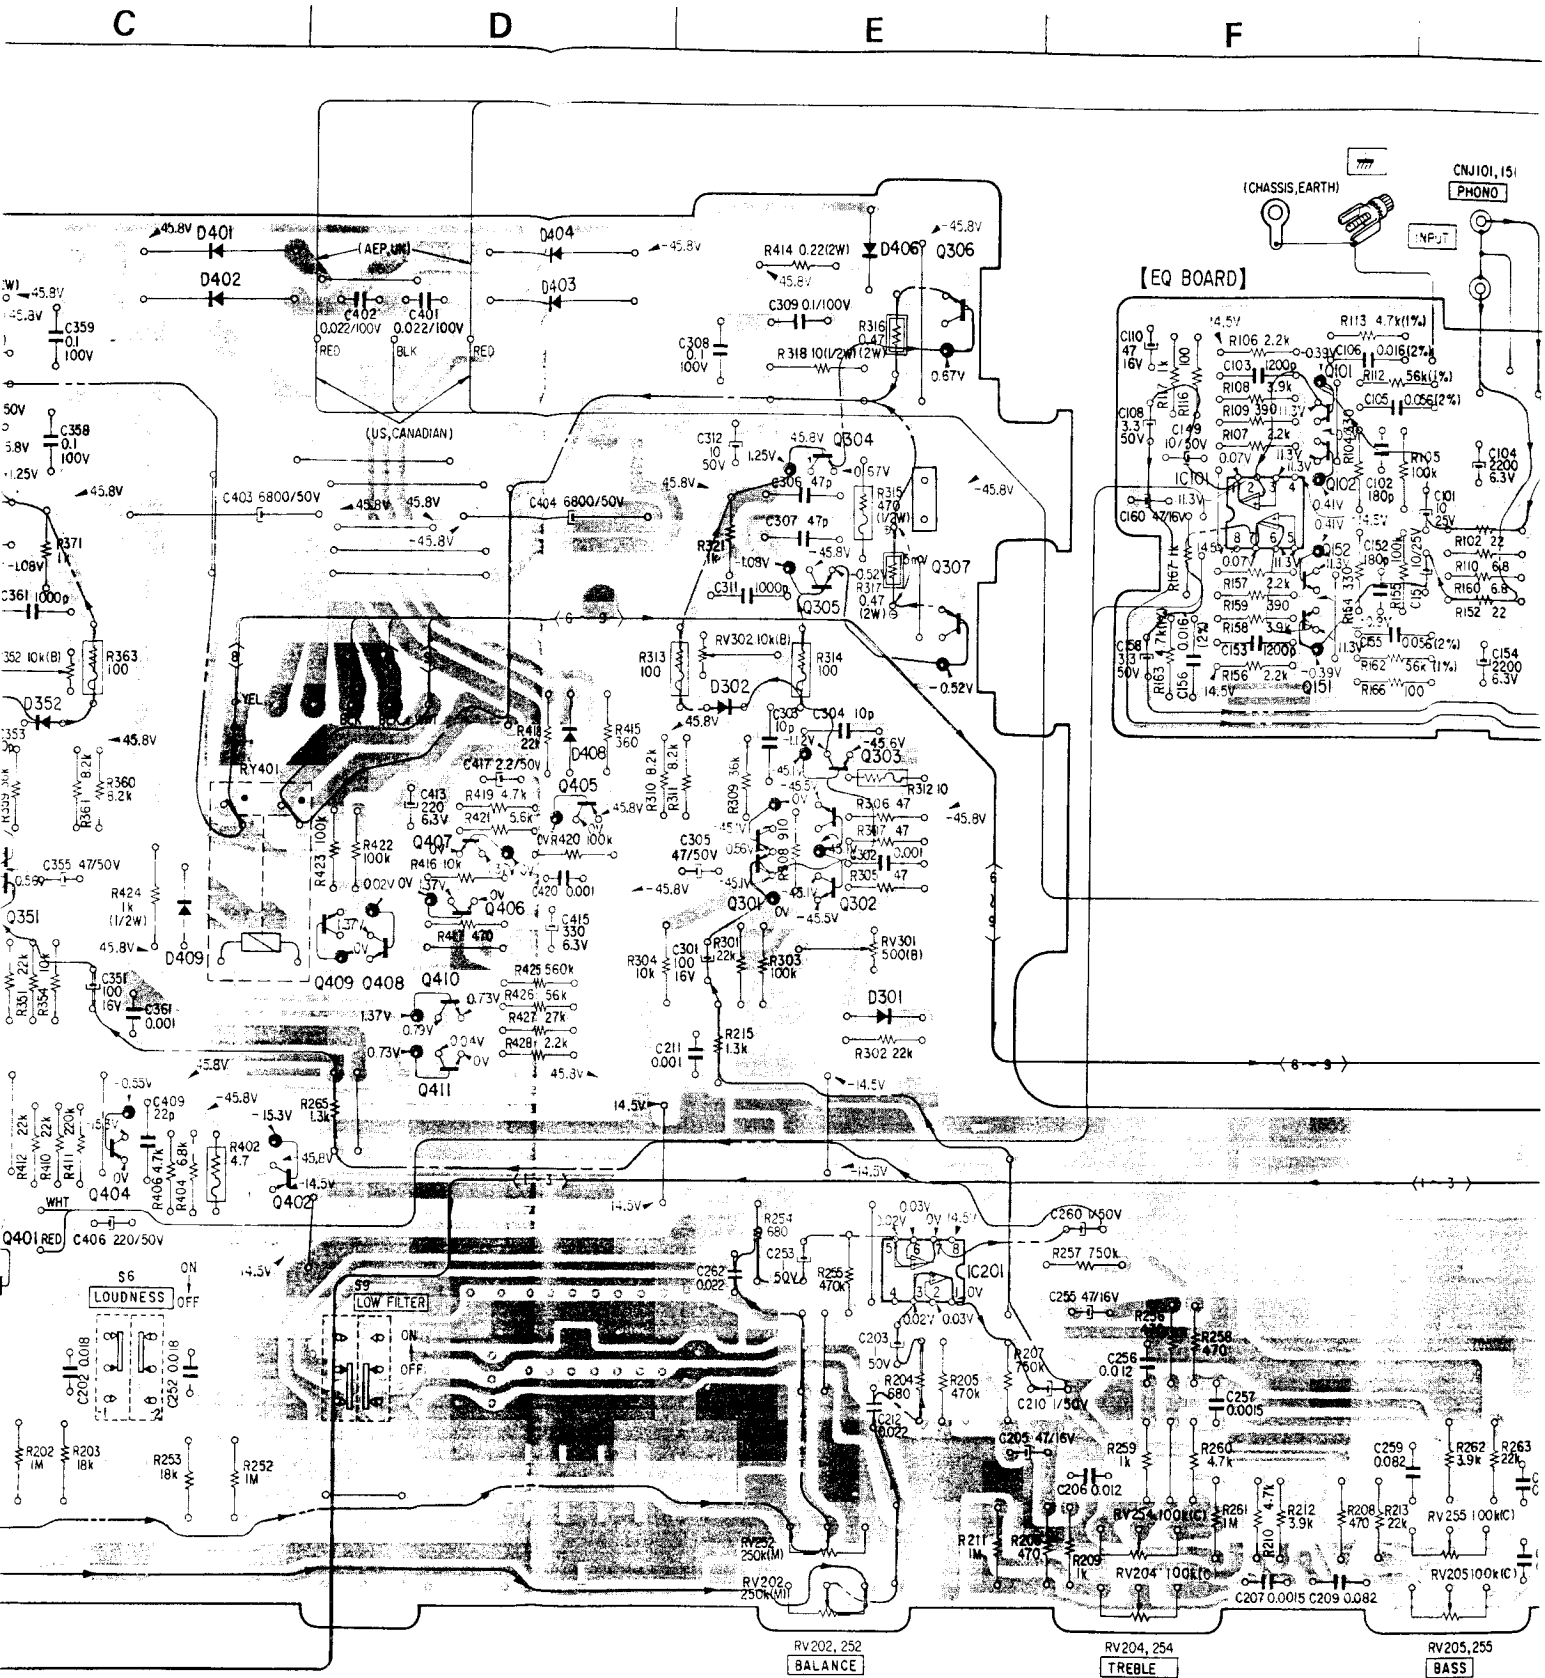

- - - : signal path
 - - - : L-CH signal path
 - - - : R-CH signal path


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 Email: enquiries@mauritron.co.uk

F



G


H

I

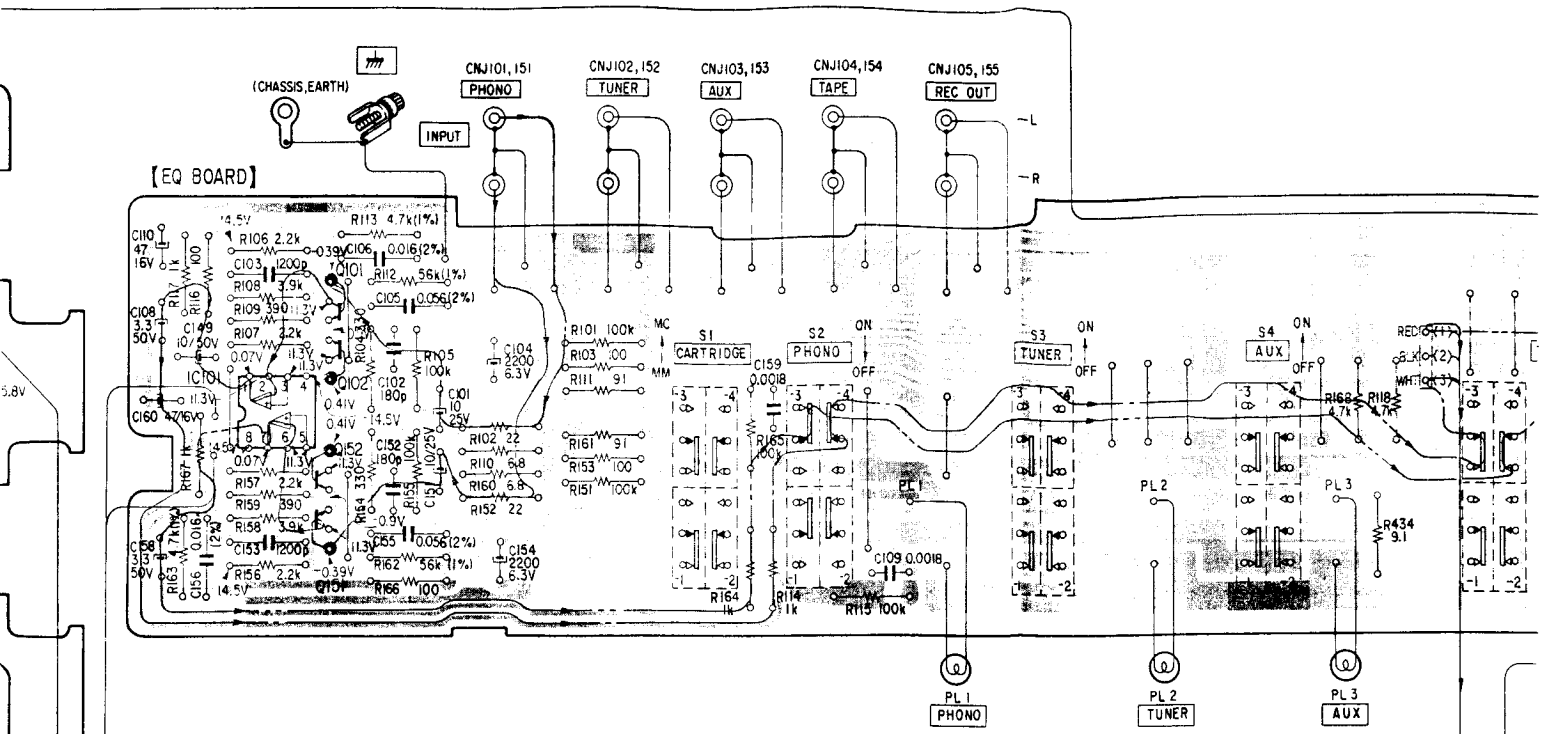


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel: 01844-351894 Fax: 01844-352554
Email: enquires@mauritron.co.uk

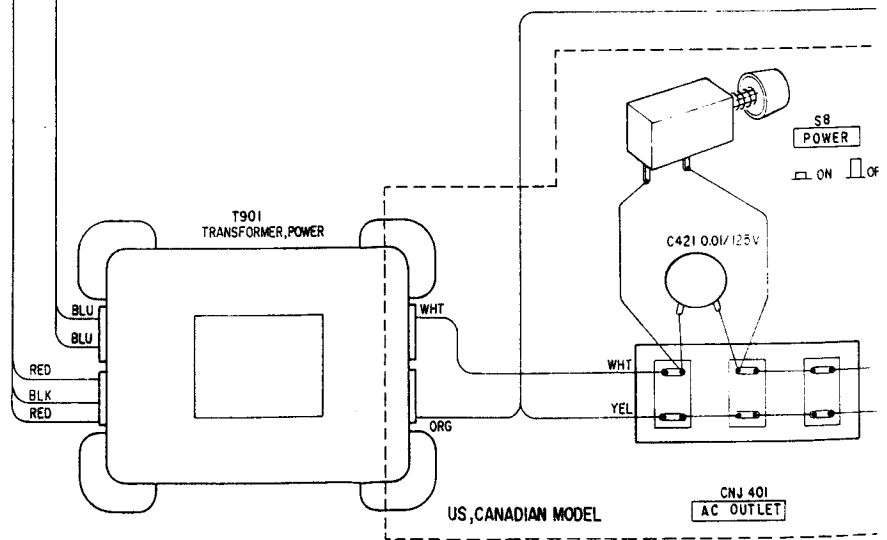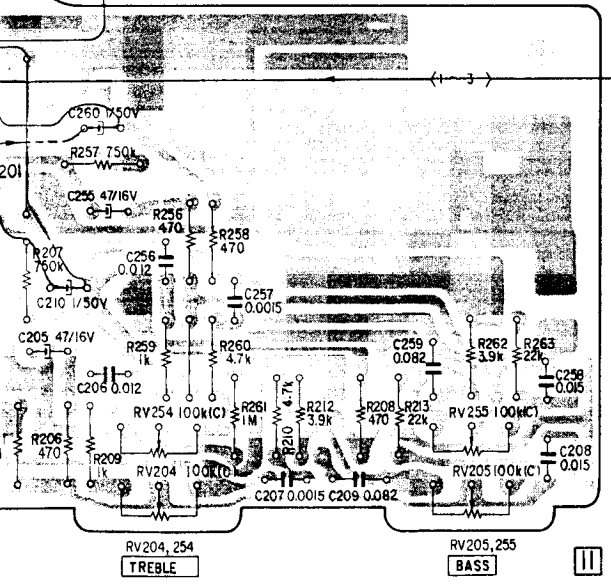

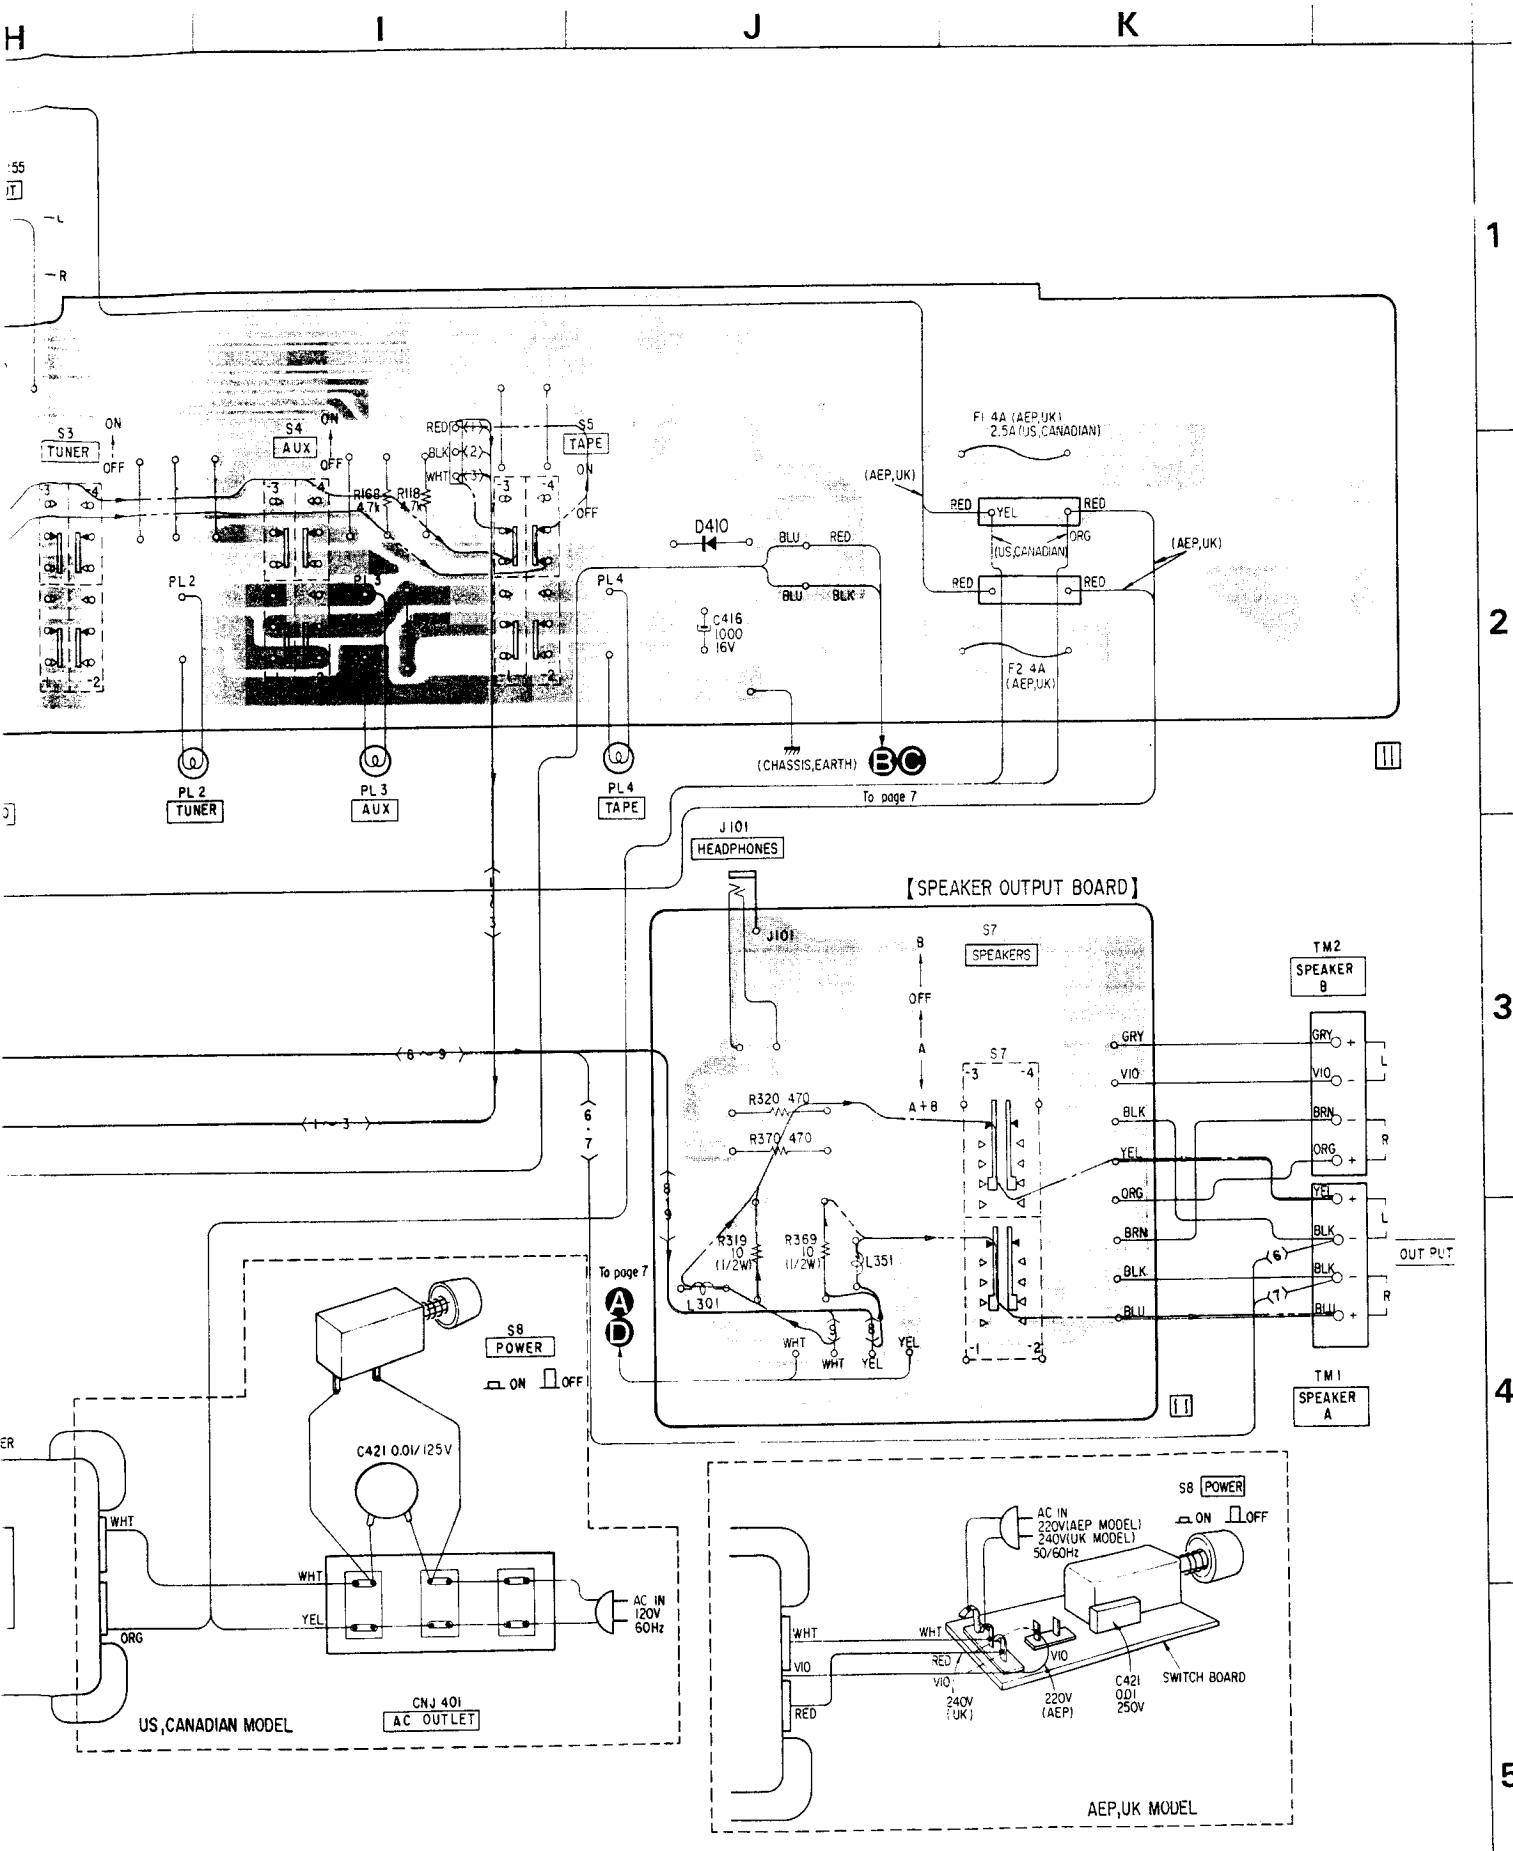

1
2
3
4
5

4.2. SCHEMATIC DIAGRAM

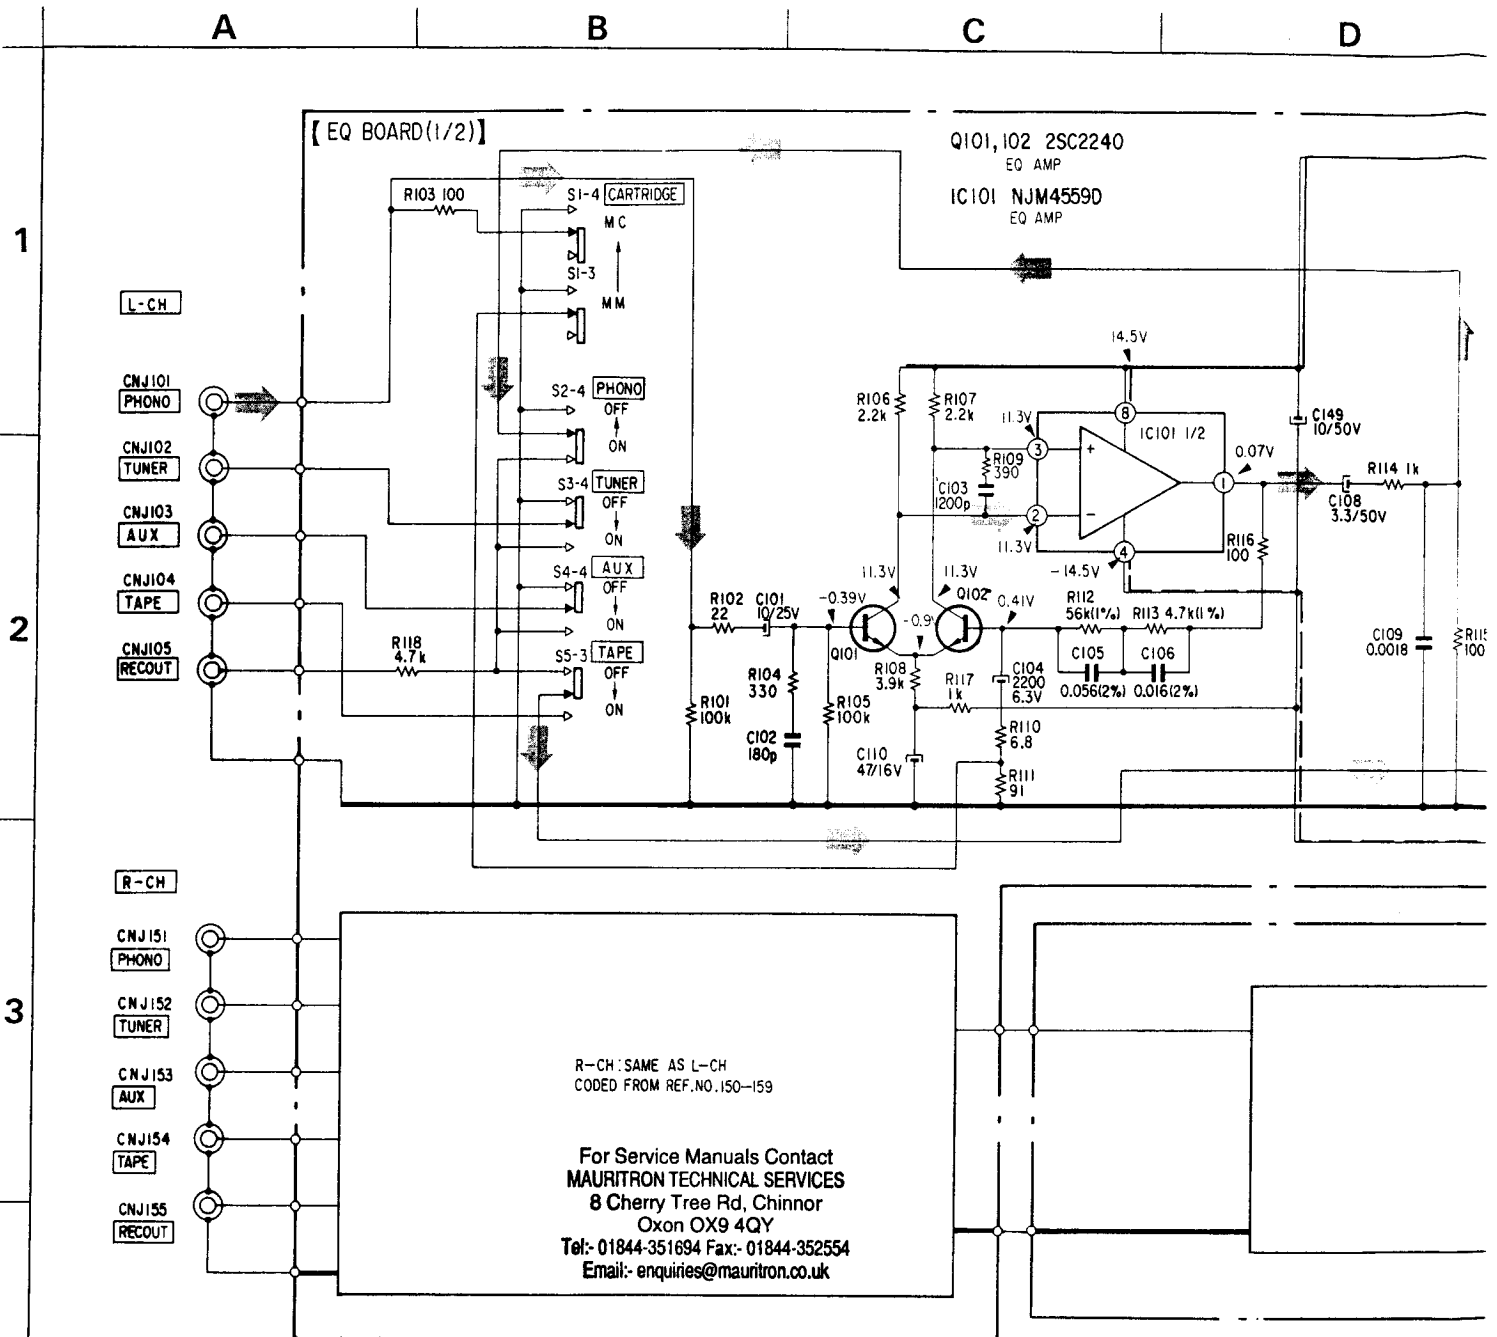

R-CH: SAME AS L-CH
CODED FROM REF. NO. 150-159

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel: 01844-351694 Fax: 01844-352554
Email: enquiries@mauritron.co.uk

- 4
- All capacitors are in μF unless otherwise noted. pF : μF 50WV or less are not indicated except for electrolytics and tantalums.
 - All resistors are in ohms, $\frac{1}{4}\text{W}$ unless otherwise noted. k Ω : 1000 Ω ; M Ω : 1000 k Ω
 - : nonflammable resistor
 - : fusible resistor.
 - : panel designation.
 - Components for right channel have same values as for left channel.
 - : signal path

- Voltages are dc with respect to ground unless otherwise noted.
- Voltage variations may be noted due to normal production tolerances.
- : adjustment for repair.
- Readings are taken under no-signal conditions with a VOM (20 k Ω /V).
- : B+ bus.
- : B- bus.

Note: The components identified by shading and mark are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par une trame et une marque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.



S4
A
S1
TL
S2
PF

D

E

F

G

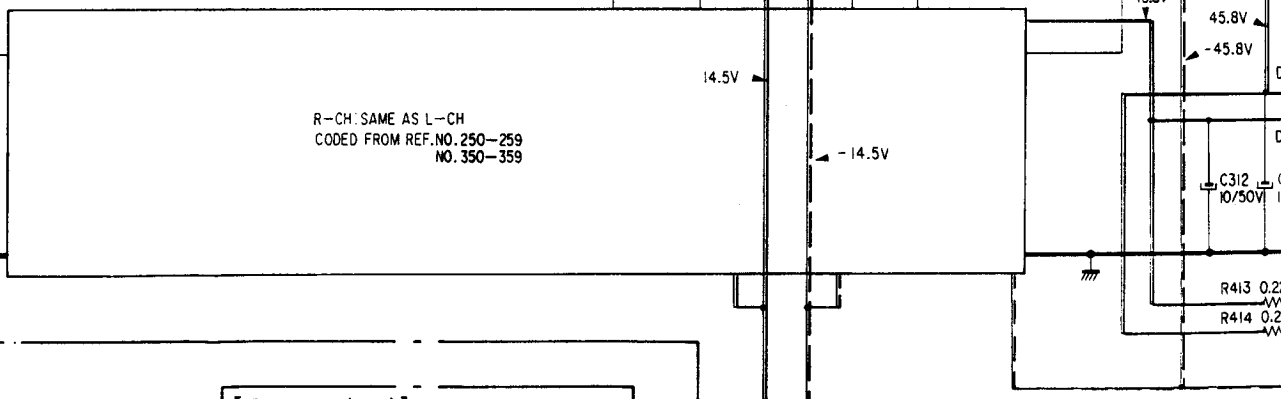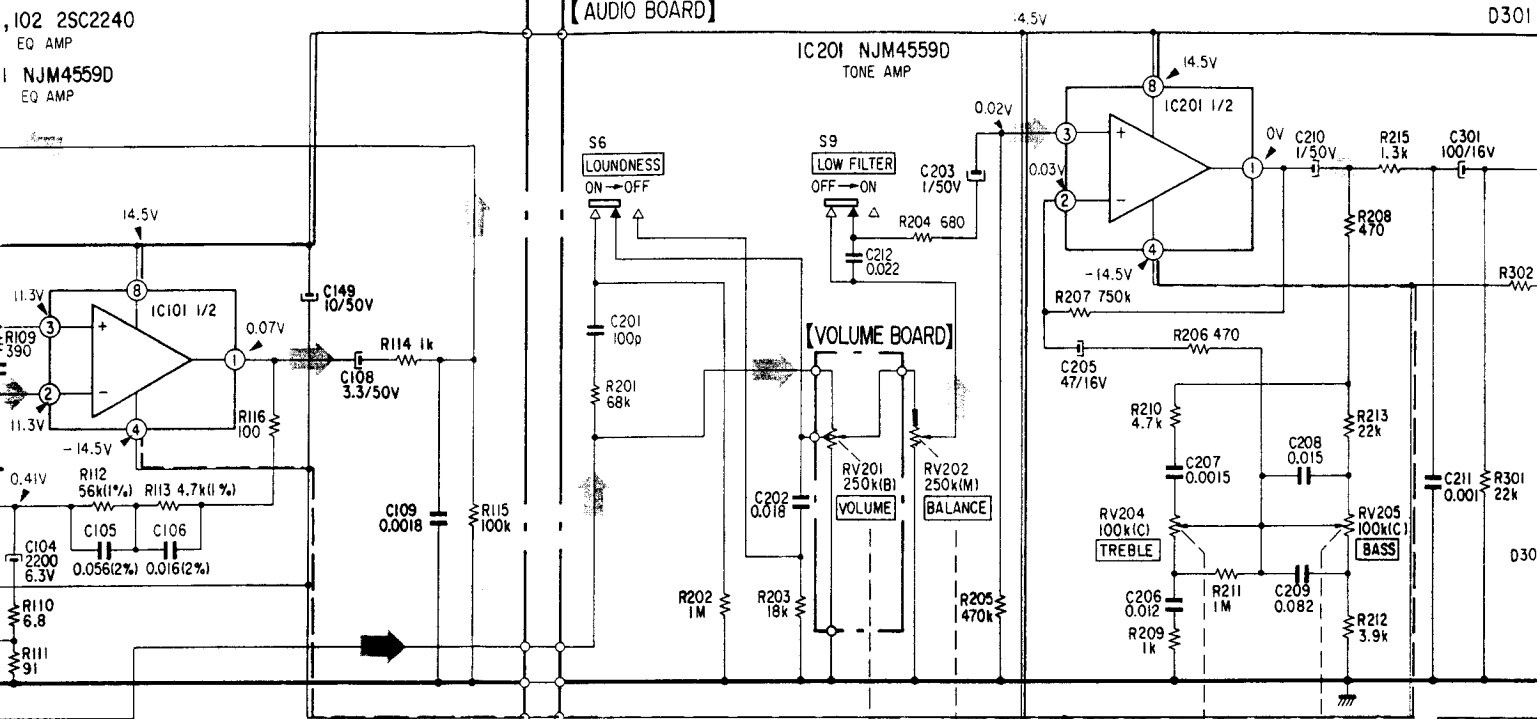

ct to ground unless otherwise
 e noted due to normal pro-
 ir.
 no-signal conditions

ntifiés par une trame et une
 ques pour la sécurité. Ne les
 une pièce portant le numéro


Q401 2SD809 CONTROL
 Q403 2SC945 REG
 D405 RD6.2E

F

G

H

I

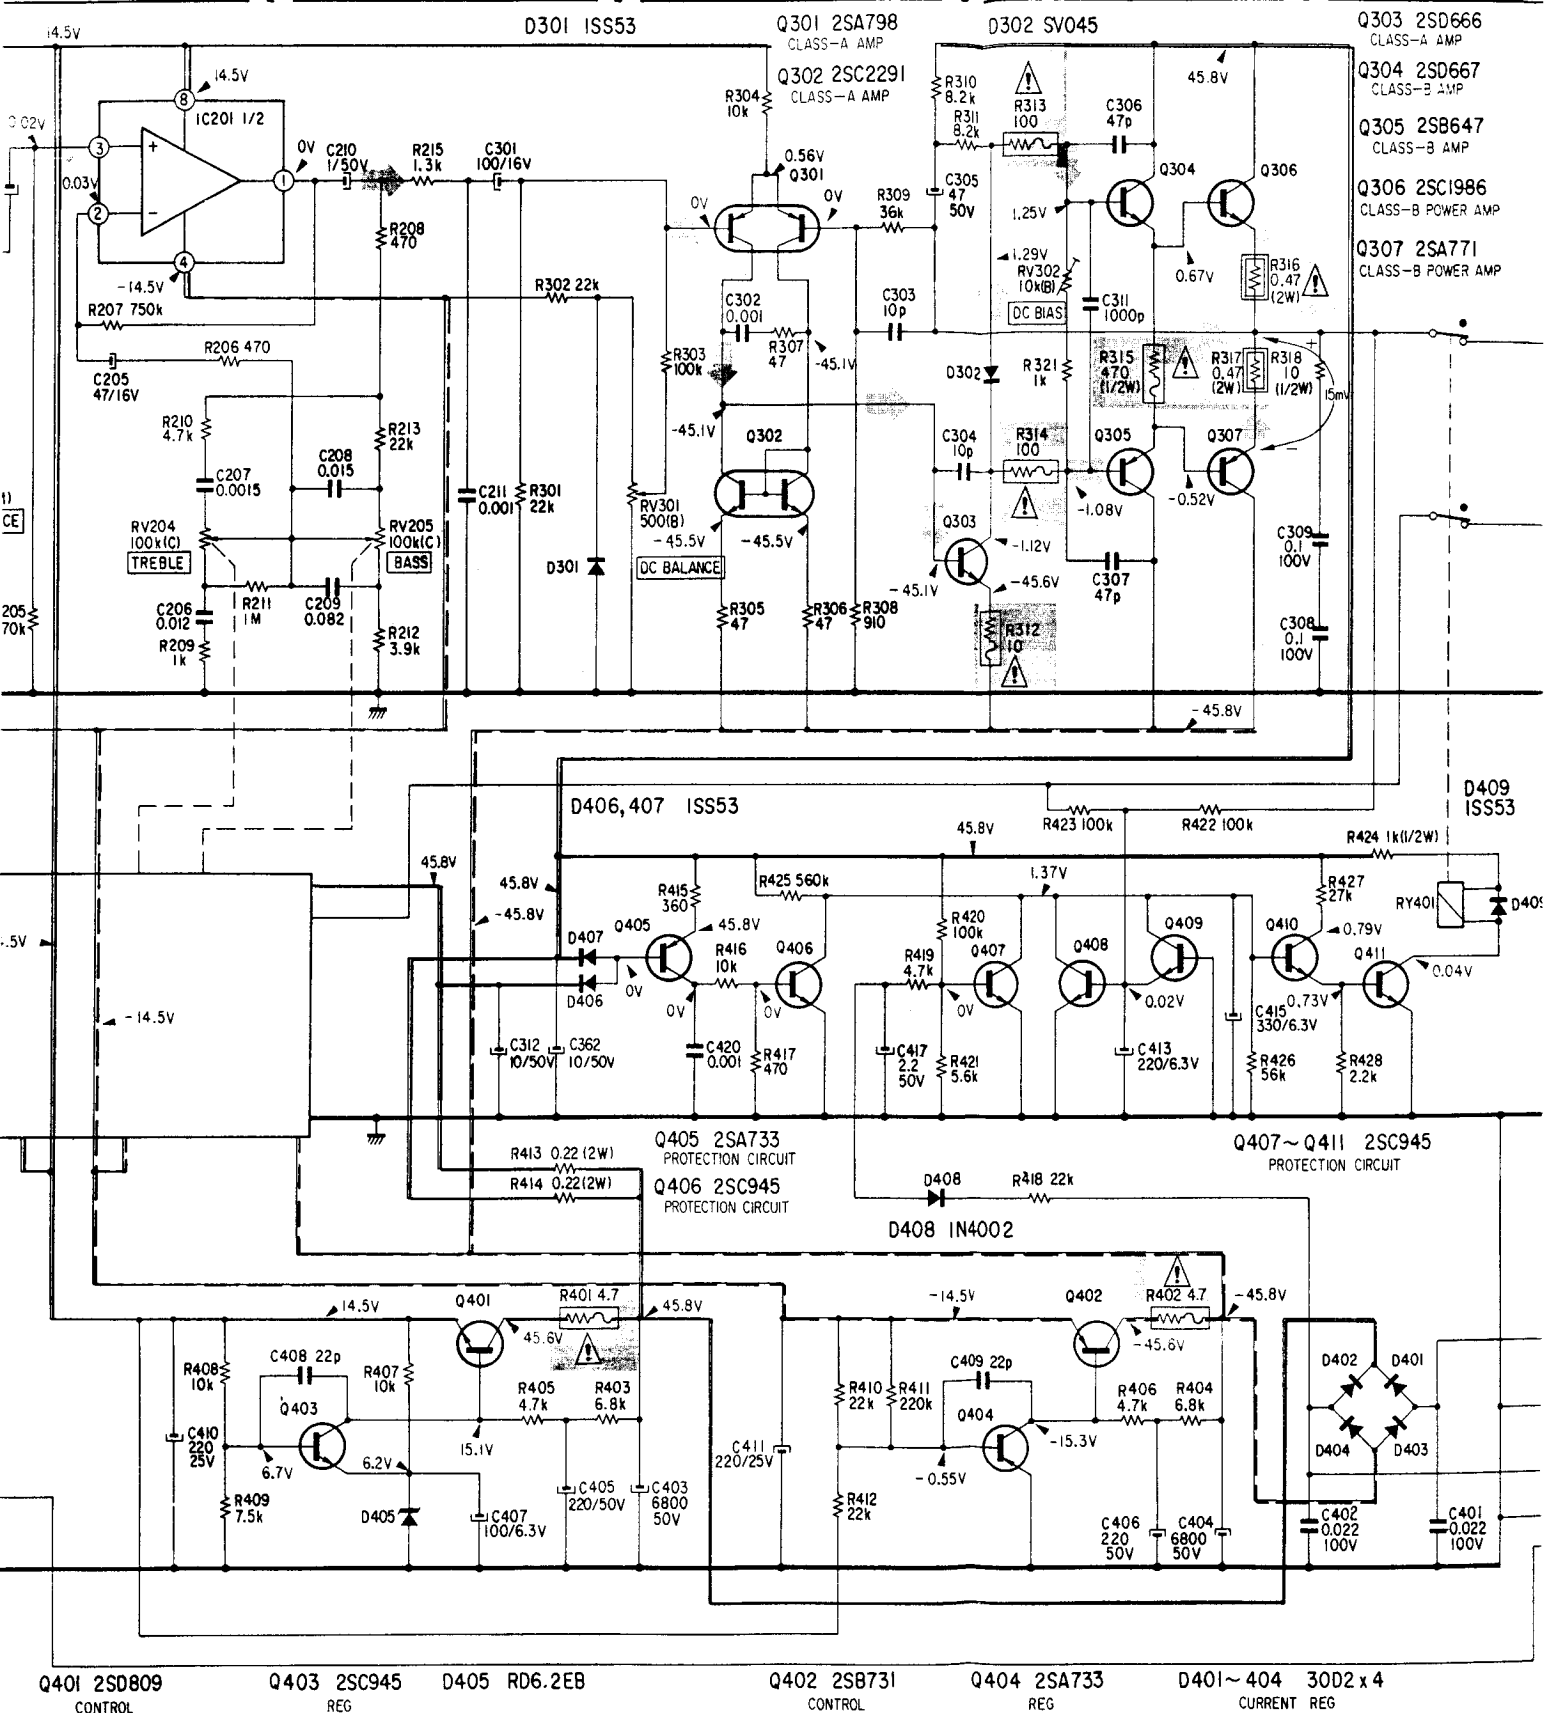


- Q303 2SD666 CLASS-A AMP
- Q304 2SD667 CLASS-B AMP
- Q305 2SB647 CLASS-B AMP
- Q306 2SC1986 CLASS-B POWER AMP
- Q307 2SA771 CLASS-B POWER AMP

- Q405 2SA733 PROTECTION CIRCUIT
- Q406 2SC945 PROTECTION CIRCUIT

- Q407~Q411 2SC945 PROTECTION CIRCUIT

- Q401 2SD809 CONTROL
- Q403 2SC945 REG
- D405 RD6.2EB
- Q402 2SB731 CONTROL
- Q404 2SA733 REG
- D401~D404 30D2 x 4 CURRENT REG


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 Email: enquiries@mauritron.co.uk

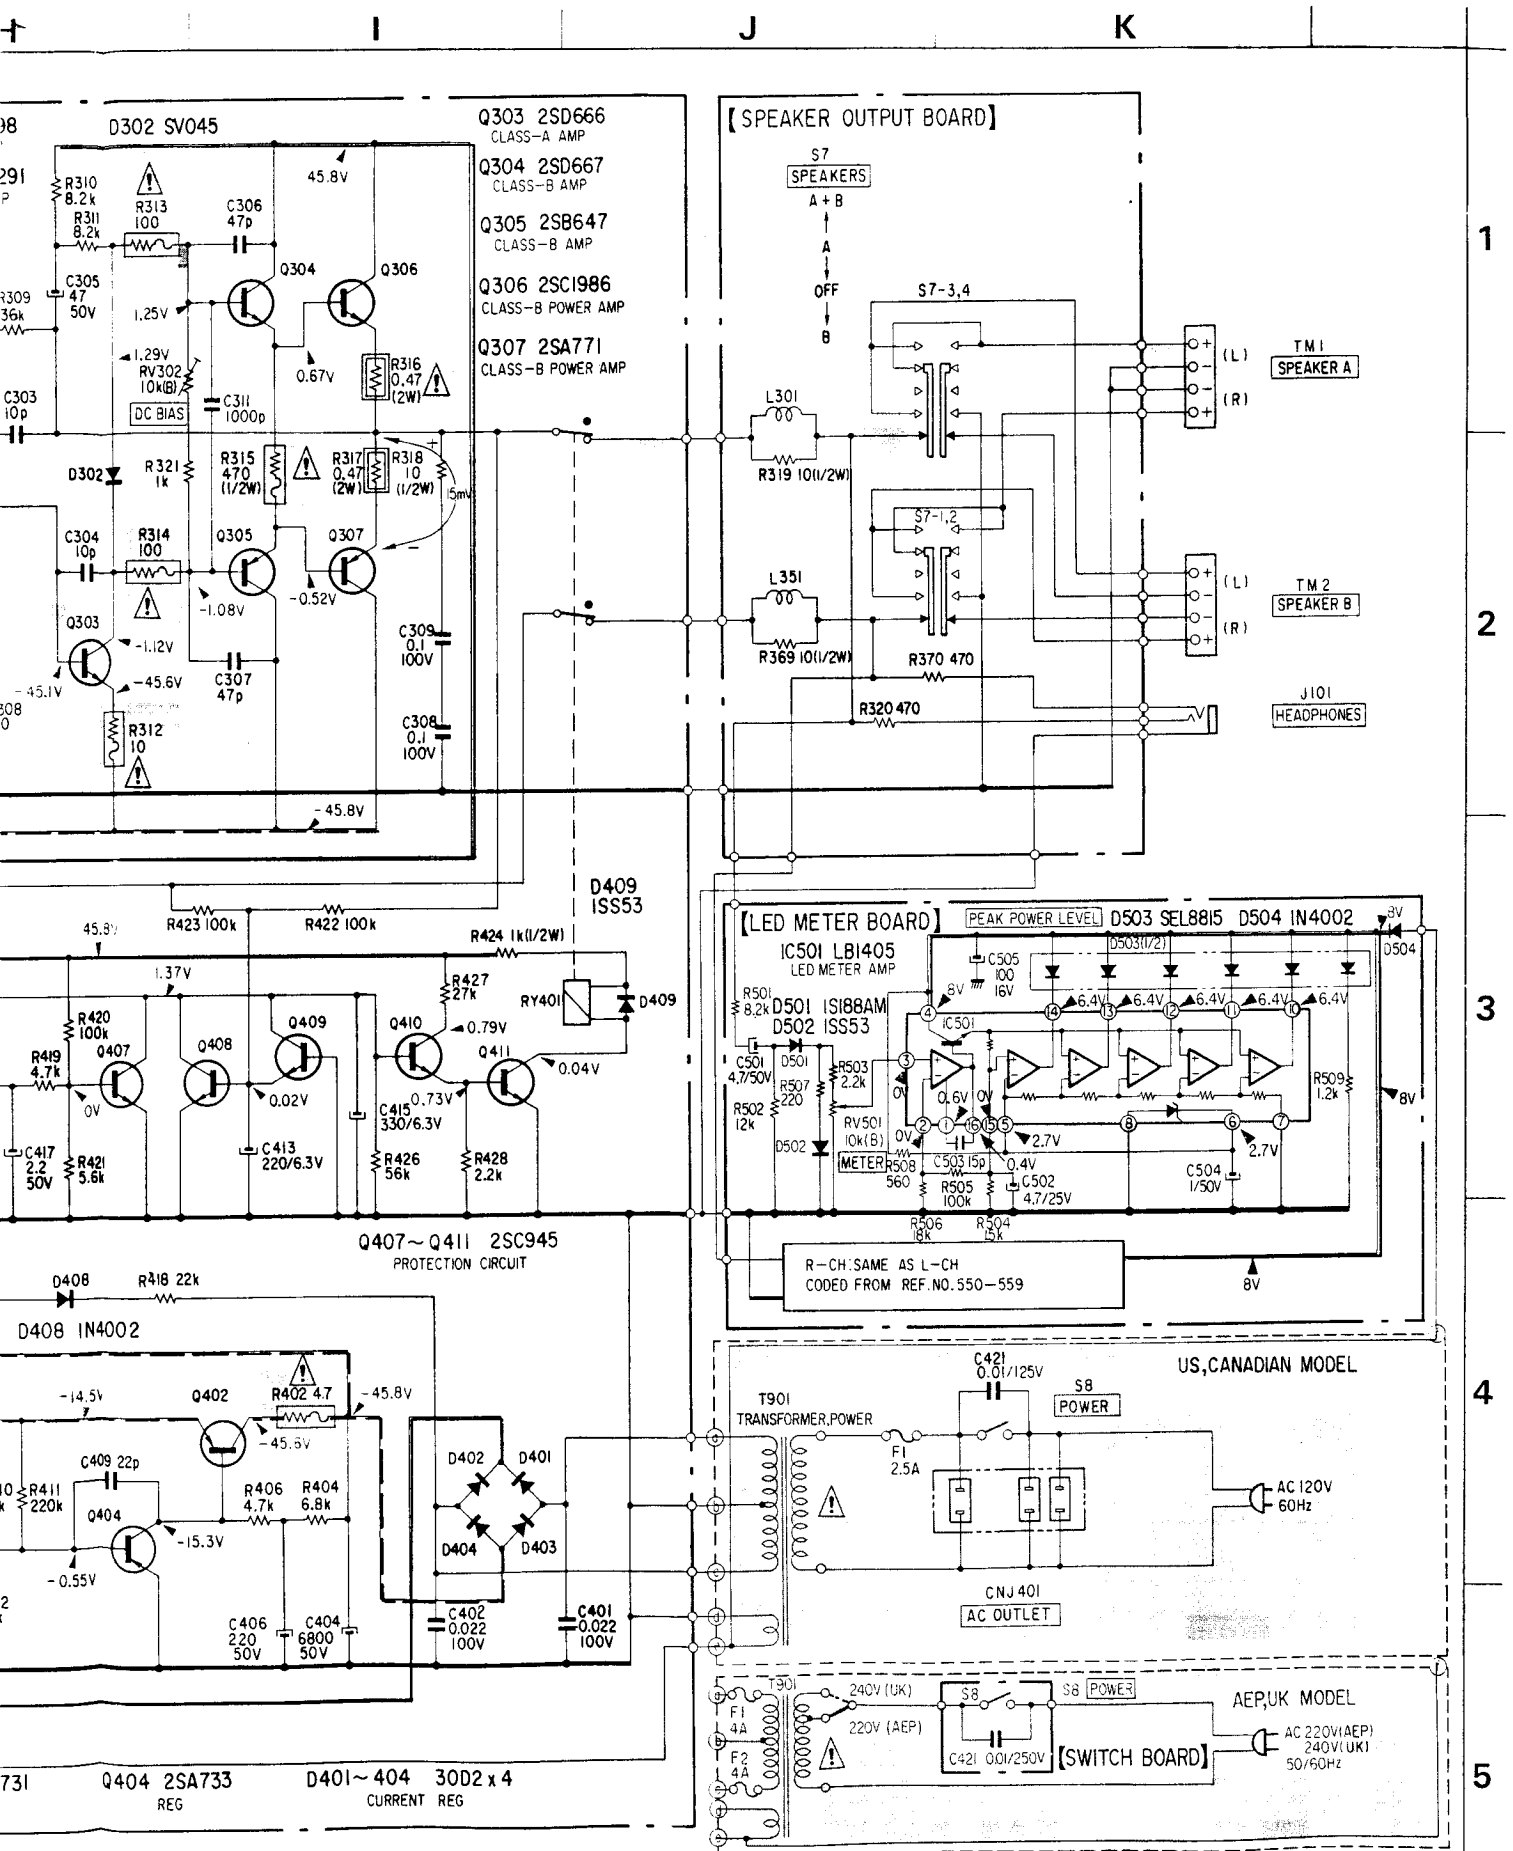

SECTION 5 EXPLODED VIEWS

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel: 01844-351694 Fax: 01844-352554
Email: enquiries@mauritron.co.uk

5-1.

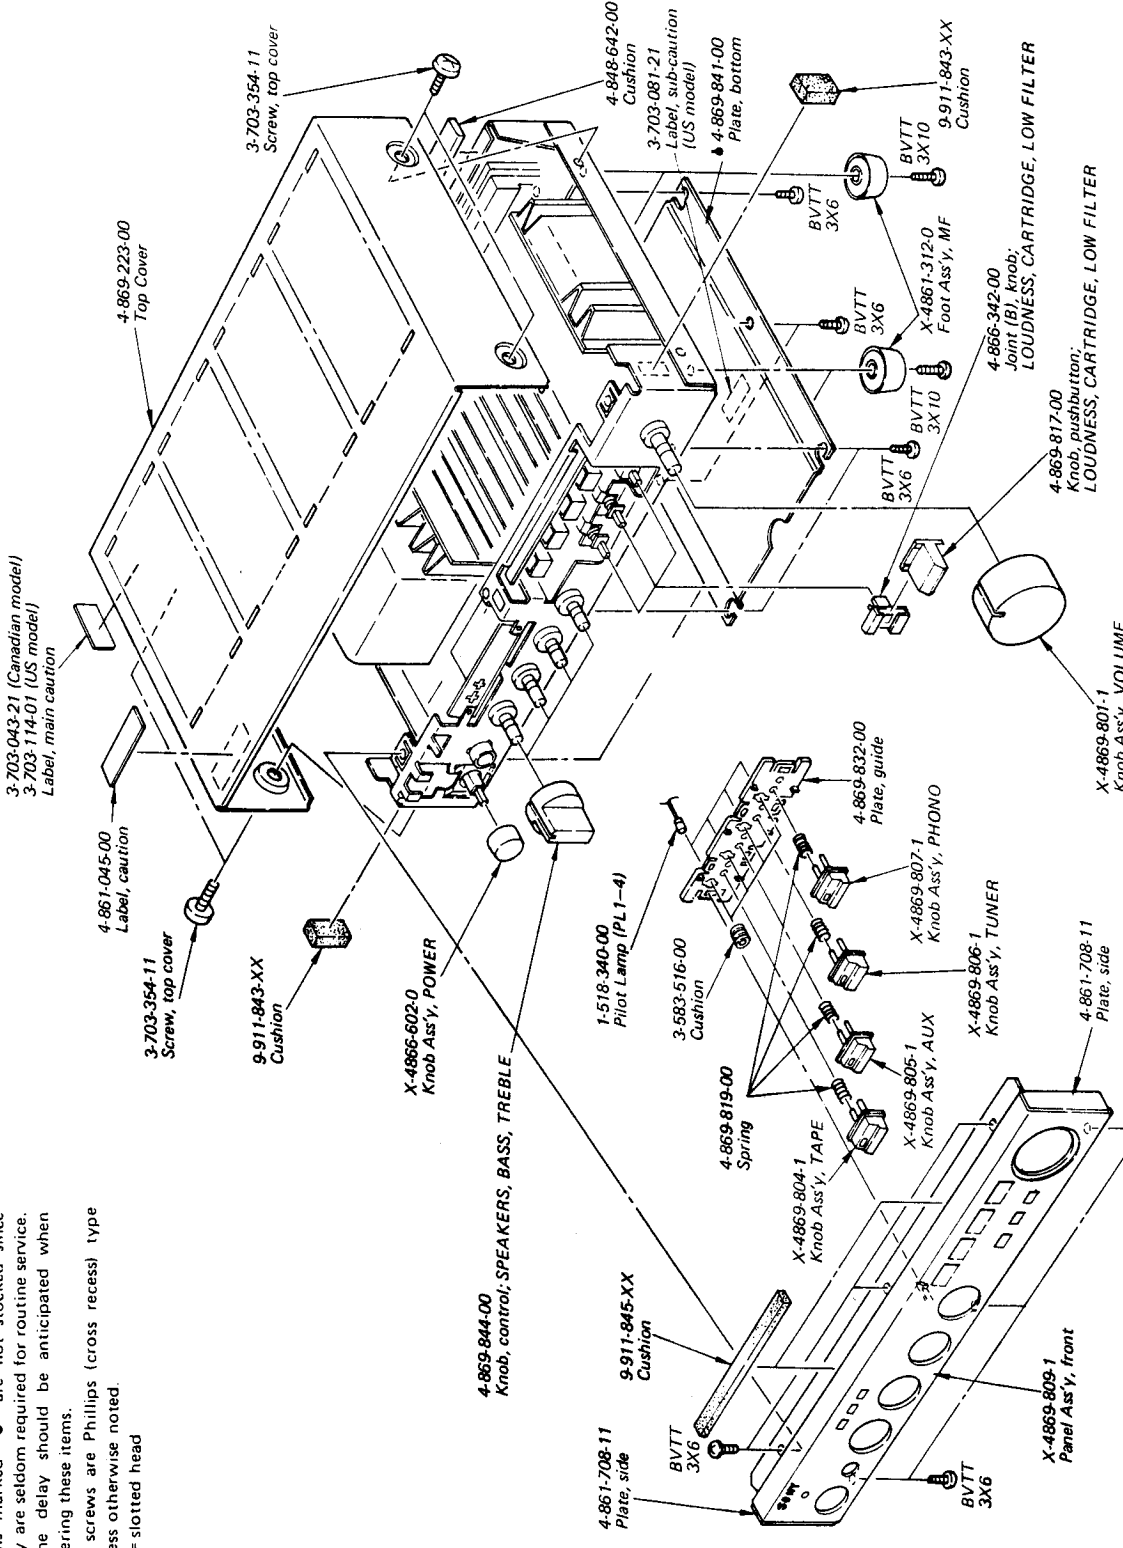

- Note:**
- Items marked "▲" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
 - All screws are Phillips (cross recess) type unless otherwise noted. (-) = slotted head

Note: Les composants identifiés par une trame et une marque ▲ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Note: The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

1

2

3

4

SECTION 6
ELECTRICAL PARTS LIST

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
----------	----------	-------------	----------	----------	-------------

SEMICONDUCTORS

Transistors	
Q101, 102	2SC1400
Q151, 152	2SA798
Q301, 351	2SC2291
Q302, 352	2SD666A
Q303, 353	2SD667A
Q304, 354	2SD667A
Q305, 355	2SB647A
Q306, 356	2SC1986
Q307, 357	2SA771
Q401	2SD809
Q402	2SB731
Q403	2SC1364
Q404, 405	2SA1027R
Q406-411	2SC1364

ICs

IC101, 201	NJM4559D
IC501, 551	LB1405

Diodes

D301, 351	1S1555
D302, 352	SV0M5
D401-404	U0SG
D405	RD6.2E
D406, 407	1S1555
D408	10E2
D409	1S1555
D410	10E2
D501	1T22AM
D502	1S1555
D504	10E2

CAPACITORS

C302, 311	0.001 50V ceramic
C352, 361	6800 50V electrolytic
C403, 404	0.01 250V film (AEP, UK model)
C421	0.01 400V ceramic (AEP, UK model)
	0.001 125V ceramic (US, Canadian model)

RESISTORS

All resistors are in ohms. Common 1/4W carbon resistors are omitted. Refer to the list on page 20 for their part numbers.


R312, 362	1-212-857-00	10	fusible
R313, 314	1-212-881-51	100	fusible
R363, 364	1-212-998-00	470	1/4W fusible
R315, 365	1-212-153-00	0.47	2W metal plate (nonflammable)
R316, 317	1-217-151-00	10	1/4W carbon
R366, 367	1-244-825-00	10	1/4W carbon
R318, 368	1-244-825-00	10	1/4W carbon
R319, 369	1-244-825-00	10	1/4W carbon
R320, 370	1-244-865-00	470	1/4W carbon
R401, 402	1-212-849-00	470	1/4W metal-oxide (nonflammable)
R413, 414	1-217-151-00	0.22	2W metal plate
R415	1-212-894-00	360	fusible
R424	1-244-873-00	1k	1/4W carbon
RV201	1-226-867-00	250k/250k, variable	VOLUME
RV202	1-226-868-00	250k/250k, variable	BALANCE
RV204	1-226-729-00	100k/100k, variable	TREBLE
RV205	1-226-728-00	100k/100k, variable	BASS
RV301, 351	1-226-232-00	500	adjustable; DC BALANCE
RV302, 352	1-226-236-00	10k	adjustable; DC BIAS
RV501, 551	1-226-236-00	10k	adjustable; LED METER

Note: The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

• Items marked Δ are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel: 01844-351694 Fax: 01844-352554
Email: enquires@maurtron.co.uk

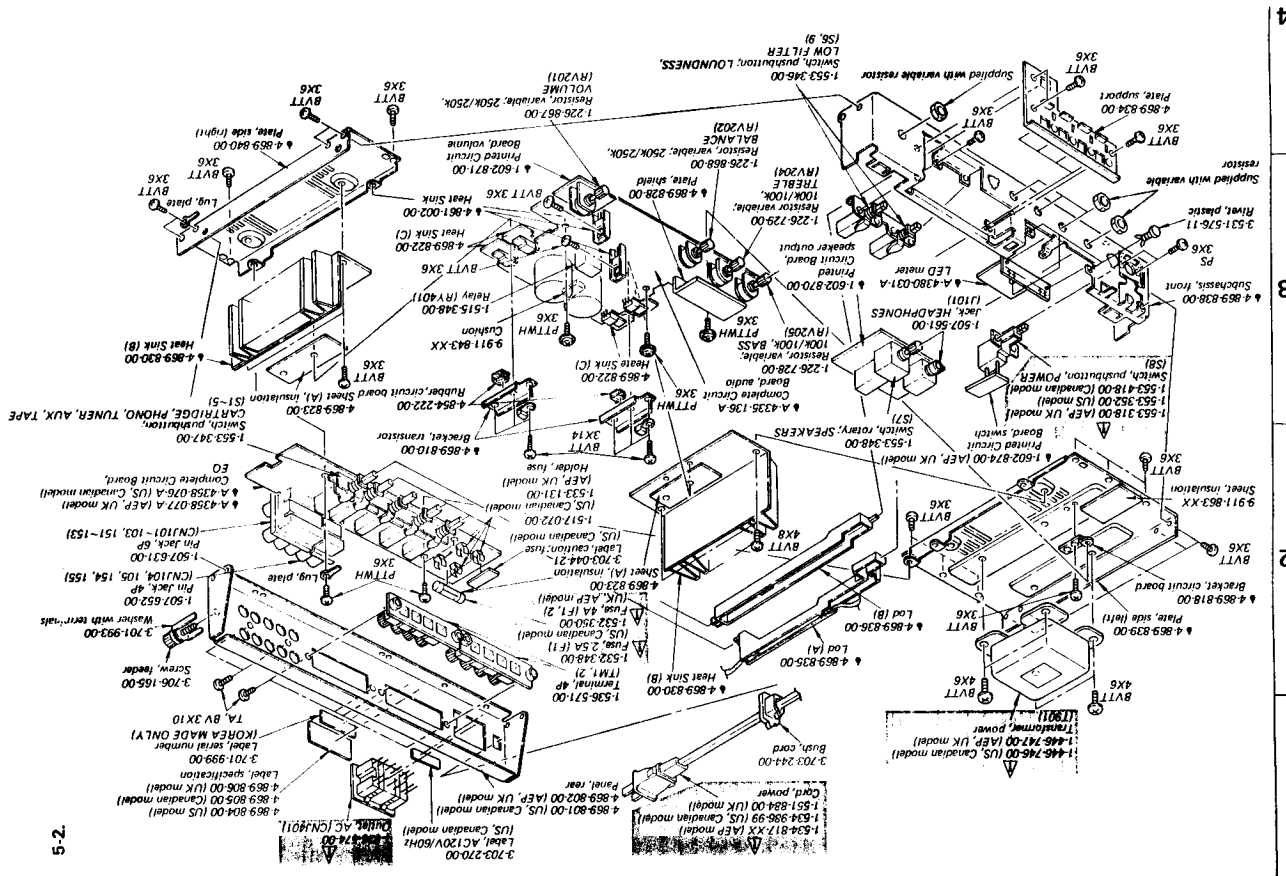

Ref. No. Part No. Description

MISCELLANEOUS

CNJ101-103, CNJ151-153)	1-507-631-00	Pin Jack, 6p
CNJ104, 105) CNJ154, 155)	1-507-652-00	Pin Jack, 4p
CNJ401	▲ 1-526-574-00	Outlet, AC
F1	▲ 1-532-348-00	Fuse, 2.5A (US, Canadian model)
F1, 2	▲ 1-532-350-00	Fuse, 4A (UK, AEP model)
J101	1-507-561-00	Jack, HEADPHONES
● L301, 351	1-420-838-00	Coil
RY401	1-515-348-00	Relay
PL1-4	1-518-340-00	Pilot Lamp
S1-5	1-553-347-00	Switch, pushbutton; CARTRIDGE, PHONO, TUNER, AUX, TAPE
S6	1-553-346-00	Switch, pushbutton; LOUDNESS
S7	1-553-348-00	Switch, rotary; SPEAKERS
S8	▲ 1-553-318-00	Switch, pushbutton; POWER (AEP, UK model)
	▲ 1-553-352-00	Switch, pushbutton; POWER (US model)
	▲ 1-553-418-00	Switch, pushbutton; POWER (Canadian model)
S9	1-553-346-00	Switch, pushbutton; LOW FILTER
T901	▲ 1-446-746-00	Transformer, power (US, Canadian model)
	▲ 1-446-747-00	Transformer, power (AEP, UK model)
TM1, 2	1-536-571-00	Terminal, 4p
	1-517-072-00	Holder, fuse (US, Canadian model)
	1-533-131-00	Holder, fuse (AEP, UK model)
	▲ 1-534-817-XX	Cord, power (AEP model)
	▲ 1-534-986-99	Cord, power (US, Canadian model)
	▲ 1-551-884-00	Cord, power (UK model)

COMPLETE CIRCUIT BOARDS

● A-4335-136-A	Audio
● A-4358-077-A	EQ (AEP, UK model)
● A-4358-076-A	EQ (US, Canadian model)
● A-4380-031-A	LED meter

PRINTED CIRCUIT BOARDS

● 1-602-870-00	Speaker Out
● 1-602-871-00	Volume
● 1-602-874-00	Switch (AEP, UK model)


ACCESSORIES AND PACKING MATERIALS

<u>Part No.</u>	<u>Description</u>
3-701-630-00	Bag, polyethylene
3-783-201-11	Manual, instruction (AEP, UK model)
3-783-201-21	Manual, instruction (US model)
3-783-201-21, 3-794-845-31)	Manual, instruction (Canadian model)
4-863-543-00	Cushion
4-866-723-00	Sheet, polyethylene
4-869-846-00	Carton, individual

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 Email: enquiries@mauritron.co.uk


MYLAR CAPACITORS

RATING											
CAP. (μF)	50 VOLT.	100 VOLT.	200 VOLT.	CAP. (μF)	50 VOLT.	100 VOLT.	200 VOLT.	CAP. (μF)	50 VOLT.	100 VOLT.	200 VOLT.
	PART No.	PART No.	PART No.		PART No.	PART No.	PART No.		PART No.	PART No.	PART No.
0.001	1-108-227-00	1-108-365-00	1-108-409-00	0.01	1-108-239-00	1-108-377-00	1-108-421-00	0.1	1-108-251-00	1-108-389-00	1-108-433-00
0.0012	1-108-351-00	1-108-366-00	1-108-410-00	0.012	1-108-357-00	1-108-378-00	1-108-422-00	0.12	1-108-363-00	1-108-390-00	1-108-434-00
0.0015	1-108-228-00	1-108-367-00	1-108-411-00	0.015	1-108-240-00	1-108-379-00	1-108-423-00	0.15	1-108-252-00	1-108-391-00	1-108-435-00
0.0018	1-108-352-00	1-108-368-00	1-108-412-00	0.018	1-108-358-00	1-108-380-00	1-108-424-00	0.18	1-108-364-00	1-108-392-00	1-108-436-00
0.0022	1-108-220-00	1-108-369-00	1-108-413-00	0.022	1-108-242-00	1-108-381-00	1-108-425-00	0.22	1-108-254-00	1-108-393-00	1-108-437-00
0.0027	1-108-353-00	1-108-370-00	1-108-414-00	0.027	1-108-359-00	1-108-382-00	1-108-426-00	0.27	1-108-854-00	-	-
0.0033	1-108-232-00	1-108-371-00	1-108-415-00	0.033	1-108-244-00	1-108-383-00	1-108-427-00	0.33	1-108-855-00	-	-
0.0039	1-108-354-00	1-108-372-00	1-108-416-00	0.039	1-108-360-00	1-108-384-00	1-108-428-00	0.39	1-108-856-00	-	-
0.0047	1-108-234-00	1-108-373-00	1-108-417-00	0.047	1-108-246-00	1-108-385-00	1-108-429-00	0.47	1-108-857-00	-	-
0.0056	1-108-355-00	1-108-374-00	1-108-418-00	0.056	1-108-361-00	1-108-386-00	1-108-430-00	-	-	-	-
0.0068	1-108-237-00	1-108-375-00	1-108-419-00	0.068	1-108-249-00	1-108-387-00	1-108-431-00	-	-	-	-
0.0082	1-108-356-00	1-108-376-00	1-108-420-00	0.082	1-108-362-00	1-108-388-00	1-108-432-00	-	-	-	-



TANTALUM CAPACITORS

RATING → : Use the high voltage rated one.							
CAP. (μF)	3.15 VOLT.	6.3 VOLT.	10 VOLT.	16 VOLT.	20 VOLT.	25 VOLT.	35 VOLT.
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.01					→	→	1-131-396-00
0.015						→	1-131-397-00
0.022						→	1-131-398-00
0.033						→	1-131-399-00
0.047						→	1-131-400-00
0.068					→	→	1-131-401-00
0.1					→	→	1-131-402-00
0.15					→	→	1-131-403-00
0.22					→	→	1-131-404-00
0.33					→	1-131-409-00	1-131-405-00
0.47	-	-	-	-	1-131-412-00	→	1-131-406-00
0.68	-	-	-	1-131-415-00	→	1-131-410-00	1-131-407-00
1.0	-	-	1-131-418-00	-	1-131-413-00	→	1-131-408-00
1.5	-	1-131-421-00	-	1-131-416-00	→	1-131-411-00	1-131-348-00
2.2	1-131-424-00	-	1-131-419-00	-	1-131-414-00	-	1-131-349-00
3.3	-	1-131-422-00	-	1-131-417-00	1-131-362-00	1-131-356-00	1-131-350-00
4.7	1-131-425-00	-	1-131-420-00	1-131-369-00	1-131-363-00	1-131-357-00	1-131-351-00
6.8	-	1-131-423-00	1-131-376-00	1-131-370-00	1-131-364-00	1-131-358-00	1-131-352-00
10	1-131-426-00	1-131-383-00	1-131-377-00	1-131-371-00	1-131-365-00	1-131-359-00	1-131-353-00
15	1-131-390-00	1-131-384-00	1-131-378-00	1-131-372-00	1-131-366-00	1-131-360-00	-
22	1-131-391-00	1-131-385-00	1-131-379-00	1-131-373-00	1-131-367-00	-	-
33	1-131-392-00	1-131-386-00	1-131-380-00	1-131-374-00	-	-	-
47	1-131-393-00	1-131-387-00	1-131-381-00	-	-	-	-
68	1-131-394-00	1-131-388-00	-	-	-	-	-
100	1-131-395-00	-	-	-	-	-	-



TANTALUM CAPACITORS

RATING						
CAP. (μF)	3 VOLT.	6.3 VOLT.	10 VOLT.	16 VOLT.	20 VOLT.	35 VOLT.
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.033						1-131-273-00
0.047						1-131-274-00
0.068						1-131-275-00
0.1						1-131-276-00
0.15						1-131-277-00
0.22			-	-	1-131-262-00	1-131-278-00
0.33			-	-	1-131-263-00	1-131-279-00
0.47			1-131-169-00	-	1-131-264-00	1-131-280-00
0.68			-	1-131-258-00	1-131-265-00	1-131-281-00
1.0			1-131-254-00	-	1-131-266-00	1-131-282-00
1.5		1-131-250-00	-	-	1-131-267-00	1-131-283-00
2.2		-	-	1-131-259-00	1-131-268-00	1-131-284-00
3.3		-	1-131-255-00	-	1-131-269-00	-
4.7		1-131-251-00	1-131-171-00	-	1-131-270-00	-
6.8		-	-	1-131-260-00	1-131-271-00	-
10	-	-	1-131-256-00	-	1-131-272-00	-
15	-	1-131-252-00	-	1-131-261-00	-	-
22	-	-	1-131-257-00	-	-	-
33	1-131-176-00	1-131-253-00	1-131-173-00	-	-	-
47	1-131-288-00	1-131-174-00	-	-	-	-
100	1-131-177-00	-	-	-	-	-

ELECTROLYTIC CAPACITORS

CAP. (μF)	RATING → : Use the high voltage rated one.					
	6.3 VOLT.	10 VOLT.	16 VOLT.	25 VOLT.	35 VOLT.	50 VOLT.
	PART No.	PART No.	PART No.	PART No.	PART No.	PART No.
0.47						
1.0						1-121-726-00
2.2						1-121-391-00
3.3	→					1-121-450-00
4.7	→	→	→	1-121-392-00		1-121-393-00
				1-121-395-00		1-121-396-00
10	→	→	1-121-651-00	1-121-398-00	→	1-121-738-00
22	→	→	1-121-479-00	1-121-480-00	1-121-662-00	1-121-152-00
33	→	→	1-121-403-00	1-121-404-00	1-121-652-00	1-121-405-00
47	→	1-121-352-00	1-121-409-00	1-121-410-00	1-121-653-00	1-121-411-00
100	→	1-121-414-00	1-121-415-00	1-121-416-00	1-121-357-00	1-121-417-00
220	1-121-419-00	1-121-420-00	1-121-421-00	1-121-422-00	1-121-261-00	1-121-423-00
330	1-121-751-00	1-121-805-00	1-121-521-00	1-121-654-00	1-121-655-00	1-121-656-00
470	1-121-424-00	1-121-425-00	1-121-426-00	1-121-733-00	1-121-361-00	1-121-810-00
1000	-	1-121-736-00	1-121-245-00	1-121-657-00	1-121-388-00	1-123-061-00
2200	1-121-658-00	1-121-659-00	1-121-660-00	1-123-067-00	1-121-984-00	-
3300	1-121-661-00	1-123-075-00	1-123-071-00	-	-	-

CAP. (μF)	100 VOLT.	160 VOLT.	250 VOLT.	350 VOLT.
	PART No.	PART No.	PART No.	PART No.
0.47	-	-	-	-
1.0	1-123-249-00	1-123-252-00	1-123-003-00	1-121-168-00
2.2	1-123-250-00	1-123-026-00	-	1-123-028-00
3.3	1-121-995-00	-	1-123-004-00	1-123-006-00
4.7	1-123-255-00	1-121-246-00	1-121-759-00	1-123-007-00
10	1-121-126-00	1-121-999-00	1-123-254-00	1-123-008-00
22	1-121-996-00	1-123-253-00	1-123-005-00	1-123-022-00
33	1-121-997-00	1-121-757-00	-	-
47	1-123-251-00	1-121-919-00	-	-
100	1-123-084-00	-	-	-

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@maurtron.co.uk

CERAMIC CAPACITORS

CAP. (pF)	RATING						
	50 VOLT.	CAP. (pF)	50 VOLT.	CAP. (pF)	50 VOLT.	CAP. (μF)	50 VOLT.
	PART No.		PART No.		PART No.		PART No.
0.5	1-101-837-00	22	1-102-959-00	150	1-101-361-00	0.001	1-102-074-00
0.75	1-101-586-00	24	1-102-960-00	160	1-101-367-00	0.0012	1-102-118-00
1.0	1-102-934-00	27	1-102-961-00	180	1-102-976-00	0.0015	1-102-119-00
1.5	1-101-576-00	30	1-102-962-00	200	1-102-977-00	0.0018	1-102-120-00
2.0	1-102-935-00	33	1-102-963-00	220	1-102-978-00	0.0022	1-102-121-00
3	1-102-936-00	36	1-102-964-00	240	1-102-979-00	0.0027	1-102-122-00
4	1-102-937-00	39	1-102-965-00	270	1-102-980-00	0.0033	1-102-123-00
5	1-102-942-00	43	1-102-966-00	300	1-102-981-00	0.0039	1-102-124-00
6	1-102-943-00	47	1-101-880-00	330	1-102-820-00	0.0047	1-102-125-00
7	1-102-944-00	51	1-101-882-00	360	1-102-821-00	0.0056	1-102-126-00
8	1-102-945-00	56	1-101-884-00	390	1-102-822-00	0.0068	1-102-127-00
9	1-102-946-00	62	1-101-886-00	430	1-102-823-00	0.0082	1-102-128-00
10	1-102-947-00	68	1-101-888-00	470	1-102-824-00	0.01	1-102-129-00
11	1-102-948-00	75	1-101-890-00	510	1-101-059-00	0.022	1-101-005-00
12	1-102-949-00	82	1-102-971-00	560	1-102-115-00	0.047	1-101-006-00
13	1-102-950-00	91	1-102-972-00	680	1-102-116-00		
15	1-102-951-00	100	1-102-973-00	820	1-102-117-00		
16	1-102-952-00	110	1-102-815-00				
18	1-102-953-00	120	1-102-816-00				
20	1-102-958-00	130	1-101-081-00				

0.001μF = 1,000pF

CERAMIC (SEMICONDUCTOR) CAPACITORS



CAP. (μF)	RATING → : Use the high voltage rated one.				
	25 VOLT.	50 VOLT.	CAP. (μF)	25 VOLT.	50 VOLT.
	PART No.	PART No.		PART No.	PART No.
0.001	→	1-161-039-00	0.018	1-161-016-00	1-161-054-00
0.0012	→	1-161-040-00	0.022	1-161-017-00	1-161-055-00
0.0015		1-161-041-00	0.027	1-161-018-00	1-161-056-00
0.0018		1-161-042-00	0.033	1-161-019-00	1-161-057-00
0.0022		1-161-043-00	0.039	1-161-010-00	1-161-058-00
0.0027	→	1-161-044-00	0.047	1-161-021-00	1-161-059-00
0.0033	→	1-161-045-00	0.056	→	1-161-060-00
0.0039	→	1-161-046-00	0.068	→	1-161-061-00
0.0047	→	1-161-047-00	0.082	1-161-024-00	1-161-062-00
0.0056	→	1-161-048-00	0.1	1-161-025-00	1-161-063-00
0.0068	→	1-161-049-00			
0.0082	1-161-012-00	1-161-050-00			
0.01	1-161-013-00	1-161-051-00			
0.012	→	1-161-052-00			
0.015	1-161-015-00	1-161-053-00			

1/4 WATT CARBON RESISTORS

Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.
1.0	1-246-401-00	10	1-246-425-00	100	1-246-449-00	1.0k	1-246-473-00	10k	1-246-497-00	100k	1-246-521-00	1.0M	1-246-545-00
1.1	1-246-402-00	11	1-246-426-00	110	1-246-450-00	1.1k	1-246-474-00	11k	1-246-498-00	110k	1-246-522-00	1.1M	1-210-814-00
1.2	1-246-403-00	12	1-246-427-00	120	1-246-451-00	1.2k	1-246-475-00	12k	1-246-499-00	120k	1-246-523-00	1.2M	1-210-815-00
1.3	1-246-404-00	13	1-246-428-00	130	1-246-452-00	1.3k	1-246-476-00	13k	1-246-500-00	130k	1-246-524-00	1.3M	1-210-816-00
1.5	1-246-405-00	15	1-246-429-00	150	1-246-453-00	1.5k	1-246-477-00	15k	1-246-501-00	150k	1-246-525-00	1.5M	1-210-817-00
1.6	1-246-406-00	16	1-246-430-00	160	1-246-454-00	1.6k	1-246-478-00	16k	1-246-502-00	160k	1-246-526-00	1.6M	1-210-818-00
1.8	1-246-407-00	18	1-246-431-00	180	1-246-455-00	1.8k	1-246-479-00	18k	1-246-503-00	180k	1-246-527-00	1.8M	1-210-819-00
2.0	1-246-408-00	20	1-246-432-00	200	1-246-456-00	2.0k	1-246-480-00	20k	1-246-504-00	200k	1-246-528-00	2.0M	1-210-820-00
2.2	1-246-409-00	22	1-246-433-00	220	1-246-457-00	2.2k	1-246-481-00	22k	1-246-505-00	220k	1-246-529-00	2.2M	1-210-821-00
2.4	1-246-410-00	24	1-246-434-00	240	1-246-458-00	2.4k	1-246-482-00	24k	1-246-506-00	240k	1-246-530-00	2.4M	1-244-754-00
2.7	1-246-411-00	27	1-246-435-00	270	1-246-459-00	2.7k	1-246-483-00	27k	1-246-507-00	270k	1-246-531-00	2.7M	1-244-755-00
3.0	1-246-412-00	30	1-246-436-00	300	1-246-460-00	3.0k	1-246-484-00	30k	1-246-508-00	300k	1-246-532-00	3.0M	1-244-756-00
3.3	1-246-413-00	33	1-246-437-00	330	1-246-461-00	3.3k	1-246-485-00	33k	1-246-509-00	330k	1-246-533-00	3.3M	1-244-757-00
3.6	1-246-414-00	36	1-246-438-00	360	1-246-462-00	3.6k	1-246-486-00	36k	1-246-510-00	360k	1-246-534-00	3.6M	1-244-758-00
3.9	1-246-415-00	39	1-246-439-00	390	1-246-463-00	3.9k	1-246-487-00	39k	1-246-511-00	390k	1-246-535-00	3.9M	1-244-759-00
4.3	1-246-416-00	43	1-246-440-00	430	1-246-464-00	4.3k	1-246-488-00	43k	1-246-512-00	430k	1-246-536-00	4.3M	1-244-760-00
4.7	1-246-417-00	47	1-246-441-00	470	1-246-465-00	4.7k	1-246-489-00	47k	1-246-513-00	470k	1-246-537-00	4.7M	1-244-761-00
5.1	1-246-418-00	51	1-246-442-00	510	1-246-466-00	5.1k	1-246-490-00	51k	1-246-514-00	510k	1-246-538-00	5.1M	1-244-762-00
5.6	1-246-419-00	56	1-246-443-00	560	1-246-467-00	5.6k	1-246-491-00	56k	1-246-515-00	560k	1-246-539-00		
6.2	1-246-420-00	62	1-246-444-00	620	1-246-468-00	6.2k	1-246-492-00	62k	1-246-516-00	620k	1-246-540-00		
6.8	1-246-421-00	68	1-246-445-00	680	1-246-469-00	6.8k	1-246-493-00	68k	1-246-517-00	680k	1-246-541-00		
7.5	1-246-422-00	75	1-246-446-00	750	1-246-470-00	7.5k	1-246-494-00	75k	1-246-518-00	750k	1-246-542-00		
8.2	1-246-423-00	82	1-246-447-00	820	1-246-471-00	8.2k	1-246-495-00	82k	1-246-519-00	820k	1-246-543-00		
9.1	1-246-424-00	91	1-246-448-00	910	1-246-472-00	9.1k	1-246-496-00	91k	1-246-520-00	910k	1-246-544-00		

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 Email: enquiries@mauritron.co.uk

HARDWARE NOMENCLATURE

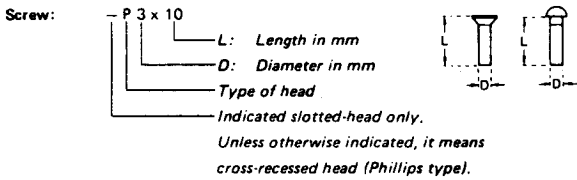

Reference Designation	Shape	Description	Remarks
SCREWS			
P		pan-head screw	binding-head (B) screw for replacement
PWH		pan-head screw with washer face	binding-head (B) screw and flat washer for replacement
PS PSP		pan-head screw with spring washer	binding-head (B) screw and spring washer for replacement
PSW PSPW		pan-head screw with spring and flat washers	binding-head (B) screw and spring and flat washers for replacement
R		round-head screw	binding-head (B) screw for replacement
K		flat-countersunk-head screw	
RK		oval-countersunk-head screw	
B		binding-head screw	
T		truss-head screw	binding-head (B) screw for replacement
F		flat-fillister-head screw	
RF		fillister-head screw	
BV		brazer-head screw	

Reference Designation	Shape	Description	Remarks
SELF-TAPPING SCREWS			
TA		self-tapping screw	ex: TA, P 3 x 10
PTP		pan-head self-tapping screw	binding-head self-tapping (TA, B) screw for replacement
PTPWH		pan-head self-tapping screw with washer face	binding-head self-tapping (TA, B) screw and flat washer for replacement
PTTWH		pan-head thread-rolling screw with washer face	binding-head (B) screw and flat washer for replacement
SET SCREWS			
SC		set screw	
SC		hexagon-socket set screw	ex: SC 2.6 x 4, hexagon socket
NUT			
N		nut	
WASHERS			
W		flat washer	
SW		spring washer	
LW		internal-tooth lock washer	ex: LW3, internal
LW		external-tooth lock washer	ex: LW3, external
RETAINING RINGS			
E		retaining ring	
G		grip-type retaining ring	