

TEAC®

SERVICE MANUAL

EU-80ST

80cm CTV


MODEL:	EU-80ST
PROBLEM:	Color purity problem

File: EU80 deg cap.doc

A missing capacitor in the degaussing circuit of some units can be the cause of poor color purity. The problem is visible when displaying a red or a white test pattern field.

Instructions

1. Check if a 100nF 275 V AC capacitor is connected in parallel with the degaussing coil. This component should be located on the solder side of the auxiliary PCB where the degaussing thermistor is mounted.
2. If the capacitor mentioned in step 1 is missing, connect a 100nF 275 V AC capacitor to the terminals of the degaussing coil connector PL201

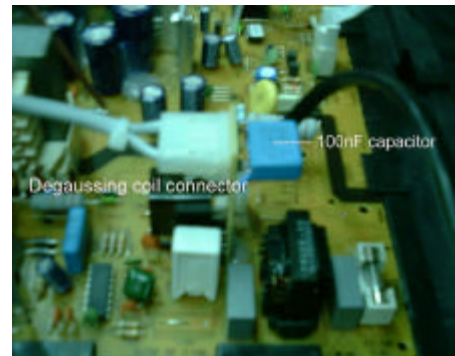

Regards,

Alcides Berta
TEAC Australia Pty Ltd.


MODEL:	EU-80ST
PROBLEM:	Color purity problem

File: EU80 deg cap.doc

A missing capacitor in the degaussing circuit of some units can be the cause of poor color purity. The problem is visible when displaying a red or a white test pattern field.

Instructions

1. Check if a 100nF 275 V AC capacitor is connected in parallel with the degaussing coil. This component should be located on the solder side of the auxiliary PCB where the degaussing thermistor is mounted.
2. If the capacitor mentioned in step 1 is missing, connect a 100nF 275 V AC capacitor to the terminals of the degaussing coil connector PL201

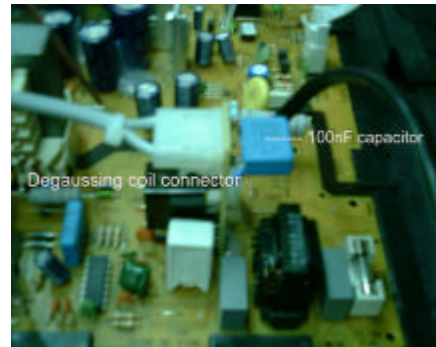

Regards,

Alcides Berta
TEAC Australia Pty Ltd.

MODEL: EU-51/80 ST
PROBLEM: Power supply problem

File: EU51-80 chopper tb.doc

The chopper transistor Q802 is damaged as a consequence of a fault in D816. This problem normally occurs when a diode type UF5407 is used in the position D816.

Instructions

Replace damaged components. Use only a diode type BMY36D for the position D816.

Regards,

Alcides Berta
TEAC Australia Pty Ltd.


MODEL:	EU 51 / 66 / 68 / 80 ST
PROBLEM:	CRT output IC protection

File: EU51-80 spgap tb.doc

This is a tentative solution to avoid damages to the output video amplifier IC901 (TDA6107) caused by electric discharges between electrodes of the CRT. The modification should be applied to units found with damaged video amplifier IC.

Instructions

Add the following components to the CRT board. Refer to the figure and table below for parts location and specifications.

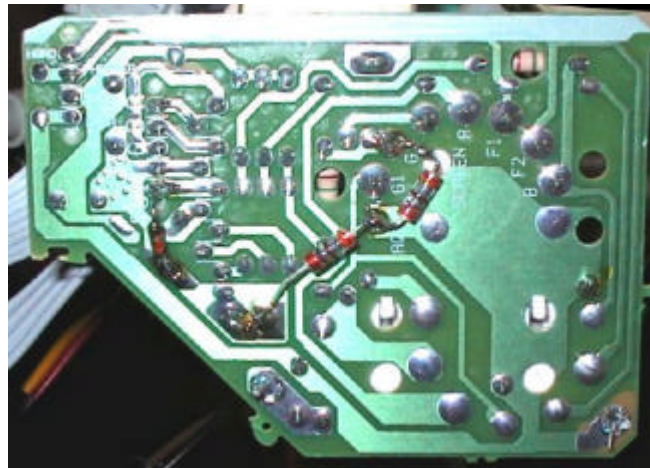

<i>Components information</i>					
<i>Item</i>	<i>Part Number</i>	<i>Description</i>	<i>From</i>	<i>To</i>	<i>Comments</i>
1	EUSPARK	300V Spark gap	Point G	Aqua	Spark gap devices have no polarity
2	EUSPARK	300V Spark gap	Ground	Aqua	
3	QDTBOUZ6R2BS	Zenner diode 6V2 400 mW	1-PL901 (Cathode)	Ground (Anode)	

Regards,

Alcides Berta
TEAC Australia Pty Ltd.

SERVICE MANUAL

TELEVISION COLOUR

CHASSIS 11AK19

FOR ALL MODELS

DO NOT CHANGE ANY MODULE UNLESS THE SET IS SWITCH OFF

The mains supply side of the switch mode power supply transformer is live.

Use an isolating transformer.

The receivers fulfill completely the safety requirements.

Safety precautions:

Servicing of this TV should only be carried out by a qualified person.

- Components marked with the warning symbol on the circuit diagram are critical for safety and must only be replaced with an identical component.

- Power resistor and fusible resistors must be mounted in an identical manner to the original component.

- When servicing this TV, check that the EHT does not exceed 26kV.

TV Set switched off:

Make short-circuit between HV-CRT clip and CRT ground layer.

Short C804 (150mF) before changing IC802 or other components in primary side of SMPS.

Measurements:


Voltage readings and oscilloscope traces are measured under following conditions.

Antenna signal 60dB from colourbar generator. (100% white, 75% colour saturation)

Brightness, contrast, colour set for a normal picture.

Mains supply, 220VAC, 50Hz.

PERI-TV SOCKET

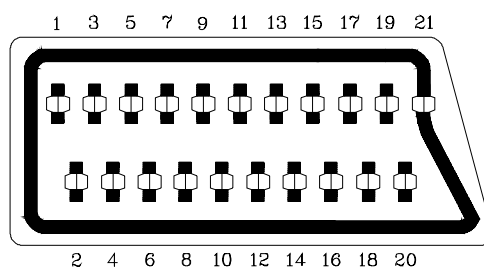

SCART 1 (SC050)

1	Audio right output	0.5Vrms / 1K
2	Audio right input	0.5Vrms / 10K
3	Audio left output	0.5Vrms / 1K
4	Ground AF	
5	Ground Blue	
6	Audio left input	0.5Vrms / 10K
7	Blue input	0.7Vpp / 75ohm
8	AV switching input	0-12VDC /10K
9	Ground Green	
10	-	
11	Green input	0.7Vpp / 75ohm
12	-	
13	Ground Red	
14	Ground Blanking	
15	Red input	0.7Vpp / 75ohm
16	Blanking input	0-0.4VDC, 1-3VDC / 75ohm
17	Ground CVS output	
18	Ground CVS input	
19	CVS output	1Vpp / 75ohm
20	CVS input	1Vpp / 75ohm
21	Ground	

SCART 2 (SC051)

1	Audio right output	0.5Vrms / 1K
2	Audio right input	0.5Vrms / 10K
3	Audio left output	0.5Vrms / 1K
4	Ground AF	
5	Ground Blue	
6	Audio left input	0.5Vrms / 10K
7	Blue input	0.7Vpp / 75ohm
8	AV switching input	0-12VDC /10K
9	Ground Green	
10	-	
11	-	
12	-	
13	Ground Red	
14	Ground Blanking	
15	-	
16	-	
17	Ground CVS output	
18	Ground CVS input	
19	CVS output	1Vpp / 75ohm
20	CVS input	1Vpp / 75ohm
21	Ground	

**** ALL WIRES TO FRONT PANEL & LOUD SPEAKERS MUST BE ZIP-TIED TOGETHER AFTER ANY KIND OF REPAIRMENT**

1. INTRODUCTION

11AK19 is a 90ø and 110ø chassis capable of driving 20-21",24",25",28-29",32",33" tubes at appropriate currents.

The chassis is capable of working in both PAL and SECAM. The sound system is capable of giving 6watts

RMS output into a load of 8ohms.

One 8 page simple TELETXT, TOPTXT and FASTEXT is provided.

The chassis is equipped with 21-pin scart connectors which can accept via scart the SVHS format from VCRs so equipped.

2. SMALL SIGNAL PART WITH TDA884X

The TDA8840/8842/8844 combine all small signal functions required for a colour TV receiver, except tuning.

2.1. Vision IF amplifier

The IF-amplifier contains 3 AC-coupled control stages with a total gain control range which is higher than 66dB.

The sensitivity of the circuit is comparable with that of modern IF-IC' s. The video signal is demodulated by means of a PLL carrier regenerator. This circuit contains a frequency detector and a phase detector. The AFC output is obtained by using the VCO control voltage of the PLL and can be read via the I²C-bus. For fast search tuning systems the window of the AFC can be increased with a factor 3. The setting is realised with the AFW bit.

Depending on the type the AGC-detector operates on top-sync level (single standard versions) or on top sync and top white-level (multi standard versions). The demodulation polarity is switched via the I²C-bus. The AGC detector time-constant capacitor is connected externally. This mainly because of the flexibility of the application. The time-constant of the AGC system during positive

modulation is rather long to avoid visible variations of the signal amplitude. To improve the speed of the AGC system a circuit has been included which detects whether the AGC detector is activated every frame period. When during 3 frame periods no action is detected the speed of the system is increased. For signals without peak white information the system switches automatically to a gated black level AGC. Because a black level clamp pulse is required for this way of operation the circuit will only switch to black level AGC in the internal mode.

The circuits contain a video identification circuit which is independent of the synchronisation circuit. Therefore search tuning is possible when the display section of the receiver is used as a monitor. The ident output is supplied to the tuning system via the I²C-bus. The video ident circuit can be made less sensitive by means of the STM bit. This mode can be used during search tuning to avoid that the tuning system will stop at very weak input signals.

2.2. Video Switches

The circuits have two CVBS inputs (internal and external CVBS) and Y/C input. When the Y/C input is not required the Y input can be used as third CVBS input. The selection of the various sources is made via the I²C-bus. The circuit has one CVBS output.

2.3. Sound Circuit

The sound band pass and trap filters have to be connected externally. The filtered intercarrier signal is fed to a limiter circuit and is demodulated by means of a PLL demodulator. This PLL circuit tunes itself automatically to the incoming carrier signal so that no adjustment is required.

The volume is controlled via the I²C-bus. The deemphasis capacitor has to be connected externally. The non-controlled audio signal can be obtained from this pin. The FM demodulator can be muted via the I²C-bus. This function can be used to switch-off the sound during a channel change so that high output peaks are prevented. The TDA8840/8842 contain an automatic volume levelling (AVL) circuit which automatically stabilises the audio output signal to a certain level which can be set by the viewer by means of the volume control. This function prevents big audio output fluctuations due to variations of the modulation depth of the transmitter. The AVL function can be activated via the I²C-bus.

2.4. Synchronisation circuit

The sync separator is preceded by a controlled amplifier which adjusts the sync pulse amplitude to a fixed level. These pulses are fed to the slicing stage which is operating at 50% of the amplitude. The separated sync pulses are fed to the first phase detector and to the coincidence detector. This coincidence detector is used to detect whether the line oscillator is synchronised and can also be used for transmitter identification. The first PLL has a very high statical steepness so that the phase of the picture is independent of the line frequency.

The horizontal output signal is generated by means of an oscillator which is running at twice the line frequency. Its frequency is divided by 2 to lock the first control loop to the incoming signal. The time-constant of the loop can be forced by the I²C-bus (fast or slow). If required the IC can select the time-constant depending on the noise content of the incoming video signal.

To protect the horizontal output transistor, the horizontal drive is immediately switched off when a power-on-reset is detected.

The drive signal is switched-on again when the normal switch-on procedure is followed.

Via the I²C-bus, adjustments can be made of the horizontal and vertical geometry. The vertical sawtooth generator drives the vertical output drive circuit which has a differential output current. For the EW drive a single ended current output is available.

When the horizontal scan is reduced to display 4 : 3 pictures on a 16 : 9 picture tube an accurate video blanking can be switched on to obtain well defined edges on the screen.

Overvoltage conditions can be detected via the EHT tracking pin. When an overvoltage condition is detected the horizontal output drive signal will be switched-off via the slow stop procedure but it is also possible that the drive is not switched-off and that just a protection indication is given in the I²C-bus output byte. The choice is made via the input bit PRD.

2.5. Chroma and Luminance processing

The circuits contain a chroma bandpass and trap circuit. The filters are realised by means of gyrator circuits and they are automatically calibrated by comparing the tuning frequency with the X-tal frequency of the decoder.

The luminance delay line and the delay for the peaking circuit are also realised by means of gyrator circuits.

The centre frequency of the chroma bandpass filter is switchable via the I²C-bus so that the performance can be optimised for "front-end" signals and external CVBS signals.

During SECAM reception the centre frequency of the chroma trap is reduced to get a better suppression of the SECAM carrier frequencies.

2.6. Colour Decoder

The decoder contains an alignment-free X-tal oscillator, a killer circuit and two colour difference demodulators. The 90° phaseshift for the reference signal is made internally.

The IC contains an automatic colour limiting (ACL) circuit which prevents that oversaturation occurs when signals with a high chroma-to-burst ratio are received. The ACL circuit is designed such that it only reduces the chroma signal and not the burst signal. This has the advantage that the colour sensitivity is not affected by this function.

The base-band delay line is integrated in the PAL/SECAM IC's.

The demodulated colour difference signals are internally supplied to the delay line. The matrixed signals are externally available.

The colour difference matrix switches automatically between

PAL/SECAM and NTSC, however, it is also possible to fix the matrix in the PAL standard.

Which colour standard the IC can decode depends on the external X-tals. The X-tal to be connected to pin 34 must have a frequency of 3.5 MHz (NTSC-M, PAL-M or PAL-N) and pin 35 can handle X-tals with a frequency of 4.4 and 3.5 MHz. To prevent calibration problems of the horizontal oscillator the external switching between the 2 X-tals should be carried out when the oscillator is forced to pin 35. For a reliable calibration of the horizontal oscillator it is very important that the X-tal indication bits (XA and XB) are not corrupted. For this reason the X-tal bits can be read in the output bytes so that the software can check the I²C-bus transmission.

2.7. RGB output circuit and black-current stabilisation

The colour-difference signals are matrixed with the luminance signal to obtain the RGB-signals. The TDA 884X device has one linear RGB input. This RGB signal can be controlled on contrast and brightness.

The output signal has an amplitude of about 2 volts black-to-white at nominal input signals and nominal settings of the controls.

To increase the flexibility of the IC it is possible to insert OSD and/or teletext signals directly at the RGB outputs.

This insertion mode is controlled via the insertion input (pin 26 in the S-DIP 56- and pin 38 in the QFP-64 level). This blanking action at the RGB outputs has some delay which must be compensated externally.

To obtain an accurate biasing of the picture tube a "Continuous Cathode Calibration" circuit has been developed.

This function is realised by means of a 2-point black level stabilisation circuit.

When the TV receiver is switched-on, the RGB output signals are blanked and the black current loop will try to set the right picture tube bias levels. Via the AST bit a choice can be made between automatic start-up or a start-up via the m-processor.

3. TUNER

Either a PLL or a VST tuner is used as a tuner.

UV1316 (VHF/UHF) is used as a PLL tuner. For only PALM/N, NTSC M applications UV 1336 is used as the PLL tuner. UV 1315 (VHF/ UHF) is used as a VST Tuner.

Channel coverage of UV1316:

BAND	OFF-AIR CHANNELS		CABLE CHANNELS	
	CHANNELS RANGE (MHz)	FREQUENCY	CHANNELS	FREQUENCY RANGE (MHz)
Low Band	E2 to C	48.25 to 82.25 (1)	S01 to S08	69.25 to 154.25
Mid Band	E5 to E12	175.25 to 224.25	S09 to S38	161.25 to 439.25
High Band	E21 to E69	471.25 to 855.25 (2)	S39 to S41	447.25 to 463.25

(1). Enough margin is available to tune down to 45.25 MHz.

(2). Enough margin is available to tune up to 863.25 MHz.

Noise	Typical	Max.	Gain	Min.	Typical	Max.
Low band	: 5dB	9dB	All channels	: 38dB	44dB	52dB
Mid band	: 5dB	9dB	Gain Taper (of-air channels)	: -	-	8dB
High band	: 6dB	9dB				

Channel Coverage UV1336:

BAND	CHANNELS	FREQUENCY RANGE (MHz)
Low Band	2 to D	55.25 to 139.25
Mid Band	E to PP	145.25 to 391.25
High Band	QQ to 69	397.25 to 801.25

Noise is typically 6dB for all channels. Gain is minimum 38dB and maximum 50dB for all channels.

Channel Coverage of UV1315:

BAND	OFF-AIR CHANNELS		CABLE CHANNELS	
	CHANNELS	FREQUENCY RANGE (MHz)	CHANNELS	FREQUENCY RANGE (MHz)
Low Band	E2 to C	48.25 to 82.25 (1)	S01 to S10	69.25 to 168.25
Mid Band	E5 to E12	175.25 to 224.25	S11 to S39	231.25 to 447.25
High Band	E21 to E69	471.25 to 855.25 (2)	S40 to S41	455.25 to 463.25

(1). Enough margin is available to tune down to 45.25 MHz.

(2). Enough margin is available to tune up to 863.25 MHz.

Noise	Typ.	Max.	Gain	Min.	Typ.	Max.
Low band	: 6dB	9dB	All Channels	38dB	44dB	50dB
Mid band	: 6dB	10dB	Gain Taper	-	-	8dB
High band	: 6dB	11dB	(off-air channels)			

4.VIDEO SWITCH TEA6415C

In case of three or more external sources are used, the video switch IC TEA6415C is used. The main function of this device is to switch 8 video input sources on the 6 outputs.

Each output can be switched on only one of each input. On each input an alignment of the lowest level of the signal is made (bottom of sync. top for CVBS or black level for RGB signals).

Each nominal gain between any input and output is 6.5dB. For D2MAC or Chroma signal the alignment is switched off by forcing, with an external resistor bridge, 5VDC on the input. Each input can be used as a normal input or as a MAC or Chroma input (with external resistor bridge). All the switching possibilities are changed through the BUS.

Driving 75ohm load needs an external resistor.

It is possible to have the same input connected to several outputs.

5. AM DEMODULATOR TDA9830

The TDA9830 is designed for AM-sound demodulation used in L and L' standard.

Sound IF Input:

The sound IF amplifier consists of three AC-coupled differential amplifier stages each with approximately 20dB gain. At the output of each stage is a multiplier for gain controlling. The overall control range is approximately -6 to +60dB and the frequency response (-3dB) of the IF amplifier is approximately 6 to 70MHz. The steepness of gain control is approximately 10mV/dB.

IF AGC:

The automatic gain control voltage to maintain the AM demodulator output signal at a constant level is generated by a mean level detector. The AGC-detector charges and discharges the capacitor at pin 3 controlled by the output signal of the AM-demodulator compared to an internal reference voltage. The maximum charge/discharge current is approximately 5 mA.

AM-demodulator

The IF amplifier output signal is fed to a limiting amplifier (two stages) and to a multiplier circuit. However the limiter output signal (which is not any more AM modulated) is also fed to the multiplier, which provides AM demodulation (in phase demodulation). After lowpass filtering (fg @ 400kHz) for carrier rejection and buffering, the demodulator output signal is present at pin 6.

Audio Switch

This circuit is an operational amplifier with three input stages and internal feedback network determining gain (0dB) and frequency response (fg @ 700kHz). Two of the input stages are connected to pin 7 and pin 9, the third input stage to an internal reference voltage. Controlled by the switching pins 10 and 12, one of the three input stages can be activated and a choice made between two different AF signals or mute state. The selected signal is present at pin 8. The decoupling capacitors at the input pins are needed, because the internally generated bias voltage for the input stages must not be influenced by the application in order to avoid DC-plop in case of switching.

Reference Circuit:

This circuit is a band gap stabiliser in combination with a voltage regulation amplifier, which provides an internal reference voltage of about 3.6V nearly independent from supply voltage and temperature. This reference voltage is filtered by the capacitor at pin 4 in order to reduce noise. It is used as a reference to generate all important voltages and currents of the circuit.

For application in 12V power supply concepts, there is an internal voltage divider in combination with a Darlington transistor in order to reduce the supply voltage for all IC function blocks to approximately 6V.

6. DIGITAL TV SOUND PROCESSOR TDA9875

The TDA9875 is a single-chip Digital TV Sound Processor. Supported standards are M, B/G, D/K, I and L.

Description of the demodulator and decoder section:**SIF Input:**

Two input pins are provided, SIF1 e.g. for terrestrial TV and SIF2 e.g. for a satellite tuner. The selected signal is passed through an AGC circuit and then digitized by an 8-bit ADC operating at 24.576MHz.

AGC:

The gain of the AGC amplifier is controlled from the ADC output by means of a digital control loop employing hysteresis. The AGC has a fast attack behaviour to prevent ADC overloads and slow decay behaviour AGC oscillations. For AM demodulation AGC must be switched off.

Mixer

The digitized input signal is fed to the mixers, which mix one or both input sound carriers down to zero IF. A 24-bit control word for each carrier sets the required frequency.

FM and AM Demodulation

An FM or AM input signal is fed via a band-limiting filter to a demodulator that can be used for either FM or AM demodulation. Apart from the standard (fixed) de-emphasis characteristic, an adaptive de-emphasis is available for encoded satellite programs. A stereo decoder recovers the left and right signal channels from the demodulated sound carriers.

FM Identification:

The identification of the FM sound mode is performed by AM synchronous demodulation of the pilot signal and narrow-band detection of the identification frequencies. The result is available via the I²C-bus interface.

NICAM Demodulation:

The NICAM signal is transmitted in a DQPSK code at a bit rate of 728 kbit/s. The NICAM demodulator performs DQPSK demodulation and feeds the resulting bitstream and clock signal onto the NICAM decoder and, for evaluation purposes, to PCLK (pin 1) and NICAM (pin 2).

NICAM Decoder:

The device performs all decoding functions in accordance with the "EBU NICAM 728 specification". After locking to the frame alignment word, the data is descrambled by applying the defined pseudo-random binary sequence; the device will then synchronise to the periodic frame flag bit C0.

The status of the NICAM decoder can be read out from the NICAM status register by the user. The OSB bit indicates that the decoder has locked to the NICAM data. The VDSP bit indicates that the decoder has locked to the NICAM data and that the data is valid sound data.

7. SOUND OUTPUT STAGE TDA2614/TDA2615/TDA2616Q

TDA2614 is used as the AF output amplifier for mono applications. It is supplied by ±12VDC coming from a separate winding in the SMPS transformer. An output power of 2*6W (THD=0.5%) can be delivered into an 8ohm load.

TDA2615 is used as the AF output amplifier for stereo applications. It is supplied by ±12VDC coming from a separate winding in the SMPS transformer. An output power of 2*6W (THD=0.5%) can be delivered into an 8ohm load.

TDA2616Q is used as the AF output amplifier for stereo and dolby prologic applications. It is supplied by ±16VDC coming from a separate winding in the SMPS transformer. An output power of 2*12W (THD=0.5%) can be delivered into an 8ohm load.

8. VERTICAL OUTPUT STAGE WITH TDA8351/8356

The TDA8351/8356 vertical deflection circuit can be used in 90° and 110° deflection systems with field frequencies from 50 up to 120Hz. With its bridge configuration the deflection output can be DC coupled with few external components. Only a single supply voltage for the scan and a second supply for the flyback are needed. The TDA8356 is intended for 90° systems and the TDA8351 is intended for 110° systems.

The drive voltage is amplified by an amplifier and fed to two amplifiers, one is inverting and the other is a non inverting amplifier. The outputs (pins 7 and 4) are connected to the series connection of the vertical deflection coil and feedback resistor Rsense (R702//R703). The voltage across Rsense is fed via pin 9 to correction amplifier, to obtain a deflection current which is proportional to the drive voltage. The supply voltage for the TDA8351/8356 is 15VDC at pin 3. The supply voltage generator has a separate supply voltage of 45VDC at pin 6.

9. VIDEO OUTPUT AMPLIFIER TDA6107Q

The TDA6107Q consists of three monolithic video output amplifiers. The amplifier can be seen as an operational amplifier with negative feedback.

The advantage of negative feedback is that the amplifier characteristics do not play an important role up to certain frequencies. The internal flash diodes protect the amplifiers against flash over in the picture tube.

The only protections required at the cathode outputs are a flash resistor and a sparkgap.

The TDA6107Q has an internal thermal protection circuit which gives a decrease of the slew rate at high temperatures.

Furthermore, the device needs only one power supply voltage (Vdd).

In contrast to previous types of DMOS video amplifiers, all the external resistors (Rf, Ri and Ra) are integrated, so the gain is fixed and saves 9 resistors.

Furthermore, the reference voltage is integrated, it saves a resistor divider and a decoupling capacitor. So, the replacement value of the TDA6107Q is very high.

The TDA6107Q is provided with a black current data pin. Since TDA884X is used as drive device, no adjustments are required for gain and black setting, as the TDA884X has I²C white point adjustment and black current set-up.

10. SINGLE/MULTISTANDARD VIF/SIF-PLL and FM-PLL/AM DEMODULATOR TDA9818

The TDA9818 is an IC for multistandard vision IF signal processing, sound AM and FM demodulation.

It is a gain controlled wide band VIF-amplifier (AC-coupled). It is applicable for IF frequencies of 38.9 MHz, 45.75 MHz and 58.75 MHz. True synchronous demodulation is provided with active carrier regeneration. It has a VCO frequency which can be switchable between L and L accent (alignment external) picture carrier frequency.

The TDA9818 has a SIF input for single reference QSS mode (PLL controlled). SIF AGC detector is to provide gain controlled SIF amplifier. The AM demodulator is without extra reference circuit. The supply voltage is +5VDC at pin 21.

11. COMBFILTER SAA4961

The SAA 4961 is a one-chip, PAL/NTSC combfilter IC with internal delay lines, filters, clock control, synchronisation and signal switches. The combfilter function is realised in a switched capacitor technique, so it has time discrete but amplitude continuous processing.

The Y/CVBS input is first clamped and then fed to the delay-line and combfilter section via a low pass pre-filter.

This filter can be bypassed via the external LPF-on pin. This pin is internally pulled up, to put the filter default on. The Y/CVBS input is also fed to the sync separator, where horizontal and vertical reference pulses are made.

Bypass mode can be forced via BYP (pin 3). FSC (pin 1) is the subcarrier input which is connected to the colour decoder.

Input FSCSW pin indicates if fsc or 2*fsc is used.

The Sys1,2 pins (20, 23) indicate which system standard is processed. Sys2 is internally pulled up, Sys1 is internally pulled down. Therefore when the Sys1,2 inputs are left open, automatically PAL 4.43MHz is forced.

SAA4961 output pin 15 "CVBS" can be used for parallel-synced teletext decoders, to guarantee that the teletext display always has a correct timing relation with the main picture. Comb filter is disabled by setting SAA4961 pin 3 "BYP" high.

12. POWER SUPPLY (SMPS)

The DC voltages required at various parts of the chassis are provided by an SMPS transformer controlled by the IC MC44604 which is designed for driving, controlling and protecting switching transistor of SMPS. The transformer produces 150/115V for FBT input, ±14V for audio output IC, S+5V for microcontroller, +15V for vertical output (field scan) and +33V for tuner and some other ICs and transistors.

13. MICROCONTROLLER SDA525X

The device is TV TEXT tuning and control system based on the SDA 525X TV TEXT microcontroller. It is designed for a low cost mono TV-SET with analogue picture and sound control. Nevertheless the system offers an on screen display (OSD) and IR remote control of all functions.

SDA525X has the following features:

- Display of program number, channel number, TV standard, analogue values, sleep timer, parental control, and mute is done by OSD.
- Single LED for IR active, standby and on mode indication.
- 1 Control line to select external source.
- 3 Control lines for TV standard selection.
- Frequency synthesis tuning (62.5 kHz steps)
- 192 step fine tuning
- Channels corresponding to standards B/G, OIRT, L and I (I+)
- Mono sound control by analogue voltage
- System configuration with service mode

14. SERIAL ACCESS CMOS 8K (1024*8) EEPROM ST24C08

The ST24C08 is a 8Kbit electrically erasable programmable memory (EEPROM), organised as 4 blocks of 256*8 bits.

The memory is compatible with the I²C standard, two wire serial interface which uses a bi-directional data bus and serial clock.

The memory carries a built-in 4 bit, unique device identification code (1010) corresponding to the I²C bus definition.

This is used together with 1 chip enable input (E) so that up to 2*8K devices may be attached to the I²C bus and selected individually.

15. CLASS AB STEREO HEADPHONE DRIVER TDA1308

The TDA1308 is an integrated class AB stereo headphone driver contained in a DIP8 plastic package. The device is fabricated in a 1 mm CMOS process and has been primarily developed for portable digital audio applications.

16. SAW FILTERS

Saw filter type : Model:

G1965M	: PAL-SECAM B/G MONO
G3962M	: PAL-SECAM B/G GER&NIC STEREO, PAL I' NIC STEREO, INT-1
G1984	: PAL-SECAM B/G GER&NIC STEREO INT-2
J1951M	: PAL-I MONO
J3950M	: PAL-I NIC STEREO
J1956M	: PAL-I' MONO
K2955M	: PAL-SECAM B/G-D/K MONO, PAL-SECAM B/G-D/K-I', MONO, PAL-SECAM B/G-D/K-L MONO
K2958M	: PAL-SECAM B/G-D/K (38) MONO
K2962M	: PAL-SECAM B/G-L/L' MONO
G3957M	: PAL-SECAM B/G-L/L' GER&NIC BG/L STEREO
K6256K	: PAL-SECAM B/G-D/K-I-L/L' MONO, PAL-SECAM B/G-D/K-I, L/L' GER&NIC BG/L STEREO, PAL-SECAM B/G-D/K-I-L/L' I, NICAM STEREO, PAL-SECAM B/G-D/K-I-L/L' GER&NIC I'-B/G-L, STEREO
K6259K	: PAL-SECAM B/G-D/K-I-M/N (EURO) MONO
M1963M	: PAL M/N MONO, NTSC M MONO, PAL M/N-NTSC M MONO

17. BTSC STEREO/SAP/DBX-DECODER and AUDIO PROCESSOR TDA9855

The TDA9855 is a BTSC stereo/SAP/dbx decoder and audio processor. It performs all functions to transform the composite baseband signal into the appropriate audio output signals to line out and to the loudspeaker output stages.

IC DESCRIPTIONS AND INTERNAL BLOCK DIAGRAM

- TDA8840/8842/8844
- TUNER (UV1315, UV1316, UV1336)
- TEA6415C
- TDA9830
- TDA2614/2615/2616Q
- TDA8351/8356
- TDA6107Q
- SAA4961
- MC44604
- SDA525X
- TDA9875
- TDA9818
- ST24C08
- TDA1308
- G1965M
- TDA9855

TDA8840/8842/8844:

The TDA884X is I²C-bus controlled single chip TV processor which is intended to be applied in PAL, NTSC, PAL/NTSC and multi-standard television receivers. These IC's are nearly pin compatible with the TDA837X TV processors but have a higher degree of integration because the delay line (TDA4665 function) and the SECAM decoder have been integrated. In addition to these functions some additional features have been added like "Continuous Cathode Calibration" (2-point black current loop which results in an accurate biasing of the 3 guns), adjustable luminance delay time, blue stretching and dynamic skin tone control.

Features:

- Vision IF circuit with PLL demodulator
- Alignment-free multi-standard FM sound demodulator (4.5 MHz to 6.5 MHz)
- Audio switch
- Flexible source selection with CVBS switch and Y(CVBS)/C input so that a comb filter can be applied
- Integrated chrominance trap circuit
- Integrated luminance delay line
- Asymmetrical peaking in the luminance channel with a noise coring function
- Black stretching of non-standard CVBS or luminance signals
- Integrated chroma band-pass filter with switchable center frequency
- Blue stretch circuit which offsets colours near white towards blue
- RGB control circuit with "Continuous Cathode Calibration" and white point adjustment
- Linear RGB inputs and fast blanking
- Possibility to insert a "blue black" option when no video signal is available
- Horizontal synchronisation with two control loops and alignment-free horizontal oscillator
- Vertical count-down circuit
- Vertical driver optimised for DC-coupled vertical output stages
- I²C-bus control of various functions
- Low dissipation (850 mW)

Functional Differences between the 8840/8842/8844:

IC VERSION (TDA)	8840	8842	8844
Multi-standard IF		X	X
Automatic Volume Limiting	X	X	
PAL Decoder	X	X	X
SECAM Decoder		X	X
NTSC Decoder		X	X
Dynamic Skin Control			X
Colour Matrix PAL/NTSC (Japan)		X	X
Colour Matrix NTSC Japan/USA			
YUV interface			X
Base-band delay line	X	X	X
Adjustable luminance delay time			X
Horizontal geometry			X
Horizontal and vertical zoom			X
Vertical scroll			X

PINNING

PIN VALUE

1. Sound IF input	: 1mVrms
2. External audio input	: 500mVrms
3. IF demodulator tuned circuit 1	
4. IF demodulator tuned circuit 2	
5. IF-PLL loop filter	: Min:32-Max:60 MHz
6. IF video output	: 4.7V (Negative Modulation), 2V (Positive Modulation)
7. Serial clock input	: Low level max:1.5 V, High level min 3.5V
8. Serial data input/output	: Low level max:1.5 V, High level min 3.5V
9. Bandgap decoupling	
10. Chrominance input (S-VHS)	: 1Vpp, Max:1.4Vpp
11. External CVBS/Y input	: 1Vpp, Max:1.4Vpp
12. Main supply voltage 1	: 8V, Min:7.2V, Max:8.8V
13. Internal CVBS input	: 1Vpp, Max:1.4Vpp
14. Ground 1	
15. Audio output	: 700mVrms, Min:500mVrms, Max:900mVrms
16. SECAM PLL decoupling	
17. External CVBS input	: Vpp, Max:1.4Vpp
18. Black-current input	: Amplitude of "low" reference current : 8mA Amplitude of "high" reference current : 20mA
19. Blue output	: 2Vpp
20. Green output	: 2Vpp
21. Red output	: 2Vpp
22. Beam current limiter input/V-guard input	
23. Red input for insertion	: 0.7Vpp, Max:0.8Vpp
24. Green input for insertion	: 0.7Vpp, Max:0.8Vpp
25. Blue input for insertion	: 0.7Vpp, Max:0.8Vpp
26. RGB insertion input	: Max:0.3V
27. Luminance input	: 1.4Vpp
28. Luminance output	: 1.4Vpp
29. (B-Y) signal output	: 1.05Vpp
30. (R-Y) signal output	: 1.05Vpp
31. (B-Y) signal input	: 1.05Vpp
32. (R-Y) signal input	: 1.05Vpp
33. Subcarrier reference output	: 3.58/4.43 MHz
34. 3.58 MHz crystal connection	
35. 4.43/3.58 MHz crystal connection	
36. Loop filter phase detector	
37. 2nd supply voltage 1	: 8V, Min:7.2V, Max:8.8V
38. CVBS output	: 1Vpp, Max:1.4Vpp
39. Decoupling digital supply	: 1.8V
40. Horizontal output	: Max: 0.3V
41. Flyback input/sandcastle output	: Min:100ma, Max:300mA
42. Phase-2 filter	: 150 ms/ms
43. Phase-1 filter	: ±0.9 kHz, Max: ±1.2 kHz
44. Ground 2	
45. East-west drive output	
46. Vertical drive A output	: 0.95mA
47. Vertical drive B output	: 0.95mA
48. IF input 1	
49. IF input 2	
50. EHT/overvoltage protection input	: Min:1.2V, Max : 2.8V
51. Vertical sawtooth capacitor	: 3Vpp
52. Reference current input	: 3Vpp
53. AGC decoupling capacitor	
54. Tuner AGC output	: Max:9V (Maximum tuner AGC Output voltage), 300mV (Output saturation voltage)
55. Audio deemphasis	: 500mVrms
56. Decoupling sound demodulator	

UV1315, UV1316, UV1336

General description of UV1315:

The UV1315 tuner belongs to the UV 1300 family of tuners, which are designed to meet a wide range of applications. It is a combined VHF, UHF tuner suitable for CCIR systems B/G, H, L, L', I and I'. The low IF output impedance has been designed for direct drive of a wide variety of SAW filters with sufficient suppression of triple transient.

Features of UV1315:

- Member of the UV1300 family small sized UHF/VHF tuners
- Systems CCIR: B/G, H, L, L', I and I'; OIRT: D/K
- Voltage synthesized tuning (VST)
- Off-air channels, S-cable channels and Hyperband
- Standardized mechanical dimensions and pinning
- Compact size

PINNING	PIN VALUE
1. Gain control voltage (AGC)	: 4.0V, Max:4.5V
2. Tuning voltage	
3. High band switch	: 5V, Min:4.75V, Max:5.5V
4. Mid band switch	: 5V, Min:4.75V, Max:5.5V
5. Low band switch	: 5V, Min:4.75V, Max:5.5V
6. Supply voltage	: 5V, Min:4.75V, Max:5.5V
7. Not connected	
8. Not connected	
9. Not connected	
10. Symmetrical IF output 1	
11. Symmetrical IF output 2	

Bandswitching table:

	Pin 3	Pin 4	Pin 5
Low band	0V	0V	+5V
Mid band	0V	+5V	0V
High band	+5V	0V	0V

General description of UV1316:

The UV1316 tuner belongs to the UV 1300 family of tuners, which are designed to meet a wide range of applications. It is a combined VHF, UHF tuner suitable for CCIR systems B/G, H, L, L', I and I'. The low IF output impedance has been designed for direct drive of a wide variety of SAW filters with sufficient suppression of triple transient.

Features of UV1316:

- Member of the UV1300 family small sized UHF/VHF tuners
- Systems CCIR: B/G, H, L, L', I and I'; OIRT: D/K
- Digitally controlled (PLL) tuning via I²C-bus
- Off-air channels, S-cable channels and Hyperband
- World standardized mechanical dimensions and world standard pinning
- Compact size
- Complies to "CENELEC EN55020" and "EN55013"

PINNING	PIN VALUE
1. Gain control voltage (AGC)	: 4.0V, Max:4.5V
2. Tuning voltage	
3. I ² C-bus address select	: Max:5.5V
4. I ² C-bus serial clock	: Min:-0.3V, Max:5.5V
5. I ² C-bus serial data	: Min:-0.3V, Max:5.5V
6. Not connected	
7. PLL supply voltage	: 5.0V, Min:4.75V, Max:5.5V
8. ADC input	
9. Tuner supply voltage	: 33V, Min:30V, Max:35V
10. Symmetrical IF output 1	
11. Symmetrical IF output 2	

General description of UV1336:

UV1336 series is developed for reception of channels broadcast in accordance with the M, N standard. The tuning is available through built-in digitally controlled I²C bus (PLL).

Features of UV1336:

- Global standard pinning
- Integrated Mixer-Oscillator&PLL function
- Conforms to CISPR 13, FCC and DOC (Canada) regulations
- Low power consumption
- Both Phono connector and 'F' connector are available

PINNING	PIN VALUE
1. Gain control voltage	: 4.0V, Max:4.5V
2. Tuning voltage	
3. Address select	: Max:5.5V
4. Serial clock	: Min:-0.3V, Max:5.5V
5. Serial data	: Min:-0.3V, Max:5.5V
6. Not connected	
7. Supply voltage	: 5.0V, Min:4.75V, Max:5.5V
8. ADC input (optional)	
9. Tuning supply voltage	: 33V, Min:30V, Max:35V
10. Ground	
11. IF output	

TEA6415C:

General Description:

The main function of the TEA6415C is to switch 8 video input sources on the 6 outputs.

Each output can be switched to only one of the inputs whereas but any same input may be connected to several outputs. All switching possibilities are controlled through the I²C-bus.

Features:

- 20 MHz Bandwidth
- Cascadable with another TEA6415C (Internal address can be changed by pin 7 voltage)
- 8 inputs (CVBS, RGB, Mac, CHROMA, ...)
- 6 Outputs
- Possibility of MAC or chroma signal for each input by switching-off the clamp with an external resistor bridge
- Bus controlled
- 6.5dB gain between any input and output
- -55dB crosstalk at 5MHz
- Fully ESD protected

PINNING	PIN VALUE
1. Input	: Max : 2Vpp, Input Current : 1mA, Max : 3mA
2. Data	: Low level : -0.3V Max:1.5V, High level : 3.0V Max : Vcc+0.5V
3. Input	: Max : 2Vpp, Input Current : 1mA, Max : 3mA
4. Clock	: Low level : -0.3V Max:1.5V, High level : 3.0V Max : Vcc+0.5V
5. Input	: Max : 2Vpp, Input Current : 1mA, Max : 3mA
6. Input	: Max : 2Vpp, Input Current : 1mA, Max : 3mA
7. Prog	
8. Input	: Max : 2Vpp, Input Current : 1mA, Max : 3mA
9. Vcc	: 12V
10. Input	: Max : 2Vpp, Input Current : 1mA, Max : 3mA
11. Input	: Max : 2Vpp, Input Current : 1mA, Max : 3mA
12. Ground	
13. Output	: 5.5Vpp, Min : 4.5Vpp
14. Output	: 5.5Vpp, Min : 4.5Vpp
15. Output	: 5.5Vpp, Min : 4.5Vpp
16. Output	: 5.5Vpp, Min : 4.5Vpp
17. Output	: 5.5Vpp, Min : 4.5Vpp
18. Output	: 5.5Vpp, Min : 4.5Vpp
19. Ground	
20. Input	: Max : 2Vpp, Input Current : 1mA, Max : 3mA

TDA9830:

General description:

The TDA9830, a monolithic integrated circuit, is designed for AM-sound demodulation used in L- and L'-standard. The IC provides an audio source selector and also mute switch.

Features:

- Adjustment free wideband synchronous AM demodulator
- Audio source-mute switch (low noise)
- Audio level according EN50049
- 5 to 8V power supply or 12 V alternative
- Low power consumption

PINNING	PIN VALUE
1. Sound IF differential input signal	: Minimum IF input signal (between pins 1 and 16):60mV Max:100mV Maximum IF input signal (between pins 1 and 16) :120mV Min :70mV
2. Not connected	
3. AGC capacitor	
4. REF voltage filtering capacitor	
5. Not connected	
6. AM demodulator output	: THD:0.8%, Max:2%; S/N:53dB, Min:47%; DC potential:2.15V, Min : 2.00V Max :2.30V
7. Input signal (from AM) to audio switch	: Max:1.2V
8. Output signal from audio switch	: 80dB, Min : 70dB
9. Input signal (from external) to audio switch	: Max:1.2V

- 10. Switch input select control : Audio switching voltage to activate pin7 : Min :0V, Max :0.8V
Audio switching voltage to activate pin9 : Min:1.5V, Max :Vp
- 11. Supply voltage : 12V, Min:10.8V, Max:13.2V
- 12. Mute control : For Mute-ON Min : 0V, Max : 0.8V For Mute-OFF Min : 1.5V, Max : Vp
- 13. Ground
- 14. Supply voltage : 5V, Min : 4.5V, Max : 8.8V
- 15. Not connected
- 16. Sound IF differential input signal : Look at pin 1

TDA2614/TDA2615/TDA2616Q:

General Description of TDA2614:

The TDA2614 is a power amplifier in a 9-lead single-in-line (SIL9) plastic medium power package. It has been especially designed for mains fed applications.

Features:

- Requires very few external components
- No switch-on/switch-off clicks
- Input mute during switch-on and switch-off
- Low offset voltage between output and ground
- Hi-fi in accordance with IEC 268 and DIN 45500
- Short-circuit proof and thermal protected
- Mute possibility

PINNING

PIN VALUE

- 1. Not connected
- 2. Mute input : 300mA (For mute to activate)
- 3. Ground
- 4. Not connected
- 5. Supply voltage (negative) : -12VDC
- 6. Output : 6.9Vrms
- 7. Supply voltage (positive) : +12VDC
- 8. Inverting input (Ground) : 0V
- 9. Non-inverting input : 700mVrms, Min : 500mVrms, Max : 900mVrms

General Description of TDA2615:

The TDA2615 is a dual power amplifier in a 9-lead single-in-line (SIL9). It has been especially designed for mains fed applications.

Features:

- Requires very few external components
- No switch-on/switch-off clicks
- Input mute during switch-on and switch-off
- Low offset voltage between output and ground
- Excellent gain balance of both amplifiers
- Hi-fi in accordance with IEC 268 and DIN 45500
- Short-circuit proof and thermal protected
- Mute possibility

PINNING

PIN VALUE

- 1. Non-inverting input 1 : 700mVrms, Min :500mVrms, Max : 900mVrms
- 2. Mute input : 300mA (For mute to activate)
- 3. Ground
- 4. Output 1 : 6.9Vrms
- 5. Supply voltage (negative) : -12VDC
- 6. Output 2 : 6.9Vrms
- 7. Supply voltage (positive) : +12VDC
- 8. Inverting inputs 1 and 2 (Ground) : 0V
- 9. Non-inverting input 2 : 700mVrms, Min : 500mVrms, Max : 900mVrms

General Description of TDA2616Q:

The TDA2616Q is a dual power amplifier. It is supplied in a 9-lead SIL-bent-to DIL plastic power package (SOT157). It has been especially designed for mains fed applications.

Features:

- Requires very few external components
- No switch-on/switch-off clicks
- Input mute during switch-on and switch-off
- Low offset voltage between output and ground
- Excellent gain balance of both amplifiers
- Hi-fi in accordance with IEC 268 and DIN 45500
- Short-circuit proof and thermal protected
- Mute possibility

PINNING

1. Non-inverting input 1	: 700mVrms, Min : 500mVrms, Max : 900mVrms
2. Mute input	: 300mA (For mute to activate)
3. Ground	
4. Output 1	: 9.8Vrms
5. Supply voltage (negative)	: -16VDC
6. Output 2	: 9.8Vrms
7. Supply voltage (positive)	: +16VDC
8. Inverting inputs 1 and 2 (Ground)	: 0V
9. Non-inverting input 2	: 700mVrms, Min : 500mVrms, Max : 900mVrms

PIN VALUE**TDA8351/8356:****General Description:**

The TDA8356 is a power circuit for use in 90° colour deflection system for field frequencies of 50 to 120 Hz.

The circuit operates as a highly efficient class G system.

The TDA8351 is a power circuit for use in 110° colour deflection system for field frequencies of 50 to 120 Hz.

The circuit operates as a highly efficient class G system.

Features:

- Few external components
- Highly efficient fully DC-coupled vertical output bridge circuit
- Vertical flyback switch
- Guard circuit
- Protection against:
 - short-circuit of the output pins (7 and 4)
 - short-circuit of the output pins to Vp
- Temperature (thermal) protection
- High EMC immunity because of common mode inputs
- A guard signal in zoom mode

PINNING

1. Input power-stage (positive); includes li(sb) signal bias	: 400mA, Min : 50mA, Max : 500mA
2. Input power-stage (negative); includes li(sb) signal bias	: 400mA, Min : 50mA, Max : 500mA
3. Operating supply voltage	: +15VDC
4. Output voltage B	: Max : 52V Output current : 2App (TDA8356) 3App (TDA8351)
5. Ground	
6. Input flyback supply voltage	: Min : Vp, Max : 50V
7. Output voltage A	: Max : 52V Output current : 2App (TDA8356) 3App (TDA8351)
8. Guard output voltage	: Max:5.5V (Io:100mA)
9. Input feedback voltage	: Max:52V

PIN VALUE**TDA6107Q:**

The TDA6107Q includes three video output amplifiers in a SIL 9 MP (Single In Line 9 pins Medium Power) package SOT111BE, using high-voltage DMOS technology, and is intended to drive the three cathodes of a colour picture tube.

In contrast to previous types of DMOS video amplifiers, all external resistors (Rf, Ri and Ra) are integrated, so the gain is fixed and it saves 9 resistors.

To obtain maximum performance, the amplifier should be used with black-current control and mounted on the CRT panel.

Features:

- Bandwidth: 4.0 MHz typ at 100Vpp (Measured in appli,cation set-up, with Rf=1K5 and Cl=Ctube+Cpcb=10pF)
- Slewrate: 950V/ms
- Fixed gain of 50 times
- No external components, only the well known supply decoupling
- Very simple application with a variety of colour decoders
- Black-current measurement output for automatic black current stabilization
- Only one supply voltage needed
- Internal protection against positive appearing CRT flash-over discharges
- Protection against ESD
- Internal reference voltage
- Thermal protection
- Controllable switch-off behaviour
- Very small PCB dimensions
- Very high replacement value

PINNING

1. Inverting input 1	: 2Vpp
2. Inverting input 2	: 2Vpp
3. Inverting input 3	: 2Vpp
4. Ground	
5. BSC-output	: Max:7V
6. Supply voltage	: 200VDC
7. Cathode output 3	: 20mA, 100Vpp
8. Cathode output 2	: 20mA, 100Vpp
9. Cathode output 1	: 20mA, 100Vpp

PIN VALUE

SAA4961:

The SAA4961 is an adaptive alignment-free one chip comb filter compatible with both PAL and NTSC systems and provides high performance in Y/C separation.

Features:

- One chip adaptive multi-standard comb filter
- Time discrete but continuous amplitude signal processing with analogue interfaces
- Internal delay lines, filters, clock processing and signal switches
- Alignment-free
- No hanging dots or residual cross colour on vertical transients
- Few external components

It is possible to switch the comb filter into one of the following 3 modes:

- 1. Comb mode** : In this mode, luminance and chrominance comb filter function are active.
Chrominance output pin (pin 12) outputs comb filtered chrominance signal, luminance output pin (pin 14) outputs comb filtered luminance signal and CVBS output pin (pin 15) outputs delay compensated CVBS signal.
- 2. Comboff mode** : In this mode, luminance comb filter function is turned off, but chrominance comb filter function operates.
Chrominance output pin (pin 12) outputs comb filtered chrominance signal, luminance output pin (pin 14) outputs delay compensated CVBS signal and CVBS output pin (pin 15) outputs delay compensated CVBS signal.
- 3. Bypass mode** : In this mode, no IC-function is active. Cext is bypassed to chrominance output pin (pin 12) and Yext/CVBS is bypassed to luminance output pin (pin 14) and CVBS output pin (pin 15).

PINNING

PIN VALUE

- | | |
|--|---|
| 1. Subcarrier frequency input | : 200mVpp, Min : 100mVpp, Max : 400mVpp |
| 2. Internal connected | |
| 3. Bypass mode forcing | : HIGH level input voltage Min : 2.4VDC, Max : Vcc |
| 4. Internal connected | |
| 5. Decoupling capacitor | : 1.25VDC, Min : 1.1VDC, Max : 1.4VDC |
| 6. Internal connected | |
| 7. Analogue supply voltage | : 5VDC, Min : 4.75VDC, Max : 5.5VDC |
| 8. Analogue supply voltage output buffer | : 5VDC, Min : 4.75VDC, Max : 5.5VDC |
| 9. Analogue ground | |
| 10. External chrominance input | : 0.7Vpp, Max : 1Vpp |
| 11. Analogue ground output buffer | |
| 12. Chrominance output signal | : 0mV, Min : -400mV, (DC offset voltage related to input) Max : +400mV
BYPASS-mode:Co/Cext : 0dB, Min : -1dB, Max : +1dB |
| 13. fsc reference selection | : HIGH level input voltage Min : 2V, Max : Vcc
: Low level input voltage Min : 0V, Max : 0.8V |
| 14. Luminance output signal | : 1Vpp, Min : 0.6Vpp, Max : 1.54Vpp |
| 15. CVBS and Y output signal | : 1Vpp, Min : 0.6Vpp, Max : 1.54Vpp |
| 16. Internal connected | |
| 17. CVBS and Y input signal | : 1Vpp, Min : 0.7Vpp, Max : 1.4Vpp |
| 18. Disable prefilter | : HIGH level input voltage Min : 2.0VDC, Max : Vcc
: LOW level input voltage Min : 0VDC, Max : 0.8VDC |
| 19. Storage Capacitor | : 2.5VDC, Min : 1.8VDC, Max : Vcc |
| 20. Standard select 1 | : HIGH level input voltage Min : 2.0VDC, Max : Vcc
: LOW level input voltage Min : 0VDC, Max : 0.8VDC |
| 21. Digital ground | |
| 22. Digital supply voltage | : 5VDC, Min : 4.75VDC, Max : 5.5VDC |
| 23. Standard select 2 | : HIGH level input voltage Min : 2.0VDC, Max : Vcc
: LOW level input voltage Min : 0VDC, Max : 0.8VDC |
| 24. Decoupling capacitor | : 1.25VDC, Min : 1.1VDC, Max : 1.4VDC |
| 25. Controlling I/O pin | : HIGH level input voltage Min : 2.4VDC, Max : Vcc
: LOW level input voltage Min : 0VDC, Max : 1.5VDC |
| 26. Analogue ground PLL | |
| 27. Analogue supply voltage PLL | : 5VDC, Min : 4.75VDC, Max : 5.5VDC |
| 28. Internal connected | |

MC44604:

General description:

The MC44604 is an enhanced high performance controller that is specifically designed for off-line and DC-to-DC converter applications. It offers a really safe and reliable power management thanks particularly to its protection features (foldback, overvoltage detection, soft start, accurate demagnetization detection). Its high current totem pole output is also ideally suited for driving a power MOSFET, but can also be used for driving a bipolar transistor in low power converters. In addition to these features, the MC44604 offers an efficient stand-by mode.

Features:

Current Mode Controller

- Operation up to 250 kHz Output Switching Frequency
- Inherent Feed Forward Compensation
- Latching PWM for Cycle-by-Cycle Current Limiting
- Oscillator with Precise Frequency Control

High Flexibility

- Externally Programmable Reference Current
- Secondary or Primary Sensing
- High Current Totem Pole Output
- Undervoltage Lockout with Hysteresis

Safety/Protection Features

- Overvoltage Protection Facility against Open Loop
- Protection against Short Circuit on Oscillator Pin
- Fully Programmable Foldback
- Soft-Start Feature
- Accurate max Duty Cycle Setting
- Demagnetization (Zero Current Detection) Protection
- Internally Trimmed Reference

“Green Controller”

- Low Start-Up and Operating Current
- Patented Stand-by Pulsed Mode for low stand-by losses
- Low dV/dT for Low EMI radiations

PINNING

PIN VALUE

1. Output Supply Voltage (Vcc)	: 12VDC
2. Output Supply Voltage (Vc)	: 12VDC
3. Output voltage	: LOW Level Drop Voltage 1VDC, Max : 1.2VDC (Isink=100mA) 1.4VDC, Max : 2VDC (Isink=500mA) HIGH Level Drop Voltage 1.5VDC, Max : 2VDC (Isource=200mA) 2VDC, Max : 2.7VDC (Isource=500mA)
4. Ground	
5. Foldback input	: 0.9VDC, Min:-0.3VDC, Max : Vcc+0.3VDC
6. Overvoltage protection (OVP)	: 0.78VDC, Min:-0.3VDC, Max : Vcc+0.3VDC
7. Current sense input	: Min:-0.3VDC, Max : Vcc+0.3VDC
8. Demagnetization detection input	: Idemag-ib (source):-4mA Idemag-ib (sink) : 10mA
9. Standby current set	: Ipeak-stby/Iref : 0.40 Min : 0.37 Max : 0.43
10. Oscillator voltage swing	: 2Vpp
11. Soft start/Dmax/Voltage mode	: Idischarge : 5mA, Min : 1.5mA (Vsoft start=1V)
12. Clamp E/A input	: 4.7VDC, Min : 4.5VDC Max : 4.9VDC
13. E/A output	: HIGH State: 6.5VDC, Min : 5.5VDC, Max : 7.5VDC LOW State : 1.0VDC, 1.1VDC
14. E/A input	: 2.5VDC, Min : 2.4VDC, Max : 2.6VDC
15. Stand-by management	: Stand-by On Detection current ratio : Idet/Iref : 0.38, Min : 0.34, Max : 0.42 Stand-by regulation current ratio : Ireg/Iref : 20.5, Min : 18, Max : 23
16. Rref input	: 2.5VDC, Min : 2.4VDC, Max : 2.6VDC

SDA525X:

General description:

The SDA525X is designed for a low cost mono TV-set with analogue picture and sound control. IN SDA525X the following IC' s are used and supported:

Non-volatile memory	: SDA 2526 or SDA2546
PLL	: SDA 3202-3, SDA 3302
IR transmitter	: SDA 2208-3 or SDA 2218
IR preamplifier	: SFH 506-32

Features:

General:

- Display of program number, channel number, TV standard, analogue values, sleep timer, parental control, and mute is done by OSD
- Single LED for IR active, standby and on mode indication
- Local control (8 keys)
- IR remote control
- Control of volume, contrast, brightness, and saturation by analogue voltages
- Non-volatile memory for 50 or 100 programs, optimum analogue values and system parameters
- Individual delta volume for each program
- 1 control line to select external source
- 3 control lines for TV standard selection
- Automatic muting if no carrier detected
- Automatic switch-off when carrier disappears for more than 5 minutes
- Software protection against tube flashovers with internal watchdog timer
- Sleep timer
- Parental control
- IF 38 MHz or 38.9 MHz selectable

Tuning:

- Frequency synthesis tuning (62.5 kHz steps)
- 192 step fine tuning
- Channels corresponding to standards
- 100 programs selectable by directly entering a program number or by up/down function depending on the NVM size
- Channel selection by directly entering a channel number or by up/down function
- Channel search function in two directions

Sound:

- Mono sound control by analogue voltage

Service Mode:

- System configuration with service mode

PINNING**PIN VALUE**

1. Crystal selection output 1	: LOW level : 0V HIGH level : 4.2V
2. Volume + switch input	: LOW level : 0V HIGH level : 5V
3. Volume - switch input	: LOW level : 0V HIGH level : 5V
4. Program - switch input	: LOW level : 0V HIGH level : 5V
5. Program + switch input:	: LOW level : 0V HIGH level : 5V
6. LED output	: LOW level : 0V HIGH level : 4.2VDC
7. Filter (sound standard) selection output 1	: LOW level : 0V HIGH level : 4.2V
8. Filter (sound standard) selection output 2	: LOW level : 0V HIGH level : 4.2V
9. Mod-switch selection output	: LOW level : 0V HIGH level : 4.2V
10. Ground	
11. Supply voltage	: +5V
12. 18 MHz crystal connection 1	: 2Vpp
13. 18 MHz crystal connection 2	: 2Vpp
14. L-ACC output	: LOW level : 0V HIGH level : 3.6V
15. RESET output	: LOW level : 0V HIGH level : 5V
16. Comb filter PAL/SECAM selection output	: LOW level : 0V HIGH level : 5V
17. Tuning output	: LOW level : 0V HIGH level : 3.4V
18. Audio switch transistor selection 1	: LOW level : 0V HIGH level : 5V
19. Audio switch transistor selection 2	: LOW level : 0V HIGH level : 5V
20. Audio switch transistor selection 3	: LOW level : 0V HIGH level : 5V
21. Audio switch transistor selection 4	: LOW level : 0V HIGH level : 5V
22. Comb filter standard selection 1	: LOW level : 0V HIGH level : 5V
23. Comb filter standard selection 2	: LOW level : 0V HIGH level : 5V
24. Analogue ground	
25. Filter 3	
26. Filter 2	
27. Filter 1	
28. Analogue supply voltage	: 5VDC
29. Reference current input	
30. CVBS input	: 1Vpp
31. Service output	: LOW level : 0V HIGH level : 5V
32. AV2-status input	: LOW level : 0V HIGH level : 5V
33. AV1-status input	: LOW level : 0V HIGH level : 5V
34. AFC output	: 600mVpp
35. Ground	
36. IR-input	: LOW level : 0V HIGH level : 5V
37. Supply voltage	: 5V
38. LC input	: 5Vpp
39. LC output	: 5Vpp
40. Mute output	: LOW level : 0V HIGH level : 4.2V
41. St-by output	: LOW level : 0V HIGH level : 1.4V
42. Clock signal output	
43. Data output	
44. Local connection	: LOW : 0V HIGH : 5V
45. SAND input	: 4Vpp
46. ODD/EVEN output	: 1.8V
47. OSD-red output	: LOW level : 0V HIGH level : 5V
48. OSD-green output	: LOW level : 0V HIGH level : 5V
49. OSD-blue output	: LOW level : 0V HIGH level : 5V
50. OSD-blanking output	: LOW level : 0Vh HIGH level : 5V
51. COR output	: LOW level : 0V HIGH level : 5V
52. Crystal selection output 2	: LOW level : 0V HIGH level : 4.2V

TDA9875:

General description:

The TDA9875 is a single-chip Digital TV Sound Processor (DTVSP) for analogue and digital multi-channel sound systems.

Features:

Demodulator and decoder section:

- Sound IF (SIF) input switch e.g. to select between terrestrial TV SIF and SAT SIF sources
- SIF AGC with 21dB control range
- SIF 8-bit Analogue-to-Digital Converter (ADC)
- DQPSK demodulation for different standards, simultaneously with 1-channel FM demodulation
- NICAM decoding (B/G, I and L standard)
- Two-carrier multistandard FM demodulation (B/G, D/K and M standard)
- Decoding for three analogue multi-channel systems (A2, A2+ and A2*) and satellite sound
- Optional AM demodulation for system L, simultaneously with NICAM
- Programmable identification (B/G, D/K and M standard) and different identification times

DSP section:

- Digital crossbar switch for all digital signal sources and destinations
- Control of volume, balance, contour, bass, treble, pseudo stereo, spatial, bass boost and soft-mute
- Plop-free volume control
- Automatic Volume Level (AVL) control
- Adaptive de-emphasis for satellite
- Programmable beeper
- Monitor selection for FM/AM DC values and signals, with peak detection option
- I²S-bus interface for a feature extension (e.g. Dolby surround) with matrix, level adjust and mute.

Analogue audio section:

- Analogue crossbar switch with inputs for mono and stereo, SCART 1 input/output, SCART2 input/output and line output
- User defined full-level/-3dB scaling for SCART outputs
- Output selection of mono, stereo, dual A/B, dual A or dual B
- 20 kHz bandwidth for SCART-to-SCART copies
- Standby mode with functionality for SCART copies
- Dual audio digital-to-analogue converter from DSP to analogue crossbar switch, bandwidth 15kHz
- Dual audio ADC from analogue inputs to DSP
- Two dual audio Digital-to-Analogue Converters (DACs) for loudspeakers (Main) and headphone (Auxiliary) outputs; also applicable for L, R, C and S in the Dolby Pro Logic mode with feature extension.

PINNING

	PIN VALUE
1. NICAM clock output (728kHz)	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
2. Serial NICAM DATA output (728kHz)	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
3. First I ² C-bus slave address modifier	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
4. SCL (I ² C-bus clock)	: LOW level input voltage : Max : 1.6V HIGH level input voltage : Min : 3.0V
5. SDA (I ² C-bus data)	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
6. Analogue supply ground 1	: 0V
7. Analogue supply voltage 1	: 5V, Min : 4.75V, Max : 5.5V
8. Resistor for reference current generator	: Iref : 220mA, Min : 170mA, Max : 260mA
9. First general purpose I/O pin	
10. Sound IF input 2	: Min : 21Vrms, Max : 250mVrms
11. Reference voltage for demodulator part	: Vdda1/Vssa1 : 50%, Min : 35%, Max : 65%
12. Sound IF input 1	: Min : 21Vrms, Max : 250mVrms
13. Second I ² C-bus slave address modifier	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
14. Digital supply ground 1	: 0V
15. Digital supply voltage 1	: 5V, Min : 4.75V, Max : 5.5V
16. Capacitor for power-on reset	: LOW level input voltage : Max : 1.6V HIGH level input voltage : Min : 3.0V
17. Crystal oscillator output	
18. Crystal oscillator input	
19. Tuning voltage output for crystal oscillator	
20. Second general purpose I/O pin	
21. System clock output	: LOW level input voltage : Max : 0.5V HIGH level input voltage : Min : 2.9V
22. I ² S-bus clock	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
23. I ² S-bus word select	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
24. I ² S-bus data output 2	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
25. I ² S-bus data output 1	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
26. I ² S-bus data input 2	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
27. I ² S-bus data input 1	: LOW level input voltage : Max : 0.8V HIGH level input voltage : Min : 2.0V
28. First test pin; connected to ground for normal operation	
29. Audio mono input	: 500mVrms
30. Second test pin; connected to ground for normal operation	
31. External audio input right channel	: 350mVrms

32. External audio input left channel	: 350mVrms
33. SCART 1 input right channel	: 350mVrms
34. SCART 1 input left channel	: 350mVrms
35. Ground guards	
36. SCART 2 input right channel	: 350mVrms
37. SCART 2 input left channel	: 350mVrms
38. Analogue supply voltage 2	: 5V, Min : 4.75V, Max : 5.5V
39. Positive reference voltage	
40. Reference voltage ground	: 0V
41. Filter capacitor pin 1	
42. Filter capacitor pin 2	
43. Analogue supply ground 2	: 0V
44. Filter capacitor pin 2	
45. Filter capacitor pin 1	
46. Reference voltage 2	: Vdda2/Vssa2 : 50%
47. Scart 1 output right channel	: 500mVrms
48. Scart 1 output left channel	: 500mVrms
49. Digital supply ground 2	: 0V
50. Analogue supply ground 4	: 0V
51. Scart 2 output right channel	: 500mVrms
52. Scart 2 output left channel	: 500mVrms
53. Reference voltage 3	: Vdda3/Vssa3:50%
54. Post-filter capacitor pin right channel	
55. Post-filter capacitor pin left channel	
56. Analogue supply ground 3	: 0V
57. Headphone output right channel	: Vo(clip) : Min : 1400mVrms
58. Headphone output left channel	: Vo(clip) : Min : 1400mVrms
59. Analogue supply voltage 3	: 5.0V, Min : 4.75V, Max : 5.5V
60. Loudspeaker (main) output right channel	: Vo(clip) : Min : 1400mVrms
61. Loudspeaker (main) output left channel	: Vo(clip) : Min : 1400mVrms
62. Line output left channel	: 500mVrms
63. Line output right channel	: 500mVrms
64. Digital supply voltage 2	: 5.0V, Min : 4.75V, Max : 5.5V

TDA9818:

General description:

The TDA9818 is an integrated circuit for multistandard vision IF signal processing, sound AM and FM demodulation.

Features:

- 5 V supply voltage
- Applicable for IF frequencies of 38.9 MHz, 45.75 MHz and 58.75 MHz
- Gain controlled wide band VIF-amplifier (AC-coupled)
- True synchronous demodulation with active carrier regeneration (very linear demodulation, good intermodulation figures, reduced harmonics, excellent pulse response)
- Robustness for overmodulation better than 105% due to gated phase detector at L/L accent standard and PLL-bandwidth control at negative modulated standards
- VCO frequency switchable between L and L accent (alignment external) picture carrier frequency
- VIF AGC detector for gain control, operating as peak sync detector for B/G, peak white detector for L; signal controlled reaction time for L
- Tuner AGC with adjustable takeover point (TOP)
- AFC detector without extra reference circuit
- AC-coupled limiter amplifier for sound intercarrier signal
- Alignment-free FM-PLL demodulator with high linearity
- SIF input for single reference QSS mode (PLL controlled); SIF AGC detector for gain controlled SIF amplifier; single reference QSS mixer able to operate in high performance single reference QSS mode and in intercarrier mode
- AM demodulator without extra reference circuit
- Stabilizer circuit for ripple rejection and to achieve constant output signals
- ESD protection for all pins

PINNING

PIN VALUE

1. VIF differential input signal voltage 1	: Input signal voltage sensitivity 60mVrms, Max:100mVrms
2. VIF differential input signal voltage 2	: Input signal voltage sensitivity 60mVrms, Max:100mVrms
3. Standard switch	: Min : 2.8V, Max : Vp
4. VIF AGC capacitor	: Charging current : 1mA, Min : 0.75mA, Max : 1.25mA Discharging current : B/G standard : 20mA, Min : 15mA, Max:25mA Normal mode L : 300nA, Min : 225nA, Max : 375nA Fast mode L : 40mA, Min : 30mA, Max : 50mA
5. SIF AGC capacitor	: Charging current : FM mode : 12mA, Min : 8mA, Max : 16mA AM mode : 1.2mA, Min : 0.8mA, Max : 1.6mA Discharging current : FM mode : 12mA, Min : 8mA, Max : 16mA Normal mode AM : 1.4mA, Min : 1mA, Max : 1.8mA Fast mode AM : 85mA, Min : 60mA, Max : 110mA
6. PLL loop filter	: Min : 0V, Max : Vp
7. L/L accent switch and adjust	: Min : 0V, Max : Vp
8. Audio output	: Rx : 470ohm : 250mVrms, Min : 200mVrms, Max : 300mVrms Rx : 0ohm : 500mVrms, Min : 400mVrms, Max : 600mVrms
9. De-emphasis input	: Min : 0V, Max : Vp
10. De-emphasis output	: Min : 0V, Max : Vp
11. Decoupling capacitor	: Min : 0V, Max : Vp
12. Single reference QSS/intercarrier output voltage	: 140mVrms, Min : 100mVrms Max : 180mVrms

13. Sound intercarrier input voltage	: Input signal voltage for lock-in: Max : 100mVrms Input signal voltage : 250mVrms
14. Tuner AGC output	: IF input signal voltage for minimum starting point of tuner takeover 2mV, Max : 5mV IF input signal voltage for maximum starting point of tuner takeover 100mV, Min : 50mV
15. Black level detector	: Min : 0V, Max : Vp
16. Composite video output voltage	: 1.1Vpp, Min : 0.97Vpp, Max : 1.23Vpp
17. AFC output	: Upper limit : Vp-0.3V, Min : Vp-0.6V, Lower limit : 0.3V, Max : 0.6V
18. VCO1 resonance circuit	
19. VCO2 resonance circuit	
20. Ground	: 0V
21. Supply voltage	: 5V, Min : 4.5V, Max : 5.5V
22. Tuner AGC takeover adjust (TOP)	
23. SIF differential input signal voltage 1	: Input signal voltage sensitivity 50mVrms, Max : 100mVrms
24. SIF differential input signal voltage 2	: Input signal voltage sensitivity 50mVrms, Max : 100mVrms

ST24C08:

General description:

The ST24C08 is a 8Kbit electrically erasable programmable memory (EEPROM), organized as 4 blocks of 256 * 8 bits. The memory operates with a power supply value as low as 2.5V. Both Plastic Dual-in-Line and Plastic Small Outline packages are available.

Features:

- Minimum 1 million ERASE/WRITE cycles with over 10 years data retention
- Single supply voltage:4.5 to 5.5V
- Two wire serial interface, fully IIC-bus compatible
- Byte and Multibyte write (up to 8 bytes)
- Page write (up to 16 bytes)
- Byte, random and sequential read modes
- Self timed programming cycle

PINNING

	PIN VALUE
1. Write protect enable (Ground)	: 0V
2. Not connected (Ground)	: 0V
3. Chip enable input (Ground)	: 0V
4. Ground	: 0V
5. Serial data address input/output	: Input LOW voltage : Min : -0.3V, Max : 0.3*Vcc Input HIGH voltage: Min : 0.7*Vcc, Max : Vcc+1
6. Serial clock	: Input LOW voltage : Min: -0.3V, Max : 0.3*Vcc Input HIGH voltage: Min : 0.7*Vcc, Max : Vcc+1
7. Multibyte/Page write mode	: Input LOW voltage : Min: -0.3V, Max :0.5V Input HIGH voltage: Min : Vcc-0.5, Max : Vcc+1
8. Supply voltage	: Min : 2.5V, Max : 5.5V

TDA1308:

Features:

- Wide temperature range
- No switch ON/OFF clicks
- Excellent power supply ripple rejection
- Low power consumption
- Short-circuit resistant
- High performance
 - high signal-to-noise ratio
 - high slew rate
 - low distortion
- Large output voltage swing

PINNING

	PIN VALUE
1. Output A (Voltage swing)	: Min : 0.75V, Max : 4.25V
2. Inverting input A	: Vo(clip) : Min : 1400mVrms
3. Non-inverting input A	: 2.5V
4. Ground	: 0V
5. Non-inverting input B	: 2.5V
6. Inverting input B	: Vo(clip) : Min : 1400mVrms
7. Output B (Voltage swing)	: Min : 0.75V, Max : 4.25V
8. Positive supply	: 5V, Min : 3.0V, Max : 7.0V

G1965M:

Features:

- TV IF filter with Nyquist slope and sound shelf at typ. 20.4dB
- High colour carrier level at typ. 1.0dB
- Constant group delay
- Insertion attenuation typ. 15.0dB

PINNING

1. Input
2. Input-ground
3. Chip carrier-ground

TDA9855

General description:

The TDA9855 is a bipolar-integrated BTSC stereo/SAP decoder with hi-fi audio processor (IIC-bus controlled) for application in TV sets.

Features:

- Quasi alignment-free BTSC stereo decoder due to auto adjustment of channel separation via IIC-bus
- High integration level with automatically tuned integrated filters
- Input level adjustment IIC-bus controlled
- Alignment-free Sap processing
- dbx noise reduction circuit
- Audio processor
 - Selector for internal and external signals (line in)
 - Automatic volume level control
 - Subwoofer or surround output with separate volume control
 - Volume control
 - Special loudness characteristic automatically controlled in combination with volume setting
 - Bass and treble control
 - Audio signal zero crossing detection between any volume step switching
 - Mute control at audio signal zero crossing
 - IIC-bus transceiver.

PINNING

PIN VALUE

- | | |
|---|--|
| 1. Treble control capacitor, left channel | |
| 2. Bass control capacitor, left channel | |
| 3. Bass control capacitor, left channel | |
| 4. Not connected | |
| 5. Programmable address bit (module address) | |
| 6. Output, left channel | : 500mVrms, Min : 480mVrms,
Max : 520mVrms |
| 7. Input loudness, left channel | |
| 8. Input volume control, left channel | : 2.15Vrms, Min : 2Vrms |
| 9. Output effects, left channel | |
| 10. Automatic volume control capacitor | |
| 11. Reference voltage 0.5Vcc | : 4VDC |
| 12. Line input, left channel | : 2.3Vrms, Min : 2Vrms |
| 13. Input automatic volume control, left channel | : Min : 2Vrms |
| 14. Output selector, left channel | |
| 15. Line output, left channel | : 500mVrms |
| 16. Capacitor timing wideband for dbx | |
| 17. Capacitor timing spectral for dbx | |
| 18. Capacitor wideband for dbx | |
| 19. Capacitor spectral for dbx | |
| 20. Variable emphasis out for dbx | |
| 21. Variable emphasis in for dbx | |
| 22. Capacitor noise reduction for dbx | |
| 23. Capacitor mute for SAP | |
| 24. Capacitor DC decoupling for SAP | |
| 25. Common ground | : 0V |
| 26. Serial data input/output | : High level input voltage:
Min : 3VDC, Max : Vcc Low level input voltage:
Min : -0.3VDC, Max : 1.5VDC
Low level output voltage : Max : 0.4VDC |
| 27. Serial clock input | : High level input voltage:
Min : 3VDC, Max : Vcc
Low level input voltage : Min : -0.3VDC, Max : 1.5VDC
Low level output voltage : Max : 0.4VDC |
| 28. Supply voltage | : 8VDC |
| 29. Input composite signal | : 250mVrms |
| 30. Capacitor for electronic filtering of supply | |
| 31. Capacitor for pilot detector | |
| 32. Capacitor for pilot detector | |
| 33. Capacitor for phase detector | |
| 34. Capacitor for filter adjust | |
| 35. Ceramic resonator | |
| 36. Capacitor DC decoupling mono | |
| 37. Capacitor DC decoupling stereo/SAP | |
| 38. Line output, right channel | : 500mVrms |
| 39. Output selector, right channel | |
| 40. Input automatic volume control, right channel | : Min:2Vrms |
| 41. Line input, right channel | : 2.3Vrms, Min : 2Vrms |
| 42. Capacitor 2 pseudo function | |
| 43. Capacitor 1 pseudo function | |
| 44. Output effects, right channel | |
| 45. Input volume control, right channel | : Min : 2Vrms |
| 46. Input loudness, right channel | |
| 47. Output, right channel | : 500mVrms, Min : 480mVrms,
Max : 520mVrms |
| 48. Not connected | |
| 49. Filter capacitor for subwoofer | |
| 50. Bass control capacitor, right channel | |
| 51. Bass control capacitor, right channel | |
| 52. Treble control capacitor | |

AK19 CHASSIS MANUAL ADJUSTMENTS PROCEDURE

In order to enter the service mode, first enter the installation menu (or press blue button on the remote control handset) and then press the digits 4, 7, 2 and 5 respectively.

For ADJUST settings:

Select **Adjust** using ∇ or \triangle button and press \triangleright or \triangleleft button to enter it. To select different adjust parameters, use ∇ or \triangle button. To change the selected parameter, use \triangleright or \triangleleft button.

WHITE BALANCE ADJUSTMENT:

The following three parameters are used to make white balance adjustment. To do this, use a Colour Analyser. Using white point RED, white point GREEN and white point BLUE parameters, insert the + sign in the square which is in the middle of the screen.

ADJUST 00 = White Point RED

ADJUST 01 = White Point GREEN

ADJUST 02 = White Point BLUE

AGC ADJUSTMENT:

In order to do AGC adjustment, enter a 60dBmV RF signal level from channel C-12.

Connect a digital voltmeter to pin 1 of the tuner. Change the AGC parameter until you see 3.70VDC on voltmeter display. Check that picture is normal at 90dBmV signal level.

IF-PLL NEGATIVE ADJUSTMENT (Only with PLL tuner):

Connect 38.9 MHz test pattern for PAL B/G, PAL-SECAM B/G, 39.5 MHz test pattern for PAL I or 45.75 MHz test pattern for PAL M/N, NTSC M model to Z401 SAW filter input terminals. Change the IF-PLL Negative parameter until you see IN, DOWN below. If you cannot catch IN, DOWN position this way, using a screwdriver rotate the VIF-COIL LT401 left or right until you see IN, DOWN.

IF-PLL POSITIVE ADJUSTMENT (Only with PLL tuner):

Connect 33.9 MHz test pattern for SECAM L' model to Z401 SAW filter input terminals. Change the IF-PLL Positive parameter until you see IN, DOWN below. If you cannot catch IN, DOWN position this way, using a screwdriver rotate the VIF-COIL LT401 left or right until you see IN, DOWN.

LUMINANCE DELAY ADJUSTMENT (with only TDA 8844 video processor):

Y-Delay PAL

Enter a PAL B/G colour and black-white bar test pattern via RF. Adjust Y-Delay PAL till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

Note: If the SAW filter is one of the G1965M, J1951M, J3950M, K2958M, K2962M, G3957M, K6256K, K6259K or M1963M, there is constant group delay distortion, so for an equal delay of the luminance and chrominance signal the delay must be set at a value of 160nS. This means the adjustment must be set to the maximum value.

Y-Delay SECAM

Enter a SECAM B/G colour and black-white bar test pattern via RF. Adjust Y-Delay SECAM till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

Note: If the SAW filter is one of the G1965M, K2958M, K2962M, G3957M, K6256K or K6259K, there is constant group delay distortion, so for an equal delay of the luminance and chrominance signal the delay must be set at a value of 160nS.

This means the adjustment must be set to the maximum value.

Y-Delay NTSC

Enter an NTSC colour and black-white bar test pattern via RF. Adjust Y-Delay NTSC till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

Note: If the SAW filter is M1963M, there is constant group delay distortion, so for an equal delay of the luminance and chrominance signal the delay must be set at a value of 160nS. This means the adjustment must be set to the maximum value.

Y-Delay Other

In case of other colour systems, enter this system with colour and black-white bar test pattern via RF. Adjust Y-Delay Other till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible. Normally for an equal delay of the luminance and chrominance signal the delay must be set at a value of 160nS.

This means the adjustment must be set to the maximum value.

VERTICAL ZOOM ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G circle test pattern via RF. Change vertical zoom till you see the upper and lower limit of the circle as close to the upper and lower limit of the picture tube as possible.

VERTICAL SCROLL ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G circle test pattern via RF. Change vertical scroll till you see the circle exactly in the middle of the screen.

4:3 HORIZONTAL SHIFT ADJUSTMENT:

Enter a RED PURITY test pattern via RF. Change horizontal shift till the picture is horizontally centred. Check whether this adjustment is correct after completing Service Mode Adjustment.

4:3 VERTICAL SLOPE ADJUSTMENT:

Enter a CROSS-HATCH B/G test pattern via RF. Change vertical slope till the size of squares on both the upper and lower part of test pattern become equal to the squares laying on the vertical centre of the test pattern. Check and readjust VERTICAL SLOPE item if the adjustment becomes improper after some other geometric adjustments are done.

4:3 VERTICAL AMPLITUDE ADJUSTMENT:

Enter a PAL B/G test pattern via RF. Change vertical slope till horizontal black lines on both the upper and lower part of the test pattern become very close to the upper and lower horizontal sides of picture tube and nearly about to disappear. Check and readjust VERTICAL AMPLITUDE item if the adjustment becomes improper after some other geometric adjustments are done.

4:3 S-CORRECTION ADJUSTMENT:

Enter a PAL B/G circle test pattern via RF. Change S-correction till the middle part of the circle is as round as possible.

4:3 VERTICAL SHIFT ADJUSTMENT:

Enter a PAL B/G test pattern via RF. Change Vertical Shift till the test pattern is vertically centred, i.e. horizontal line at the centre pattern is in equal distance both to upper and lower side of the picture tube. Check and readjust Vertical Shift item if the adjustment becomes improper after some other geometric adjustments are done.

4:3 EW WIDTH ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G test pattern via RF. Change EW Width till the vertical black and white bars on both left and right side of the pattern exactly disappear.

4:3 EW PARABOLA WIDTH ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G test pattern via RF. Change EW Parabola Width till vertical lines close to the both sides of the picture frame become parallel to vertical sides of picture tube. Check and readjust EW Parabola Width item if the adjustment becomes improper after some other geometric adjustments are done.

4:3 EW CORNER PARABOLA ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G test pattern via RF. Change EW Corner Parabola till vertical lines at the corners of both sides of picture frame become vertical and parallel to vertical corner sides of picture tube. Check and readjust EW Corner Parabola item if the adjustment becomes improper after some other geometric adjustments are done.

4:3 EW TRAPEZIUM ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G test pattern via RF. Change EW Trapezium till vertical lines, especially lines at the sides of the picture frame became parallel to the both sides of picture tube as close as possible. Check and readjust EW Trapezium item if the adjustment becomes improper after some other geometric adjustments are done.

16:9 HORIZONTAL SHIFT ADJUSTMENT:

Enter a RED PURITY test pattern via RF. Change horizontal shift till the picture is horizontally centred. Check whether this adjustment is correct after completing Service Mode Adjustment.

16:9 VERTICAL SLOPE ADJUSTMENT:

Enter a CROSS-HATCH B/G test pattern via RF. Change vertical slope till the size of squares on both the upper and lower part of test pattern become equal to the squares laying on the vertical centre of the test pattern. Check and readjust VERTICAL SLOPE item if the adjustment becomes improper after some other geometric adjustments are done.

16:9 VERTICAL AMPLITUDE ADJUSTMENT:

Enter a PAL B/G test pattern via RF. Change vertical slope till horizontal black lines on both the upper and lower part of the test pattern become very close to the upper and lower horizontal sides of picture tube and nearly about to disappear. Check and readjust VERTICAL AMPLITUDE item if the adjustment becomes improper after some other geometric adjustments are done.

16:9 S-CORRECTION ADJUSTMENT:

Enter a PAL B/G circle test pattern via RF. Change S-correction till the middle part of the circle is as round as possible.

16:9 VERTICAL SHIFT ADJUSTMENT:

Enter a PAL B/G test pattern via RF. Change Vertical Shift till the test pattern is vertically centred, i.e. horizontal line at the centre pattern is in equal distance both to upper and lower side of the picture tube. Check and readjust Vertical Shift item if the adjustment becomes improper after some other geometric adjustments are done.

16:9 EW WIDTH ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G test pattern via RF. Change EW Width till the vertical black and white bars on both left and right side of the pattern exactly disappear.

16:9 EW PARABOLA WIDTH ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G test pattern via RF. Change EW Parabola Width till vertical lines close to the both sides of the picture frame become parallel to vertical sides of picture tube. Check and readjust EW Parabola Width item if the adjustment becomes improper after some other geometric adjustments are done.

16:9 EW CORNER PARABOLA ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G test pattern via RF. Change EW Corner Parabola till vertical lines at the corners of both sides of picture frame become vertical and parallel to vertical corner sides of picture tube. Check and readjust EW Corner Parabola item if the adjustment becomes improper after some other geometric adjustments are done.

16:9 EW TRAPEZIUM ADJUSTMENT (only for 110ø picture tubes):

Enter a PAL B/G test pattern via RF. Change EW Trapezium till vertical lines, especially lines at the sides of the picture frame became parallel to the both sides of picture tube as close as possible. Check and readjust EW Trapezium item if the adjustment becomes improper after some other geometric adjustments are done.

APPLICATION NOTE-1

HOW TO ADD "CLOSED CAPTION" FEATURE TO 11AK19 CHASSIS ?

Necessary boards:

- 11CCM19 Vestel Code: 20014926
- 11CC19-1 Vestel Code: 20002051

- Plug the 11CC19-1 board into the PL401 socket so that the copper side will point out the tuner.
- Remove the diodes D506, D507, D508.
- Insert 11CCM19 board instead of the cathode positions of these diodes via PL301.
- Connect the wires from PL302 (on the 11CCM19 board) to the anode positions of these diodes.
- Connect a 5 cm. length cable between the PL303 (on the 11CCM19 board) and the metal shield which covers the "video stage".
- Connect a cable between the pin 3 of PL401 and pin 16 of SCART 1 (SC050) under the main PCB.
- Connect the 5 wires from PL300 (on the 11CCM19 board) to the socket on the 11CC19-1 board.
- Change the necessary components as follows:

R448	RES CF 1/4W 1K
R465	RES SMD 1/10W 1K
R447	RES SMD 1/10W 560R
L406	FIXED COIL 10 μ H
C428	CAP EL 10 μ F / 50V
Q415	TR BC548B
S415	JUMPER SMD
S416	JUMPER WIRE
J141	DISCONNECTED

APPLICATION NOTE-2

AFC & AGC SETTING PROCEDURE FOR 11AK19 CHASSIS:

1-) FOR AFC SETTING :

- Apply a 38.9 MHz. / 80 dB μ V standart PAL B/G IF signal to the terminals of L201 fixed coil via a pattern generator.
- Enter service mode and select "ADJUST 04". Change it until you obtain the "IN/DOWN" symbol on the screen.
- Switch off the TV to store this adjustment in the memory.

2-) FOR AGC SETTING :

- Apply a standart e.g: 224.25 MHz. / 60 dB μ V standart PAL B/G signal to the antenna input via a pattern generator.
- Enter the service mode (press "blue bton" on the handset and then type 4,7,2,5). Select "ADJUST" menu and enter it. Select the AGC adjustment item (ADJUST 03).
- Measure the voltage on pin 1 of the tuner via a voltmeter.
- Adjust AGC level by means of the arrow keys on the remote control unit until you obtain the max. voltage value.
- When you get the max. voltage on that pin, adjust this voltage to 1 Volt lower than the max. value. (The max. voltage is approx. 3.7 V, so you have to adjust AGC voltage to 3.7-1=2.7V).
- Increase the signal level up to 90 dB μ V and test the picture.
- Switch off the TV to store this adjustment in the memory.

APPROPRIATE SETTING VALUES:

- **AGC VOLTAGE (at Pin 1 of tuner) : 2.7V**

11AK19 SERVICE ADJUSTMENT VALUES

		90°			110°		
		CONSTANT VALUE	ADJUST RANGE (!)	NOT EFFECTE	CONSTANT VALUE	ADJUST RANGE (!)	NOT EFFECTE
ADJUST 00	White Point RED	35					
ADJUST 01	White Point GREEN	35					
ADJUST 02	White Point BLUE	35					
ADJUST 03	AGC		20-32				
ADJUST 04	IF-PLL Negative	80			80		
ADJUST 05	IF-PLL Positive	80			80		
ADJUST 06	Y-Delay PAL	0			0		
ADJUST 07	Y-Delay SECAM	6			6		
ADJUST 08	Y-Delay NTSC	8			8		
ADJUST 09	Y-Delay OTHER	4			4		
ADJUST 10	4:3 Vertical Zoom	13			13		
ADJUST 11	4:3 Vertical Scroll	13			13		
ADJUST 12	4:3 Horizontal Shift		17-43			20-32	
ADJUST 13	4:3 Vertical Slope		28-45			30-41	
ADJUST 14	4:3 Vertical Amplitude		40-58			38-49	
ADJUST 15	4:3 S-Correction		14-28				
ADJUST 16	4:3 Vertical Shift		24-35			30-42	
ADJUST 17	4.3 EW Width	52		!!		48-53	
ADJUST 18	4.3 EW Parabola Widht	34		!!		45-52	
ADJUST 19	4.3 EW Corner Parabola	31		!!		18-28	
ADJUST 20	4.3 EW Trapezium	6		!!		20-32	
ADJUST 21	16:9 Vertical Zoom	13			13		
ADJUST 22	16:9 Vertical Scroll	13			13		
ADJUST 23	16:9 Horizontal Shift		20-30			24-36	
ADJUST 24	16:9 Vertical Slope		30-45			30-45	
ADJUST 25	16:9 Vertical Amplitude		0-5			0-5	
ADJUST 26	16:9 S-Correction		0-10			0-10	
ADJUST 27	16:9 Vertical Shift		24-33			25-38	
ADJUST 28	16:9 EW Width			!!		45-55	
ADJUST 29	16:9 EW Parabola Widht			!!		24-34	
ADJUST 30	16:9 EW Corner Parabola			!!		35-48	
ADJUST 31	16:9 EW Trapezium			!!		23-33	
ADJUST 32	Cinema Vertical Zoom			!!			X
ADJUST 33	Cinema Vertical Scroll			!!			X
ADJUST 34	Cinema Horizontal Shift			!!			X
ADJUST 35	Cinema Vertical Slope			!!			X
ADJUST 36	Cinema Vertical Amplitude			!!			X
ADJUST 37	Cinema S-Correction			!!			X
ADJUST 38	Cinema Vertical Shift			!!			X
ADJUST 39	Cinema EW Width			!!			X
ADJUST 40	Cinema EW Parabola Widht			!!			X
ADJUST 41	Cinema EW Corner Parabola			!!			X
ADJUST 42	Cinema EW Trapezium			!!			X
ADJUST 43	OSD Position	149±2			149±2		

X : VALUES ARE ONLY FOR 16:9
 ! : SUGGESTED VALUE RANGE
 !! : NOT EFFECTED

OPTIONAL COMPONENTS LIST

10002704 EU-51ST

	VESTEL CODE	DESCRIPTION	POSITION NUMBER				
SYSTEM PAL BG	30000092	CAP MKT 220NF 63V J	C415				
	30000295	CAP CER 100NF 50V Z F	CX41				
	30000628	RES CF 1/4W 2.7K J	RX10	RX11			
	30000712	RES CF 1/4W 470R J	J126	J127			
	30001575	IC TDA8842/N2	IC401				
	30001693	FILTER SAW G3962	Z401				
	30001748	XTAL 4.433619 MHZ	X401				
	30001808	CONN.MALE 12P MOLEX	PL403				
	30001810	CONN.MALE 14P MOLEX	PL404				
	30002388	CABLE 0.6MM BLUE	CAB011	CAB021			
	20000849	FUSE ASSY.TK79-A (3.15A)	F801				
	30001732	FUSE 3.15A 250V 5*20					
	35000138	FUSE HOLDER TK79A (BLACK)	F801				
	30000422	CAP EL 330UF 400V M	C804				
	30001107	RES MO 3W 15K J	R806				
	30001260	RES WW 5W 2.2R J RAD.	R817				
	30001305	DIODE BYM56E	D801	D802	D803	D804	
	20015426	M.B.A.19-SMPS 90-270V 90° SDA 54XX RAD					
	20015427	M.B.A.19-SMPS 90-270V 90° SDA 54XX AXI					
	20015428	M.B.A.19-SMPS 90-270V 90° SDA 54XX SEQ					
	20015429	M.B.A.19-SMPS 90-270V 90° SDA 54XX JUM					
	30000471	RES CF 1/4W 10K J	R808				
	30000540	RES CF 1/2W 1.5M J (400V)	R816				
	30000660	RES CF 1/4W 3.3K J	R871				

	VESTEL CODE	DESCRIPTION	POSITION NUMBER				
TELETEXT	30002229	CONN.ASSY.15CM 3P MON.LED					
	30006662	XTAL 6MHZ	X501				
	30006718	IC SDA545X OTP	IC501				
	20014995	MAIN B.ASSY.19-TXT (TEAC) RAD					
	20014996	MAIN B.ASSY.19-TXT (TEAC) AXI					
	20014997	MAIN B.ASSY.19-TXT (TEAC) SEQ					
	30000466	RES CF 1/4W 1K J	R448				
	30000500	RES CF 1/4W 12K J	R711				
	30000633	RES CF 1/4W 27K J	R547				
	30000718	RES CF 1/4W 4.7K J	R710				
	30001284	DIODE 1N4148	D510	D506	D507	D508	
	30000100	CAP MKT 330NF 63V J	C521				
	30000345	CAP EL 10UF 50V M	C428				
	30001454	TR BC548B	Q415	Q702			
	30000236	CAP SMD 33PF 50V J	C524	C525			
	30000288	CAP SMD 10NF 50V K	C506				
	30000469	RES SMD 1/10W 1K J 0805	R447				
	30000484	RES SMD 1/10W 1M J (0805)	R584				
	30000631	RES SMD 1/10W 2.7K J 0805	R540				
	30000696	RES SMD 1/10W 39K J (0805)	R548				

	VESTEL CODE	DESCRIPTION	POSITION NUMBER				
POWER SUPPLY	30000161	CAP MKP 47NF 630V J	C811				
	30001129	RES MO 22K 3W J	R822				
	20000849	FUSE ASSY.TK79-A (3.15A)	F801				
	30001732	FUSE 3.15A 250V 5*20					
	35000138	FUSE HOLDER TK79A (BLACK)	F801				
	30000422	CAP EL 330UF 400V M	C804				
	30001107	RES MO 3W 15K J	R806				
	30001260	RES WW 5W 2.2R J RAD.	R817				
	30001305	DIODE BYM56E	D801	D802	D803	D804	
	30000471	RES CF 1/4W 10K J	R808				
	30000540	RES CF 1/2W 1.5M J (400V)	R816				
	30000660	RES CF 1/4W 3.3K J	R871				

	VESTEL CODE	DESCRIPTION	POSITION NUMBER				
PICTURE TUBE	THOMSON A51EBV13X25						
	30000123	CAP PP 33NF 630V K	C610				
	30000143	CAP MKP 2.2NF 2KV %3.5	C611				
	30000172	CAP MKP 680NF 250V J (P15)	C617				
	30000180	CAP MKP 9.1NF 2000V %3.5	C626				
	30000712	RES CF 1/4W 470R J	R717				
	30000815	RES CF 1/4W 8.2K J	R613	R615			
	30000860	RES MF 1/4W 1R F	R703				
	30001215	RES FUSE 1W 1R J	R611				
	30001855	SOCKET CRT NARROWNECK W/GND	PL900				
	30002026	FIXED COIL 1MH AK19 25/28	L602				

10002697 EU-66ST

	VESTEL CODE	DESCRIPTION	POSITION NUMBER				
SYSTEM PAL BG	30000092	CAP MKT 220NF 63V J	C415				
	30000295	CAP CER 100NF 50V Z F	CX41				
	30000628	RES CF 1/4W 2.7K J	RX10	RX11			
	30000712	RES CF 1/4W 470R J	J126	J127			
	30001579	IC TDA8844/N2	IC401				
	30001693	FILTER SAW G3962	Z401				
	30001748	XTAL 4.433619 MHZ	X401				
	30001808	CONN.MALE 12P MOLEX	PL403				
	30001810	CONN.MALE 14P MOLEX	PL404				
	30002388	CABLE 0.6MM BLUE	CAB011	CAB021			
	30001745	XTAL 3.579545	X404				
	30002583	JUMPER WIRE 0.6MM	C451	C452	L403	S503	S504
			S505	S510	J200		
	30000109	CAP MKT 470NF 63V J	C113				
	30000284	CAP SMD 1NF 50V K R (0805)	C490				
	30000322	CAP SMD 3.3NF 50V K (0805)	C439				
	30000499	RES SMD 1/10W 1.2K J (0805)	R421				
	30000503	RES SMD 1/10W 12K J (0805)	R561	R574			
	30000558	RES SMD 1/10W 180R J	R422				
	30000593	RES SMD 1/10W 2.2K J (0805)	R420				
30000717	RES SMD 1/10W 470R J (0805)	R465					
30001734	JUMPER SMD (0805)	S065					
30001734	JUMPER SMD (0805)	R478					

	VESTEL CODE	DESCRIPTION	POSITION NUMBER				
TELETEXT	30002229	CONN.ASSY.15CM 3P MON.LED					
	30006662	XTAL 6MHZ	X501				
	30006718	IC SDA545X OTP	IC501				
	30000466	RES CF 1/4W 1K J	R448				
	30000500	RES CF 1/4W 12K J	R711				
	30000633	RES CF 1/4W 27K J	R547				
	30000718	RES CF 1/4W 4.7K J	R710				
	30001284	DIODE 1N4148	D510	D506	D507	D508	
	30000100	CAP MKT 330NF 63V J	C521				
	30000345	CAP EL 10UF 50V M	C428				
	30001454	TR BC548B	Q415	Q702			
	30000236	CAP SMD 33PF 50V J	C524	C525			
	30000288	CAP SMD 10NF 50V K	C506				
	30000469	RES SMD 1/10W 1K J 0805	R447				
	30000484	RES SMD 1/10W 1M J (0805)	R584				
	30000631	RES SMD 1/10W 2.7K J 0805	R540				
	30000696	RES SMD 1/10W 39K J (0805)	R548				

	VESTEL CODE	DESCRIPTION	POSITION NUMBER				
POWER SUPPLY	30000161	CAP MKP 47NF 630V J	C811				
	30001129	RES MO 22K 3W J	R822				
	20000965	HEAT.ASSY.19-SMPS 110w 90-270V					
	30001388	TR MTW8N60E	Q802				
	35000015	SPRING TR.HOLDER (BIG)					
	35000117	HEATSINK 19-PRIMER 110'					
	40000145	INSULATOR SILICON PAD(20*30MM)					
	30001159	RES MO 1W 0.33R J	R819	R870			
	30002081	TRF SMPS AK19 110° (90-270V)	TR802				
	30002104	LINE FILTER 2X22MH (AK16)	TR801				
	20000849	FUSE ASSY.TK79-A (3.15A)	F801				
	30001732	FUSE 3.15A 250V 5*20					
	35000138	FUSE HOLDER TK79A (BLACK)	F801				
	30000422	CAP EL 330UF 400V M	C804				
	30001107	RES MO 3W 15K J	R806				
	30001260	RES WW 5W 2.2R J RAD.	R817				
	30001305	DIODE BYM56E	D801	D802	D803	D804	
	30000471	RES CF 1/4W 10K J	R808				
	30000540	RES CF 1/2W 1.5M J (400V)	R816				
	30000660	RES CF 1/4W 3.3K J	R871				


	VESTEL CODE	DESCRIPTION	POSITION NUMBER				
PICTURE TUBE	VIDEOCOLOR A66EHJ43X99						
	30000123	CAP PP 33NF 630V K	C610				
	30000143	CAP MKP 2.2NF 2KV %3.5	C611				
	30000172	CAP MKP 680NF 250V J (P15)	C617				
	30000180	CAP MKP 9.1NF 2000V %3.5	C626				
	30000712	RES CF 1/4W 470R J	R717				
	30000815	RES CF 1/4W 8.2K J	R613	R615			
	30000860	RES MF 1/4W 1R F	R703				
	30001215	RES FUSE 1W 1R J	R611				
	30001855	SOCKET CRT NARROWNECK W/GND	PL900				
	30002026	FIXED COIL 1MH AK19 25/28	L602				

HOTEL MODE FEATURE

This is the text that explains how the password menu will work for hotel-tv mode in TEAC project. Size key, which is placed in left-bottom and not valid in only-TV-mode, will be used (if hotel mode is supported--option19 bit0 is set)(NOTE-1) to display the password line on OSD as the following:



If the password is okay then extra *three* lines will appear as "new password", "hotel mode" and "store." The user will be able to change the password via the first new line, and can store it by accessing the "store" line, as the confirmation of the new password. To change the hotel mode, the user do not have to store it ,i.e, as soon as s/he close the menu, the mode will be the same as s/he did.

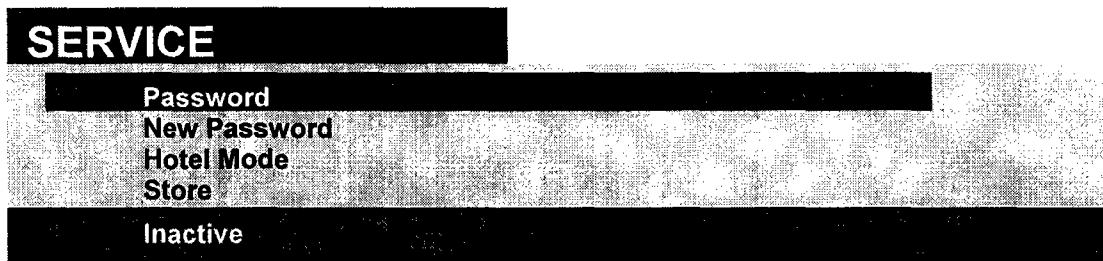

If the user try to get a password different from four digits, for example 3 digit-password, s/he can not store it, store operation is valid only for four-digit passwords. However you can insist on saving some eeprom space of yourself by choosing a password like "0007"!

In the case of forgetting the password, the user(TEAC) can not toggle the hotel mode, because s/he can not access the options menu by entering the necessary password in the installation menu, and (IB) also can not toggle via the password menu in the hotel mode, because s/he forgot the password. For this situation, we realized that, but this will be known only by TEAC not by IB, if the "crash number-" ,which is 1325, is entered as password then *password will take the value of the "crash number"*, and new menu will appear ,so, you can access the features.

For the improper 'new password', which is not four digits, the OSD will show the entered digits, in fact, entered stars, and the store operation won't be allowed. To clear the previous digits, the user must complete the current entries to four digits and now s/he can reenter the new password as s/he want.

Appending..


Option 19-bit0=== 1→hotel mode supported
(size key available-then hotel password menu)

0→hotel mode not supported
(size key is nonfunctional in TV mode)

hotel mode=== OFF→ menu_key (main menu)
red key* (sound m.)
green key* (picture)
yellow key* (feature)
blue key* (install)

(These keys are already valid in text mode independent from hotel mode status.)

ON→ no access to above menus
Only to hotel features

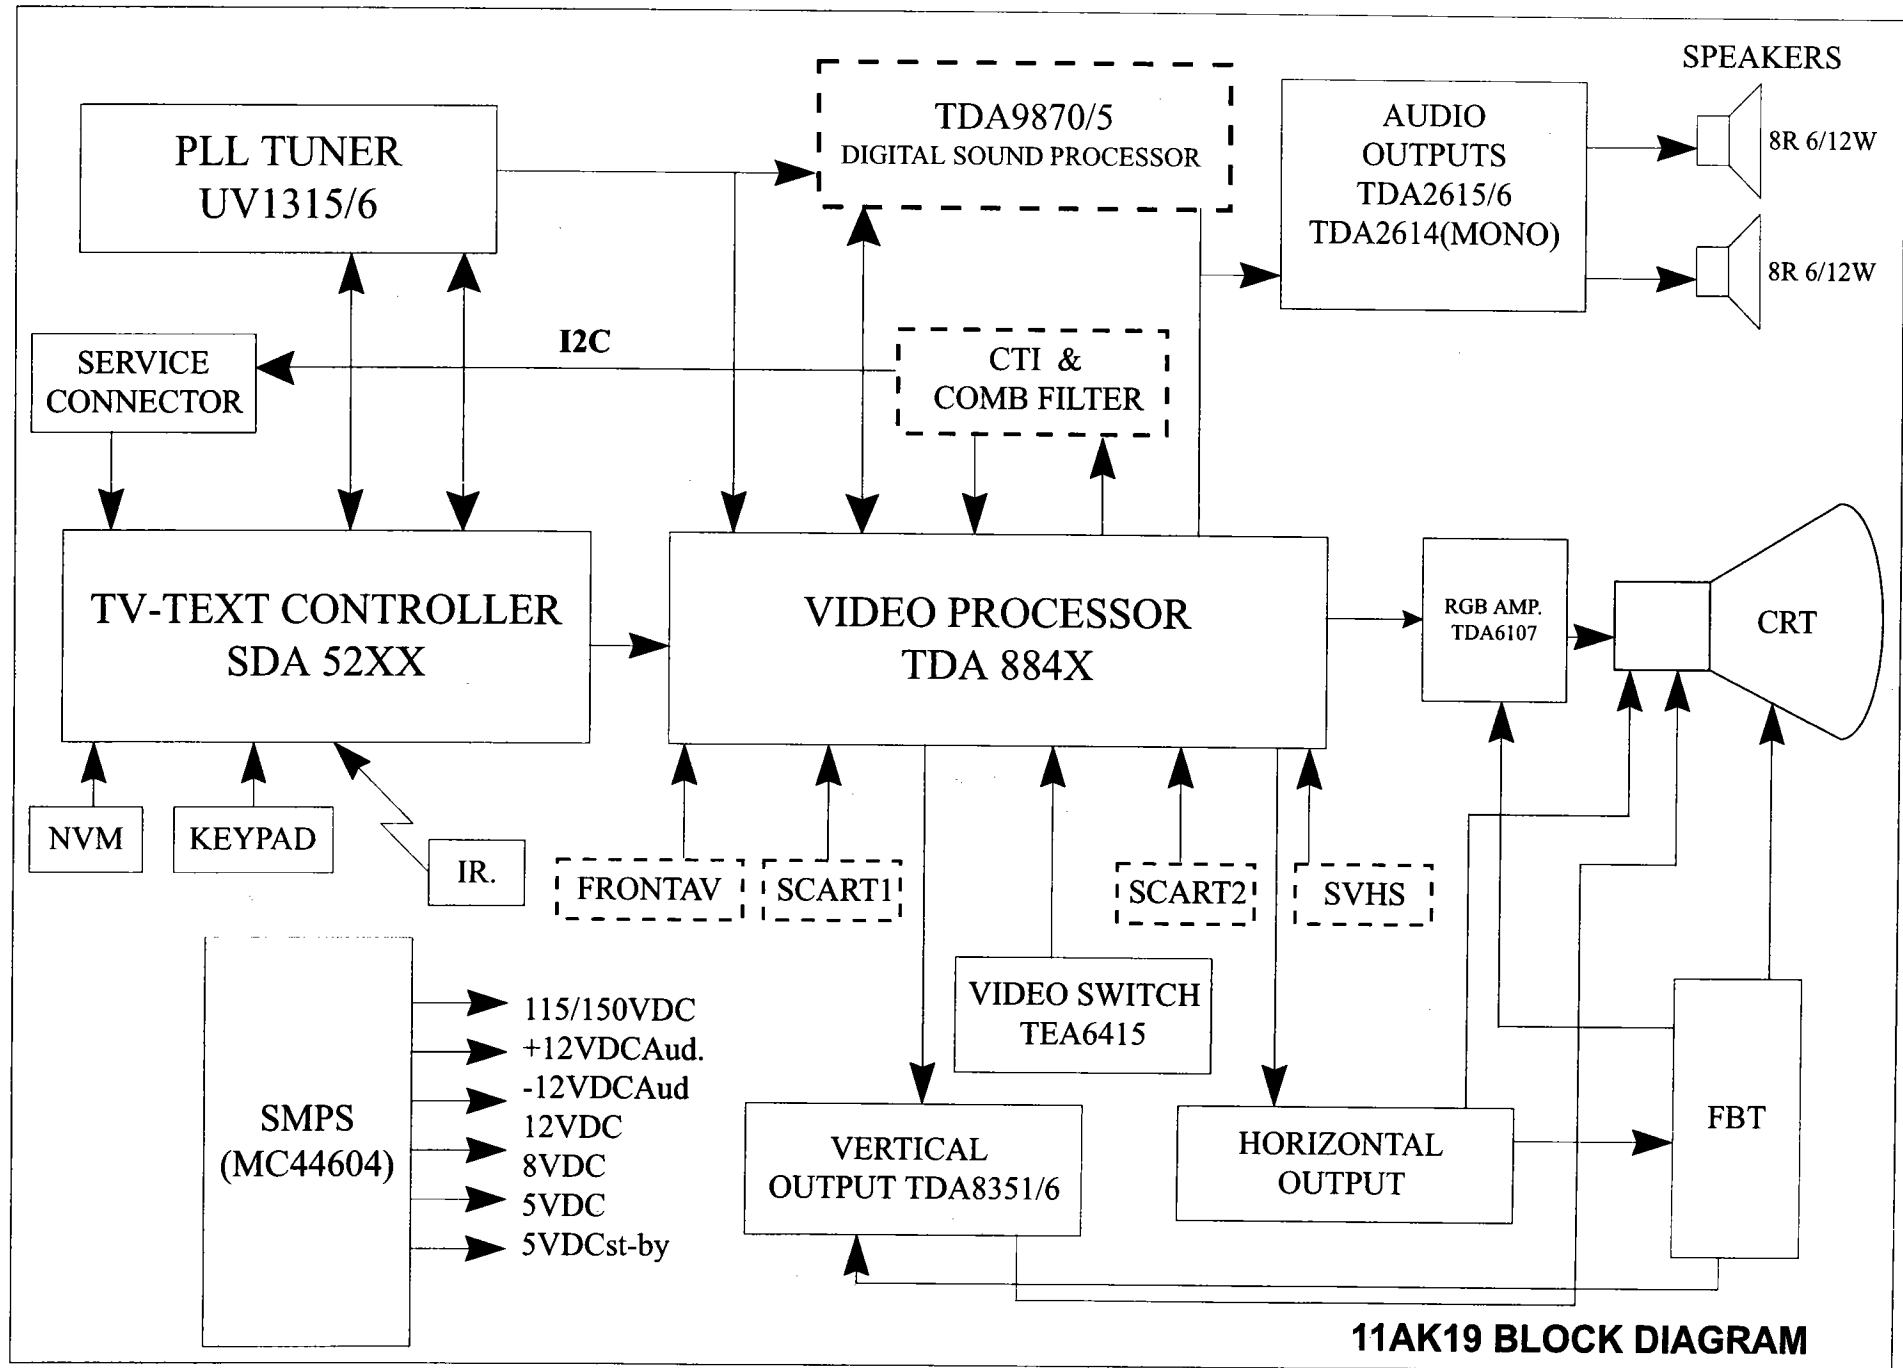

11AK19 BLOCK DIAGRAM

GENERAL BLOCK DIAGRAM OF CHASSIS AK19

BILL OF MATERIAL LIST

10003668

8411 TEAC AUSTR TEAC EU-80ST(MET.GOLD)

BOM Date : 15/05/2000

NO	LEVEL	COMPONENT CODE	MATERIAL	UNIT	QTY	POSITION NUMBER				
1	1	20000598	CRT KIT (33) AK19 WO/UL	PC	1,000
2	2	30002145	33 DEG COIL&EARTH CB. WO/UL	PC	1,000
3	2	30007299	CONN.ASSY.4/60 R2.6 HRZ&VRT 33 IMPROVED	PC	1,000
4	2	35000010	EARTH SPRING (4CM)	PC	1,000
5	1	20001605	MD.ASY.TK35-8411 (19)	PC	1,000
6	2	30001284	DIODE 1N4148	PC	2,000	D500	D501	.	.	.
7	2	30002181	SWITCH TACT	PC	5,000	SW501	SW502	SW503	SW504	SW505
8	2	30002300	CONN.ASSY 5/45 FC	PC	1,000	CN03
9	2	30002335	CON.ASSY.3/60 FC (PRE-AMP)	PC	1,000	CN02
10	2	30002447	PCB TK35-2	PC	1,000
11	2	40000084	BRACKET PREAMPLIFIER	PC	1,000
12	1	20004312	SNOW BOX ASSY 8410/11	PC	1,000
13	2	20004310	SNOW BOX TOP 8410/11	PC	1,000
14	3	60000011	EPS	KG	0,420
15	2	20004311	SNOW BOX BOTTOM 8410/11	PC	1,000
16	3	60000011	EPS	KG	0,420
17	1	20020857	MD.ASY.SB19-SVHS/ST.HP/FAV (EMC)	PC	1,000
18	2	20005484	MD.OTO.SB19-SVHS/ST.HP/FAV	PC	1,000
19	3	20002369	MD.RAD.SB19-SVHS	PC	1,000
20	4	20005481	MD.AXI.SB19-SVHS	PC	1,000
21	5	20002370	MD.SEQ.SB19-SVHS	PC	1,000
22	6	30000650	RES CF 1/4W 33R J	PC	2,000	R111	R112	.	.	.
23	6	30001979	FIXED COIL 1UH Q45 M-A	PC	1,000	L102
24	4	30000191	CAP CER 100PF 50V J SL	PC	1,000	C107
25	3	20002372	MD.RAD.SB19-STR/HP	PC	1,000
26	4	20002373	MD.AXI.SB19-STR/HP	PC	1,000
27	5	20002374	MD.SEQ.SB19-STR/HP	PC	1,000
28	6	30000471	RES CF 1/4W 10K J	PC	2,000	R101	R102	.	.	.
29	6	30000808	RES CF 1/4W 82R J	PC	2,000	R103	R105	.	.	.
30	3	20005482	MD.AXI.SB19-SVHS+FAV+STHP	PC	1,000
31	4	20006033	MD.SEQ.SB19-SVHS+FAV+STHP	PC	1,000
32	5	30002583	JUMPER WIRE 0.6MM	G	1,000	L101	R108	R110	S101	S102
.	S103	S104	S105	.	.
33	4	30008890	PCB 11SB19-1	PC	1,000

34	5	60000047	CCL 1220*1020*1.6 FR2 V0 351	M2	0,010
35	2	30001830	CONN MALE 2P TOP BLUE	PC	1,000	PL103
36	2	30001838	CONN MALE 3P TOP YELLOW	PC	1,000	PL105
37	2	30001839	CONN MALE 3P TOP GREEN	PC	1,000	PL104
38	2	30001891	RCA JACK 1P WHITE 28 FAV	PC	1,000	CON103
39	2	30001892	RCA JACK 1P RED 28 FAV	PC	1,000	CON104
40	2	30001893	RCA JACK 1P YELLOW 28 FAV	PC	1,000	CON102
41	2	30001895	JACK 4P DIN TYPE FOR SVHS	PC	1,000	CON101
42	2	30001902	JACK HEADPHONE STEREO WO/SW	PC	1,000	CON105
43	2	30002315	CONN ASSY 2/55 SHL.D.C. BLU	PC	1,000	PL103
44	2	30002321	CONN ASSY 3/55 SHL.D.C. GRN	PC	1,000	PL104
45	2	30002322	CONN ASSY 3/55 SHL.D.C. YLW	PC	1,000	PL105
46	2	30009317	CONN ASSY.3/70 W/NELTRON BLACK W/FERRIT)	PC	1,000	PL102
47	1	20022893	FRONT 8411 W/H (UL) (MET.GOLD-7642/P)	PC	1,000
48	2	20039148	FRONT 8411 W/H (UL) L.GRAY (I)	PC	1,000
49	3	60000009	FR-HIPS NATR.V-0 6335	KG	3,510
50	3	60000515	MASTERBATCH LIGHT GRAY %1	G	35,000
51	2	20041880	RIGHT FOOT 8410-11 L.GRAY (I)	PC	1,000
52	3	60000001	ABS (NATURAL)	KG	0,110
53	3	60000515	MASTERBATCH LIGHT GRAY %1	G	0,000
54	2	20041881	LEFT FOOT 8410-11 L.GRAY (I)	PC	1,000
55	3	60000001	ABS (NATURAL)	KG	0,110
56	3	60000515	MASTERBATCH LIGHT GRAY %1	G	0,000
57	2	35000196	SCREW S C ZN YSMB 3.5*19	PC	8,000
58	2	60000200	PAINT ALBA METALIC GOLD-022 7642	KG	0,030
59	1	20022903	LENS 8411(V/M/P)(ME.GOLD/P)TEA80ST(11U/S	PC	1,000
60	2	20000885	LENS 8411 (I)	PC	1,000
61	3	60000015	POLYCARBONATE (PC) (BLACK)	KG	0,060
62	2	60000200	PAINT ALBA METALIC GOLD-022 7642	KG	0,000
63	1	20022905	CONTROL PNL.DOOR 8411 (ME.GOLD-7642/P)	PC	1,000
64	2	20004465	CONTROL PNL.DOOR 8411 (I)	PC	1,000
65	3	60000015	POLYCARBONATE (PC) (BLACK)	KG	0,060
66	2	60000200	PAINT ALBA METALIC GOLD-022 7642	KG	0,000
67	1	20022909	BACK CVR.8410/11 (UL) (ME.GOLD-7642/P)	PC	1,000
68	2	20039147	BACK CVR.8410/11 (UL) L.GRAY(I) AK19	PC	1,000
69	3	60000009	FR-HIPS NATR.V-0 6335	KG	4,280

70	3	60000515	MASTERBATCH LIGHT GRAY %1	G	43,000
71	2	60000200	PAINT ALBA METALIC GOLD-022 7642	KG	0,030
72	1	20022915	SCR.AS.8411 W/SB&B-EX&TWT (BASE-UL)(19)	PC	1,000
73	2	20003603	BRACKET FRONT-AV 7210/11/12(I)	PC	1,000
74	3	60000003	ABS BLACK	KG	0,000
75	2	20003605	PIN (CONTROL PANEL DOOR) (I)	PC	2,000
76	3	60000001	ABS (NATURAL)	KG	0,000
77	3	60000022	MASTERBATCH (BLACK)	KG	0,000
78	2	20022917	BASE 8410/11 (I)(W/UL) W/CHAS.FRAME AK19	PC	1,000
79	3	20004005	CHASSIS FRAME AK19 (110°)	PC	1,000
80	4	60000003	ABS BLACK	KG	0,050
81	3	60000009	FR-HIPS NATR.V-0 6335	KG	1,400
82	3	60000022	MASTERBATCH (BLACK)	KG	0,010
83	2	35000212	SCREW S C ZNSY YSMB 2.9*13	PC	1,000
84	2	35000214	SCREW S C ZNSY YSMB 3.5*19	PC	3,000
85	2	35000215	SCREW S C ZNSY YSMB 3.9*13	PC	3,000
86	2	35000216	SCREW S C ZNSY YSMB 3.9*19	PC	14,000
87	2	35000224	SCREW C SK ZN YFMB 2.9*9.5	PC	24,000
88	2	35000231	SCREW SK C NI YFMB 2.9*6.5	PC	4,000
89	2	35000233	SCREW P C ZN AKBR 10*45 (33')	PC	4,000
90	2	40000026	EJECTOR CLIP-CLAP	PC	1,000
91	2	40000082	FOOT RUBBER 8410/11	PC	2,000
92	2	40000107	ADJUSTABLE BOOS 84XX	PC	4,000
93	2	40005464	RUBBER FOOT (PIN GOOD R2305)	PC	4,000
94	1	20022937	F CARTON BOX TEAC EU-80ST W/SEPERATOR	PC	1,000
95	2	50006059	CARTON BOX 8410/11 CRAFT HAM EMPTY	PC	1,000
96	2	50007925	CARTON BOX TEAC EU-80ST	PC	1,000
97	2	50013103	CARTON SEPERATOR 640x875 (8410/11)	PC	1,000
98	1	20023013	LBL.BCK.CVR.TEAC EU-80ST	PC	1,000
99	2	20013018	LBL.BCK.CVR.ASSY (TV) (WO/UL)	PC	1,000
100	3	50004065	LABEL LOT W/BARCODE (3)	PC	1,050
101	3	70000321	RIBBON T13506 ZA 110MM*335MM	PC	1,050
102	1	20024659	ARTWORK TEAC AUSTR TEAC EU-80ST	PC	1,000
103	2	20002584	ASSEMBLY ASSY.TV	PC	1,000
104	3	35000209	SCREW S C ZNSY YFMB 3.9*16	PC	4,000
105	3	50000157	TENSILE BAND (8410/11)	PC	2,000
106	2	20027323	R/C 2042 TEAC	PC	1,000

			RC773(ME.GOLD7642/P)(11U/S							
107	3	30009456	R/C 2042 NOBRAND (S) (ME.GOLD-7642/P)	PC	1,000
108	2	30002391	BATTERY AAA UM4 1.5V GREEN	PC	2,000
109	2	50005951	WARRANTY CARD TEAC (ENG)	PC	1,000
110	2	50007924	I/B TEAC EU-80ST FST/545X/2040/ENG	PC	1,000
111	1	20025913	CHS.ASSY.19B-1WGN2124433XM3	PC	1,000
112	2	20003135	CRT DIFF.KIT AK19-33/THO(02)	PC	1,000
113	3	20019645	MD.ASY.19-T KARTI (04) 33"	PC	1,000
114	4	20003511	CABLE ASSY.19-5/60 (FC RGB)	PC	1,000
115	5	30002340	CABLE 5/60 (FC RGB) 33'	PC	1,000
116	5	40000099	CABLE HOLDER 2.5*5P	PC	2,000
117	4	20014739	MD.RAD.19-T KARTI (02-03-04)	PC	1,000
118	5	20014740	MD.AXI.19-T KARTI (02-03-04)	PC	1,000
119	6	20014741	MD.SEQ.19-T KARTI (02-03-04)	PC	1,000
120	7	30000471	RES CF 1/4W 10K J	PC	2,000	R002	R001	.	.	.
121	7	30000770	RES CF 1/4W 680R J	PC	1,000	R003
122	7	30001284	DIODE 1N4148	PC	4,000	D001	D002	D003	D004	.
123	6	30007006	PCB T-1	PC	1,000
124	7	60000047	CCL 1220*1020*1.6 FR2 V0 351	M2	0,000
125	5	30000375	CAP EL 220UF 16V M	PC	1,000	C001
126	5	30001455	TR BC558B	PC	1,000	Q001
127	4	30001912	PIN F 5P/2.5MM (11.5MM)	PC	1,000	PL002
128	4	30009828	CABLE 1P R2.6 (25CM)	PC	1,000	CAB+8V
129	3	30000131	CAP MKP 100NF 250V J	PC	1,000	C610
130	3	30000154	CAP MKP 390NF 250V J	PC	1,000	C630
131	3	30000155	CAP MKP 4.3NF 1600V J	PC	1,000	C611
132	3	30000177	CAP MKP 820NF 250V J	PC	1,000	C617
133	3	30000689	RES CF 1/4W 3.9K J	PC	1,000	R613
134	3	30000712	RES CF 1/4W 470R J	PC	1,000	R717
135	3	30000779	RES CF 1/4W 68K J	PC	1,000	R606
136	3	30000860	RES MF 1/4W 1R F	PC	1,000	R702
137	3	30001215	RES FUSE 1W 1R J	PC	1,000	R611
138	3	30001855	SOCKET CRT NARROWNECK W/GND	PC	1,000	PL900
139	3	30002026	FIXED COIL 1MH AK19 25/28	PC	1,000	L602
140	3	30002055	TRF FBT 110ø (AK19 16:9)	PC	1,000	TR602
141	2	20025914	CHS.WO/CRT.19B-1WGN2124433XX3	PC	1,000
142	3	20002120	MD.ASY.ESP19-ONLY EXT.SPK.	PC	1,000
143	4	20002121	MD.OTO.ESP19-ONLY EXT.SPK.	PC	1,000
144	5	20002096	MD.AXIE.ESP19-ONLY EXT.SPK.	PC	1,000

145	6	20002097	MD.SEQ.ESP19-ONLY EXT.SPK.	PC	1,000
146	7	30002583	JUMPER WIRE 0.6MM	G	0,380	L100	L101	L102	.	.
147	6	30009559	PCB 11ESP19	PC	1,000
148	4	20013688	MD.MAN.ESP19-ONLY EXT.SPK.	PC	1,000
149	5	30001763	CONN.MALE 2P (2752) GRAY	PC	1,000	PL109
150	5	30001765	CONN MALE 2P (2752) BLACK	PC	1,000	PL106
151	5	30001876	JACK EXT.SPK.W/STOPPER	PC	1,000	PL107
152	5	30002244	CONN.2/25 W/GRY (EXTERNAL)	PC	1,000	PL104
153	5	30002245	CONN.2/25 W/BLK (EXTERNAL)	PC	1,000	PL105
154	3	20002122	MD.ASY.BAV19E-BAV/OUT	PC	1,000
155	4	20002123	MD.OTO.BAV19E-BAV/OUT	PC	1,000
156	5	20002099	MD.SMD.BAV19E-BAV/OUT	PC	1,000
157	6	20002100	MD.RAD.BAV19E-BAV/OUT	PC	1,000
158	7	20002101	MD.AXI.BAV19E-BAV/OUT	PC	1,000
159	8	30009556	PCB 11BAV19E-2	PC	1,000
160	7	30000109	CAP MKT 470NF 63V J	PC	3,000	C103	C104	C113	.	.
161	7	30000352	CAP EL 100UF 16V M	PC	1,000	C100
162	7	30000387	CAP EL 33UF 50V M	PC	2,000	C101	C102	.	.	.
163	7	30001454	TR BC548B	PC	3,000	Q100	Q101	Q102	.	.
164	6	30000464	RES SMD 1/10W 100R J	PC	1,000	R100
165	6	30000469	RES SMD 1/10W 1K J 0805	PC	7,000	R102	R105	R106	R107	R110
.	R111	R112	.	.	.
166	6	30000653	RES SMD 1/10W 33R J	PC	1,000	R101
167	6	30000732	RES SMD 1/10W 470K J	PC	2,000	R103	R108	.	.	.
168	6	30000807	RES SMD 1/10W 75K J	PC	1,000	R113
169	4	20003214	MD.MAN.BAV19E-BAV OUT	PC	1,000
170	5	30001840	CONN MALE 3P SIDE WHITE	PC	1,000	PL101
171	5	30001842	CONN MALE 3P SIDE BLUE	PC	1,000	PL100
172	5	30001880	JACK RCA 3P (BACK AV) 180°	PC	1,000	PL113
173	5	30002250	CONN ASSY 3/28 SHL.D.C. BLU	PC	1,000
174	5	30002251	CONN ASSY 3/28 SHL.D.C. WHT	PC	1,000
175	3	20022201	MD.ASY.ST19-BG/DK GS H FAV+1SC (7BPCB	PC	1,000
176	4	20003168	MD.MAN.ST19-COMMON	PC	1,000
177	5	30001741	XTAL 24.576MHZ	PC	1,000	X301
178	5	30001809	CONN.FEMALE 12P MOLEX	PC	1,000	PL301
179	5	30001811	CONN.FEMALE 14P MOLEX	PC	1,000	PL302
180	5	30002583	JUMPER WIRE 0.6MM	G	0,130	JX01
181	5	30009846	CABLE 0.6MM BLUE (4CM)	PC	1,000	CAB151
182	4	20003174	MD.MAN.ST19-FRONT AV+1SC	PC	1,000

183	5	30001844	CONN MALE 3P SIDE GREEN	PC	1,000	PL304
184	4	20003192	MD.MAN.ST19-BG/DK GER.STR.	PC	1,000
185	5	30001589	IC TDA9817	PC	1,000	IC302
186	5	30001597	IC TDA 9875A	PC	1,000
187	5	30001692	FILTER SAW OFWK3953M	PC	1,000	Z300
188	5	30001706	FILTER SAW OFWK9453	PC	1,000	Z301
189	5	30002041	ADJ COIL 251NH Q50	PC	1,000	LT301
190	4	20022137	MD.OTO.ST19-BGDK/I G/N HP(7BPCB)	PC	1,000
191	5	20001779	MD.SMD.ST19-COMMON	PC	1,000
192	6	20001780	MD.RAD.ST19-COMMON	PC	1,000
193	7	20001781	MD.AXI.ST19-COMMON	PC	1,000
194	8	20001782	MD.SEQ.ST19-COMMON	PC	1,000
195	9	30000459	RES CF 1/4W 100R J	PC	2,000	R303	R304	.	.	.
196	9	30001987	FIXED COIL 4.7UH Q70 K-A	PC	4,000	L302	L303	L304	L305	.
197	9	30002583	JUMPER WIRE 0.6MM	G	1,760	J300	J305	J307	J308	J309
.	J311	J313	J314	J315	J319
.	J320	J321	J323	.	.
198	7	30000100	CAP MKT 330NF 63V J	PC	8,000	C304	C316	C318	C319	C322
.	C323	C327	C328	.	.
199	7	30000362	CAP EL 1UF 50V M	PC	1,000	C335
200	7	30000384	CAP EL 2.2UF 50V M	PC	4,000	C308	C309	C310	C311	.
201	7	30000387	CAP EL 33UF 50V M	PC	1,000	C330
202	7	30000400	CAP EL 47UF 50V M	PC	4,000	C301	C307	C312	C315	.
203	7	30000413	CAP EL 4.7UF 50V M	PC	1,000	C340
204	6	30000189	CAP SMD 100PF 50V J (0805)	PC	2,000	C337	C339	.	.	.
205	6	30000224	CAP SMD 220PF 50V J (08*05)	PC	4,000	C317	C320	C321	C324	.
206	6	30000256	CAP SMD 470PF 50V J (0805)	PC	2,000	C325	C326	.	.	.
207	6	30000284	CAP SMD 1NF 50V K R (0805)	PC	2,000	C341	C344	.	.	.
208	6	30000289	CAP SMD 10NF 50V K R (0805)	PC	2,000	C305	C306	.	.	.
209	6	30000294	CAP SMD 100NF 50V K (0805)	PC	3,000	C338	C378	C379	.	.
210	6	30000332	CAP SMD 4.7NF 50V K (0805)	PC	2,000	C342	C343	.	.	.
211	6	30000336	CAP SMD 5.6NF 50V K (0805)	PC	1,000	C329
212	6	30000464	RES SMD 1/10W 100R J	PC	4,000	R305	R306	R325	R326	.
213	6	30000469	RES SMD 1/10W 1K J 0805	PC	2,000	R321	R351	.	.	.
214	6	30000475	RES SMD 1/10W 10K J 0805	PC	1,000	R323
215	6	30000524	RES SMD 1/10W 150R J (0805)	PC	1,000	R316
216	6	30000534	RES SMD 1/10W 15K J (0805)	PC	4,000	R310	R311	R312	R313	.
217	6	30000546	RES SMD 1/10W 1.5R J (0805)	PC	2,000	R301	R320	.	.	.
218	6	30000593	RES SMD 1/10W 2.2K J (0805)	PC	2,000	R314	R315	.	.	.
219	6	30000609	RES SMD 1/10W 2.2R J	PC	2,000	R309	R324	.	.	.

220	6	30000626	RES SMD 1/10W 270R J	PC	1,000	R308
221	6	30000710	RES SMD 1/10W 47R J (0805)	PC	1,000	R322
222	6	30001734	JUMPER SMD (0805)	PC	2,000	J317	J322	.	.	.
223	6	30001968	FERRITE BEAD (0805) BLM21B201S	PC	2,000	L309	L310	.	.	.
224	6	30001971	FERRITE BEAT (805) BLM21A601S	PC	2,000	L306	L307	.	.	.
225	5	20001784	MD.SMD.ST19-BG/DK GER.STR.	PC	1,000
226	6	20001785	MD.RAD.ST19-BG/DK GER.STR.	PC	1,000
227	7	20001786	MD.AXI.ST19-BG/DK GER.STR.	PC	1,000
228	8	20001787	MD.SEQ.ST19-BG/DK GER.STR.	PC	1,000
229	9	30001284	DIODE 1N4148	PC	2,000	D302	D303	.	.	.
230	9	30001979	FIXED COIL 1UH Q45 M-A	PC	1,000	L312
231	7	30000384	CAP EL 2.2UF 50V M	PC	2,000	C364	C365	.	.	.
232	7	30001423	TR BF240	PC	1,000	Q303
233	7	30001454	TR BC548B	PC	3,000	Q301	Q302	Q304	.	.
234	6	30000289	CAP SMD 10NF 50V K R (0805)	PC	3,000	C355	C359	C361	.	.
235	6	30000294	CAP SMD 100NF 50V K (0805)	PC	3,000	C356	C360	C362	.	.
236	6	30000312	CAP SMD 22NF 50V K (0805)	PC	1,000	C363
237	6	30000315	CAP SMD 220NF 25V Z (0805)	PC	1,000	C366
238	6	30000475	RES SMD 1/10W 10K J 0805	PC	1,000	R361
239	6	30000494	RES SMD 1/10W 120R J (0805)	PC	1,000	R332
240	6	30000558	RES SMD 1/10W 180R J	PC	1,000	R346
241	6	30000593	RES SMD 1/10W 2.2K J (0805)	PC	1,000	R335
242	6	30000597	RES SMD 1/10W 22K J	PC	2,000	R350	R352	.	.	.
243	6	30000664	RES SMD 1/10W 3.3K J (0805)	PC	1,000	R331
244	6	30000721	RES SMD 1/10W 4.7K J	PC	2,000	R333	R345	.	.	.
245	6	30000727	RES SMD 1/10W 47K J (0805)	PC	2,000	R339	R347	.	.	.
246	6	30000747	RES SMD 1/10W 560R J (0805)	PC	1,000	R334
247	6	30000755	RES SMD 1/10W 56K J	PC	1,000	R338
248	6	30000782	RES SMD 1/10W 68K J	PC	1,000	R342
249	6	30000818	RES SMD 1/10W 8.2K J (0805)	PC	2,000	R343	R344	.	.	.
250	6	30001734	JUMPER SMD (0805)	PC	4,000	C370	S301	S302	S305	.
251	5	20001799	MD.SMD.ST19-HEADPHONE	PC	1,000
252	6	20001800	MD.RAD.ST19-HEADPHONE	PC	1,000
253	7	30000352	CAP EL 100UF 16V M	PC	3,000	C336	C373	C374	.	.
254	7	30000362	CAP EL 1UF 50V M	PC	1,000	C375
255	7	30000384	CAP EL 2.2UF 50V M	PC	2,000	C347	C348	.	.	.
256	6	30000242	CAP SMD 330PF 50V J	PC	2,000	C352	C354	.	.	.
257	6	30000294	CAP SMD 100NF 50V K (0805)	PC	1,000	C369
258	6	30000309	CAP SMD 2.2NF 50V K R	PC	2,000	C357	C358	.	.	.
259	6	30000332	CAP SMD 4.7NF 50V K (0805)	PC	2,000	C349	C350	.	.	.

260	6	30000475	RES SMD 1/10W 10K J 0805	PC	3,000	R336	R337	R360	.	.
261	6	30000636	RES SMD 1/10W 27K J 0805	PC	1,000	R362
262	6	30000751	RES SMD 1/10W 5.6K J 0805	PC	2,000	R358	R359	.	.	.
263	6	30000778	RES SMD 1/10W 6.8K J 0805	PC	2,000	R341	R363	.	.	.
264	5	20001810	MD.SMD.ST19-WO/WYCOM	PC	1,000
265	6	30000220	CAP SMD 22PF 50V J (08*05)	PC	1,000	C345
266	6	30000289	CAP SMD 10NF 50V K R (0805)	PC	1,000	C377
267	6	30000814	RES SMD 1/10W 820R J	PC	1,000	R330
268	5	20001949	MD.SMD.ST19-7A/987XA GRUBU	PC	1,000
269	6	30000609	RES SMD 1/10W 2.2R J	PC	1,000	R302
270	6	30001734	JUMPER SMD (0805)	PC	7,000	C313	C314	C334	R307	R318
.	S310	S311	.	.	.
271	5	20022128	MD.SMD.ST19-PCB GRB (7BPCB)	PC	1,000
272	6	20022129	MD.RAD.ST19-PCB GRB (7BPCB)	PC	1,000
273	7	20022130	MD.AXI.ST19-PCB GRB (7BPCB)	PC	1,000
274	8	30008720	PCB 11ST19-7B	PC	1,000
275	7	30000226	CAP CER 2.2PF 50V C CH	PC	1,000	C399
276	7	30000295	CAP CER 100NF 50V Z F	PC	1,000	C380
277	4	20022146	MD.MAN.ST19-HEADPHONE(EMC)	PC	1,000
278	5	30001518	IC TDA1308	PC	1,000	IC305
279	5	30001841	CONN MALE 3P SIDE BLACK	PC	1,000	PL303
280	4	20024505	MD.MAN.ST19-W/EMC	PC	1,000
281	5	30000330	CAP CER 4.7NF 50V K B	PC	3,000	CX5	CX6	CX7	.	.
282	3	20025748	MD.ASY.CFC19-CF+CTI	PC	1,000
283	4	20023965	MD.OTO.CFC19-CC+CF+CTI	PC	1,000
284	5	20023935	MD.SMD.CFC19-COMMON	PC	1,000
285	6	20023936	MD.RAD.CFC19-COMMON	PC	1,000
286	7	20023937	MD.AXI.CFC19-COMMON	PC	1,000
287	8	20023949	MD.SEQ.CFC19-COMMON	PC	1,000
288	9	20023939	MD.JUM.CFC19-COMMON	PC	1,000
289	9	30000459	RES CF 1/4W 100R J	PC	1,000	R032
290	9	30000466	RES CF 1/4W 1K J	PC	1,000	R021
291	9	30000500	RES CF 1/4W 12K J	PC	1,000	R048
292	9	30000622	RES CF 1/4W 270R J	PC	1,000	R308
293	9	30000712	RES CF 1/4W 470R J	PC	1,000	R302
294	9	30000723	RES CF 1/4W 47K J	PC	1,000	R043
295	9	30000792	RES CF 1/4W 75R J	PC	1,000	R310
296	9	30001284	DIODE 1N4148	PC	7,000	D024	D023	D025	D026	D020
.	D022	D021	.	.	.
297	9	30001992	FIXED COIL 10UH Q65 K-A	PC	2,000	L302	L301	.	.	.

298	9	30001996	FIXED COIL 22UH Q40 K	PC	1,000	L050
299	8	30008616	PCB 11CFC19-1	PC	1,000
300	9	60000047	CCL 1220*1020*1.6 FR2 V0 351	M2	0,010
301	7	30000283	CAP CER 1NF 50V K B	PC	1,000	C097
302	7	30000295	CAP CER 100NF 50V Z F	PC	1,000	C080
303	7	30000352	CAP EL 100UF 16V M	PC	2,000	C309	C308	.	.	.
304	7	30000400	CAP EL 47UF 50V M	PC	1,000	C072
305	7	30001454	TR BC548B	PC	3,000	Q302	Q304	Q040	.	.
306	7	30001455	TR BC558B	PC	2,000	Q301	Q303	.	.	.
307	6	30000209	CAP SMD 18PF 50V J (0805)	PC	1,000	C312
308	6	30000265	CAP SMD 560PF 50V J (0805)	PC	1,000	C304
309	6	30000294	CAP SMD 100NF 50V K (0805)	PC	19,000	C081	C079	C075	C084	C078
.	C083	C082	C077	C076	C073
.	C074	C098	C310	C311	C313
.	C302	C306	C307	C301	.
310	6	30000341	CAP SMD 68NF 50V K (0805)	PC	1,000	C303
311	6	30000344	CAP SMD 8.2NF 50V K	PC	1,000	C305
312	6	30000464	RES SMD 1/10W 100R J	PC	1,000	R031
313	6	30000469	RES SMD 1/10W 1K J 0805	PC	5,000	R022	R023	R321	R314	R033
314	6	30000475	RES SMD 1/10W 10K J 0805	PC	4,000	R301	R324	R326	R044	.
315	6	30000588	RES SMD 1/10W 220R J 0805	PC	7,000	R319	R320	R313	R312	R305
.	R306	R309	.	.	.
316	6	30000593	RES SMD 1/10W 2.2K J (0805)	PC	2,000	R335	R020	.	.	.
317	6	30000626	RES SMD 1/10W 270R J	PC	2,000	R307	R304	.	.	.
318	6	30000636	RES SMD 1/10W 27K J 0805	PC	2,000	R322	R315	.	.	.
319	6	30000692	RES SMD 1/10W 3.9K J 0805	PC	1,000	R049
320	6	30000710	RES SMD 1/10W 47R J (0805)	PC	1,000	R318
321	6	30000721	RES SMD 1/10W 4.7K J	PC	2,000	R331	R330	.	.	.
322	6	30000755	RES SMD 1/10W 56K J	PC	2,000	R316	R323	.	.	.
323	6	30000778	RES SMD 1/10W 6.8K J 0805	PC	1,000	R303
324	6	30000797	RES SMD 1/10W 75R J (0805)	PC	2,000	R317	R325	.	.	.
325	6	30001734	JUMPER SMD (0805)	PC	2,000	S303	R329	.	.	.
326	4	20025749	MD.MAN.CFC19-CF+CTI	PC	1,000
327	5	20023942	MD.MAN.CFC19-COMMON	PC	1,000
328	6	30000345	CAP EL 10UF 50V M	PC	1,000	CX42
329	6	30001912	PIN F 5P/2.5MM (11.5MM)	PC	2,000	PL051
330	6	30001915	PIN F 8P/2.5MM	PC	1,000	PL050
331	6	30002583	JUMPER WIRE 0.6MM	G	0,130	C020
332	5	20023956	MD.MAN.CFC19-CTI OPT	PC	1,000
333	6	30001533	IC TDA4671/V1	PC	1,000

334	5	20023959	MD.MAN.CFC19-CF	PC	1,000
335	6	30001769	CONN.MALE 3P (2703) GRAY	PC	1,000	PL302
336	6	30008885	IC TDA9181P/N1	PC	1,000	IC100
337	3	20025915	M.ASSY.19B-MAN 15GN21244X3XX3	PC	1,000
338	4	20008751	HE.ASY.19-HOR&VER BAV/EXT.110°	PC	1,000
339	5	20003607	BRACKET HEATSINK BACK AV AK19 (I)	PC	1,000
340	6	60000003	ABS BLACK	KG	0,000
341	5	30001441	TR BU2508AF	PC	1,000	Q605
342	5	30002736	IC TDA 8351/N6	PC	1,000	IC701
343	5	35000015	SPRING TR.HOLDER (BIG)	PC	1,000
344	5	35000119	HEATSINK 19-HOR&VER BACKAV	PC	1,000
345	5	35000158	NUT C ZN BOTTOM M3	PC	1,000
346	5	35000165	KNURL WASHER C ZNSY 3*6*04 (M3)	PC	1,000
347	5	35000183	SCREW C ZN YSMB M3*12	PC	1,000
348	5	50001756	LABEL 19-HOR&VER 110ø	PC	1,000
349	4	20020555	MB.MAN.19B-STR WO/DOLBY	PC	1,000
350	5	20000956	HE.ASY.19-REG&STR WO/DL	PC	1,000
351	6	30001500	IC LM7808	PC	1,000	IC805
352	6	30001525	IC TDA2615	PC	1,000	IC100
353	6	30001622	IC 7805 (1A)	PC	1,000	IC807
354	6	35000158	NUT C ZN BOTTOM M3	PC	3,000
355	6	35000165	KNURL WASHER C ZNSY 3*6*04 (M3)	PC	3,000
356	6	35000181	SCREW C ZN YSMB M3*8	PC	1,000
357	6	35000183	SCREW C ZN YSMB M3*12	PC	2,000
358	6	35001647	HEATSINK REG.&AUDIO (AK19,SATELLITE TV)	PC	1,000
359	6	40000020	TR HOLDER TR-06A	PC	2,000
360	6	40000146	INSULATOR SILICON PAD (15*20)	PC	2,000
361	6	50001759	LABEL 19-REG STEREO	PC	1,000
362	5	30000383	CAP EL 2200UF 25V M	PC	2,000	C823	C826	.	.	.
363	5	40000101	SPACER SUPPORT AK19 STR®	PC	1,000
364	4	20020559	MB.MAN.19B-COMMON	PC	1,000
365	5	20003606	BRACKET HEATSINK (AUDIO-HOR)	PC	1,000
366	6	60000003	ABS BLACK	KG	0,010
367	5	30000075	CAP MKT 100NF 250V K (DC)	PC	1,000	C605
368	5	30000161	CAP MKP 47NF 630V J	PC	1,000	C811
369	5	30000356	CAP EL 100UF 63V M	PC	2,000	C612	C702	.	.	.
370	5	30000359	CAP EL 1000UF 16V M	PC	2,000	C817	C828	.	.	.
371	5	30000360	CAP EL 1000UF 25V M	PC	1,000	C632

372	5	30000402	CAP EL 47UF 100V M	PC	1,000	C704
373	5	30000411	CAP EL 4700UF 16V M	PC	1,000	C813
374	5	30000447	CAP CER 4.7NF 4KV M E	PC	1,000	C860
375	5	30001384	TR MCR22-6	PC	1,000	Q810
376	5	30001762	CONN.MALE 2P (2052) GRAY	PC	1,000	PL100
377	5	30001783	CONN.MALE 5P (2005)	PC	1,000	PL050
378	5	30001792	CONN.MALE 2P MOLEX	PC	1,000	PL801
379	5	30001827	HRZ VRT CONN.(4P)	PC	1,000	PL601
380	5	30001999	FIXED COIL 40UH (LOSS COIL)	PC	1,000	L605
381	5	30002011	COIL CHOKE 150UH 0.82A RAD	PC	1,000	L803
382	5	30002090	LINE DRIVER NEW TYPE	PC	1,000	TR601
383	5	30007759	RES CF 1W 47K J	PC	1,000	R828
384	5	30009829	CABLE 1P R2.6 (8CM)	PC	1,000	CAB111
385	5	30009832	CABLE 0.6MM BLUE (13CM)	PC	1,000	A-A
386	4	20020794	MB.MAN.19B-PLL NORMAL	PC	1,000
387	5	20030540	MB.MAN.19B-PLL NORMAL (THOMSON TUNER)	PC	0,550
388	5	20030541	MB.MAN.19B-PLL NORMAL (SAMSUNG TUNER)	PC	0,450
389	6	30000723	RES CF 1/4W 47K J	PC	1,000	R201
390	5	30009637	TUNER WSP (PLL) 38.9 MK2 - BATCH	PC	1,000
391	5	30009846	CABLE 0.6MM BLUE (4CM)	PC	1,000	CAB81
392	4	20020820	MB.MAN.19B-FTZ WO/90° YERLI	PC	1,000
393	5	35000058	SHIELD AK19 SIDE	PC	1,000
394	5	35000059	SHIELD AK19 (TOP)	PC	1,000
395	5	35000061	SHIELD AK19 (BOTTOM W/PVC)	PC	1,000
396	4	20020842	MB.MAN.19B-EXT.SPK.	PC	1,000
397	5	35000194	SCREW S C ZN YSMB 2.9*9.5	PC	1,000
398	4	20020844	MB.MAN.19B-BAV OUT WO/BTSC	PC	1,000
399	5	30001835	CONN MALE 3P TOP WHITE	PC	1,000	PL058
400	5	30001837	CONN MALE 3P TOP BLUE	PC	1,000	PL059
401	5	35000194	SCREW S C ZN YSMB 2.9*9.5	PC	2,000
402	4	20020870	MB.MAN.19B-CABINET 110° W/TUNER	PC	1,000
403	5	30001762	CONN.MALE 2P (2052) GRAY	PC	1,000	LD501
404	5	30001770	CONN.MALE 3P (2003) GRAY	PC	1,000	PL502
405	5	30001783	CONN.MALE 5P (2005)	PC	1,000	PL501
406	4	20021193	MB.MAN.19B-PSBG GER+NI PLL 110°	PC	1,000
407	5	30000410	CAP EL 470UF 50V M	PC	1,000	C115
408	5	30001579	IC TDA8844/N2	PC	1,000	IC401
409	5	30001692	FILTER SAW OFWK3953M	PC	1,000	Z401

410	5	30001724	FILTER SER TRAP TPS 5.5MHZ	PC	1,000	Z209
411	5	30001745	XTAL 3.579545	PC	1,000	X404
412	5	30001748	XTAL 4.433619 MHZ	PC	1,000	X401
413	5	30001808	CONN.MALE 12P MOLEX	PC	1,000	PL403
414	5	30001810	CONN.MALE 14P MOLEX	PC	1,000	PL404
415	4	20021745	MB.MAN.19B-W/EMC 29" 32" 16:9-33"	PC	1,000
416	5	30000084	CAP MKT 150NF 275V M AC P=15	PC	1,000	C801
417	5	30007731	CABLE 1P R2.6 65 W/CLIPS	PC	1,000
418	5	30009849	CABLE 0.6MM BLUE (7CM)	PC	1,000	CX8
419	4	20023211	MB.MAN.19B-8P/TXT 545X TEAC (CF/CTI)	PC	1,000
420	5	20017158	PR.IC.19-545X TEAC	PC	1,000
421	6	30001862	SOCKET IC 52P (SHRINK)	PC	1,000	IC501(S)
422	6	30006718	IC SDA545X OTP	PC	1,000	IC501
423	5	30000359	CAP EL 1000UF 16V M	PC	1,000	C820
424	5	30000797	RES SMD 1/10W 75R J (0805)	PC	1,000	RX41
425	5	30006662	XTAL 6MHZ	PC	1,000	X501
426	5	30008706	CONN ASSY 3/25 FLAT	PC	1,000
427	5	30009833	CABLE 0.6MM BLUE (10CM)	PC	1,000	C-C
428	4	20027409	MB.MAN.19B-33" SIZE TEAC	PC	1,000
429	5	20000952	HE.ASY.16/19-REG(2)	PC	1,000
430	6	30001622	IC 7805 (1A)	PC	1,000
431	6	35000105	HEATSINK 16/19-REGULATOR(2)	PC	1,000
432	6	35000158	NUT C ZN BOTTOM M3	PC	1,000
433	6	35000165	KNURL WASHER C ZNSY 3*6*04 (M3)	PC	1,000
434	6	35000181	SCREW C ZN YSMB M3*8	PC	1,000
435	5	20000954	HE.ASY.19-CRT BOARD	PC	1,000
436	6	30008721	IC TDA6108	PC	1,000	IC901
437	6	35000114	HEATSINK 19-CRT BOARD	PC	1,000
438	6	35000158	NUT C ZN BOTTOM M3	PC	1,000
439	6	35000165	KNURL WASHER C ZNSY 3*6*04 (M3)	PC	1,000
440	6	35000189	SCREW C NI YSMB M3*6	PC	1,000
441	5	20000963	HE.ASY.19-E/W 110°	PC	1,000
442	6	30001429	TR BUK444-200A	PC	1,000	Q603
443	6	35000115	HEATSINK 19-E/W	PC	1,000
444	6	35000158	NUT C ZN BOTTOM M3	PC	1,000
445	6	35000165	KNURL WASHER C ZNSY 3*6*04 (M3)	PC	1,000
446	6	35000190	SCREW C NI YSMB M3*10	PC	1,000
447	5	20003508	CABLE ASSY.19-4/60 FC (FLAMAN)	PC	1,000
448	6	30002338	CABLE 4/60 (FC FLAMAN) 33'	PC	1,000

449	6	40000098	CABLE HOLDER 2.5*4P	PC	2,000
450	5	20027095	MD.ASY.19-11DCP01 (DUAL CASE PTC) KARTI	PC	1,000	TH801
451	6	30000076	CAP MKT 100NF 275V M AC	PC	1,000	CX61
452	6	30001268	THERMISTOR 3P	PC	1,000	TH201
453	6	30001795	CONN.MALE 3P (DEG)	PC	1,000	PL201
454	6	30001912	PIN F 5P/2.5MM (11.5MM)	PC	1,000	PL202
455	6	30009315	PCB 11DCP01	PC	1,000
456	7	60000047	CCL 1220*1020*1.6 FR2 V0 351	M2	0,000
457	5	30000075	CAP MKT 100NF 250V K (DC)	PC	1,000	C901
458	5	30000084	CAP MKT 150NF 275V M AC P=15	PC	1,000	C802
459	5	30000121	CAP KP 27NF 630V J	PC	1,000	C613
460	5	30000179	CAP MKP 9.1NF 1600V %3.5	PC	1,000	C626
461	5	30000350	CAP EL 10UF 250V M	PC	1,000	C902
462	5	30000406	CAP EL 47UF 250V M (HR)	PC	2,000	C606	C829	.	.	.
463	5	30001064	RES ADJ 470R 0.1W VER (MAN)	PC	1,000	VR801
464	5	30001171	RES MO 2W 4.7K J	PC	2,000	R610	R631	.	.	.
465	5	30001320	DIODE GUC BY228	PC	1,000	D612
466	5	30001323	DIODE BY299	PC	1,000	D611
467	5	30001964	FERRITE BAR 5*8	PC	2,000	D816-1	D816-2	.	.	.
468	5	30002031	FIXED COIL INJECTION 15MH	PC	1,000	L604
469	5	30002156	LIN.COIL 30UH 110' (AK19)	PC	1,000	L603
470	5	30002170	COIL FTZ/RAD	PC	1,000	PL904
471	5	30002583	JUMPER WIRE 0.6MM	G	0,130	PL802
472	5	30002876	CABLE ASSY 1/25 AK19 EMC	PC	1,000
473	5	30007681	DIODE UF5407	PC	1,000	D816
474	5	35000135	TEST PIN 1.1MM	PC	1,000	PL903
475	4	20027410	MB.MAN.19B-SMPS 110° 170-270V TEAC 545X	PC	1,000
476	5	20000848	FUSE ASSY.TK79-A (2.5A)	PC	1,000	F801
477	6	30001731	FUSE 2.5A 250V 5*20MM	PC	1,000
478	6	35000136	FUSE HOLDER TK79-A (GRAY)	PC	1,000	F801
479	5	20000965	HE.ASY.19-SMPS 110° 90-270V	PC	1,000
480	6	30001388	TR MTW8N60E	PC	1,000	Q802
481	6	35000015	SPRING TR.HOLDER (BIG)	PC	1,000
482	6	35000117	HEATSINK 19-PRIMER 110'	PC	1,000
483	6	40000145	INSULATOR SILICON PAD(20*30MM)	PC	1,000
484	5	20035411	CN.ASY.19-CONNECT R806 RES MO 5W 5K1	PC	1,000	R806
485	6	30001178	RES MO 5W 5K1 J	PC	2,000

486	5	30000421	CAP EL 220UF 400V M (FOR 28")	PC	1,000	C804
487	5	30001129	RES MO 22K 3W J	PC	1,000	R822
488	5	30001131	RES MO 1W 0.22R J	PC	1,000	R870
489	5	30001260	RES WW 5W 2.2R J RAD.	PC	1,000	R817
490	5	30001307	DIODE BYW95A	PC	2,000	D814	D815	.	.	.
491	5	30001499	IC MC44604P	PC	1,000	IC802
492	5	30002080	TRF SMPS AK19 110° (170-270V)	PC	1,000	TR802
493	5	30002103	LINE FILTER 2*32MH (AK19)	PC	1,000	TR801
494	5	30007069	IC TCDT1102G	PC	1,000	IC801
495	4	20030248	MB.MAN.19B-2SC STR FAV+SVHS TEAC	PC	1,000
496	5	30000410	CAP EL 470UF 50V M	PC	1,000	C114
497	5	30000548	RES CF 1/4W 1.6K J	PC	1,000	RX61
498	5	30000797	RES SMD 1/10W 75R J (0805)	PC	1,000	R093
499	5	30001619	IC TEA6415C	PC	1,000	IC050
500	5	30001764	CONN.MALE (2052) BLACK	PC	1,000	PL101
501	5	30001830	CONN MALE 2P TOP BLUE	PC	1,000	PL056
502	5	30001838	CONN MALE 3P TOP YELLOW	PC	1,000	PL051
503	5	30001865	SOCKET SCART (R)	PC	2,000	SC050	SC051	.	.	.
504	3	20025916	M.ASSY.19B-OTO 15GN21XX4X3XX3	PC	1,000
505	4	20010983	MB.SMD.19B-AK19B1 (MC44604) PCB GRUBU	PC	1,000
506	5	20025313	MB.RAD.19B-AK19B1 (MC44604) PCB GRUBU	PC	1,000
507	6	20025314	MB.AXI.19B-AK19B1 (MC44604) PCB GRUBU	PC	1,000
508	7	20025315	MB.SEQ.19B-AK19B1 (MC44604) PCB GRUBU	PC	1,000
509	8	20025713	MB.JUM.19B-AK19B1 (MC44604) PCB GRUBU	PC	1,000
510	9	30002583	JUMPER WIRE 0.6MM	G	2,380	J801	D822	S805	R802	R803
.	J803	S804	J101	J111	J120
.	J125	J278	J288	J451	J800
.	J802	S511	J163	J197	.
511	8	30000466	RES CF 1/4W 1K J	PC	3,000	R809	R807	R829	.	.
512	8	30000471	RES CF 1/4W 10K J	PC	3,000	R844	R831	R546	.	.
513	8	30000495	RES CF 1/4W 1.2K J	PC	1,000	R587
514	8	30000519	RES CF 1/4W 150R J	PC	1,000	R812
515	8	30000554	RES CF 1/4W 180R J	PC	1,000	R569
516	8	30000569	RES CF 1/4W 180K J	PC	1,000	R850
517	8	30000580	RES CF 1/4W 22R J	PC	1,000	R835
518	8	30000583	RES CF 1/4W 220R J	PC	2,000	J167	R559	.	.	.

519	8	30000594	RES CF 1/4W 22K J	PC	2,000	R810	R811	.	.	.
520	8	30000599	RES CF 1/4W 220K J	PC	1,000	R821
521	8	30000603	RES CF 1/2W 2.2M J (400V)	PC	1,000	R860
522	8	30000633	RES CF 1/4W 27K J	PC	1,000	R805
523	8	30000706	RES CF 1/4W 47R J	PC	4,000	R836	R833	R814	R103	.
524	8	30000718	RES CF 1/4W 4.7K J	PC	2,000	R879	R832	.	.	.
525	8	30000815	RES CF 1/4W 8.2K J	PC	1,000	R834
526	8	30000837	RES CF 1/4W 9.1K J	PC	1,000	R813
527	8	30001284	DIODE 1N4148	PC	3,000	D823	D524	D525	.	.
528	8	30001318	DIODE BA159	PC	1,000	D805
529	8	30001349	DIODE ZENER 11V	PC	1,000	D819
530	8	30001369	DIODE ZENER 3.6V ZPD	PC	1,000	D505
531	8	30001992	FIXED COIL 10UH Q65 K-A	PC	1,000	L503
532	7	30007878	PCB 11AK19B-1	PC	1,000
533	6	30000074	CAP MKT 100NF 63V J	PC	2,000	C807	C483	.	.	.
534	6	30000191	CAP CER 100PF 50V J SL	PC	1,000	C803
535	6	30000283	CAP CER 1NF 50V K B	PC	3,000	C855	C808	C809	.	.
536	6	30000290	CAP CER 10NF 50V Z F	PC	1,000	C853
537	6	30000295	CAP CER 100NF 50V Z F	PC	2,000	C830	C832	.	.	.
538	6	30000342	CAP CER 820PF 50V K B	PC	1,000	C806
539	6	30000345	CAP EL 10UF 50V M	PC	1,000	C580
540	6	30000353	CAP EL 100UF 25V M	PC	1,000	C848
541	6	30000387	CAP EL 33UF 50V M	PC	1,000	C449
542	6	30000433	CAP CER 1NF 1KV M B	PC	2,000	C821	C824	.	.	.
543	6	30007708	CAP CER 1NF 1KV K (PULSE)	PC	1,000	C827
544	5	30000189	CAP SMD 100PF 50V J (0805)	PC	1,000	C528
545	5	30000289	CAP SMD 10NF 50V K R (0805)	PC	1,000	C506
546	5	30000294	CAP SMD 100NF 50V K (0805)	PC	1,000	C510
547	5	30000300	CAP SMD 1.5NF 50V K	PC	1,000	C495
548	5	30000469	RES SMD 1/10W 1K J 0805	PC	3,000	R571	R554	R543	.	.
549	5	30000475	RES SMD 1/10W 10K J 0805	PC	1,000	R581
550	5	30000563	RES SMD 1/10W 1.8K J (0805)	PC	1,000	R566
551	5	30000593	RES SMD 1/10W 2.2K J (0805)	PC	3,000	R537	R538	R539	.	.
552	5	30000597	RES SMD 1/10W 22K J	PC	1,000	R101
553	5	30000751	RES SMD 1/10W 5.6K J 0805	PC	3,000	R528	R529	R530	.	.
554	5	30001734	JUMPER SMD (0805)	PC	3,000	J092	J231	J401	.	.
555	4	20020167	MB.SMD.19B-COMMON	PC	1,000
556	5	20020168	MB.RAD.19B-COMMON	PC	1,000
557	6	20020169	MB.AXL.19B-COMMON	PC	1,000
558	7	20020170	MB.SEQ.19B-COMMON	PC	1,000

559	8	20020171	MB.JUM.19B-COMMON	PC	1,000
560	9	20020172	MB.PER.19B-COMMON	PC	1,000
561	9	30002583	JUMPER WIRE 0.6MM	G	19,000	J096	J098	J100	J102	J103
.	J107	J108	J109	J110	J112
.	J115	J117	J118	J122	J124
.	J130	J132	J133	J136	J138
.	J139	J143	J145	J146	J147
.	J148	J149	J150	J151	J153
.	J155	J157	J158	J159	J160
.	J161	J169	J170	J177	J178
.	J179	J180	J182	J183	J184
.	J186	J189	J190	J191	J192
.	J193	J194	J196	J198	J199
.	J201	J202	J203	J204	J205
.	J206	J207	J208	J209	J210
.	J211	J212	J214	J215	J216
.	J218	J220	J221	J223	J225
.	J226	J227	J230	J237	J238
.	J239	J240	J241	J242	J245
.	J246	J247	J248	J249	J250
.	J251	J252	J253	J255	J256
.	J257	J260	J262	J266	J267
.	J270	J273	J274	J282	J290
.	J291	J292	J293	J294	J295
.	J296	J299	J498	J499	J570
.	J611	J612	J613	J615	J616
.	J619	J648	J651	J804	J808
.	J810	J850	R616	R825	R827
.	S112	S113	S114	S602	S107
.	J805	J114	J131	J156	J171
.	J187	J188	J243	J254	J263
.	J265	J271	J277	J280	J598
.	J128	J164	.	.	.
562	8	30000459	RES CF 1/4W 100R J	PC	8,000	R202	R407	R431	R432	R602
.	R621	R714	R715	.	.
563	8	30000466	RES CF 1/4W 1K J	PC	5,000	R605	R626	R716	R818	R700
564	8	30000471	RES CF 1/4W 10K J	PC	3,000	R203	R488	R601	.	.
565	8	30000580	RES CF 1/4W 22R J	PC	1,000	R705
566	8	30000633	RES CF 1/4W 27K J	PC	1,000	R451
567	8	30000650	RES CF 1/4W 33R J	PC	1,000	R455

568	8	30000706	RES CF 1/4W 47R J	PC	1,000	R402
569	8	30000723	RES CF 1/4W 47K J	PC	1,000	R201
570	8	30000770	RES CF 1/4W 680R J	PC	1,000	R460
571	8	30000810	RES CF 1/4W 820R J	PC	2,000	R868	R869	.	.	.
572	8	30000815	RES CF 1/4W 8.2K J	PC	1,000	R619
573	8	30000949	RES MF 1/4W 3K G	PC	1,000	R706
574	8	30001082	RES MO 1/2W 1K J	PC	2,000	R620	R630	.	.	.
575	8	30001284	DIODE 1N4148	PC	8,000	D201	D420	D509	D602	D603
.	D607	D608	D701	.	.
576	8	30001315	DIODE BYD33D	PC	1,000	D813
577	8	30001317	DIODE BA157	PC	2,000	D605	D609	.	.	.
578	8	30001318	DIODE BA159	PC	4,000	D818	D826	D827	D807	.
579	8	30001347	DIODE ZENER 8.2V	PC	1,000	D408
580	8	30001377	DIODE ZENER 33V UZT 33B	PC	1,000	D604
581	8	30001979	FIXED COIL 1UH Q45 M-A	PC	1,000	L201
582	8	30001984	FIXED COIL 2.2UH Q55 M-AX	PC	1,000	L801
583	8	30001986	FIXED COIL 3.3UH Q65 K	PC	1,000	L402
584	8	30001992	FIXED COIL 10UH Q65 K-A	PC	4,000	L502	L405	L406	L504	.
585	8	30001997	FIXED COIL 33UH Q60 J	PC	1,000	J129
586	8	30002016	FIXED COIL 150UH Q60 K	PC	2,000	J649	L001	.	.	.
587	6	30000071	CAP MKT 10NF 63V J	PC	1,000	C705
588	6	30000074	CAP MKT 100NF 63V J	PC	3,000	C403	C436	C709	.	.
589	6	30000092	CAP MKT 220NF 63V J	PC	2,000	C706	C415	.	.	.
590	6	30000106	CAP MKT 47NF 100V J	PC	1,000	C604
591	6	30000109	CAP MKT 470NF 63V J	PC	1,000	C112
592	6	30000198	CAP CER 120PF 500V J SL	PC	1,000	C831
593	6	30000295	CAP CER 100NF 50V Z F	PC	4,000	C816	C819	C822	C825	.
594	6	30000313	CAP CER 22NF 50V Z F	PC	1,000	C406
595	6	30000345	CAP EL 10UF 50V M	PC	7,000	C102	C203	C402	C405	C410
.	C440	C514	.	.	.
596	6	30000353	CAP EL 100UF 25V M	PC	1,000	C426
597	6	30000362	CAP EL 1UF 50V M	PC	2,000	C431	C437	.	.	.
598	6	30000371	CAP EL 22UF 50V M	PC	2,000	C516	C570	.	.	.
599	6	30000375	CAP EL 220UF 16V M	PC	4,000	C413	C814	C845	C847	.
600	6	30000384	CAP EL 2.2UF 50V M	PC	1,000	C407
601	6	30000387	CAP EL 33UF 50V M	PC	1,000	C601
602	6	30000393	CAP EL 3.3UF 50V M	PC	1,000	C500
603	6	30000407	CAP EL 470UF 16V M	PC	1,000	C607
604	6	30000433	CAP CER 1NF 1KV M B	PC	4,000	C850	C851	C846	C852	.
605	6	30001435	TR BC639	PC	1,000	Q604

606	6	30001454	TR BC548B	PC	8,000	Q100	Q402	Q406	Q420	Q514
.	Q805	Q806	Q807	.	.
607	6	30001455	TR BC558B	PC	3,000	Q503	Q601	Q701	.	.
608	6	30001506	IC TL431	PC	1,000	Q809
609	6	30008805	CAP MKT 39NF 63V J	PC	1,000	C854
610	5	30000189	CAP SMD 100PF 50V J (0805)	PC	2,000	C448	C498	.	.	.
611	5	30000201	CAP SMD 15PF 50V J (08*05)	PC	2,000	C576	C577	.	.	.
612	5	30000220	CAP SMD 22PF 50V J (08*05)	PC	1,000	C422
613	5	30000252	CAP SMD 47PF 50V J (08*05)	PC	2,000	C446	C447	.	.	.
614	5	30000284	CAP SMD 1NF 50V K R (0805)	PC	2,000	C433	C434	.	.	.
615	5	30000294	CAP SMD 100NF 50V K (0805)	PC	15,000	C211	C424	C427	C513	C537
.	C538	C539	C540	C029	C030
.	C031	C032	C526	C530	C533
616	5	30000300	CAP SMD 1.5NF 50V K	PC	2,000	C497	C499	.	.	.
617	5	30000309	CAP SMD 2.2NF 50V K R	PC	1,000	C603
618	5	30000312	CAP SMD 22NF 50V K (0805)	PC	7,000	C108	C412	C416	C417	C418
.	C425	C438	.	.	.
619	5	30000315	CAP SMD 220NF 25V Z (0805)	PC	1,000	C419
620	5	30000322	CAP SMD 3.3NF 50V K (0805)	PC	1,000	C423
621	5	30000332	CAP SMD 4.7NF 50V K (0805)	PC	1,000	C459
622	5	30000334	CAP SMD 47NF 50V K (0805)	PC	2,000	C411	C450	.	.	.
623	5	30000457	RES SMD 1/10W 10R J 0805	PC	1,000	R104
624	5	30000464	RES SMD 1/10W 100R J	PC	2,000	R580	R582	.	.	.
625	5	30000469	RES SMD 1/10W 1K J 0805	PC	11,000	R405	R437	R438	R439	R440
.	R441	R500	R502	R503	R507
.	R708
626	5	30000475	RES SMD 1/10W 10K J 0805	PC	8,000	R433	R524	R534	R552	R572
.	R578	R594	R709	.	.
627	5	30000480	RES SMD 1/10W 100K J (0805)	PC	2,000	R446	R586	.	.	.
628	5	30000489	RES SMD 1/10W 1R J (0805)	PC	1,000	R449
629	5	30000503	RES SMD 1/10W 12K J (0805)	PC	1,000	R200
630	5	30000563	RES SMD 1/10W 1.8K J (0805)	PC	1,000	R498
631	5	30000588	RES SMD 1/10W 220R J 0805	PC	1,000	R618
632	5	30000606	RES SMD 1/10W 2.2M J	PC	1,000	R457
633	5	30000631	RES SMD 1/10W 2.7K J 0805	PC	1,000	R450
634	5	30000653	RES SMD 1/10W 33R J	PC	1,000	R075
635	5	30000659	RES SMD 1/10W 330R J (0805)	PC	2,000	R403	R426	.	.	.
636	5	30000688	RES SMD 1/10W 390R J (0805)	PC	1,000	R404
637	5	30000697	RES SMD 1/10W 39K G	PC	1,000	R459
638	5	30000710	RES SMD 1/10W 47R J (0805)	PC	1,000	R419

639	5	30000717	RES SMD 1/10W 470R J (0805)	PC	1,000	R400
640	5	30000721	RES SMD 1/10W 4.7K J	PC	2,000	R486	R542	.	.	.
641	5	30000727	RES SMD 1/10W 47K J (0805)	PC	1,000	R100
642	5	30000732	RES SMD 1/10W 470K J	PC	1,000	R458
643	5	30000735	RES SMD 1/10W 4.7R J (0805)	PC	1,000	R418
644	5	30000747	RES SMD 1/10W 560R J (0805)	PC	1,000	R102
645	5	30001734	JUMPER SMD (0805)	PC	19,000	J097	J195	J224	J233	J236
.	J258	J268	J279	J283	J289
.	J405	J406	J610	J617	S415
.	S070	J275	J450	J400	.
646	4	20020522	MB.SMD.19B-W/8R 15W 29"32"33" GS/NI	PC	1,000
647	5	20020523	MB.RAD.19B-W/8R 15W 19"32"33" GS/NI	PC	1,000
648	6	20020524	MB.AXI.19B-W/8R 15W 29"32"33" GS/NI	PC	1,000
649	7	20020525	MB.SEQ.19B-W/8R 15W 29"32"33" GS/NI	PC	1,000
650	8	20020526	MB.JUM.19B-W/8R 15W 29"32"33" GS/NI	PC	1,000
651	9	30002583	JUMPER WIRE 0.6MM	G	0,130	J297
652	8	30000805	RES CF 1/4W 75K J	PC	1,000	R108
653	5	30000284	CAP SMD 1NF 50V K R (0805)	PC	2,000	C107	C101	.	.	.
654	5	30000480	RES SMD 1/10W 100K J (0805)	PC	2,000	R107	R109	.	.	.
655	5	30000807	RES SMD 1/10W 75K J	PC	1,000	R106
656	4	20020553	MB.SMD.19B-2SC STR WO/DOLBY	PC	1,000
657	5	30000242	CAP SMD 330PF 50V J	PC	4,000	C061	C062	C066	C067	.
658	5	30000469	RES SMD 1/10W 1K J 0805	PC	4,000	R067	R069	R079	R081	.
659	4	20020771	MB.SMD.19B-SMPS 170-270V 545X NORMAL	PC	1,000
660	5	20020772	MB.RAD.19B-SMPS 170-270V 545X NORMAL	PC	1,000
661	6	20020773	MB.AXI.19B-SMPS 170-270V 545XNORMAL/16:9	PC	1,000
662	7	20020774	MB.SEQ.19B-SMPS 170-270V 545XNORMAL/16:9	PC	1,000
663	8	30000531	RES CF 1/4W 15K J	PC	1,000	R849
664	8	30000540	RES CF 1/2W 1.5M J (400V)	PC	1,000	R816
665	8	30000660	RES CF 1/4W 3.3K J	PC	1,000	R871
666	8	30000801	RES CF 1/4W 7.5K J	PC	1,000	R808
667	8	30001317	DIODE BA157	PC	1,000	D606
668	8	30001329	DIODE 1N4007	PC	4,000	D801	D802	D803	D804	.
669	4	20020784	MB.SMD.19B-PLL NORMAL	PC	1,000
670	5	20020785	MB.RAD.19B-PLL NORMAL	PC	1,000
671	6	20020786	MB.AXI.19B-PLL NORMAL	PC	1,000
672	7	20020787	MB.SEQ.19B-PLL NORMAL	PC	1,000

673	8	20026015	MB.JUM.19B-PLL NORMAL	PC	1,000
674	9	30002583	JUMPER WIRE 0.6MM	G	0,250	J140	J272	.	.	.
675	8	30000459	RES CF 1/4W 100R J	PC	2,000	R208	R209	.	.	.
676	6	30000345	CAP EL 10UF 50V M	PC	1,000	C204
677	6	30000352	CAP EL 100UF 16V M	PC	1,000	C201
678	5	30000597	RES SMD 1/10W 22K J	PC	1,000	R213
679	5	30001734	JUMPER SMD (0805)	PC	2,000	S201	S203	.	.	.
680	4	20020863	MB.AXI.19B-CABINET 110° veya TACK SW	PC	1,000
681	5	20020864	MB.SEQ.19B-CABINET 110° veya TACK SW	PC	1,000
682	6	20020865	MB.JUM.19B-CABINET 110° veya TACK SW	PC	1,000
683	7	30002583	JUMPER WIRE 0.6MM	G	0,250	S812	S813	.	.	.
684	4	20021263	MB.SMD.19B-W/EMC 110°	PC	1,000
685	5	20021264	MB.RAD.19B-W/EMC 110°	PC	1,000
686	6	20041707	MB.AXI.19B-W/EMC 110°	PC	1,000
687	7	20041708	MB.SEQ.19B-W/EMC 110°	PC	1,000
688	8	20041709	MB.JUM.19B-W/EMC 110°	PC	1,000
689	9	30002583	JUMPER WIRE 0.6MM	G	0,130	J175
690	6	30000082	CAP MKT 15NF 63V J	PC	2,000	C116	C117	.	.	.
691	6	30000191	CAP CER 100PF 50V J SL	PC	1,000	C212
692	5	30000300	CAP SMD 1.5NF 50V K	PC	2,000	C109	C111	.	.	.
693	4	20021398	MB.SMD.19B-PSBG GS&NI STR PLL	PC	1,000
694	5	20021399	MB.RAD.19B-PSBG GS&NI STR PLL	PC	1,000
695	6	20021400	MB.AXI.19B-PSBG GS&NI STR PLL	PC	1,000
696	7	20021401	MB.SEQ.19B-PSBG GS&NI STR PLL	PC	1,000
697	8	20021402	MB.JUM.19B-PSBG GS&NI STR PLL	PC	1,000
698	9	30002583	JUMPER WIRE 0.6MM	G	1,750	C451	C452	S503	S504	S505
.	S510	J200	J165	J166	S506
.	S507	S508	S509	J276	.
699	8	30000650	RES CF 1/4W 33R J	PC	1,000	R428
700	8	30000712	RES CF 1/4W 470R J	PC	2,000	R588	R599	.	.	.
701	8	30001257	RES MG 1/2W 4.7M J	PC	1,000	R845
702	8	30001284	DIODE 1N4148	PC	2,000	D503	D504	.	.	.
703	8	30001990	FIXED COIL 6.8UH Q75 K	PC	1,000	L403
704	6	30000109	CAP MKT 470NF 63V J	PC	1,000	C113
705	6	30001454	TR BC548B	PC	1,000	Q407
706	6	30001455	TR BC558B	PC	1,000	Q512
707	5	30000220	CAP SMD 22PF 50V J (08*05)	PC	1,000	C421
708	5	30000284	CAP SMD 1NF 50V K R (0805)	PC	2,000	C490	C439	.	.	.

709	5	30000499	RES SMD 1/10W 1.2K J (0805)	PC	1,000	R421
710	5	30000503	RES SMD 1/10W 12K J (0805)	PC	2,000	R561	R574	.	.	.
711	5	30000524	RES SMD 1/10W 150R J (0805)	PC	1,000	R429
712	5	30000534	RES SMD 1/10W 15K J (0805)	PC	1,000	R454
713	5	30000558	RES SMD 1/10W 180R J	PC	1,000	R422
714	5	30000593	RES SMD 1/10W 2.2K J (0805)	PC	1,000	R420
715	5	30001734	JUMPER SMD (0805)	PC	3,000	S065	R478	J500	.	.
716	4	20023206	MB.SMD.19B-8P/TXT 545X TEAC (CF/CTI)	PC	1,000
717	5	20023207	MB.RAD.19B-8P/TXT 545X TEAC (CF/CTI)	PC	1,000
718	6	20023208	MB.AXI.19B-8P/TXT 545X TEAC (CF/CTI)	PC	1,000
719	7	20023209	MB.SEQ.19B-8P/TXT 545X TEAC (CF/CTI)	PC	1,000
720	8	20023210	MB.JUM.19B-8P/TXT 545X TEAC (CF/CTI)	PC	1,000
721	9	30002583	JUMPER WIRE 0.6MM	G	0,380	J141	J264	S416	.	.
722	8	30000466	RES CF 1/4W 1K J	PC	1,000	R448
723	8	30000500	RES CF 1/4W 12K J	PC	1,000	R711
724	8	30000718	RES CF 1/4W 4.7K J	PC	1,000	R710
725	8	30001284	DIODE 1N4148	PC	4,000	D510	D506	D507	D508	.
726	8	30001315	DIODE BYD33D	PC	2,000	D811	D812	.	.	.
727	6	30000099	CAP MKT 33NF 63V J	PC	1,000	C529
728	6	30000100	CAP MKT 330NF 63V J	PC	1,000	C521
729	6	30000345	CAP EL 10UF 50V M	PC	2,000	C428	C517	.	.	.
730	6	30000400	CAP EL 47UF 50V M	PC	1,000	C505
731	6	30001454	TR BC548B	PC	2,000	Q415	Q702	.	.	.
732	5	30000237	CAP SMD 33PF 50V J (08*05)	PC	2,000	C524	C525	.	.	.
733	5	30000294	CAP SMD 100NF 50V K (0805)	PC	1,000	C590
734	5	30000469	RES SMD 1/10W 1K J 0805	PC	3,000	R590	R592	R598	.	.
735	5	30000475	RES SMD 1/10W 10K J 0805	PC	3,000	R595	R596	R564	.	.
736	5	30000484	RES SMD 1/10W 1M J (0805)	PC	1,000	R584
737	5	30000626	RES SMD 1/10W 270R J	PC	1,000	R447
738	5	30000631	RES SMD 1/10W 2.7K J 0805	PC	3,000	R540	R591	R593	.	.
739	5	30000636	RES SMD 1/10W 27K J 0805	PC	1,000	R550
740	5	30000668	RES SMD 1/10W 33K J 0805	PC	1,000	R556
741	5	30000688	RES SMD 1/10W 390R J (0805)	PC	1,000	R465
742	5	30000807	RES SMD 1/10W 75K J	PC	1,000	R548
743	5	30001734	JUMPER SMD (0805)	PC	1,000	S502
744	4	20027380	MB.SMD.19B-33" SIZE TEAC CF+CTI+SVHS	PC	1,000


745	5	20027381	MB.RAD.19B-33" SIZE TEAC CF+CTI+SVHS	PC	1,000
746	6	20027382	MB.AXI.19B-33" SIZE TEAC CF+CTI+SVHS	PC	1,000
747	7	20027383	MB.SEQ.19B-33" SIZE TEAC CF+CTI+SVHS	PC	1,000
748	8	20027384	MB.JUM.19B-33" SIZE TEAC CF+CTI+SVHS	PC	1,000
749	9	20027385	MB.PER.19B-33" SIZE TEAC CF+CTI+SVHS	PC	1,000
750	9	30002583	JUMPER WIRE 0.6MM	G	0,500	S604	J901	J903	J614	.
751	8	30000459	RES CF 1/4W 100R J	PC	3,000	R907	R908	R909	.	.
752	8	30000513	RES CF 1/4W 130K J	PC	1,000	R823
753	8	30000525	RES CF 1/2W 1.5K J	PC	5,000	R901	R902	R903	R905	R906
754	8	30000572	RES CF 1/4W 2K J	PC	1,000	R824
755	8	30000655	RES CF 1/4W 330R J	PC	1,000	R707
756	8	30000775	RES CF 1/4W 6.8K J	PC	2,000	R614	R617	.	.	.
757	8	30000815	RES CF 1/4W 8.2K J	PC	1,000	R615
758	8	30001210	RES FUSE 1/4W 100R J	PC	1,000	R704
759	8	30001228	RES FUSE 1/2W 2.2R J	PC	1,000	R628
760	8	30001232	RES FUSE 1/4W 2.7R J	PC	1,000	R629
761	8	30001235	RES FUSE 1/2W 0.33R J	PC	1,000	R608
762	8	30001242	RES FUSE 1/4W 47R J	PC	1,000	R914
763	8	30001318	DIODE BA159	PC	1,000	D601
764	8	30001329	DIODE 1N4007	PC	3,000	D901	D902	D903	.	.
765	6	30000074	CAP MKT 100NF 63V J	PC	1,000	C435
766	6	30000078	CAP MKT 1UF 100V M	PC	2,000	C621	C618	.	.	.
767	6	30000082	CAP MKT 15NF 63V J	PC	1,000	C608
768	6	30000106	CAP MKT 47NF 100V J	PC	1,000	C707
769	6	30000319	CAP CER 2.7NF 500V K B	PC	1,000	C904
770	6	30000433	CAP CER 1NF 1KV M B	PC	1,000	C620
771	6	30000434	CAP CER 1NF 2KV K B	PC	1,000	C903
772	6	30001454	TR BC548B	PC	1,000	Q426
773	6	30001455	TR BC558B	PC	1,000	Q425
774	6	30007308	CAP CER 220PF 1KV K (PULSE)	PC	1,000	C833
775	6	30009208	CAP CER 470PF 1KV K (PULSE)	PC	1,000	C835
776	5	30000284	CAP SMD 1NF 50V K R (0805)	PC	2,000	C708	C715	.	.	.
777	5	30000289	CAP SMD 10NF 50V K R (0805)	PC	1,000	C600
778	5	30000309	CAP SMD 2.2NF 50V K R	PC	1,000	C430
779	5	30000340	CAP SMD 6.8NF 50V K (0805)	PC	1,000	C627
780	5	30000475	RES SMD 1/10W 10K J 0805	PC	1,000	R487

781	5	30000480	RES SMD 1/10W 100K J (0805)	PC	2,000	R479	R494	.	.	.
782	5	30000542	RES SMD 1/10W 1.5M J	PC	1,000	R639
783	5	30000550	RES SMD 1/10W 160K J	PC	1,000	R456
784	4	20029471	MB.SMD.19B-2SC STR FV+SVHS+CF33"OTP TEAC	PC	1,000
785	5	20029472	MB.RAD.19B-2SC STR FV+SVHS+CF33"OTP TEAC	PC	1,000
786	6	20029473	MB.AXI.19B-2SC STR FV+SVHS+CF33"OTP TEAC	PC	1,000
787	7	20029474	MB.SEQ.19B-2SC STR FV+SVHS+CF33"OTP TEAC	PC	1,000
788	8	20029785	MB.JUM.19B-2SC STR FV+SVHS+CF33"OTP TEAC	PC	1,000
789	8	30000466	RES CF 1/4W 1K J	PC	1,000	R508
790	8	30000531	RES CF 1/4W 15K J	PC	2,000	R549	R570	.	.	.
791	8	30000620	RES CF 1/4W 27R J	PC	1,000	R044
792	8	30001992	FIXED COIL 10UH Q65 K-A	PC	1,000	L407
793	8	30002015	FIXED COIL 150UH Q50 K (RAD)	PC	2,000	L050	L051	.	.	.
794	6	30000092	CAP MKT 220NF 63V J	PC	4,000	C051	C053	C054	C071	.
795	6	30000283	CAP CER 1NF 50V K B	PC	1,000	C408
796	6	30000345	CAP EL 10UF 50V M	PC	1,000	C068
797	6	30000352	CAP EL 100UF 16V M	PC	1,000	C028
798	6	30001454	TR BC548B	PC	2,000	Q055	Q500	.	.	.
799	6	30001455	TR BC558B	PC	1,000	Q504
800	5	30000189	CAP SMD 100PF 50V J (0805)	PC	2,000	C099	C097	.	.	.
801	5	30000224	CAP SMD 220PF 50V J (08*05)	PC	1,000	C098
802	5	30000294	CAP SMD 100NF 50V K (0805)	PC	4,000	C052	C072	C073	C075	.
803	5	30000300	CAP SMD 1.5NF 50V K	PC	4,000	C059	C060	C064	C065	.
804	5	30000312	CAP SMD 22NF 50V K (0805)	PC	1,000	C110
805	5	30000315	CAP SMD 220NF 25V Z (0805)	PC	1,000	S063
806	5	30000332	CAP SMD 4.7NF 50V K (0805)	PC	4,000	C03	C04	C01	C02	.
807	5	30000334	CAP SMD 47NF 50V K (0805)	PC	1,000	C409
808	5	30000457	RES SMD 1/10W 10R J 0805	PC	1,000	R105
809	5	30000464	RES SMD 1/10W 100R J	PC	2,000	R050	R051	.	.	.
810	5	30000469	RES SMD 1/10W 1K J 0805	PC	1,000	R082
811	5	30000475	RES SMD 1/10W 10K J 0805	PC	6,000	R094	R095	R096	R097	R098
.	R099
812	5	30000494	RES SMD 1/10W 120R J (0805)	PC	1,000	R492
813	5	30000524	RES SMD 1/10W 150R J (0805)	PC	1,000	R045
814	5	30000593	RES SMD 1/10W 2.2K J (0805)	PC	1,000	R509
815	5	30000668	RES SMD 1/10W 33K J 0805	PC	1,000	R511


816	5	30000675	RES SMD 1/10W 3.3M J	PC	1,000	R510
817	5	30000688	RES SMD 1/10W 390R J (0805)	PC	1,000	R493
818	5	30000710	RES SMD 1/10W 47R J (0805)	PC	1,000	R084
819	5	30000717	RES SMD 1/10W 470R J (0805)	PC	1,000	R049
820	5	30000774	RES SMD 1/10W 680R J (0805)	PC	4,000	R066	R068	R078	R080	.
821	5	30000797	RES SMD 1/10W 75R J (0805)	PC	9,000	R065	R070	R071	R072	R073
.	R040	R041	R083	R417	.
822	3	20026727	IC 24C16 774J6E2111100010	PC	1,000
823	4	30009005	IC 24C16	PC	1,000
824	1	20027150	BUTTON FUNCTION 8411 (ME.GOLD-7642/P)	PC	1,000
825	2	20038634	BUTTON FUNCTION 8411 L.GRAY (I)	PC	1,000
826	3	60000001	ABS (NATURAL)	KG	0,010
827	3	60000515	MASTERBATCH LIGHT GRAY %1	KG	0,000
828	2	60000200	PAINT ALBA METALIC GOLD-022 7642	KG	0,000
829	1	20027151	MD.ASY.LD18-8411 (ME.GOLD/P)(GRAY/S)TEAC	PC	1,000
830	2	20004430	LENS LED 8411 (I)	PC	1,000
831	3	60000013	ACRYLIC MILKY	G	0,430
832	2	20027152	BUT.ON/OFF 8411(ME.GOLD/P)(GR/POW/S)TEAC	PC	1,000
833	3	20038640	BUTTON ON/OFF 8411 L.GRAY(I) (WO/TS)	PC	1,000
834	4	60000001	ABS (NATURAL)	KG	0,010
835	4	60000515	MASTERBATCH LIGHT GRAY %1	G	0,010
836	3	60000200	PAINT ALBA METALIC GOLD-022 7642	KG	0,000
837	2	20027453	MD.ASY.LD18-LD18	PC	1,000
838	3	30001279	LED RED/GREEN LTL293SJ	PC	1,000
839	3	30002325	CONN.ASSY 2/60 FC (LED)	PC	1,000
840	3	30009097	PCB 11LD18-1	PC	1,000
841	1	20036465	ON/OFF AS.110°(33"')(2.2/AU)(W/MAKARON)	PC	1,000
842	2	30002174	SWITCH ON/OFF 4A/64A	PC	1,000
843	2	30002368	CABLE AC 2P 65CM W/MLX CONN.	PC	1,000
844	2	30002386	POWER CORD 2.2MT AUST.TYPE	PC	1,000
845	2	40000127	SWITCH INSULATION DOOR LK101	PC	1,000
846	2	40001898	MACARON (12cm.Isý ile daralan)	PC	1,000
847	1	20038434	SPK.ASSY.84XX W/EXT&TWET.(19)(TEAC-HE)	PC	1,000
848	2	20038435	SPK.ASSY.84XX W/EXT&TWT (R)(19)(TEAC-HE)	PC	1,000
849	3	30000426	CAP EL 6.8UF 50V M (BPL)	PC	1,000

850	3	30001947	TWEETER 8R 15W CLOSED	PC	1,000
851	3	30002238	CABLE 2/20 R2.6 WO/SOCKET AK16	PC	1,000
852	3	30007497	CONN.ASSY.2/69 R2.6 W/GRAY CONN.	PC	1,000
853	3	30011811	SPEAKER 8R 15W (4"W/SCEW) W/LL	PC	1,000
854	3	50011720	LABEL HIGH END	PC	1,000
855	2	20038436	SPK.ASSY.84XX W/EXT&TWT (L)(19)(TEAC-HE)	PC	1,000
856	3	30000426	CAP EL 6.8UF 50V M (BPL)	PC	1,000
857	3	30001947	TWEETER 8R 15W CLOSED	PC	1,000
858	3	30002238	CABLE 2/20 R2.6 WO/SOCKET AK16	PC	1,000
859	3	30007498	CONN.ASSY.2/76 R2.6 W/BL CONN.	PC	1,000
860	3	30011811	SPEAKER 8R 15W (4"W/SCEW) W/LL	PC	1,000
861	3	50011720	LABEL HIGH END	PC	1,000
862	1	20043399	EXP.KIT 12/18/19 (33") W/SPRING	PC	1,000
863	2	20004519	CABLE HOLDER CRT (I)	PC	1,000
864	3	60000018	COPOLYMER POLYPROPYLENE	KG	0,000
865	2	35000013	SPRING ON/OFF SWITCH	PC	1,000
866	2	35000512	NUT C ZN M4	PC	1,000
867	2	70000331	ADHESIVE TAPE 75MM/660M (4125)	M	2,360
868	1	30002760	33" CPT TUBE 50 HZ IRON	PC	1,000
869	1	40001939	LOGO TEAC (BIG)(GRAY W/P)	PC	1,000
870	1	50000007	PLASTIZOTE (1400*1000)	PC	2,000
871	1	50006126	LBL.SERVICE TEAC	PC	1,000
872	1	50007923	LBL.SCREEN TEAC EU-80ST	PC	1,000

A8-21KA11

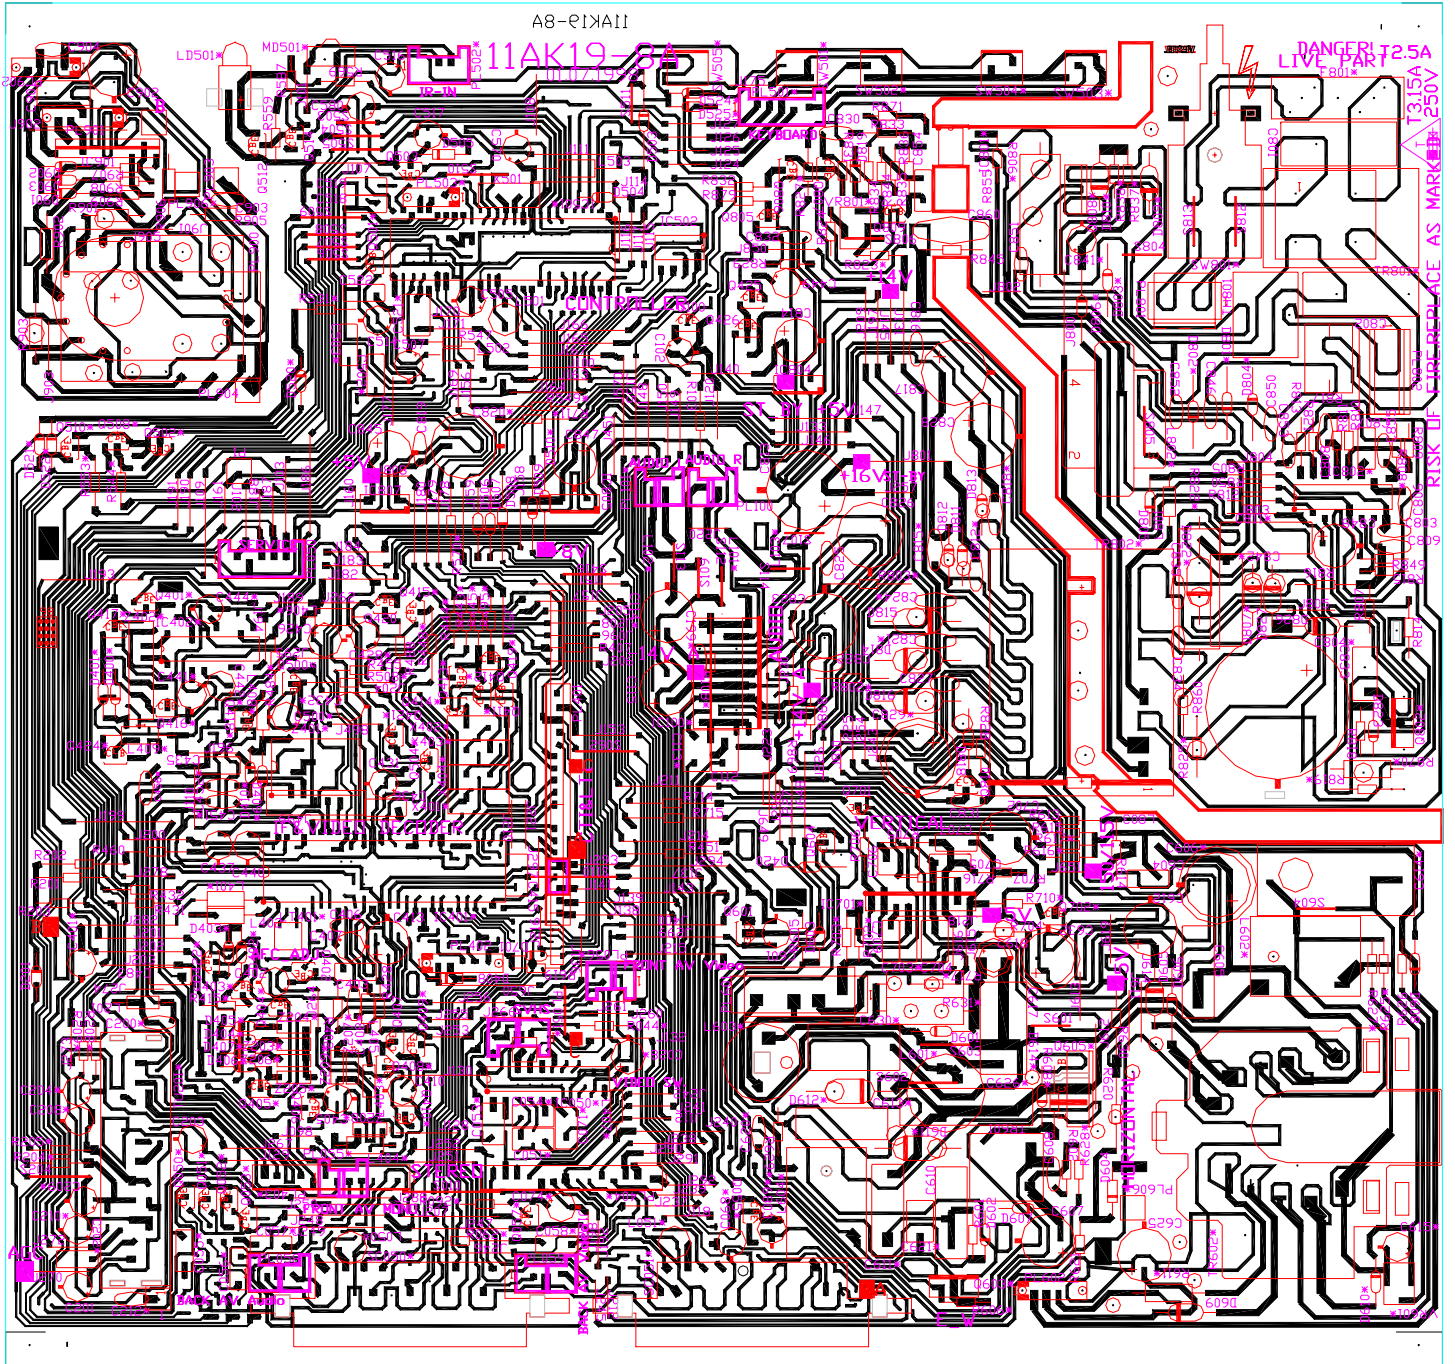

DANGER! LIVE PART
T315A
FACE AS MARK

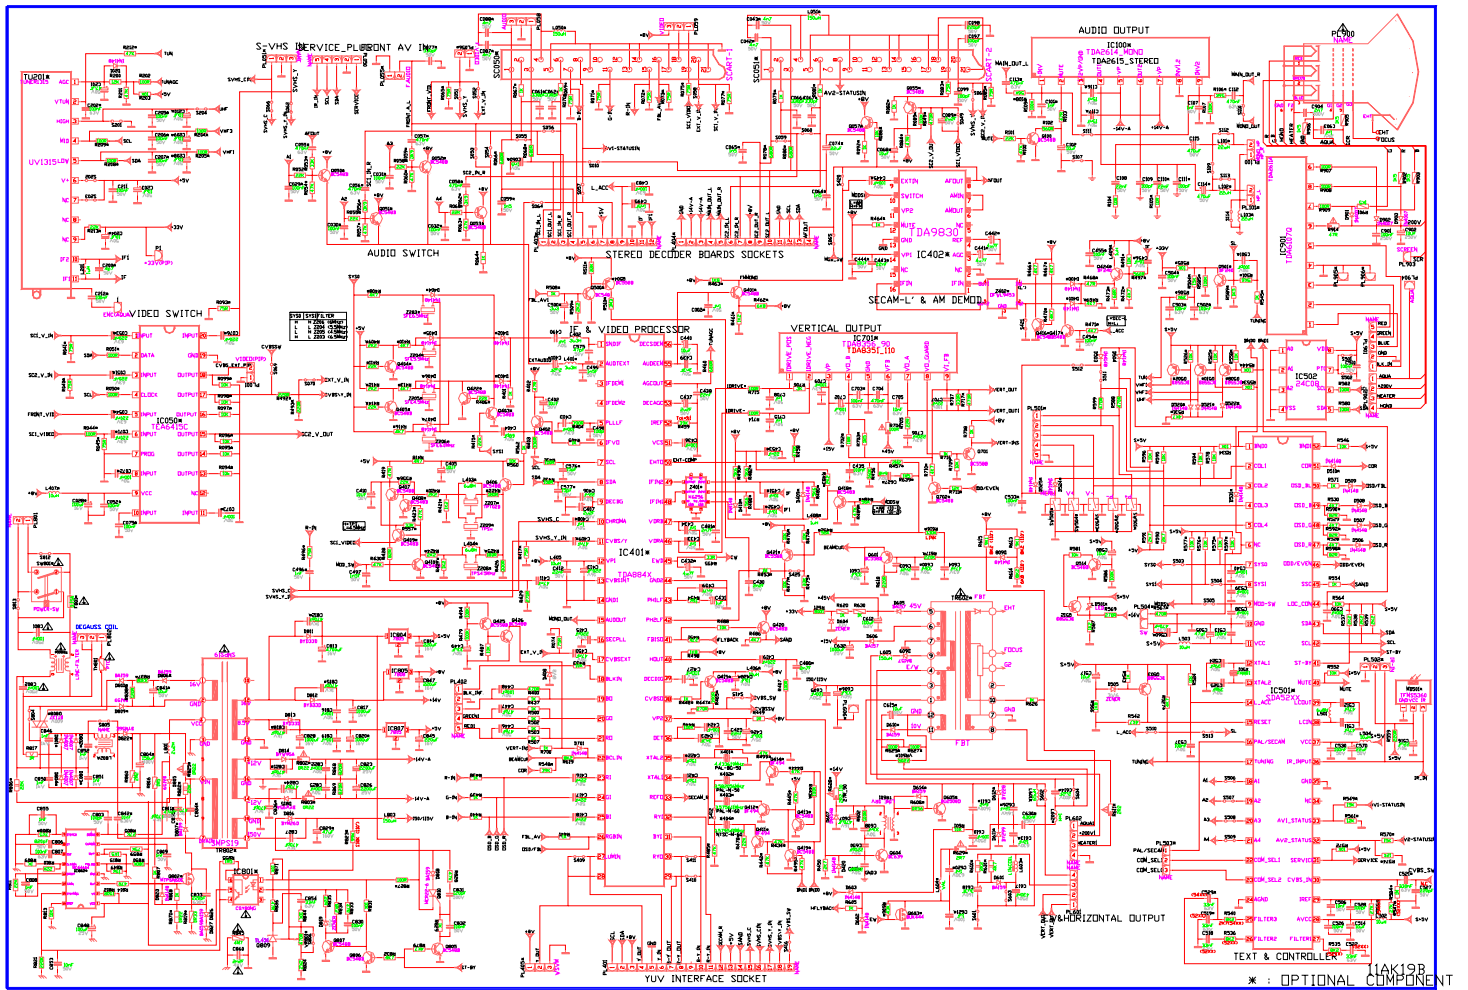

11AK19B COMPONENT
 * : OPTIONAL

