

# AV RECEIVER/AV AMPLIFIER RX-V765/HTR-6270/ AX-V765 SERVICE MANUAL

## IMPORTANT NOTICE

This manual has been provided for the use of authorized YAMAHA Retailers and their service personnel. It has been assumed that basic service procedures inherent to the industry, and more specifically YAMAHA Products, are already known and understood by the users, and have therefore not been restated.

**WARNING:** Failure to follow appropriate service and safety procedures when servicing this product may result in personal injury, destruction of expensive components, and failure of the product to perform as specified. For these reasons, we advise all YAMAHA product owners that any service required should be performed by an authorized YAMAHA Retailer or the appointed service representative.

**IMPORTANT:** The presentation or sale of this manual to any individual or firm does not constitute authorization, certification or recognition of any applicable technical capabilities, or establish a principle-agent relationship of any form.

The data provided is believed to be accurate and applicable to the unit(s) indicated on the cover. The research, engineering, and service departments of YAMAHA are continually striving to improve YAMAHA products. Modifications are, therefore, inevitable and specifications are subject to change without notice or obligation to retrofit. Should any discrepancy appear to exist, please contact the distributor's Service Division.

**WARNING:** Static discharges can destroy expensive components. Discharge any static electricity your body may have accumulated by grounding yourself to the ground buss in the unit (heavy gauge black wires connect to this buss).

**IMPORTANT:** Turn the unit OFF during disassembly and part replacement. Recheck all work before you apply power to the unit.

## CONTENTS

TO SERVICE PERSONNEL .....	2
FRONT PANELS .....	3-4
REAR PANELS .....	5-8
REMOTE CONTROL PANEL .....	9
SPECIFICATIONS / 参考仕様 .....	10-16
INTERNAL VIEW .....	17
SERVICE PRECAUTIONS / サービス時の注意事項 .....	17
DISASSEMBLY PROCEDURES / 分解手順 .....	18-20
UPDATING FIRMWARE / ファームウェアの書き込み .....	21-31
SELF-DIAGNOSTIC FUNCTION / ダイアグ (自己診断機能) .....	32-64

CONFIRMATION OF IDLING CURRENT OF AMP UNIT / アンプユニットのアイドリング電流の確認 .....	65
DISPLAY DATA .....	66-67
IC DATA .....	68-86
PIN CONNECTION DIAGRAMS .....	87-89
BLOCK DIAGRAMS .....	90-93
PRINTED CIRCUIT BOARDS .....	94-111
SCHEMATIC DIAGRAMS .....	113-124
REPLACEMENT PARTS LIST .....	125-147
REMOTE CONTROL .....	148-150
ADVANCED SETUP .....	151-152
本機の基本設定 / 初期化を行う .....	153-154



このサービスマニュアルは、エコマーク認定の再生紙を使用しています。  
This Service Manual uses recycled paper.




**YAMAHA**

YAMAHA CORPORATION  
P.O.Box 1, Hamamatsu, Japan  
animate '09.05

## ■ TO SERVICE PERSONNEL

1. Critical Components Information  
Components having special characteristics are marked  $\Delta$  and must be replaced with parts having specifications equal to those originally installed.
2. Leakage Current Measurement (For 120V Models Only)  
When service has been completed, it is imperative to verify that all exposed conductive surfaces are properly insulated from supply circuits.
  - Meter impedance should be equivalent to 1500 ohms shunted by 0.15  $\mu$ F.

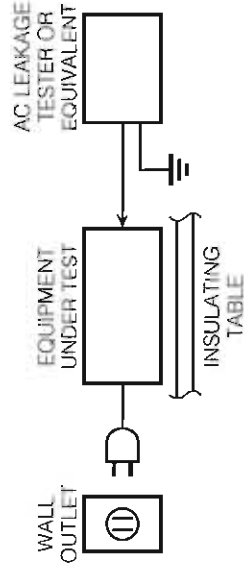

- Leakage current must not exceed 0.5mA.
- Be sure to test for leakags with the AC plug in both polarities.



For U model  
"CAUTION"

"F3701: FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE 10A, 125V FUSE."

For C model

CAUTION

F3701: REPLACE WITH SAME TYPE 10A, 125V FUSE.

ATTENTION

F3701: UTILISER UN FUSIBLE DE RECHANGE DE MÊME TYPE DE 10A, 125V.

## WARNING: CHEMICAL CONTENT NOTICE!

This product contains chemicals known to the State of California to cause cancer, or birth defects or other reproductive harm.

DO NOT PLACE SOLDER, ELECTRICAL/ELECTRONIC OR PLASTIC COMPONENTS IN YOUR MOUTH FOR ANY REASON WHATSOEVER!

Avoid prolonged, unprotected contact between solder and your skin! When soldering, do not inhale solder fumes or expose eyes to solder/flux vapor!

If you come in contact with solder or components located inside the enclosure of this product, wash your hands before handling food.

## About lead free solder / 無鉛ハンダについて

All of the P.C.B.s installed in this unit and solder joints are soldered using the lead free solder.

Among some types of lead free solder currently available, it is recommended to use one of the following types for the repair work.

- Sn + Ag + Cu (tin + silver + copper)
- Sn + Cu (tin + copper)
- Sn + Zn + Bi (tin + zinc + bismuth)

### Caution:

As the melting point temperature of the lead free solder is about 30°C to 40°C (50°F to 70°F) higher than that of the lead solder, be sure to use a soldering iron suitable to each solder.

本機に搭載されているすべての基板およびハンダ付けによる接合部は無鉛ハンダでハンダ付けされています。

無鉛ハンダにはいくつかの種類がありますが、修理時には下記のような無鉛ハンダの使用を推奨します。

- Sn+Ag+Cu (錫 + 銀 + 銅)
- Sn+Cu (錫 + 銅)
- Sn+Zn+Bi (錫 + 亜鉛 + ビスマス)

### 注意：


無鉛ハンダの融点温度は通常の鉛入りハンダに比べ30～40℃程度高くなっていますので、それぞれのハンダに合ったハンダごてをご使用ください。

RX-V765/HTR-6270/AX-V765


## FRONT PANELS

### Top view


U model




C, R, T, K, A, B, G, E, F, L models




J model



### Front view RX-V765 (U model)

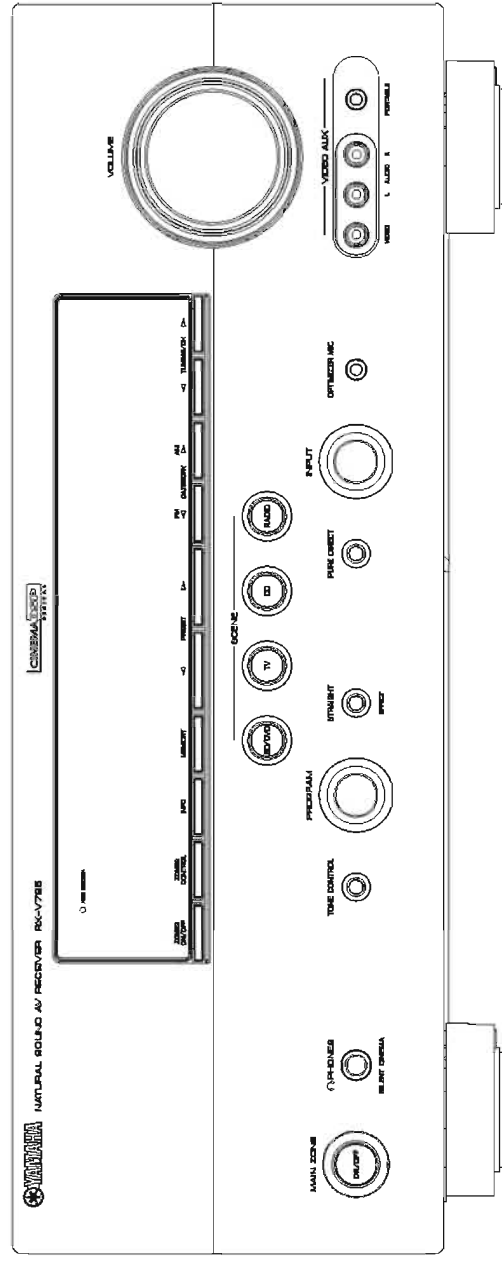


### RX-V765 (C, R, K, A, B, G, E, F, L models)

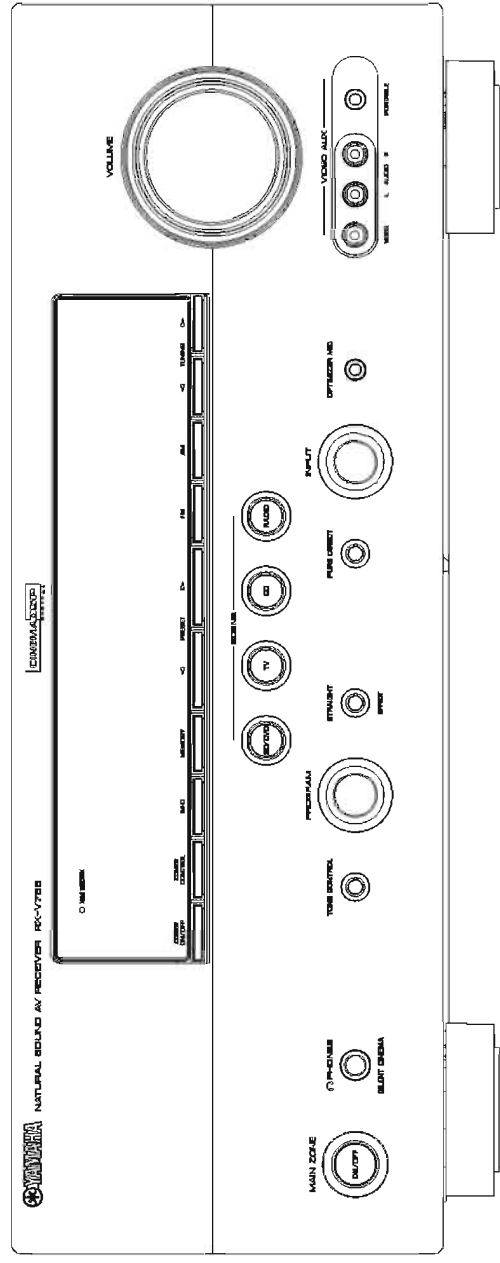


RX-V765/HTR-6270/AX-V765


RX-V765 (T model)

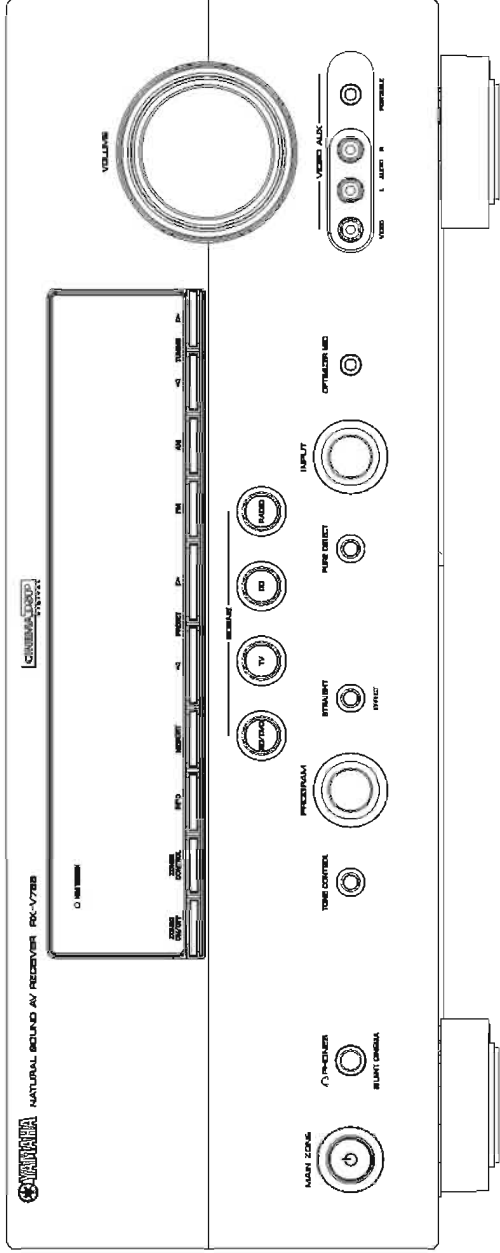

HTR-6270 (C, F models)

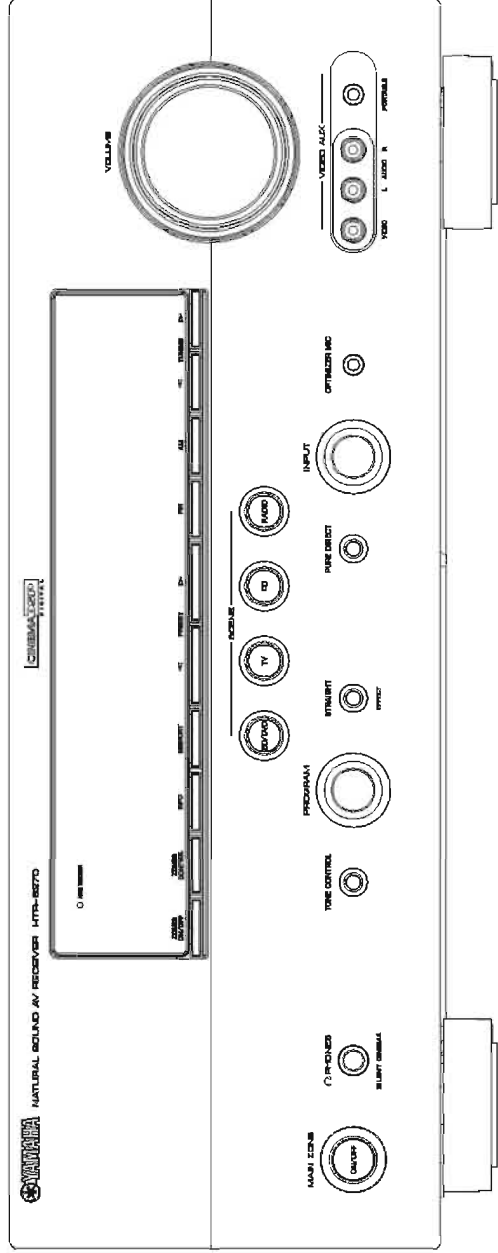


AX-V765 (J model)

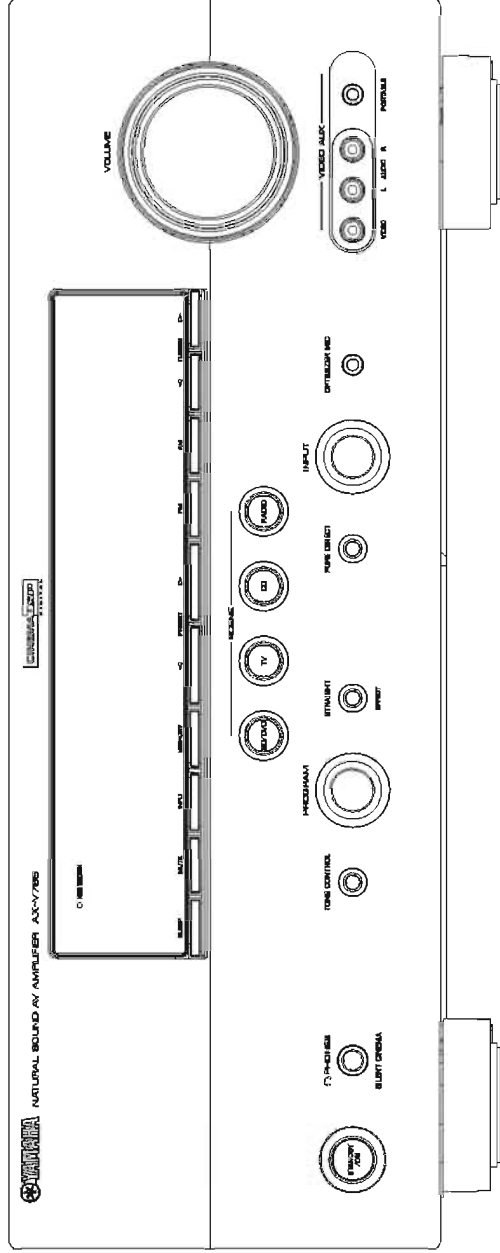


## REAR PANELS


RX-V765 (U model)

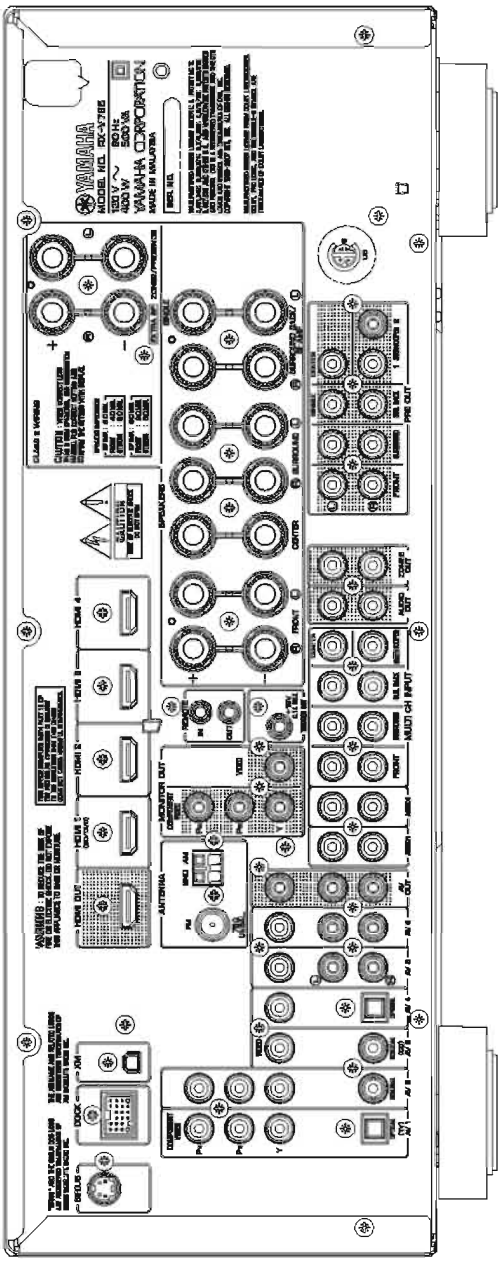

RX-V765 (C model)

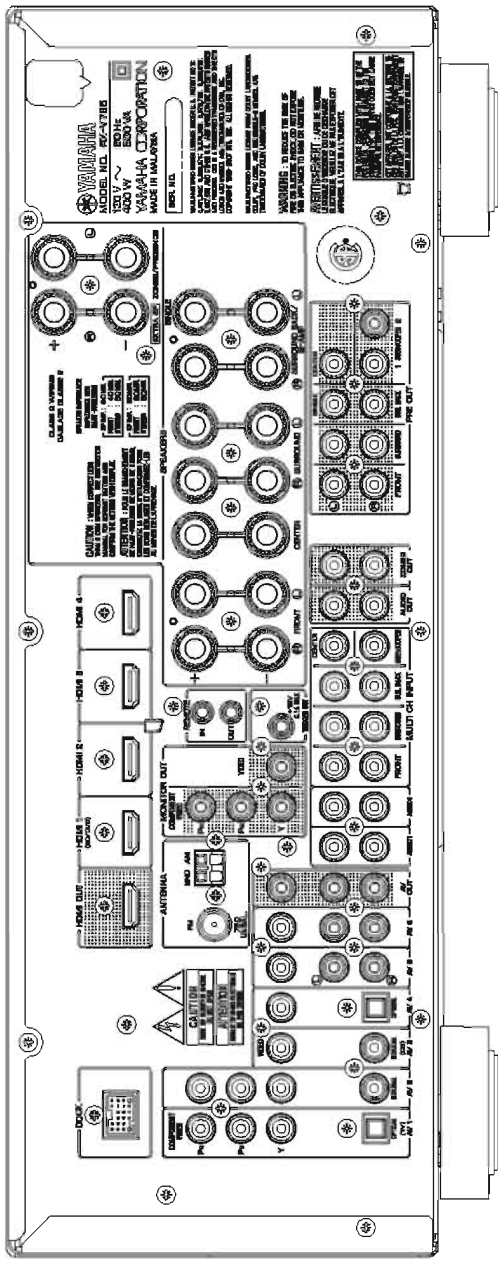


RX-V765 (R model)

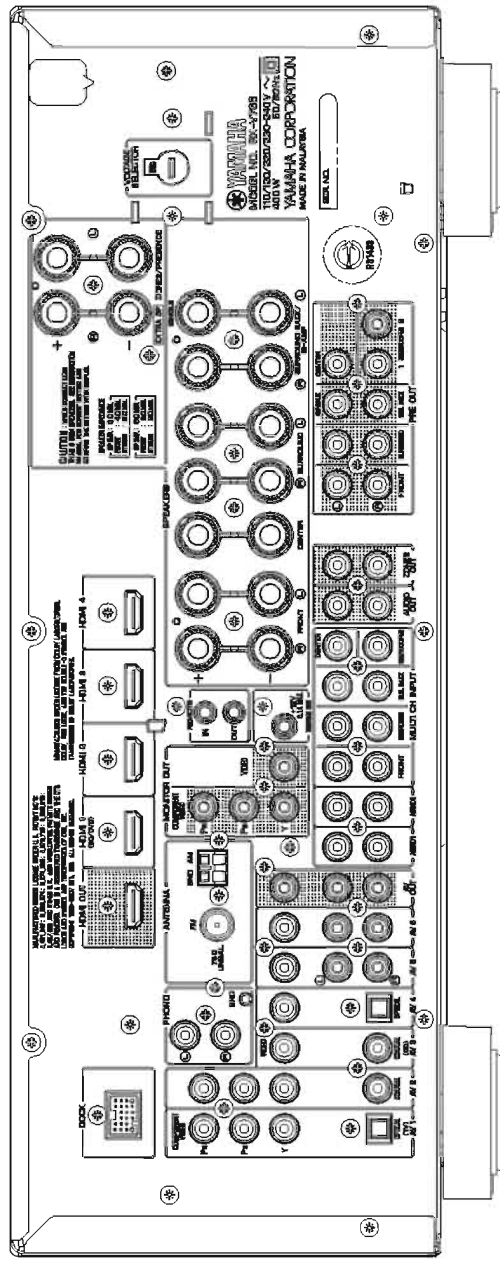


RX-V765/TR-6270/AX-V765


RX-V765 (T model)

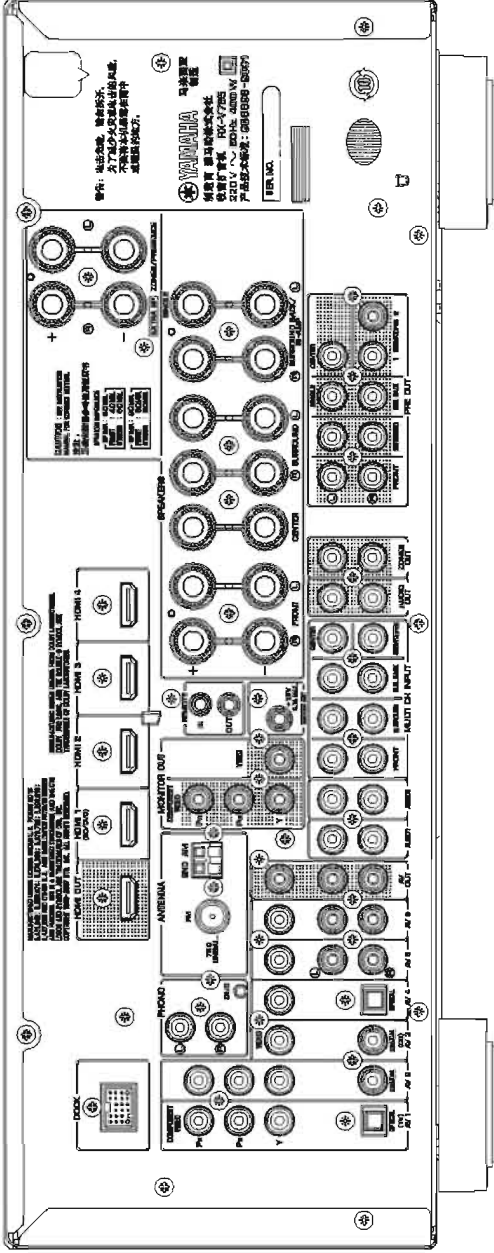


RX-V765 (K model)

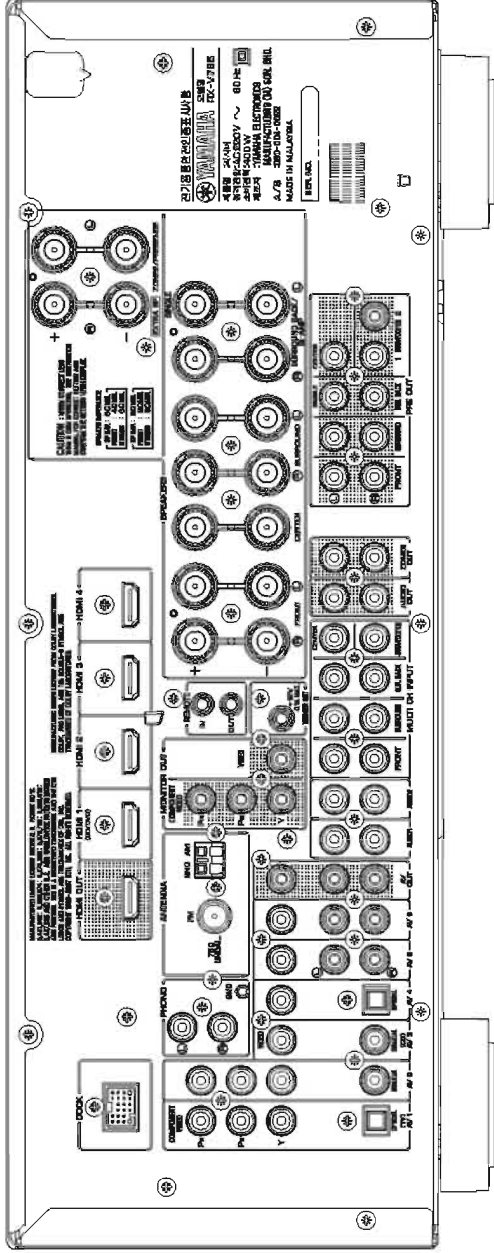


RX-V765 (A model)

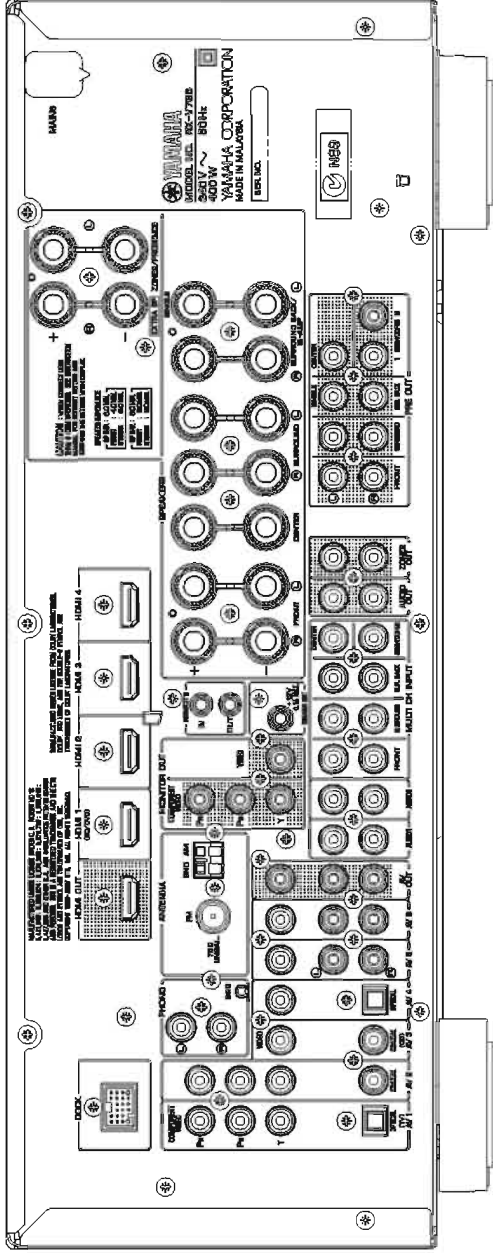


RX-V765 (B, G, E, F models)

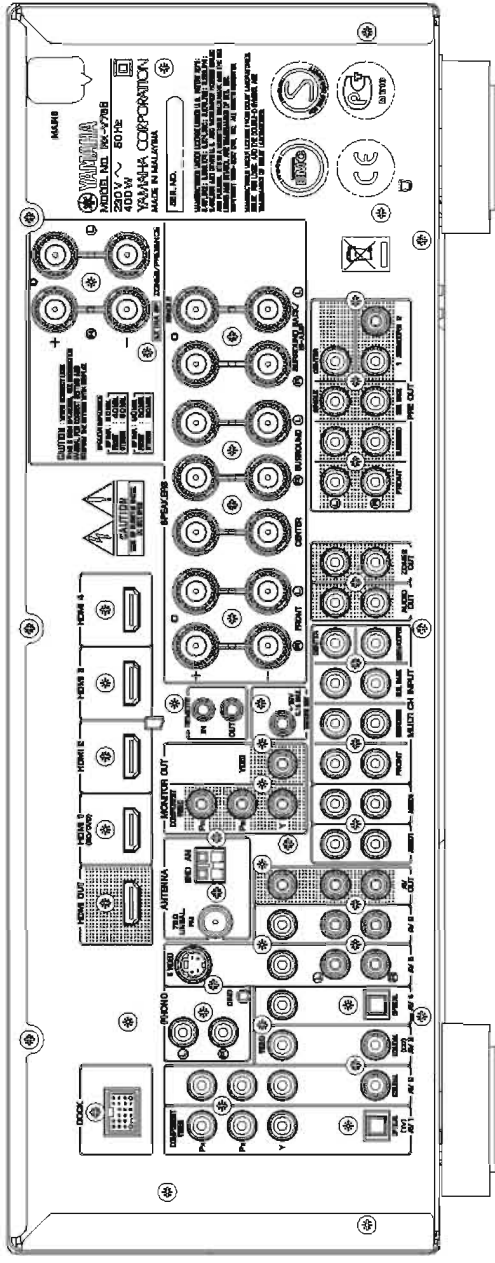

RX-V765 (L model)

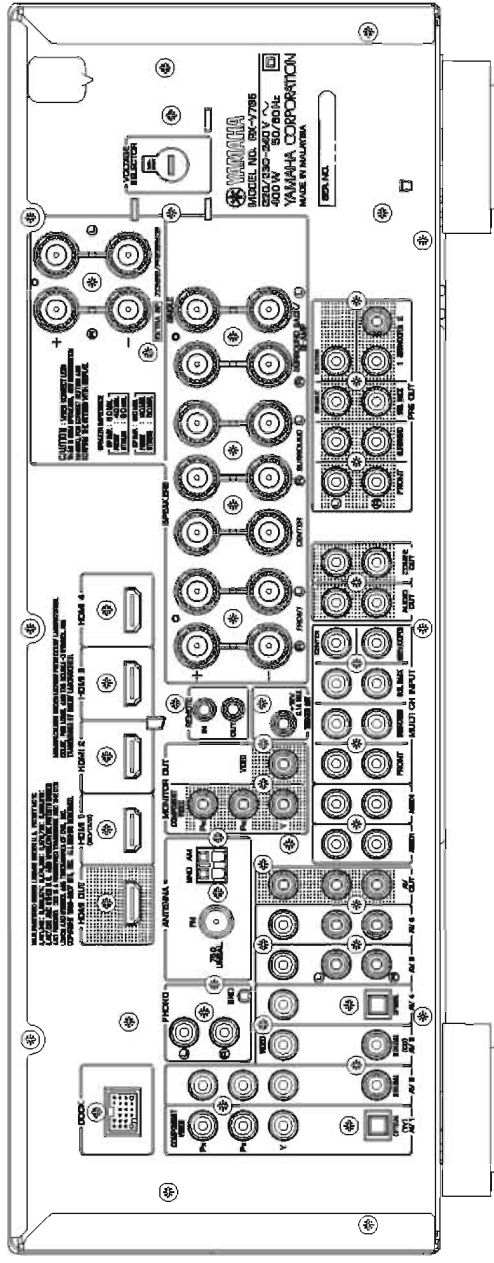


HTR-6270 (C model)

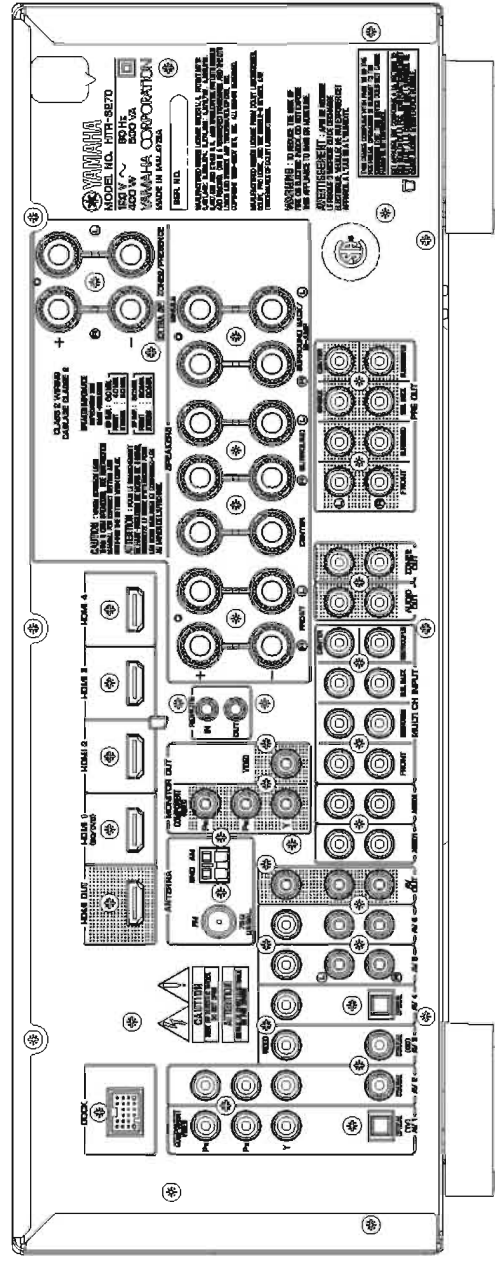


RX-V765/HTR-6270/AX-V765

HTR-6270 (F model)

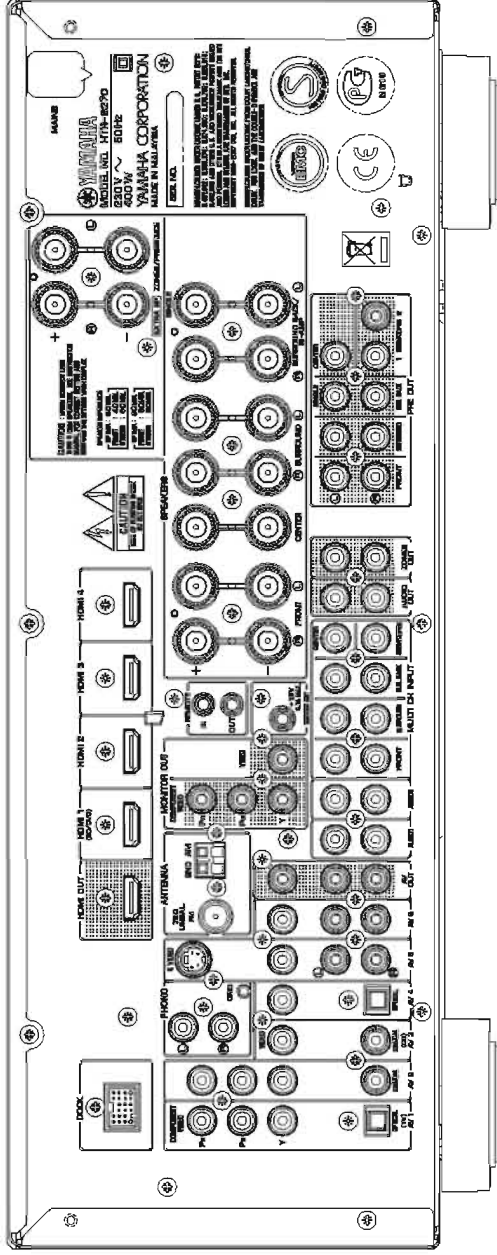


AX-V765 (J model)

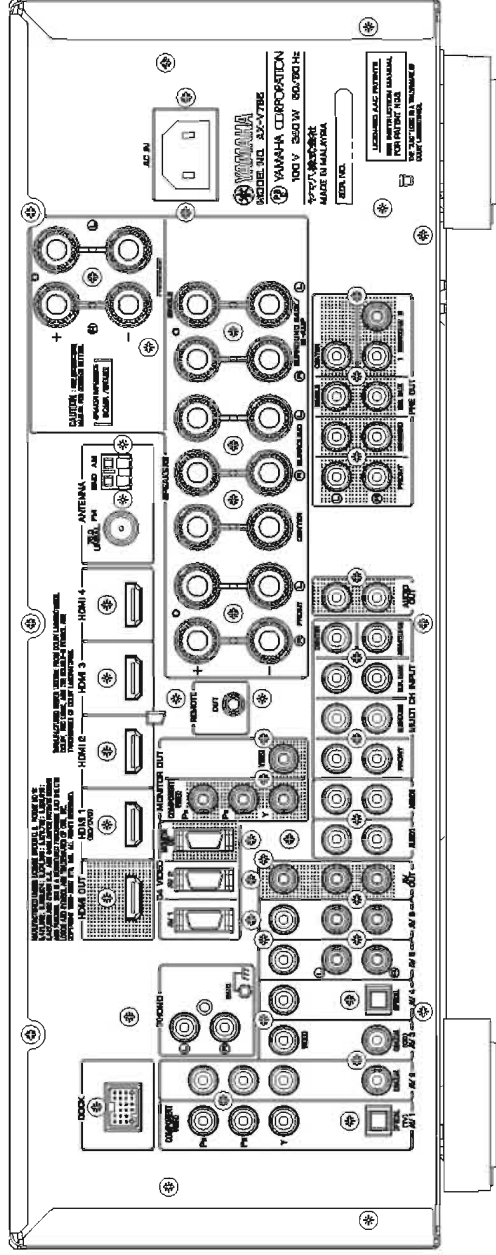




# REMOTE CONTROL PANELS


RAV290  
(U model)

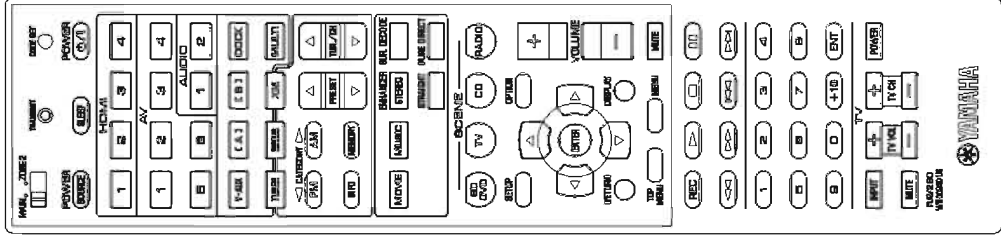


RAV291  
(C model)

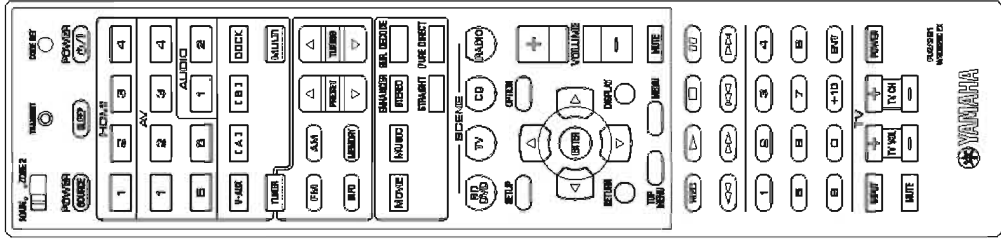


RAV292  
(R, A, L models)

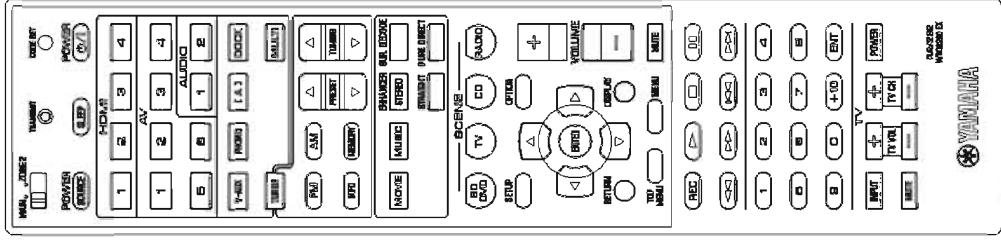

RAV295  
(T, K, B, G, E, F models)

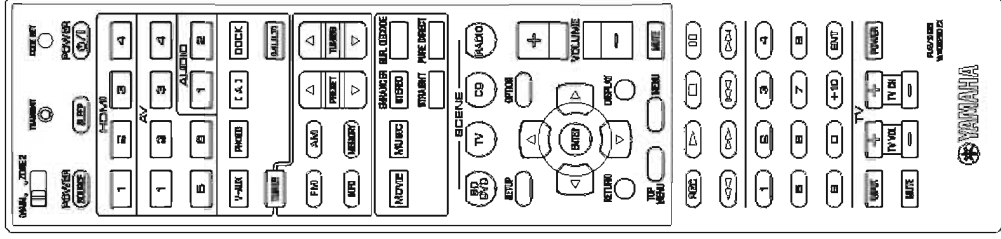

RAV289  
(J model)

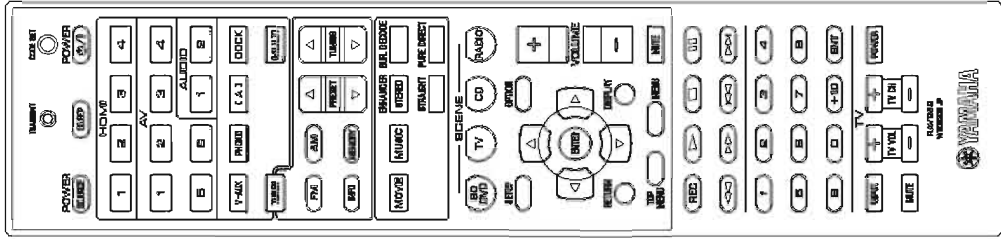

## SPECIFICATIONS / 参考仕様

### ■ Audio Section / オーディオ部

#### Minimum RMS Output Power (Power Amp. Section) /

##### 定格出力 (パワーアンプ部)

[RX-V765] (20 Hz to 20 kHz, 0.08 % THD, 8 ohms)	
FRONT L/R	95 W + 95 W
CENTER	95 W
SURROUND L/R	95 W + 95 W
SURROUND BACK L/R	95 W + 95 W
[HTR-6270] (1 kHz, 0.7 % THD, 8 ohms)	
FRONT L/R	110 W + 110 W
CENTER	110 W
SURROUND L/R	110 W + 110 W
SURROUND BACK L/R	110 W + 110 W
[AX-V765] (20 Hz to 20 kHz, 0.09 % THD, 6 ohms)	
FRONT L/R	95 W + 95 W
CENTER	95 W
SURROUND L/R	95 W + 95 W
SURROUND BACK L/R	95 W + 95 W

#### Maximum Power / 実用最大出力 (JEITA) (1 kHz, 10 % THD)

[R, T, K, L, J models]	
FRONT L/R	135 W + 135 W
R, T, K, L models (8 ohms)	135 W + 135 W
J model (6 ohms)	135 W + 135 W
CENTER	135 W
R, T, K, L models (8 ohms)	135 W
J model (6 ohms)	135 W
SURROUND L/R	135 W + 135 W
R, T, K, L models (8 ohms)	135 W + 135 W
J model (6 ohms)	135 W + 135 W
SURROUND BACK L/R	135 W + 135 W
R, T, K, L models (8 ohms)	135 W + 135 W
J model (6 ohms)	135 W + 135 W

#### MAX. Power Per Channel (1 kHz, 0.7 % THD, 4 ohms)

[B, G, E, F, L models]	
FRONT L/R	145 W + 145 W
CENTER	145 W
SURROUND L/R	145 W + 145 W
SURROUND BACK L/R	145 W + 145 W

#### IEC Power (1 kHz, 0.08 % THD, 8 ohms) [B, G, E, F, L models]

FRONT L/R	105 W + 105 W
-----------	---------------

#### Dynamic Power Per Channel / ダイナミックパワー (IHF)

FRONT L/R drive	
U, C, R, T, K, A, B, G, E, F, L models (8 / 6 / 4 / 2 ohms)	130 / 165 / 195 / 240 W
J model (6 / 4 / 2 ohms)	135 / 165 / 210 W

#### Dynamic Headroom [U, C models]

8 ohms	1.4 dB
--------	--------

#### Damping Factor / ダンピングファクタ

(20 Hz to 20 kHz, 8 ohms, SPEAKER-A)

FRONT L/R	100 or more
-----------	-------------

#### Input Sensitivity/Input Impedance / 入力感度 / 入力インピーダンス

(1 kHz, 100 W/8 ohms)

PHONO (MM)	3.5 mV / 47 k-ohms
AV5 etc.	200 mV / 47 k-ohms
MULTI CH INPUT	
FRONT L/R, CENTER, SURROUND L/R, SURROUND BACK L/R, SUBWOOFER	200 mV / 47 k-ohms

#### Maximum Input Signal / 最大許容入力 (1 kHz)

PHONO (MM) (0.1 % THD)	60 mV or more
AV5 etc. (Effect ON) (0.5 % THD)	2.3 V or more

#### Output Level/Output Impedance / 出力電圧 / 出力インピーダンス

REC OUT	200 mV/1.2 k-ohms
PRE OUT	1 V/1.2 k-ohms
SUBWOOFER (2 ch stereo and FRONT SP: small)	1 V/1.2 k-ohms

#### ZONE2 OUT

U, C, R, T, K, A, B, G, E, F, L models	200 mV/1.2 k-ohms
--	-------------------

#### Headphone Jack Rated Output/Output Impedance /

##### ヘッドホン出力 / 出力インピーダンス

AV5 etc. input (1 kHz, 50 mV, 8 ohms)	100 mV/470 ohms
---------------------------------------	-----------------

#### Frequency Response / 再生周波数帯域

AV5 etc., FRONT (10 Hz to 100 kHz)	+0/-3 dB
------------------------------------	----------

#### RIAA Equalization Deviation / RIAA 偏差

PHONO (MM)	0 ±0.5 dB
------------	-----------

#### Total Harmonic Distortion / 全高調波歪率

PHONO (MM) to REC OUT (20 Hz to 20 kHz, 1 V)	0.02 % or less
AV5 etc. (PURE DIRECT) to FRONT SP OUT (20 Hz to 20 kHz, 50 W)	0.08 % or less
U, C models (8 ohms)	0.08 % or less
R, A, B, G, E, F, L models (6 ohms)	0.08 % or less

#### Signal to Noise Ratio / 信号対雑音比 (IHF-A network)

PHONO (MM) to REC OUT (Input shorted 5 mV)	
U, C, R, T models	86 dB or more
K, A, B, G, E, F, L models	81 dB or more
PHONO (MM) to REC OUT (Input shorted 2.5 mV)	
J model	80 dB or more
AV5, etc. (PURE DIRECT) to SP OUT (Input shorted 250 mV)	
	100 dB or more

#### Residual Noise / 残留ノイズ (IHF-A Network)

FRONT L/R to SP OUT	150 µV or less
---------------------	----------------

#### Channel Separation / チャンネルセパレーション (1 kHz / 10 kHz)

PHONO (Input shorted)	
	60 dB or more / 55 dB or more
AV5, etc. (Input 5.1 k-ohms shorted)	
	60 dB or more / 45 dB or more

#### Volume Control / 可変範囲 / ステップ

	MUTE / -80 dB to +16.5 dB / 0.5 dB step
--	---

#### Tone Control Characteristics / トーンコントロール特性

FRONT L/R	
Bass	
Boost/Cut	±10 dB/2 dB, step 50 Hz
Turnover frequency	350 Hz
Treble	
Boost/Cut	±10 dB/2 dB, step 20 kHz
Turnover frequency	3.5 kHz

#### Filter Characteristics / フィルタ特性

FRONT, CENTER, SURROUND, SURROUND BACK small (H.P.F.)	
	fc=40/60/80/90/100/110/120/160/200 Hz, 12 dB/oct
SUBWOOFER small (L.P.F.)	
	fc=40/60/80/90/100/110/120/160/200 Hz, 24 dB/oct

### ■ Video Section / ビデオ部

#### Video Signal Type (Gray back) / ビデオ信号方式 (グレーバック)

U, C, R, K, J models	NTSC
T, A, B, G, E, F, L models	PAL

#### Composite Video Signal Level / コンポジットビデオ信号

	1 Vp-p / 75 ohms
--	------------------

#### S-Video Signal Level [B, G, E, F models]

Y	1 Vp-p / 75 ohms
C	0.286 Vp-p / 75 ohms

RX-V765/HTR-6270/AX-V765

**Component Video Signal Level / コンポーネントビデオ信号**

Y	1 Vp-p / 75 ohms
Cb/Cr	0.7 Vp-p / 75 ohms

**D4 Video Signal / D4 ビデオ信号 [J model]**

Y	1 Vp-p / 75 ohms
Cb/Cr	0.7 Vp-p / 75 ohms

**Video Maximum Input Level / ビデオ最大許容入力**

VIDEO CONVERSION OFF ..... 1.5 Vp-p or more

**Video Signal to Noise Ratio / ビデオ信号対雑音比**

..... 50 dB or more

**Monitor Out Frequency Response / モニター出力周波数帯域**

(VIDEO CONVERSION OFF) ..... 5 Hz to 60 MHz, -3 dB

D4 video signal / D4 ビデオ信号 [J model] ..... 5 Hz to 60 MHz, -3 dB

■ **FM Section / FM 部**

**Tuning Range / 受信周波数範囲**

U, C models	87.5 to 107.9 MHz
R, L models	87.5 to 108.0 MHz / 87.50 to 108.00 MHz
T, K, A, B, G, E, F models	87.50 to 108.00 MHz
J model	76.0 to 90.0 MHz

**50 dB Quieting Sensitivity (IHF) (1 kHz, 100 % MOD.)**

Mono/Stereo ..... 3  $\mu$ V (20.8 dBf)

**Signal to Noise Ratio / 信号対雑音比 (IHF)**

Mono ..... 74 dB

Stereo ..... 70 dB

**Harmonic Distortion / 歪率 (1 kHz)**

Mono ..... 0.3 %

Stereo ..... 0.3 %

**Antenna Input / アンテナ入力**

..... 75 ohms unbalanced

■ **AM Section / AM 部**

**Tuning Range / 受信周波数範囲**

U, C models	530 to 1,710 kHz
R, L models	530 to 1,710 kHz / 531 to 1,611 kHz
T, K, A, B, G, E, F, J models	531 to 1,611 kHz

**Antenna / アンテナ**

..... Loop antenna

■ **General / 総合**

**Power Supply / 電源電圧**

U, C models	AC 120 V, 60 Hz
R model	AC 110/120/220/230-240 V, 50/60 Hz
T model	AC 220 V, 50 Hz
K model	AC 220 V, 60 Hz
A model	AC 240 V, 50 Hz
B, G, E, F models	AC 230 V, 50 Hz
L model	AC 220/230-240 V, 50/60 Hz
J model	AC 100 V, 50/60 Hz

**Power Consumption / 消費電力**

U, C models	400 W / 500 VA
R, T, K, A, B, G, E, F, L models	400 W
J model	240 W

**Standby Power Consumption (reference data) /**

**待機時消費電力 (参考値)**

HDMI control: OFF / Standby through: OFF	0.2 W or less
HDMI control: ON / Standby through: ON	1.2 W or less
HDMI control: ON / Standby through: ON / Repeat	3.0 W or less
<b>Maximum Power Consumption [R, L models]</b>	590 W

**Dimensions (W x H x D) / 寸法 (幅 x 高さ x 奥行)**

..... 435 x 171 x 365 mm (17-1/8" x 6-3/4" x 14-3/8")

**Weight / 質量**

..... 11.0 kg (24.3 lbs.)

**Finish / 仕上げ**

[RX-V765]

Gold color ..... T model

Black color ..... U, C, R, T, A, B, G, E, F, L models

Titanium color ..... K, G, E, F, L models

[HTR-6270]

Black color ..... C, F models

Black color ..... J model

**Accessories / 付属品**

Remote control ..... x 1

Battery (R03, AAA, UM-4) ..... x 2

Indoor FM antenna (1.4 m) ..... x 1

AM loop antenna (1.0 m) ..... x 1

Optimizer microphone (6.0 m) ..... x 1

Power cable (2 m) (J model) ..... x 1

• Specifications are subject to change without notice due to product improvements.


※ 参考仕様および外観は予告なく変更されることがあります。

U	..... U.S.A. model	B	..... British model
C	..... Canadian model	G	..... European model
R	..... General model	E	..... South European model
T	..... Chinese model	F	..... Russian model
K	..... Korean model	L	..... Singapore model
A	..... Australian model	J	..... Japanese model



Manufactured under license from Dolby Laboratories.

Dolby, Pro Logic and the double-D symbol are trademarks of Dolby Laboratories.

ドルビーラトリーズからの実施権に基づき製造されています。「ドルビー」, 「PRO LOGIC」, 「Surround EX」 およびダブルD記号は、ドルビーラトリーズの商標です。



DTS is a registered trademark and the DTS logos, Symbol, DTS-HD and DTS/HD Master Audio are trademark of DTS, Inc. © 1996-2007 DTS, Inc. All Rights Reserved.

DTSはDTS社の登録商標です。また、DTSロゴ、記号、およびDTS-HD、DTS/HD Master AudioはDTS社の商標です。著作権 1996-2007年DTS社。不許複製。



Neural Surround™ name and related logos are trademarks owned by Neural Audio Corporation.

**iPod™**

"iPod" is a trademark of Apple Inc., registered in the U.S. and other countries.

iPodは、米国およびその他の国々で登録されたApple Inc.の商標または登録商標です。

## • DIMENSIONS

### Bluetooth™

Bluetooth is a registered trademark of Bluetooth SIG and is used by Yamaha in accordance with a license agreement. Bluetoothは、Bluetooth SIGの登録商標でありヤマハはライセンスに基づき使用しています。

## HDMI

"HDMI", the "HDMI" logo and "High-Definition Multimedia Interface" are trademarks, or registered trademarks of HDMI Licensing LLC. HDMI, HDMIロゴ、およびHigh-Definition Multimedia Interfaceは、HDMI Licensing, LLCの商標または登録商標です。

### x.v.Color™

"x.v.Color" is a trademark of Sony Corporation. 「x.v.Color」は、ソニー株式会社の商標です。

### SILENT™ CINEMA


"SILENT CINEMA" is a trademark of Yamaha Corporation. 「サイレントシネマ™ SILENT CINEMA™」はヤマハ株式会社の登録商標です。



SIRIUS, XM and all related marks and logos are trademarks of Sirius XM Radio Inc. and its subsidiaries. All rights reserved. Service not available in Alaska and Hawaii.



AACロゴマークはドルビーラボラトリーズの商標です。

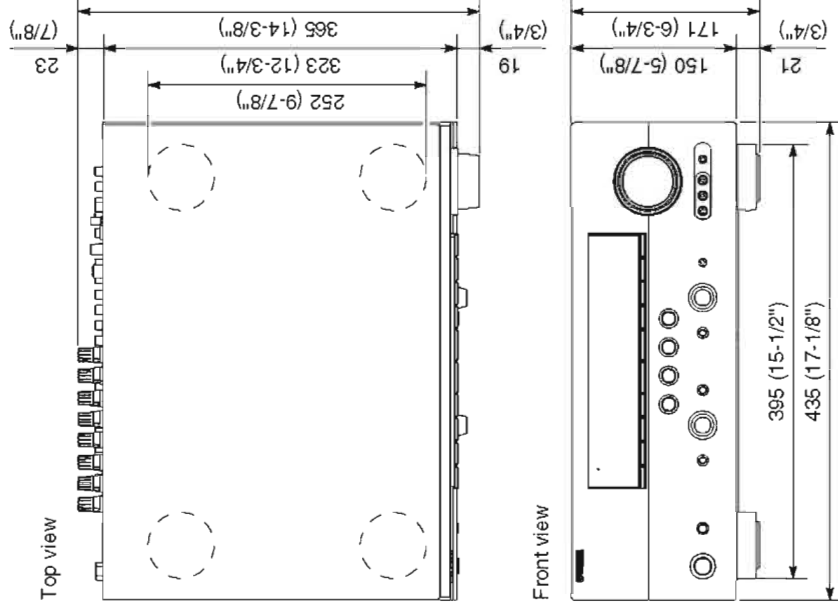

Unit: mm (inch)  
単位: mm (インチ)

## • SCENE TEMPLATE

Name	BD/DVD	TV	CD	RADIO
INPUT	HDMI1	AV-1 (Component / Optical)	AV-3 (Video / Coaxial)	TUNER
Sound field mode	STRAIGHT	STRAIGHT	STRAIGHT	MUSIC ENHANCER 7ch Enhancer
IR code output	DVD Play	None	CD Power On / Play	None

• SOUND FIELD PARAMETERS

Category	Program	Parameter																																			
		Decode Type	3D DSP: ON/OFF	DSP Level: -6dB to +3dB	Init. Delay: 1 to 99ms	Room Size: 0.1 to 2.0	Liveness: 0 to 10	Sur. Infil. Delay: 1 to 49ms	Sur. Room Size: 0.1 to 2.0	Sur. Liveness: 0 to 10	SB. Infil. Delay: 1 to 49ms	SB. Room Size: 0.1 to 2.0	SB. Liveness: 0 to 10	Rev. Time: 1.0 to 5.0s	Rev. Delay: 0 to 250ms	Rev. Level: 0 to 100%	Dialogue Lift: 0 to 5	Center Level: 0 to 100%	Surround L Level: 0 to 100%	Surround R Level: 0 to 100%	Sur. Back Level: 0 to 100%	Presence L Level: 0 to 100%	Presence R Level: 0 to 100%	Direct: Auto/Off	Effect Level: High/Low	Panorama: On/Off	Center Width: 0 to 7	Dimension: -3 to +3	Center Image: 0 to 10	FOCUS: 0 to 8	TruBass: 0 to 8	Initialize					
MOVIE	Standard	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	Speclacle	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	Sci-Fi	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Adventure	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Drama	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Mono Movie	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Sports	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Action Game	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Replaying Game	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Hall in Munich	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Hall in Vienna	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Chamber	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Cellar Club	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
The Roxy Theatre	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
The Bottom Line	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Music Video	1 <sub>s</sub>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
STEREO			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
2ch Stereo																																					
7ch Stereo																																					
MUSIC ENHANCER																																					
Straight Enhancer																																					
7ch Enhancer																																					
SUR. DECODE		●																																			
Surround Decoder		2																																			
STRAIGHT																																					

○ : The parameter to be used varies between when there is one surround pack and when there are two. On the display, the parameter value varies accordingly while the same parameter name appears. / サラウンドパックの数が1つの場合と2つの場合で使用するパラメータは変わるが、パラメータ名は同じ表示で、パラメータ値のみを切換えて表示  
△ : Setting is possible only when Pro Logic II x Music (Pro Logic II Music) is selected using decode type. / Decode type で Pro Logic II x Music (Pro Logic II Music) を選択時のみ設定可  
▲ : Setting is possible only when Neo:6 Music is selected using decode type. / Decode type で Neo:6 Music を選択時のみ設定可  
■ : Setting is possible only when CS II Cinema/Music is selected using decode type. / Decode type で CS II Cinema/Music を選択時のみ選択可

\*1 Decode Type

Decode Type	PL II x Movie Neo:6 Cinema
-------------	-------------------------------

PL II when Surround Back is None. / Surround Back が None の場合は PL II

\*2 Decode Type

Decode Type	Pro Logic
	PL II x Movie
	PL II x Music
	PL II x Game
	Pro Logic II z
	Neo:6 Cinema
	Neo:6 Music Neutral Sur

PL II when Surround Back is None. / Surround Back が None の場合は PL II  
PL II when Surround Back is None. / Surround Back が None の場合は PL II  
PL II when Surround Back is None. / Surround Back が None の場合は PL II

(U model)

• SET MENU TABLE / セットメニュー


MAIN MENU	SUB-MENU	PARAMETER	VALUE [INITIAL VALUE]
1 • Speaker Setup	1 Auto Setup (YPAO)	Extra SP Assign	[Zone2] / Presence / None
		EQ Type	[Natural] / Flat / Front
2 Manual Setup	A) Config	Start	[ENTER] / Start
		Extra SP Assign	Zone2 / Presence / [None]
		LFE/Bass Out	SWFR / Front / [Both]
		Front SP	Small / [Large]
		Center SP	None / [Small] / Large
		Sur. L/R SP	None / SMLx1 / [SMLx2] / LRGx1 / LRGx2
		Sur. B L/R SP	40 / 60 / [80] / 90 / 100 / 110 / 120 / 160 / 200 Hz
		Crossover Freq.	Freq. ....
		Subwoofer Phase	[Normal] / Reverse
		Zone2 Menu	Not Available / [Available]
		FR L	-10.0 to +10.0 dB, [0 dB], 0.5 dB step
		FR R	
C) Distance	CNTR	SUR L	
		SUR R	-10.0 to +10.0 dB, [-1.0 dB], 0.5 dB step
		SBL	
		SBR	
		SWFR	-10.0 to +10.0 dB, [0 dB], 0.5 dB step
		Unit	meters (m) / [feet (ft)]
		Front L	0.30 to 24.00 m, [3.00 m]
		Front R	
		Center	0.30 to 24.00 m, [2.60 m]
		Sur. L	
		Sur. R	0.30 to 24.00 m, [2.40 m]
		Sur. B L	
Sur. B R			
D) Equalizer	SWFR	PRNS L	0.30 to 24.00 m, [3.00 m]
		PRNS R	
		EQ Type Select	Auto PEQ / [GEG] / Off
		GEQ	* "GEQ" is available only when "EQ Type Select" is set to "GEG." / "GEG" 選択時のみ設定可能
		Front L	63 Hz ..... ..... ..... 0 dB
		Front R	160 Hz ..... ..... ..... 0 dB
		Center	400 Hz ..... ..... ..... 0 dB
		Sur. L	1 kHz ..... ..... ..... 0 dB
		Sur. R	2.5 kHz ..... ..... ..... 0 dB
		SBL	6.3 kHz ..... ..... ..... 0 dB
		SBR	16 kHz ..... ..... ..... 0 dB
		E) Test Tone	Auto PEQ / [GEG] / Off
Front R			
Center			
Sur. L			
2 • Sound Setup	1 Dynamic Range	Min/Auto / STD. / [Max]	
		[Off] / On	
		0 to 240 ms, [0 ms], 1 ms step	
2 Lipsync	Auto Delay	Manual Delay	
		Control	On / [Off]
		Standby Through	On / [Off]
3 • Function Setup	1 HDMI	Audio Output	[Amp] / TV / Amp+TV
		Control	(* This menu is available only when "Control" is set to "Off." / "Control : 0" 選択時のみ設定可能)
		Audio Output	(* This menu is available only when "Control" is set to "Off." / "Control : 0" 選択時のみ設定可能)



MAIN MENU	SUB-MENU	PARAMETER	VALUE [INITIAL VALUE]	
MUSIC	Hall in Munich	[1], [2], [6], [10], [16]		
	Hall in Vienna	[1], [2], [6], [10], [16]		
	Chamber	[1], [2], [10], [13], [14], [15], [16]		
	Cellar Club	[1], [2], [6], [10], [16]		
	The Roxy Theatre	[1], [2], [6], [10], [13], [14], [15], [16]		
	The Bottom Line	[1], [2], [6], [10], [16]		
	Music Video	[1], [3], [4], [7], [8], [16]		
	STEREO	Direct	[Auto] / Off	
		Initialize		
		[1]	DSP Level	-6 to +3 dB, [0 dB]
		[2]	Init. Delay	
		[3]	P. Init. Dly	1 to 99 ms
		[4]	S. Init. Dly	1 to 49 ms
		[6]	Room Size	
		[7]	P. Room Size	0.1 to 2.0
[8]		S. Room Size		
[10]		Liveness	0 to 10	
[11]		S. Liveness		
[13]		Rev. Time	1.0 to 5.0 s	
[14]		Rev. Delay	0 to 250 ms	
[15]		Rev. Level	0 to 100 %	
[16]		Initialize		
5 • Memory Guard			[Off] / On	



## INTERNAL VIEW

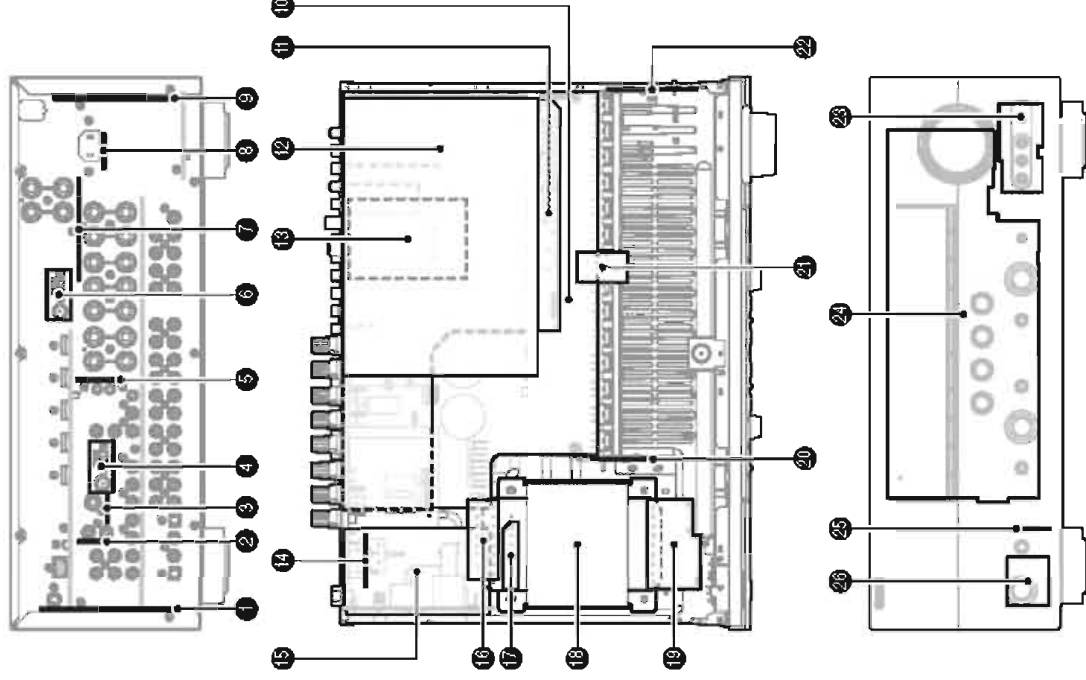

- ① OPERATION (2) P.C.B.
- ② OPERATION (9) P.C.B.  
(R, T, K, A, B, G, E, F, L, J models)
- ③ VIDEO (9) P.C.B. (B, G, E, F models)
- ④ AM/FM TUNER  
(U, C, R, T, K, A, B, G, E, F, L models)
- ⑤ VIDEO (4) P.C.B.
- ⑥ AM/FM TUNER (J model)
- ⑦ OPERATION (8) P.C.B.
- ⑧ OPERATION (11) P.C.B. (J model)
- ⑨ VIDEO (2) P.C.B.
- ⑩ MAIN (1) P.C.B.
- ⑪ VIDEO (1) P.C.B.
- ⑫ DIGITAL P.C.B.
- ⑬ VIDEO (8) P.C.B. (J model)
- ⑭ MAIN (3) P.C.B. (R, L models)
- ⑮ VIDEO (3) P.C.B.
- ⑯ MAIN (2) P.C.B.
- ⑰ VIDEO (7) P.C.B.  
(U, C, T, K, A, B, G, E, F, J models)
- ⑱ MAIN (4) P.C.B. (R, L models)
- ⑲ POWER TRANSFORMER
- ⑳ VIDEO (6) P.C.B.
- ㉑ MAIN (6) P.C.B.
- ㉒ MAIN (5) P.C.B.
- ㉓ OPERATION (10) P.C.B.
- ㉔ OPERATION (7) P.C.B.
- ㉕ OPERATION (1) P.C.B.
- ㉖ OPERATION (3) P.C.B.
- ㉗ OPERATION (6) P.C.B.

## SERVICE PRECAUTIONS / サービス時の注意事項

### Safety measures

- Some internal parts in this product contain high voltages and are dangerous.  
Be sure to take safety measures during servicing, such as wearing insulating gloves.
  - Note that positions indicated below are dangerous even after the power is turned off because an electric charge remains and a high voltage continues to exist there.  
Before starting any repair work, perform discharge by connecting a discharge resistor (5k-ohms/10W) between terminals at following positions.  
The time required for discharging is about 30 seconds.  
C3703 on VIDEO (2) P.C.B.
- Refer to "PRINTED CIRCUIT BOARDS: VIDEO (2) P.C.B."

### 安全対策

- この製品の内部には高電圧部分があり危険です。修理の際は、絶縁性の手袋を使用するなどの安全対策を行ってください。
  - 下記箇所には電源をOFFにした後も電荷が残り、高電圧が維持されており危険です。  
修理作業前に放電用抵抗 (5kΩ/10W) を下記箇所の端子間に接続して放電してください。  
放電所用時間は約30秒間です。  
VIDEO (2) P.C.B. の C3703
- "PRINTED CIRCUIT BOARDS: VIDEO (2) P.C.B." を参照してください。

## ■ DISASSEMBLY PROCEDURES / 分解手順

(Remove parts in the order as numbered.)

Disconnect the power cable from the AC outlet.

(番号順に部品を取り外してください。)  
AC電源コンセントから、電源コードを抜いてください。

### 1. Removal of Top Cover

- a. Remove 4 screws (①), 5 screws (②) and screw (③). (Fig. 1)
- b. Slide the top cover rearward to remove it. (Fig. 1)

### 1. トップカバーの外し方

- a. ①のネジ4本、②のネジ5本、③のネジ1本を外します。(Fig.1)
- b. トップカバーを後方へスライドさせ、取り外します。(Fig.1)

### 2. Removal of Front Panel and Sub-Chassis Unit

- a. Remove screw (④) and then remove the support top. (Fig. 1)
- b. Remove 2 knobs. (Fig. 1)
- c. Remove 6 screws (⑤) and then remove the front panel. (Fig. 1)
- d. Remove 2 push rivets and then remove the plate side (L) and (R). (Fig. 1)
- e. Remove CB20, CB461 and CB477. (Fig. 1)
- f. Remove 2 screws (⑥) and then pull out the sub-chassis unit. (Fig. 1)
- g. Unlock and remove CB333. (Fig. 1)
- h. Remove the sub-chassis unit. (Fig. 1)

### 2. フロントパネル、サブシャーシユニットの外し方

- a. ④のネジ1本を外し、サポートトップを取り外します。(Fig.1)
- b. ノブ2個を取り外します。(Fig.1)
- c. ⑤のネジ6本を外し、フロントパネルを取り外します。(Fig.1)
- d. プッシュリベット2個を外し、プレートサイド(L)、(R)を取り外します。(Fig.1)
- e. CB20、CB461、CB477を外します。(Fig.1)
- f. ⑥のネジ2本を外し、サブシャーシユニットを引き出します。(Fig.1)
- g. ロックを外し、CB333を外します。(Fig.1)
- h. サブシャーシユニットを取り外します。(Fig.1)

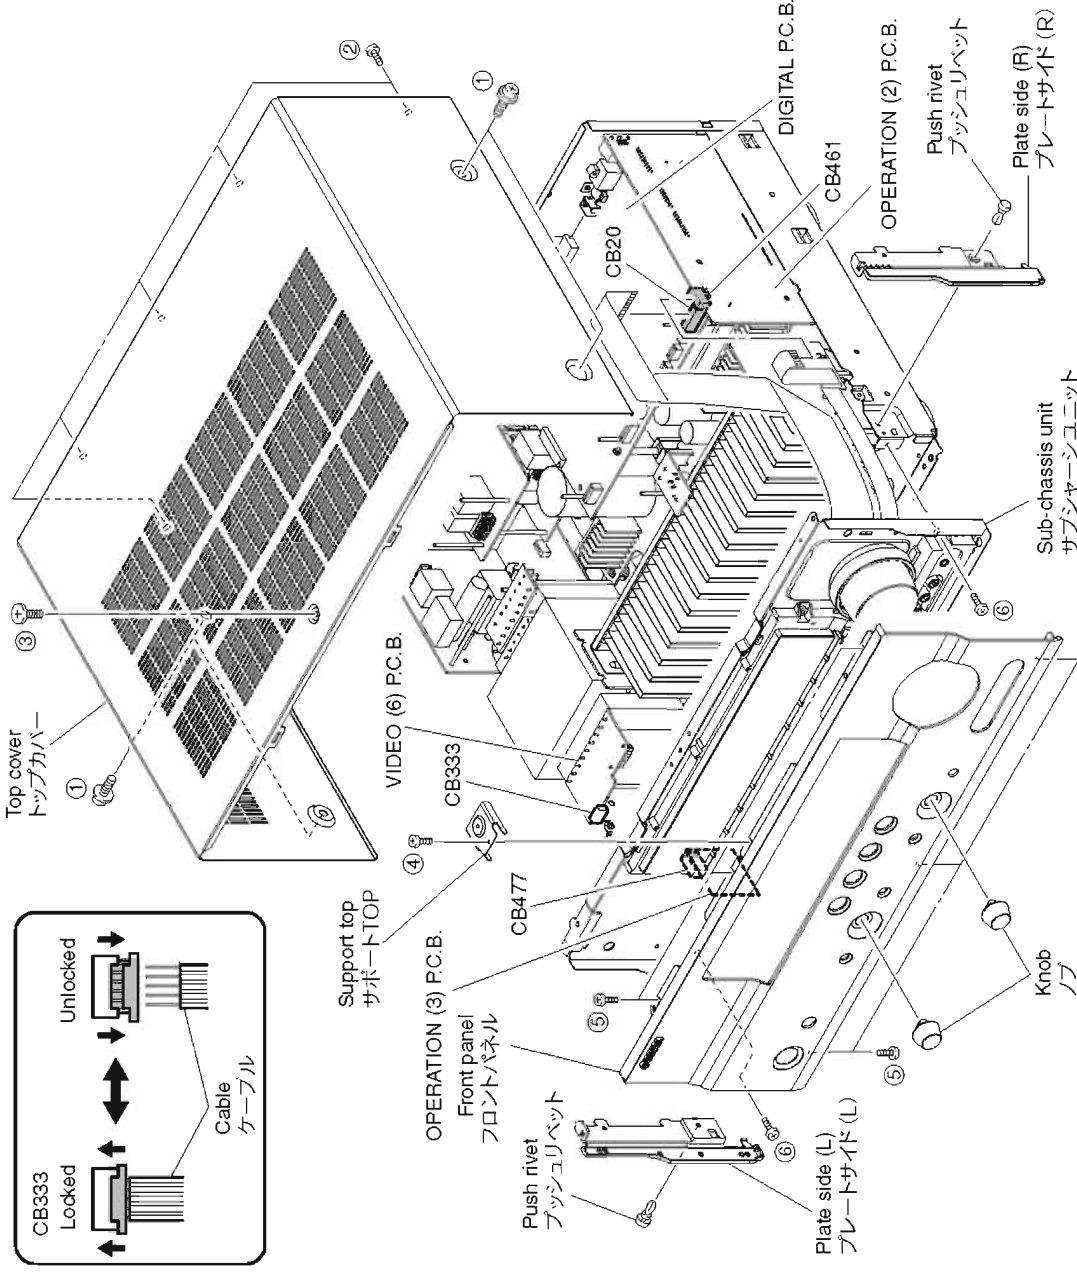


Fig. 1

### 3. Removal of DIGITAL P.C.B.

- a. Remove 3 screws (U model) / 2 screws (C, R, T, K, A, B, G, E, F, L models) (⑦) and 5 screws (⑧). (Fig. 2)
- b. Remove screw (⑨). (Fig. 2)
- c. Remove CB7, CB21, CB25, CB72 and CB73 (B, G, E, F models). (Fig. 2)
- d. Unlock and remove CB22-24. (Fig. 2)
- e. Release hook. (Fig. 2)
- f. Remove the DIGITAL P.C.B. which is connected directly to the OPERATION (2) P.C.B. with board-to-board connectors. (Fig. 2)

### 3. DIGITAL P.C.B.の外し方

- a. ⑦のネジ2本、⑧のネジ5本を外します。(Fig. 2)
- b. ⑨のネジ1本を外します。(Fig. 2)
- c. CB7、CB21、CB25、CB72を外します。(Fig. 2)
- d. ロックを外し、CB22～24を外します。(Fig. 2)
- e. フック1箇所を外します。(Fig. 2)
- f. DIGITAL P.C.B.を取り外します。ただし、DIGITAL P.C.B.はOPERATION (2) P.C.B.に基板対基板コネクタで直接接続されています。(Fig. 2)

### 4. Removal of AMP Unit

- a. Remove 3 screws (⑩) and 4 screws (⑪). (Fig. 2)
- b. Remove 3 screws (⑫). (Fig. 2)
- c. Remove the amp unit. (Fig. 2)

### 4. アンプユニットの外し方

- a. ⑩のネジ3本、⑪のネジ4本を外します。(Fig. 2)
- b. ⑫のネジ3本を外します。(Fig. 2)
- c. アンプユニットを取り外します。(Fig. 2)

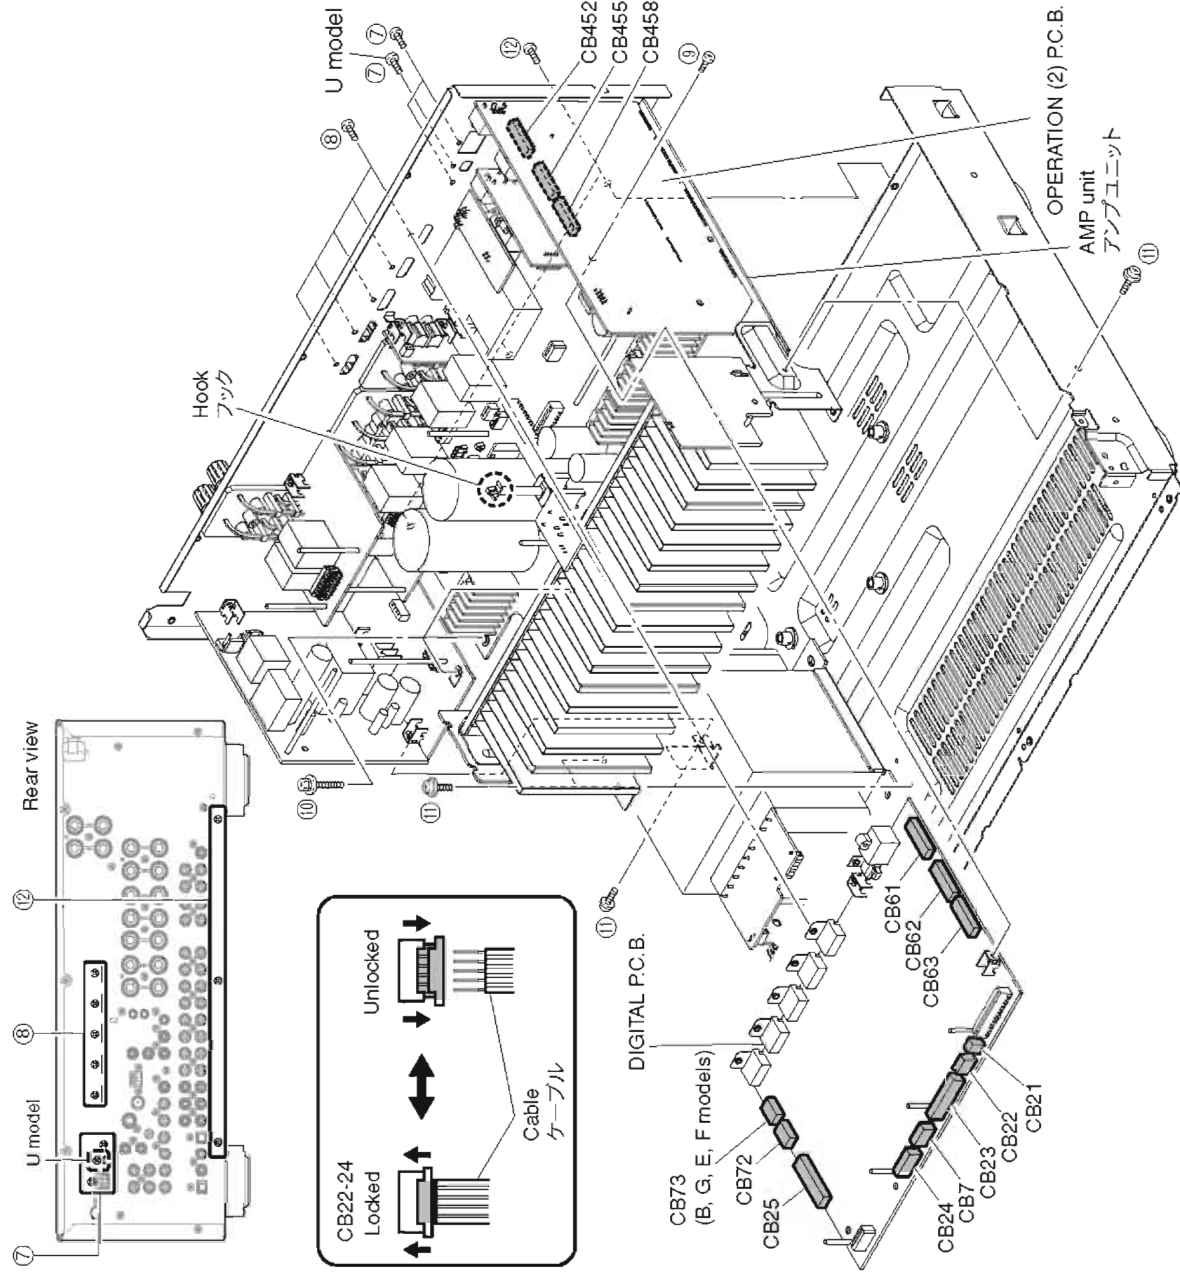


Fig. 2

### When checking the P.C.B.s:

- Place the P.C.B.s (with rear panel) upright. (Fig. 3)
- Connect the ground points of the heatsink, rear panel and MAIN (1) P.C.B. (G1000) to the chassis with a ground lead or the like. (Fig. 3)
- When connecting the flexible flat cable, be careful with polarity.
- Reconnect all cables (connectors) that have been disconnected.
- Be sure to use the extension cable for servicing for the following section.

DIGITAL P.C.B. CB20 to OPERATION (1) P.C.B. CB401:  
MF125400 (25P, 400mm, P=1.25)

OPERATION (1) P.C.B. CB402 to OPERATION (2) P.C.B. CB461:

MF109400 (9P, 400mm, P=1.25)

### P.C.B. をチェックする場合には:

- リアパネルと一緒にP.C.B.を立ち上げて置きます。(Fig. 3)
- ヒートシンク、リアパネル、MAIN (1) P.C.B.のG1000のアースをリード線等でシャーシに接続してください。(Fig. 3)
- フラットケーブルを接続する際、極性に注意してください。
- 外したケーブル (コネクタ) をすべて接続します。ただし次の区間は、サービス用延長ケーブルを使用してください。

DIGITAL P.C.B. CB20 ～ OPERATION (1) P.C.B. CB401:  
MF125400 (25P、400mm、P=1.25)

OPERATION (1) P.C.B. CB402 ～ OPERATION (2) P.C.B. CB461:

MF109400 (9P、400mm、P=1.25)

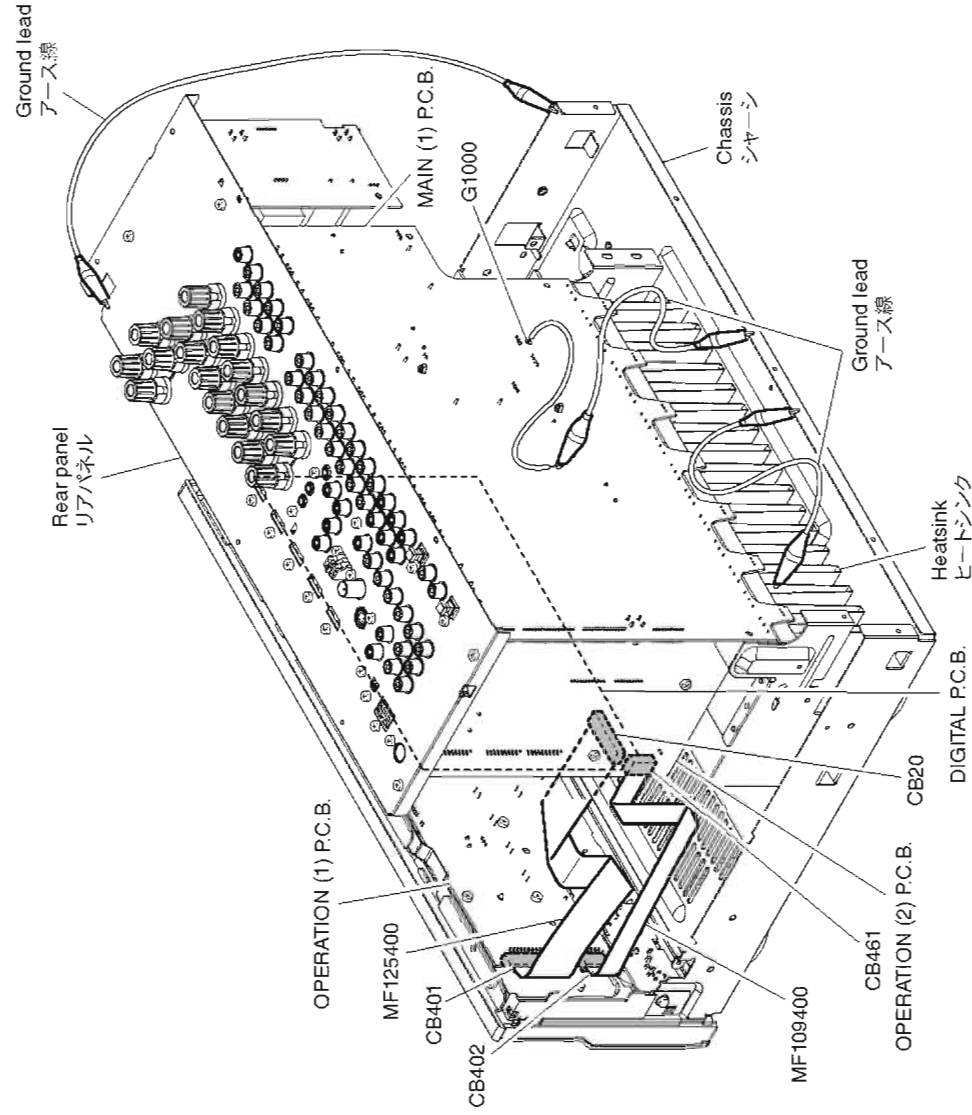


Fig. 3

## ■ UPDATING FIRMWARE / フォームウェアの書き込み

**Note)** The user memories (sound field parameters, system memory, tuner presetting, etc.) are kept stored even when you write the firmware.

**注意)** フォームウェアの書き込みを行っても、ユーザーメモリー（音場プログラムのパラメーターやシステムメモリー、チューナープリセット等）は保持されます。

When replacing the following parts, be sure to write the latest firmware.

下記の部品をサービス部品に交換した場合、最新のフォームウェアの書き込みを行ってください。

Replaced parts	Writing method using the CD / CD を使用して書き込む方法	Writing method using PC (RS232C) / PC (RS232C) を使用して書き込む方法
DIGITAL P.C.B.	yes	yes
IC20 (Main microprocessor) of DIGITAL P.C.B.	no	yes
IC49 (TI (DSP) flash ROM) of DIGITAL P.C.B.	yes	yes

### ● Confirmation of firmware version and checksum

Before and after writing firmware, check the firmware version and checksum by using the self-diagnostic function menu.

### ● フォームウェアのバージョンとチェックサムの確認

フォームウェアの書き込みの前後に、フォームウェアのバージョンとチェックサムをダイアグメニューで確認します。

Start up the self-diagnostic function and select "25. ROM VER/SUM/PORT" menu. (See "SELF DIAGNOSTIC FUNCTION")

ダイアグを起動し、“25.ROM VER/SUM/PORT”メニューを選択します。(ダイアグ (自己診断機能) 参照)

Using the sub-menu, have the firmware version and checksum displayed, and note down them.

サブメニューでフォームウェアのバージョンとチェックサムを表示し、それらを書きとめます。

#### 25. ROM VER/SUM/PORT

Firmware version

Ver: H029

The firmware version of microprocessor (IC20 DIGITAL P.C.B.) is displayed.  
マイコン (IC20 DIGITAL P.C.B.) のフォームウェアバージョンが表示されます。

All checksum

Sum: 0F96

The checksum value of microprocessor (IC20 DIGITAL P.C.B.) is displayed.  
マイコン (IC20 DIGITAL P.C.B.) のチェックサムが表示されます。

TI (DSP) FLASH ROM version

TiVer: 02.00F1

The firmware version of TI (DSP) FLASH ROM (IC49 DIGITAL P.C.B.) is displayed.  
TI (DSP) FLASH ROM (IC49 DIGITAL P.C.B.) のフォームウェアバージョンが表示されます。

TI (DSP) FLASH ROM checksum

TiSum: 46C49F69

The checksum value of TI (DSP) FLASH ROM (IC49 DIGITAL P.C.B.) is displayed.  
TI (DSP) FLASH ROM (IC49 DIGITAL P.C.B.) のチェックサムが表示されます。

### Writing method using the CD


● **Required Tools**

- DVD or CD player (with DIGITAL OUTPUT (OPTICAL or COAXIAL) jack)
  - Optical cable (when OPTICAL jack is used)
  - Digital audio pin cable (when COAXIAL jack is used)
  - Firmware CD
- \* To make the firmware CD, download the latest firmware from the specified download source.

● **Connection**

Connect this unit and DVD/CD player as shown below. (Fig. 1)

### Example of OPTICAL jack / OPTICAL 端子使用例

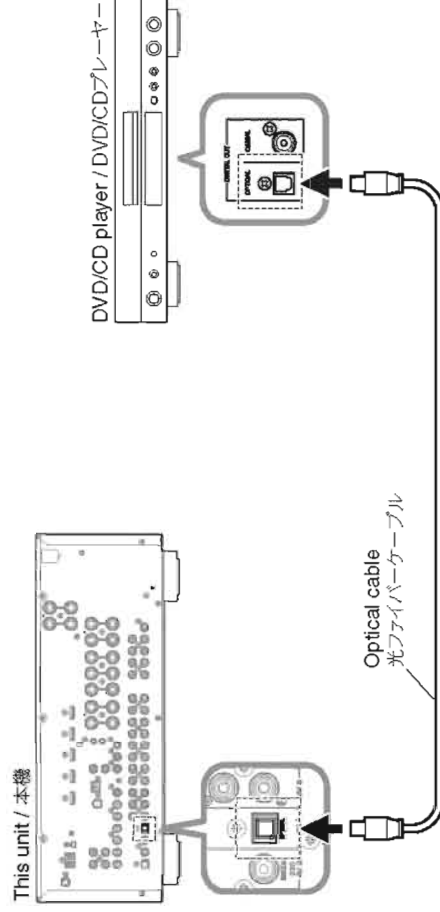

### Example of COAXIAL jack / COAXIAL 端子使用例

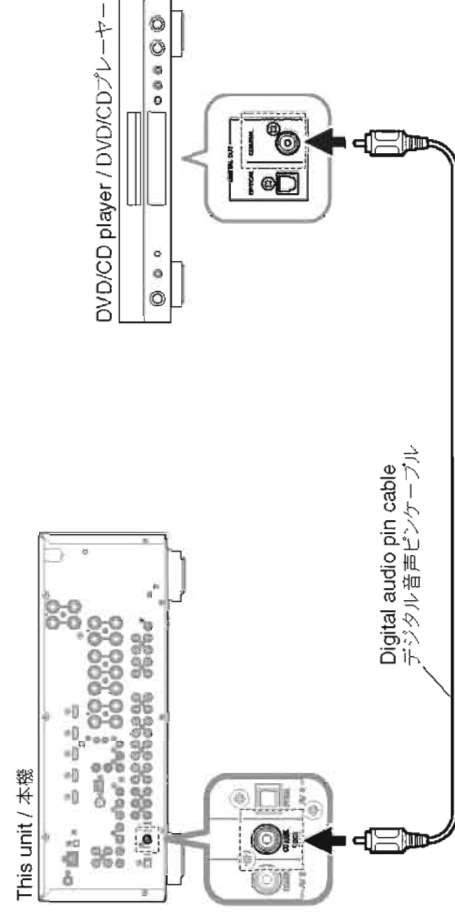


Fig. 1

### CD を使用して書き込む方法

● **必要なツール**

- DVD または CD プレーヤー (DIGITAL OUTPUT (OPTICAL または COAXIAL) 端子付き)
  - 光ファイバーケーブル (OPTICAL 端子使用時)
  - デジタル音声ピンケーブル (COAXIAL 端子使用時)
  - フォームウェア CD
- ※ フォームウェア CD は、最新のフォームウェアを指定のダウンロード先からダウンロードして製作してください。

● **接続**

本機と DVD/CD プレーヤーを下記のように接続します。(Fig. 1)

● **Operation Procedures**

1. While pressing the "STRAIGHT" key of this unit, connect the power cable of this unit to the AC outlet. (Fig. 2)

The FIRMWARE UPDATE mode is activated and "CDDA Upgrader" is displayed. (Fig. 2)

● **操作手順**

1. 本機の "STRAIGHT" キーを押しながら、本機の電源コードを AC コンセントに接続します。(Fig. 2)  
FIRMWARE UPDATE モードが起動し、"CDDA Upgrader" が表示されます。(Fig. 2)

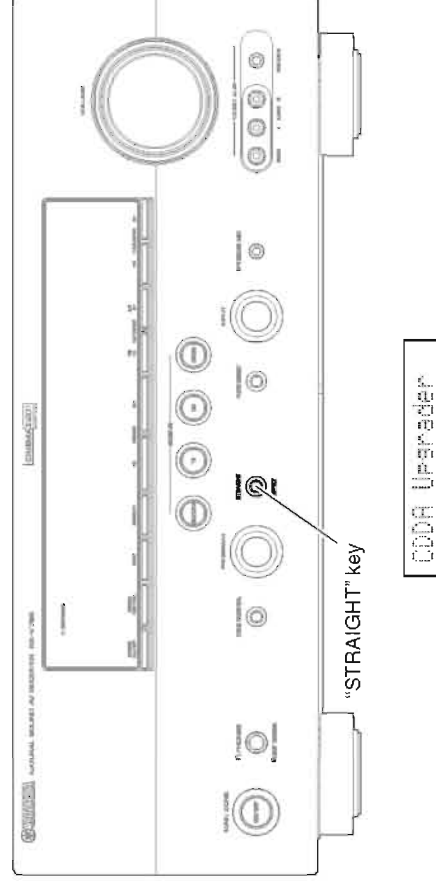


Fig. 2

2. Connect the power cable of DVD/CD player to the AC outlet.
3. Press the "STANDBY/ON" key of the DVD/CD player to turn on the power.
4. Press the "EJECT" key of the DVD/CD player to open the disc tray.
5. Put the firmware CD on the disc tray and close the disc tray.
6. Press the "PLAY" key of the DVD/CD player. Then writing of the firmware is started. (Fig. 3)
7. When writing of the firmware is completed, "Update Success", "Please..." and "Power off!!" are displayed repeatedly. (Fig. 3)

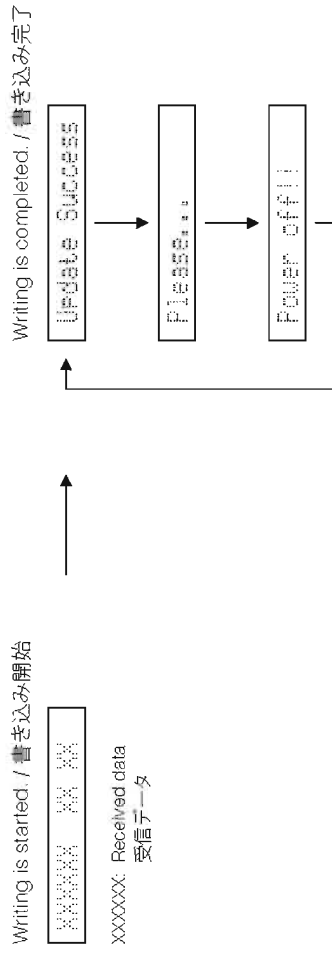


Fig. 3

- \* If the display remains unchanged for longer than 10 seconds after starting the firmware CD play procedure, perform the firmware CD play procedure again from the beginning.

If "FILE CORRUPTED" is displayed after "XXXXXX", make sure that the written data is not corrupted and perform Steps 1 to 7 of "Writing method using the CD" again.

If "Upgrade Failed" is displayed, perform Steps 1 to 7 of "Operation Procedures" again.

8. Press the "STOP" key of the DVD/CD player.
9. Press the "EJECT" key of the DVD/CD player to open the disc tray.
10. Remove the firmware CD from the disc tray and close the disc tray.
11. Press the "STANDBY/ON" key of the DVD/CD player to turn off the power.
12. Press the "MAIN ZONE ON/OFF" key of this unit to turn off the power.
13. Start up the self-diagnostic function and select "25. ROM VER/SUM/PORT" menu.  
Using the sub-menu, have the firmware version and checksum displayed, and then check that they are the same as written ones.
  - \* When the displayed firmware version and checksum are different from written ones, perform the "Writing method using the CD" all over again.
14. Press the "MAIN ZONE ON/OFF" key of this unit to turn off the power.

- ※ ファームウェア CD の再生開始後、10 秒以上経過してもディスプレイ表示が変わらない場合、ファームウェア CD の再生を最初からやり直してください。

"XXXXXX" の後に、「FILE CORRUPTED」が表示された場合、書き込みデータが破損していないかを確認し、「CD を使用して書き込む方法」の 1 から 7 までをもう一度やり直してください。  
"Upgrade Failed" が表示された場合、「操作手順」の 1 から 7 までをもう一度やり直してください。


8. DVD/CD プレーヤーの "STOP" キーを押します。
9. DVD/CD プレーヤーの "EJECT" キーを押し、ディスクトレイを開きます。
10. ファームウェア CD をディスクトレイから取り出し、ディスクトレイを閉じます。
11. DVD/CD プレーヤーの "STANDBY/ON" キーを押して電源を切ります。
12. 本機の "STANDBY/ON" キーを押して電源を切ります。
13. ダイアグを起動し、「25. ROM VER/SUM/PORT」メニューを選択します。  
サブメニューでファームウェアのバージョンとチェックサムを表示し、それらが書き込んだものと同じであることを確認します。
  - ※ 表示されたファームウェアのバージョンとチェックサムが、書き込まれたものと異なる場合、「CD を使用して書き込む方法」をもう一度やり直してください。
14. 本機の "STANDBY/ON" キーを押して電源を切ります。



### Writing method using PC (RS232C)

#### ● Required Tools

- Firmware downloader program  
For microprocessor: DSP\_FLASHER\_v3.0.exe  
For DSP (TI flash ROM):  
DSP\_FLASHER Ver2.7.exe
- Firmware  
For microprocessor: VX65xxxx.mot  
For DSP (TI flash ROM):  
Vx65\_data1\_verxxxxxr.hex
- RS232C cross cable "D-sub 9 pin female"  
(Specifications)

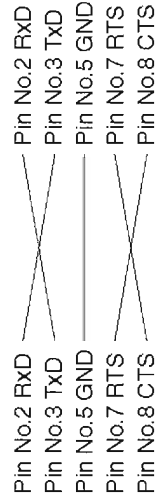

- RS232C conversion adaptor (Part No.: WR492800)


#### ● Preparation and precautions

- Download the firmware downloader program and the firmware from the specified source to the same folder of the PC.
- Prepare the above specified RS232C cross cable.
- While writing the firmware, keep the other application software on the PC closed.  
It is also recommended to keep the software on the task tray closed as well.

### PC (RS232C) を使用して書き込む方法

#### ● 必要なツール

- ファームウェア書き込み用プログラム  
マイコン用: DSP\_FLASHER\_v3.0.exe  
DSP (TI flash ROM) 用:  
DSP\_FLASHER Ver2.7.exe
- ファームウェア  
マイコン用: VX65xxxx.mot  
DSP (TI flash ROM) 用:  
Vx65\_data1\_verxxxxxr.hex
- RS232C クロスケーブル "D-sub 9pin メス"  
(仕様)

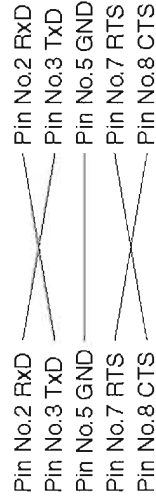

- RS232C 変換アダプター (部品番号: WR492800)

#### ● 準備と注意

- 指定のダウンロード先から、ファームウェア書き込み用プログラムとファームウェアを、PCの同じフォルダへダウンロードしてください。
- RS232C クロスケーブルは必ず上記仕様のもので用意してください。
- 書き込み時は、PC上の他のアプリケーションソフトは閉じてください。
- さらに、タスクトレイ上にあるソフトも閉じておくことを推奨します。

● **Connection**

1. Remove the top cover. (See "DISASSEMBLY PROCEDURES")
2. Connect the writing port (CB27 of DIGITAL P.C.B.) of this unit to the serial port (RS232C) of the PC with RS232C cross cable, RS232C conversion adaptor and flexible flat cable as shown below. (Fig. 1)
3. Set the switch (SW7) of RS232C conversion adaptor as shown below. (Fig. 1)

● **接続**

1. トップカバーを取り外します。(“分解手順”参照)
2. 本機の書き込み用ポート (DIGITAL P.C.B. CB27) とPCのシリアルポート (RS232C) を下記のように接続します。(Fig. 1)
3. RS232C 変換アダプターのスイッチ (SW7) を下記のよう設定します。(Fig. 1)

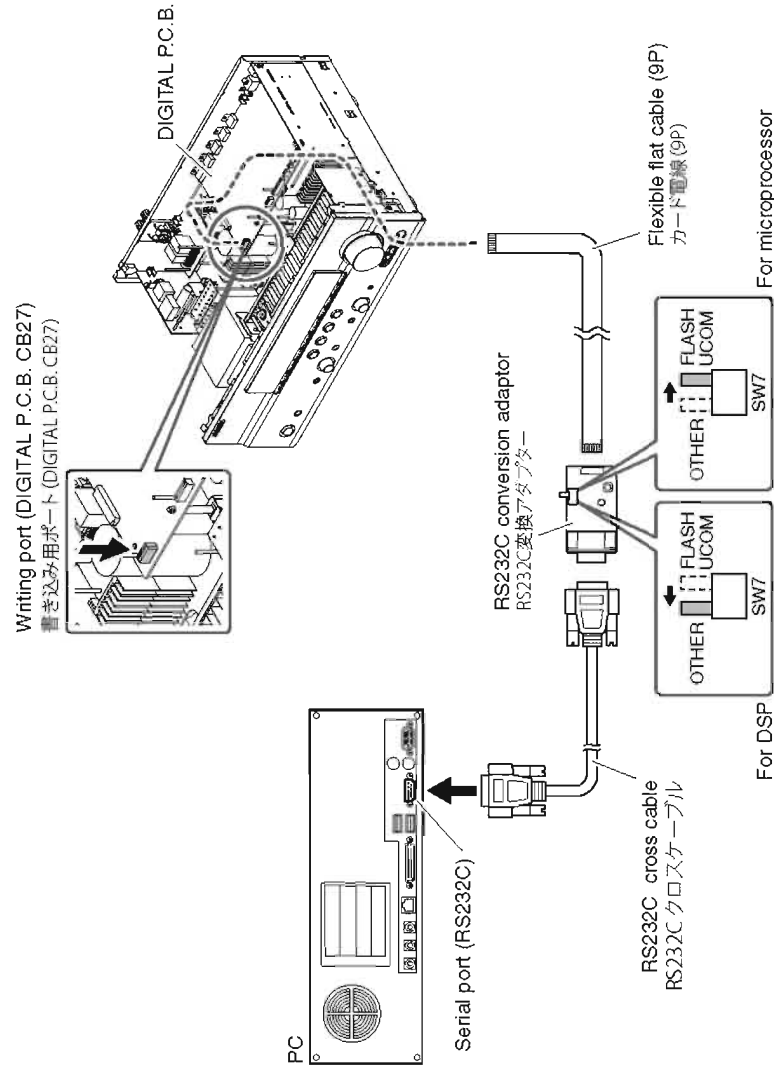


Fig. 1

## ● Operation Procedures

## ● 操作手順

### Writing to the microprocessor

### マイコンへの書き込み

1. With the power cable of this unit unconnected to the AC outlet, start up DSP\_FLASHER\_v3.0.exe. The screen appears as shown below. (Fig. 2)

1. 本機の電源コードをACコンセントに接続していない状態で、DSP\_FLASHER\_v3.0.exe を起動します。下記の画面が表示されます。(Fig.2)

2. Click [...] and select the firmware name. (Fig. 2)

2. [...] をクリックし、書き込むファームウェアを選択します。(Fig.2)


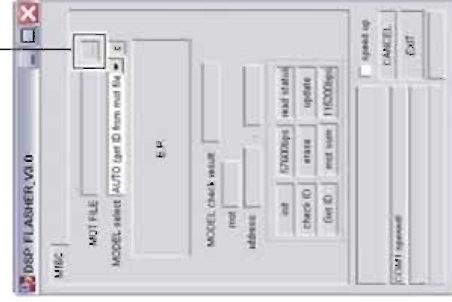


Fig. 2

3. Connect the power cable of this unit to the AC outlet.
4. Click [E.P.] to start writing. (Fig. 3)
5. When writing of the firmware is completed, "Program Finished!" is displayed. (Fig. 3)  
Click [OK]. (Fig. 3)
6. Click [EXIT] to end DSP\_FLASHER\_v3.0.exe. (Fig. 3)

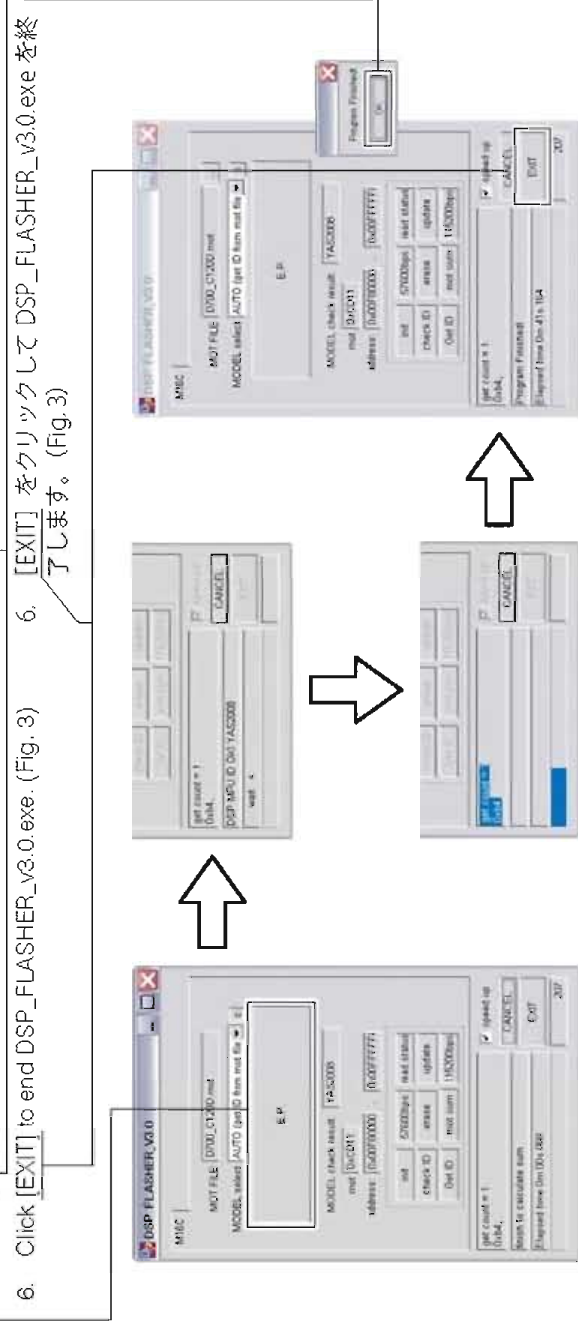

Writing being executed / 書き込み中

Writing completed. / 書き込み完了

Fig. 3

7. Start up the self-diagnostic function and select "25. ROM VER/SUM/PORT" menu.  
Using the sub-menu, have the firmware version and checksum displayed, and then check that they are the same as written ones.  
\* When the firmware version and checksum are different from written ones, perform the "Writing to the microprocessor" all over again.
  8. Disconnect the power cable of this unit from the AC outlet.
7. ダイアグを起動し、"25. ROM VER/SUM/PORT"メニューを選択します。  
サブメニューでファームウェアのバージョンとチェックサムを表示し、それらが書き込んだものと同じであることを確認します。  
※ ファームウェアのバージョンとチェックサムが、書き込まれたものと異なる場合、「マイコンへの書き込み」をもう一度やり直してください。
  8. 本機の電源コードを AC コンセントから抜きます。

Writing to DSP

DSPへの書き込み

1. With the power cable of this unit unconnected to the AC outlet, start up DSP\_FLASHER Ver2.7.exe. The screen appears as shown below. (Fig. 4)
2. Click [Vx61 DSP]. (Fig. 4)

1. 本機の電源コードをACコンセントに接続していない状態で、DSP\_FLASHER Ver2.7.exe を起動します。下記の画面が表示されます。(Fig. 4)
2. [Vx61 DSP] をクリックします。(Fig. 4)

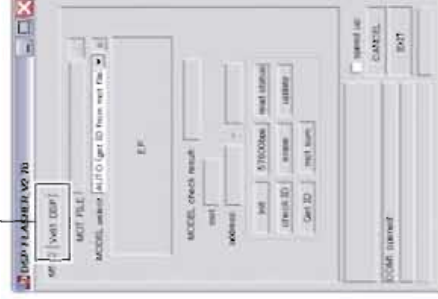


Fig. 4

3. Click [...]. (Fig. 5)

3. [...] をクリックし、書き込むファームウェアを選択します。(Fig. 5)

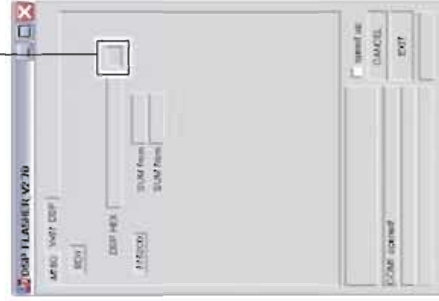


Fig. 5

- Click [RDY]. (Fig. 6)



Fig. 6

- While pressing the "PURE DIRECT" key of this unit, connect the power cable of this unit to the AC outlet. (Fig. 7)  
Writing is started automatically. (Fig. 7)

- While pressing the "PURE DIRECT" key of this unit, connect the power cable of this unit to the AC outlet. (Fig. 7)  
Writing is started automatically. (Fig. 7)

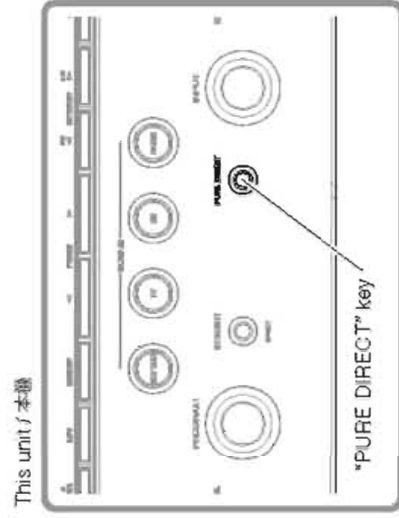


Fig. 7



Writing being executed. /  
書き込み中

6. When writing of the firmware is completed, "Vx61 DSP Flash finished!" is displayed. (Fig. 3)
7. Click [EXIT] to end DSP\_FLASHER\_v2.7.exe. (Fig. 8)

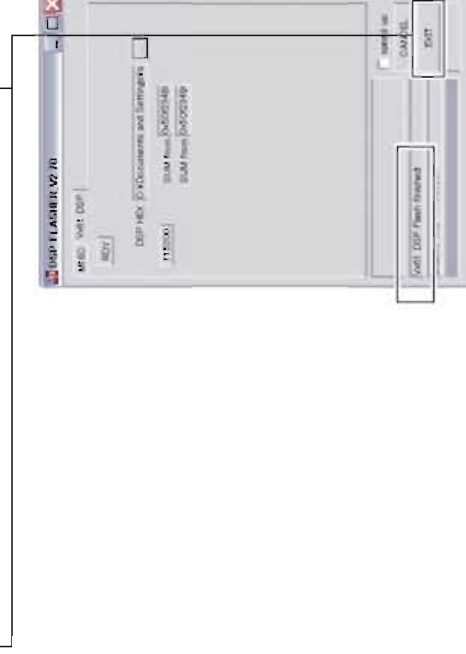


Fig. 8

8. Start up the self-diagnostic function and select "25. ROM VER/SUM/PORT" menu.  
Using the sub-menu, have the firmware version and checksum displayed, and then check that they are the same as written ones.  
\* When the firmware version and checksum are different from written ones, perform the "Writing to DSP" all over again.
  9. Disconnect the power cable of this unit from the AC outlet.
8. ダイアグを起動し、"25. ROM VER/SUM/PORT"メニューを選択します。  
サブメニューでファームウェアのバージョンとチェックサムを表示し、それらが書き込んだものと同じであることを確認します。  
※ ファームウェアのバージョンとチェックサムが、書き込まれたものと異なる場合、"DSPへの書き込み"をもう一度やり直してください。
  9. 本機の電源コードをACコンセントから抜きます。

## ■ SELF-DIAGNOSTIC FUNCTION / ダイアグ (自己診断機能)

This unit has self-diagnostic functions that are intended for inspection, measurement and location of faulty point.

本機には、検査、測定、不良個所の発見を目的にしたダイアグ (自己診断機能) があります。

There are 25 main menu items, each of which has sub-menu items.

メインメニューは25個あり、それぞれにサブメニューがあります。

Listed in the table below are main menu items and sub-menu items.

下表はダイアグメニュー一覧です。

Note that not all menu items listed will apply to the models covered in this service manual.

下表の全ダイアグメニュー項目が、このサービスマニュアル記載のモデルに適用されるとは限りません。

No.	Main menu	Sub-menu
1	BYPASS	1 ANALOG BYPASS 2 DSP BYPASS
2	RAM THROUGH	1 RAM MARGIN 2 RAM FULL ALL 3 RAM FULL CENTER 4 RAM FULL SURROUND 5 RAM FULL SURROUND BACK
3	HDMI AUDIO	1 SPDIF 2 Multi 3 DSD
4	SPEAKERS SET	1 FRNT: SML 0dB 2 CENTER: NONE 3 LFE/B: FRNT 4 Zone2 Amp ON 5 Bi-AMP 6 TONE: MAX 7 TONE: MIN 8 SPEAKER 6 ohms
5	MULTI CH-INPUT	1 8ch INPUT 6 ohms 2 8ch INPUT 8 ohms 3 LIM/PLDET/THM
6	MIC CHECK	1 MIC CHECK
7	FL/OSD CHECK	1 VFD CHECK 2 VFD DISP OFF / MONITOR MUTE 3 VFD DISP ALL / COMPONENT MUTE 4 VFD DIMMER / OSD CHARACTER PATTERN 5 CHECK PATTERN / OSD CHARACTER PATTERN
8	MANUAL TEST	1 TEST ALL
9	A/D DATA CHECK	1 PS1/PS2 2 DC/TH 3 IMP/PL 4 DST/DK 5 K0/K1
10	VIDEO CHECK	1 I2C 2 DIGITAL COMPONENT 3 DIGITAL CVBS 4 DIGITAL Y/C (B, G, E, F models) 5 ANALOG BYPASS 6 TEST PATTERN (Not applied to these models / このモデルには適用されません。) 7 VIDEO INFORMATION
11	XM STATUS (U model)	1 1k -1dB /44kHz 2 1k -61dB /44kHz 3 Mute /44kHz




No.	Main menu	Sub-menu
11	XM STATUS (U model)	4 XM Tone /44kHz 5 ISO Tone /44kHz 6 1k - 1dB /32kHz 7 1k -61dB /32kHz 8 Mute /32kHz 9 XM Tone /32 kHz 10 ISO Tone /32 kHz 11 Bus Power: OFF
12	SIRIUS (U model)	1 SIRIUS: OK (NG) 2 SR 3 SSP (SIRIUS #0 VERSION) 4 MAC (SIRIUS #1 VERSION) 5 ADP (SIRIUS #2 VERSION) 6 PRDID 7 SEQID
13	HD RADIO (Not applied to these models. / このモデルには適用されません。)	1 HD CPU VERSION 2 D: xxxxxxxxxxxx
14	DOCK	1 DOCK
15	HDMI INFO	2 BT VERSION 1 HMN 2 HPI 3 HVN
16	HDMI SELECT	1 HDMI NONE 2 HDMI IN 1 3 HDMI IN 2 4 HDMI IN 3 5 HDMI IN 4 6 HDMI UP CONVERSION 7 HDMI UP THROUGH
17	USB (Not applied to these models. / このモデルには適用されません。)	1 USB File 1 2 USB File 2
18	IF STATUS (Not applied to these models. / このモデルには適用されません。)	1 DSP STATUS
19	BUS CHECK	1 TI BUS 2 BF LOOP (Not applied to these models. / このモデルには適用されません。) Invalidity
20	NO MENU	
21	PROTECTION HISTORY	1 HISTORY 1 2 HISTORY 2 3 HISTORY 3 4 HISTORY 4 Invalidity
22	NO MENU	
23	UPDATE	1 TI FLASH BOOT (Not applied to these models. / このモデルには適用されません。)
24	FACTORY PRESET	1 PRESET INHI
25	ROM VER/SUM/PORT	2 PRESET RSRV 1 VERSION 2 ALL SUM 3 TI (DSP) FLASH VERSION 4 TI (DSP) FLASH SUM 5 XM VERSION 6 SIRIUS VERSION 7 MODEL/DESTINATION 8 Verify (Not applied to these models. / このモデルには適用されません。) Invalidity

## ● Starting Self-Diagnostic Function

While pressing those 2 keys of this unit as shown in the figure below, press the "MAIN ZONE ON/OFF" key to turn on the power.

The self-diagnostic function mode is activated.

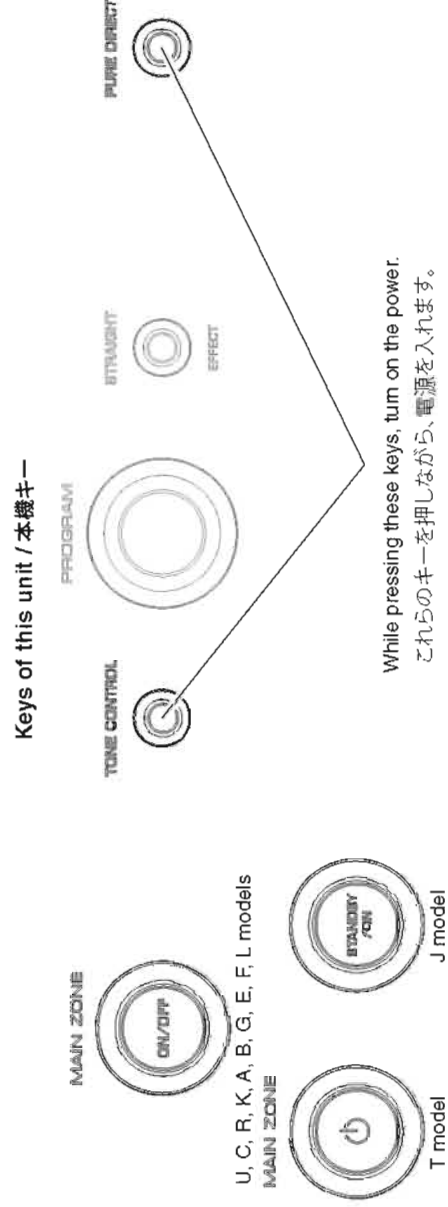

While pressing these keys, turn on the power.  
これらのキーを押しながら、電源を入れます。

## ● Starting Self-Diagnostic Function in the protection cancel mode

If the protection function works and causes hindrance to trouble shoot, cancel the protection function as described below, and it will be possible to enter the self-diagnostic function mode.

(The protection functions other than the excess current detect function will be disabled.)

While pressing those 2 keys as shown in the figure above, press the "MAIN ZONE ON/OFF" key to turn on the power and keep pressing those 2 keys and "MAIN ZONE ON/OFF" key for 3 seconds or longer.

The self-diagnostic function mode is activated with the protection functions disabled.

In this mode, the SLEEP segment of the FL display of this unit flashes to indicate that the mode is self-diagnostic function mode with the protection functions disabled.

### CAUTION!

Using this product with the protection function disabled may cause damage to itself. Use special care when using this mode.

## ● Canceling Self-Diagnostic Function

1. Before canceling self-diagnostic function, execute setting for FACTORY PRESET of main menu No. 24 (Memory initialization inhibited or Memory initialized).

\* In order to keep the user memory stored, be sure to select PRESET INHIBITED (Memory initialization inhibited).

2. Press the "MAIN ZONE ON/OFF" key of this unit to turn off the power.

## ● ダイアグの起動

本機の下図に示す2つのキーを押しながら "STANDBY/ON" キーを押して電源を入れます。  
ダイアグが起動します。

## ● プロテクション解除モードでの起動

プロテクションが動作することにより、故障箇所の診断に支障をきたすような場合は、次の方法によりプロテクションを解除した状態でダイアグモードに入ることができます。

(過電流検出以外のプロテクション動作を解除する)

上図に示す2つのキーを押しながら "STANDBY/ON" キーを押して電源を入れ、2つのキーと "STANDBY/ON" キーを3秒以上押し続けます。

プロテクション解除モードでダイアグが起動します。

このモードでは本機 FL の "SLEEP" セグメントが点滅し、プロテクションを解除した状態でのダイアグモードであることを知らせます。

### 注意!

プロテクションを解除した状態でのダイアグモードは、危険な状態でもプロテクションが作動しないため、動作させると、機器を破壊することがあります。このモードを使用する場合は十分注意してください。

## ● ダイアグの解除

1. ダイアグを解除する前に、メインメニュー No. 24 の FACTORY PRESET (メモリーの初期化禁止 / またはメモリーの初期化) の設定をします。  
※ ユーザーメモリーを保持したい場合は、必ず PRESET INHIBIT (メモリー初期化禁止) を選択してください。
2. 本機の "STANDBY/ON" キーを押して電源を切ります。

## ● Display provided when Self-Diagnostic Function started

The display is as described below depending on the situation when the last time the power to this unit is turned off.

1. **When the power is turned off by usual operation:**  
The FL display of this unit displays "NO PROTECT" then the main menu (sub-menu "1. ANALOG BYPASS" of main menu No. 1 BYPASS) a few seconds later.

Opening message / オープニング表示



Main menu display / メインメニュー表示

## ● ダイアグ起動時の表示

最後に本機の電源が切れたときの状況により、下記のように表示されます。

1. **通常の操作で電源を切った場合：**

本機のFLディスプレイに "NO PROTECT" が表示されます。数秒後、メインメニュー No. 1 BYPASS のサブメニュー "1. ANALOG BYPASS" が表示されます。

Opening message / オープニング表示

After a few seconds / 数秒後



Main menu display / メインメニュー表示

2. **When the protection function worked to tum off the power:**

The FL display of this unit displays the data of protection function which worked at that time then the main menu (sub-menu "1. ANALOG BYPASS" of main menu No. 1 BYPASS) a few seconds later.

Note: At that time if you reactivate the self-diagnostic function after turning off the power once by pressing the "MAIN ZONE ON/OFF" key, "NO PROTECT" will be displayed because that situation is equal to "1. When the power is turned off by usual operation." described above. However the protection function history is stored in memory with a backup. For details, refer to main menu No. 21 PROTECTION HISTORY.

2. **プロテクションが働いて電源が切れた場合：**

本機のFLディスプレイにそのときに働いたプロテクションの情報が表示されます。数秒後、メインメニュー No. 1 BYPASS のサブメニュー "1. ANALOG BYPASS" が表示されます。

注) このときに "STANDBY/ON" キーを押して一旦電源を切った後にダイアグを再起動すると、上述の「1. 通常の操作で電源を切った場合」に相当するので、"NO PROTECT" が表示されます。

ただし、プロテクションの履歴はメモリーにバックアップして記憶されます。詳細は、メインメニュー No. 21 PROTECTION HISTORY を参照してください。

- 2-1. **When the protection function worked due to excess current.**

PRI PROTxxx

AD value when the protection function is working  
電圧の A/D 変換値

**Cause:** An excessive current flowed through the power amplifier.

**Supplementary information:** As current of the power amplifier is detected, the abnormal channel can be identified by checking the current detect transistor.

Turning on the power without correcting the abnormality will cause the protection function to work immediately and the power supply will instantly be shut off.

**原因：** パワーアンプに過電流が流れた。

**補足：** パワーアンプの電流を検出していますので、電流検出トランジスタをチェックすれば異常チャンネルが特定できます。

異常状態のまま電源を入れると、瞬時にプロテクションが働き、すぐに電源が切れます。

**Note)**

- Applying the power to this unit without correcting the abnormality can be dangerous and cause additional circuit damage. To avoid this, if protection function has been activated 3 times continuously, the power will not turn on even when the "MAIN ZONE ON/OFF" key is pressed. In order to turn on the power again, disconnect the power cable of this unit from the AC outlet once and then reconnect it again.
- The output transistors in each amplifier channel should be checked for damage before applying power of this unit.
- Amplifier current should be monitored by measuring DC voltage across the emitter resistors for each channel.

**注意！**

- 異常状態のまま本機の電源を入れると、危険な状態になり、さらに回路が損傷を受ける原因になります。それを避けるために、プロテクションが連続して3回働いた場合、それ以降“STANDBY ON”キーを押しても電源が入らなくなります。再度電源を入れる場合、一度本機の電源コードをAC電源コンセントから抜いて接続し直してください。
- 本機の電源をいれる前に、各アンプのチャンネル内の出力トランジスタに損傷がないかチェックしてください。
- アンプの電流は、各チャンネルのエミッターの抵抗器間電圧を測定することによりモニターしてください。

## 2-2. When the protection function worked due to a short between speaker terminals.

I PROTECT:xxx

AD value when the protection function is working  
電圧の A/D 変換値

**Cause:** The line between speaker terminals is shorted.

**Supplementary information:** As the excess current is detected after operation of the speaker relay, the shorted speaker terminal and the connected speaker can be identified.

Turning on the power without correcting the abnormality will cause the protection function to work immediately and the power supply will instantly be shut off.

**原因：**スピーカー端子間がショートしている。

**補足：**スピーカーリレー動作後に過電流を検出しているので、スピーカー端子および接続しているスピーカーのショートの特定ができます。

異常状態のまま電源を入れると、瞬時にプロテクションが働き、すぐに電源が切れます。

## 2-3. When the protection function worked due to abnormal DC output.

PRD PR1:xxx

AD value when the protection function is working  
電圧の A/D 変換値

**Cause:** DC output from the power amplifier is abnormal.

**Supplementary information:** The protection function worked due to a DC voltage appearing at the speaker terminal. A cause could be a defect in the amplifier.

Turning on the power without correcting the abnormality will cause the protection function to work in 3 seconds and the power supply will be shut off.

**原因：**パワーアンプからのDC出力が異常。

**補足：**パワーアンプの不具合により、スピーカー端子に直流電圧が加えられたために、プロテクションが働いたことを示します。

異常状態のまま電源を入れると、3秒後にプロテクションが働き、電源が切れます。

## 2-2. スピーカー端子間のショートによりプロテクションが働いた場合

## 2-3. DC 出力異常によりプロテクションが働いた場合

2-4. When the protection function worked due to abnormal voltage in the power supply section.

FRU PRT:xxx

2-4. 電源部の電圧異常によりプロテクションが働いた場合

AD value when the protection function is working  
電圧の A/D 変換値

**Cause:** The voltage in the power supply section is abnormal.  
**Supplementary information:** The protection function worked due to a defect or overload in the power supply.  
Turning on the power without correcting the abnormality will cause the protection function to work in 1 second and the power supply will be shut off.

**原因：**電源部の電圧が異常。  
**補足：**電源部の不具合により、電源電圧が正常な範囲から外れたために、プロテクションが働いたことを示します。

異常状態のまま電源を入れると、1秒後にプロテクションが働き、電源が切れます。

2-5. When the protection function worked due to excessive heatsink temperature.

THN PRT:xxx

2-5. ヒートシンクの異常温度によりプロテクションが働いた場合

AD value when the protection function is working  
電圧の A/D 変換値

**Cause:** The temperature on the heatsink is excessive.  
**Supplementary information:** The protection function worked due to the temperature limit being exceeded.  
Causes could be poor ventilation or a defect related to the thermal sensor.  
Turning on the power without correcting the abnormality will cause the protection function to work in 1 second and the power supply will be shut off.

**原因：**ヒートシンクの温度が異常。  
**補足：**ヒートシンクの温度が制限値を超えたために、プロテクションが働いたことを示します。

異常状態のまま電源を入れると、1秒後にプロテクションが働き、電源が切れます。

※ 各プロテクションの検出に関しては、後述のメインメニューを参照してください。

\* For detection of each protection function, refer to main menu described later.

● History of protection function

When the protection function has worked, its history is stored in memory with a backup.  
Even if no abnormality is noted while servicing the unit, an abnormality which has occurred previously can be defined as long as the backup data has been stored.  
For details of the history of protection function, refer to main menu No. 21 PROTECTION HISTORY.  
The history of the protection function is cleared when self-diagnostic function is cancelled by selecting PRESET RESERVED (Memory initialized) of main menu No. 24 or when the backup data is erased.

● プロテクションの履歴

プロテクションが働いた場合、その履歴をバックアップして記憶しています。サービスのときに異常が認められなくても、バックアップが残っていれば、お客様のところまで起きた異常を区別できます。  
プロテクション履歴の詳細は、メインメニュー No. 21 PROTECTION HISTORY を参照してください。  
メインメニュー No. 24 PRESET RESERVED (メモリーの初期化) を選んでダイアグを解除した場合、またはバックアップが消えた場合にプロテクションの履歴はクリアされます。

## ● Operation procedure of Main menu and Sub-menu

There are 25 main menu items, each of them having sub-menu items.

### Main menu selection

Select the main menu using "PROGRAM" knob.

### Sub-menu selection

Select the sub-menu using "SCENE RADIO" (forward) and "SCENE CD" (reverse) keys.

## ● メインメニューとサブメニューの操作

ダイアグにはNo. 1～25のメインメニューがあり、それぞれにサブメニューがあります。


### メインメニューの選択

"PROGRAM" ノブで選択します。

### サブメニューの選択

"SCENE RADIO" (順送り)、"SCENE CD" (逆送り) キーで選択します。

Keys of this unit / 本機キー

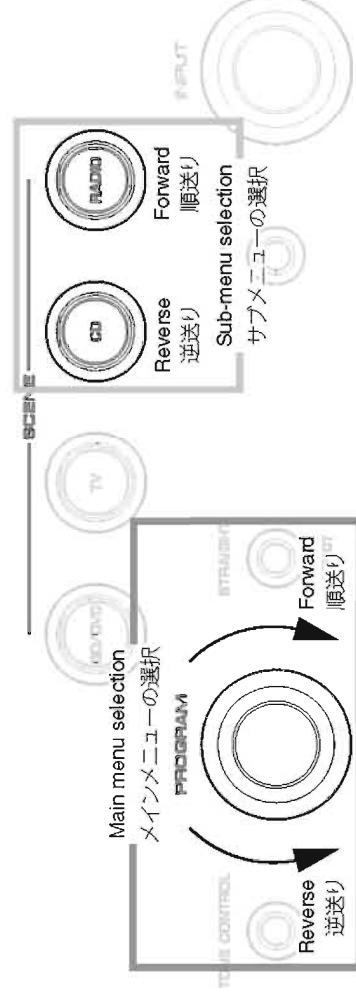

## ● Functions in Self-Diagnostic Function mode

In addition to the self-diagnostic function menu items, functions as listed below are available.

- Power ON/OFF
- Master volume
- Muting
- Input select
- Audio select
- PROGRAM select
- Tone control
- PURE DIRECT ON/OFF
- ZONE2 ON/OFF

\* Functions related to the tuner and the set menu are not available.

## ● ダイアグ中の機能

ダイアグメニューの他に、以下の機能が動作します。

- 電源 オン/オフ
- マスターボリューム
- ミューティン
- インプットセレクト
- オーディオセレクト
- プログラムセレクト
- トーンコントロール
- PURE DIRECT ON/OFF

※ チューナー関連、セットメニュー関連は機能しません。

## ● Initial settings used to start Self-Diagnostic Function

The following initial settings are used when starting self-diagnostic function.

When self-diagnostic function is canceled, these settings are restored to those before starting self-diagnostic function.

- Master volume: -20 dB
- Zone2 Volume: +2.5 dB
- Input: AV5 (MAIN ZONE) / AUDIO1 (ZONE2)
- Main menu: 1. ANALOG BYPASS
- Speaker setting: LARGE, Bass out to SWFR (All channels)
- Speaker impedance: 8 ohms position
- OSD: ON
- XM Power: ON (U model)

## ● ダイアグ開始時の初期設定

ダイアグ開始時に以下のような設定になります。  
ダイアグ解除時にはダイアグ開始前の状態に戻ります。

- マスターボリューム：-20 dB
- インプット：AV5
- メインメニュー：1. ANALOG BYPASS
- スピーカー設定：LARGE、Bass out to SWFR (すべてのチャンネル)
- スピーカーインピーダンス：8 オーム
- OSD：オン

● Details of Self-Diagnostic Function menu

1. BYPASS

Using the sub-menu, it is possible to select ANALOG BYPASS output or DSP BYPASS output.

● ダイアグメニュー詳細

1. BYPASS

サブメニューにより、ANALOG BYPASS/DSP BYPASSが選択可能です。

ANALOG BYPASS

The analog input audio signal is output to FRONT L/R in PURE DIRECT.

ANALOG BYPASS

アナログ入力オーディオ信号がPURE DIRECTでFRONT L/Rへ出力されます。

1. ANALOG BYPASS

INPUT: AV5 ANALOG  
SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

Input level	Volume	SPEAKER OUT						SUB- WOOFER OUTPUT
		FRONT	CENTER	SURROUND	SURROUND BACK	PRESENCE	ZONE2	
Both ch., -20 dBm	+6.5 dB	+13.0 dBm	-∞	-∞	-∞	-∞	-∞	-∞

DSP BYPASS

The digital input audio signal is output to FRONT L/R in PURE DIRECT.

DSP BYPASS


デジタル入力オーディオ信号がPURE DIRECTでFRONT L/Rへ出力されます。

1. DSP BYPASS

INPUT: AV5 ANALOG  
SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz


Input level	Volume	SPEAKER OUT						SUB- WOOFER OUTPUT
		FRONT	CENTER	SURROUND	SURROUND BACK	PRESENCE	ZONE2	
Both ch., -20 dBm	+6.5 dB	-∞	-∞	-∞	-∞	-∞	-∞	-∞

ANALOG BYPASS

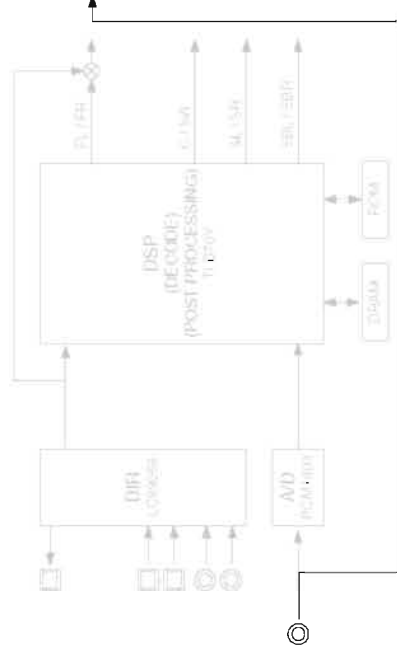

(Shaded items not used in this example)

DSP BYPASS

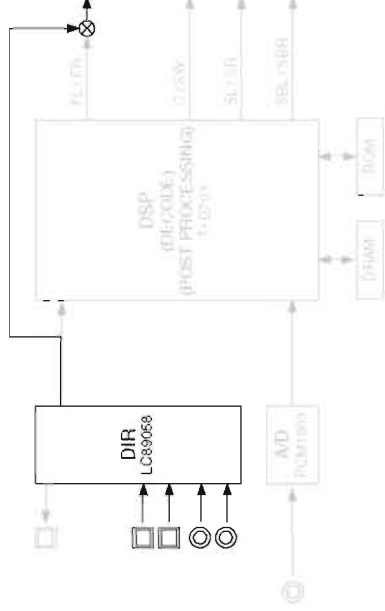

(Shaded items not used in this example)

**2. RAM THROUGH**

Using the sub-menu, it is possible to select MARGIN output or FULL BIT output.

**2. RAM THROUGH**

サブメニューにより、MARGIN/FULL BITが選択可能です。

**RAM MARGIN**

The audio signal is output including the head margin.

**RAM MARGIN**

音声信号がヘッドマージンを含んで出力されます。

**2. RAM MARGIN**

INPUT: AV5 ANALOG  
SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

Input level	Volume	SPEAKER OUT					
		FRONT	CENTER	SURROUND	SURROUND BACK	PRESENCE	SUB-WOOFER OUTPUT
Both ch, -20 dBm	+6.5 dB	+13.0 dBm	+13.0 dBm	+13.0 dBm	+13.0 dBm	-∞	-6.5 dBm



**RAM FULL BIT**

The audio signal is output in digital full bit without including the head margin.

The SUBWOOFER signal is output but not in digital full bit.

**RAM FULL BIT**


音声信号がヘッドマージンを含まず、デジタルフルビットで出力されます。

SUBWOOFERは出力されますが、デジタルフルビットではありません。

2, RAM FULL ALL

INPUT: AV5 ANALOG  
SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

Input level	Volume	SPEAKER OUT					SUB- WOOFER OUTPUT	
		FRONT	CENTER	SURROUND	SURROUND BACK	ZONE2		PRESENCE
Both ch, -20 dBm	+6.5 dB	+13.0 dBm	+13.0 dBm	+13.0 dBm	+13.0 dBm	-∞	-∞	-6.5 dBm

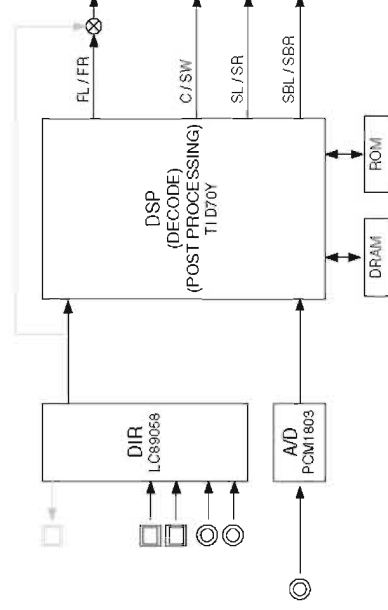

(Shaded items not used in this example)

When input source is stereo, signal is assigned as below.

2 ch 信号入力時、以下のように信号が振り分けられて出力されます。

- Front L → Front L / Center / Surround L / Surround Back L, R
- Front R → Front R / Surround R
- Front L +10 dB → SWFR

**FX-V765/HTR-6270/AX-V765**

**RAM FULL CENTER**

The audio signal is output to only CENTER in digital full bit without including the head margin.

**RAM FULL CENTER**

音声信号がヘッドマージンを含まず、デジタルフルビットで CENTER のみへ出力されます。

2. RAM FULL C

INPUT: AV5 ANALOG  
SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

Input level	Volume	SPEAKER OUT					SUB-WOOFER OUTPUT
		FRONT	CENTER	SURROUND	SURROUND BACK	ZONE2	
Both ch, -20 dBm	+6.5 dB	-∞	+13.0 dBm	-∞	-∞	-∞	-∞

**RAM FULL SURROUND**

The audio signal is output to only SURROUND L/R in digital full bit without including the head margin.

**RAM FULL SURROUND**

音声信号がヘッドマージンを含まず、デジタルフルビットで SURROUND L/R のみへ出力されます。

2. RAM FULL SUR

INPUT: AV5 ANALOG  
SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

Input level	Volume	SPEAKER OUT					SUB-WOOFER OUTPUT
		FRONT	CENTER	SURROUND	SURROUND BACK	ZONE2	
Both ch, -20 dBm	+6.5 dB	-∞	-∞	+13.0 dBm	-∞	-∞	-∞

**RAM FULL SURROUND BACK**

The audio signal is output to only SURROUND BACK L/R in digital full bit without including the head margin.

**RAM FULL SURROUND BACK**

音声信号がヘッドマージンを含まず、デジタルフルビットで SURROUND BACK L/R のみへ出力されます。

2. RAM FULL SB

INPUT: AV5 ANALOG  
SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

Input level	Volume	SPEAKER OUT					SUB-WOOFER OUTPUT
		FRONT	CENTER	SURROUND	SURROUND BACK	ZONE2	
Both ch, -20 dBm	+6.5 dB	-∞	-∞	-∞	+13.0 dBm	-∞	-∞

### 3. HDMI AUDIO


Using the sub-menu, the audio signals input to HDMI IN are selected and output.

- \* When selecting "DSD", be sure to connect an HDMI unit equipped with DSD output function to this unit.

### 3. HDMI AUDIO

サブメニューにより、HDMI INに入力された音声信号が選択、出力されます。

- ※ "DSD" を選択する場合、必ずDSD出力が可能なHDMI機器を接続してください。

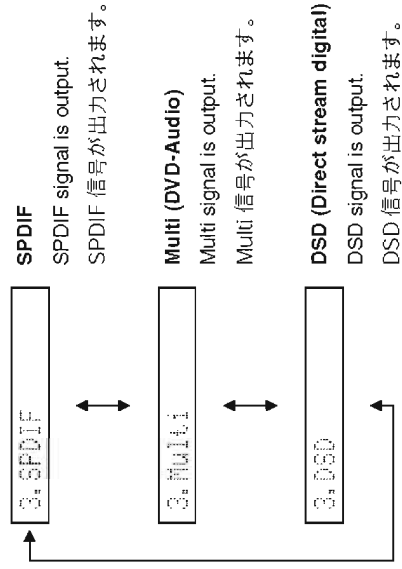

#### 4. SPEAKER SET

The analog switch settings for each sub-menu are as shown in the table below.

#### 4. SPEAKER SET

各サブメニューにおけるアナログスイッチの設定は以下の通りです。

	FRONT	CENTER	SURROUND	SURROUND BACK	SUBWOOFER
FRNT : SML 0dB	SMALL	LARGE	LARGE	LARGE	SWFR
CENTER : NONE	LARGE	NONE	LARGE	LARGE	SWFR
LFE/B : FRNT	LARGE	SMALL	SMALL	SMALL	FRONT
Zone2 Amp ON	LARGE	LARGE	LARGE	-(*)1	SWFR
Bi-AMP	LARGE	LARGE	LARGE	LARGE (*2)	SWFR
ZONE : MAX	LARGE	LARGE	LARGE	LARGE	SWFR
ZONE : MIN	LARGE	LARGE	LARGE	LARGE	SWFR
SPEAKER 6 ohms	LARGE	LARGE	LARGE	LARGE	SWFR

(\*1) ZONE2 L/R (EXTRA SP L/R): LARGE  
(\*2) Bi-AMP: LARGE

**LARGE:** This mode is used for a speaker with high bass reproduction performance (a large unit). Full bandwidth signals are output.

**LARGE:** 低音再生能力の高い（ユニットの大きい）スピーカーを使用するモードです。全帯域が出力されます。

**SMALL:** This mode is used for a speaker with low bass reproduction performance (a small unit). The signals of 90 Hz or less are mixed into the channel specified by LFE/BASS.

**SMALL:** 低音再生能力の低い（ユニットの小さい）スピーカーを使用するモードです。90 Hz 以下が LFE/BASS で指定したチャンネルへミックスされます。

**NONE:** This mode is used for no center speaker. The center content is reduced by 3 dB and distributed to FRONT L/R.


**NONE:** センタースピーカーを使用しないモードです。センター成分は -3 dB されて、FRONT L/R へ振り分けられます。

**SWFR:** LFE of 5.1 ch signal or LFE/BASS lower than 90 Hz is output through SUBWOOFER OUT.

**SWFR:** 5.1 ch 信号の LFE または 90 Hz 以下の LFE/BASS が SUBWOOFER OUT へ出力されます。

**FRONT:** LFE of 5.1 ch signal or LFE/BASS lower than 90 Hz is distributed to FRONT L/R.

**FRONT:** 5.1 ch 信号の LFE または 90 Hz 以下の LFE/BASS を FRONT L/R へ振り分けられます。

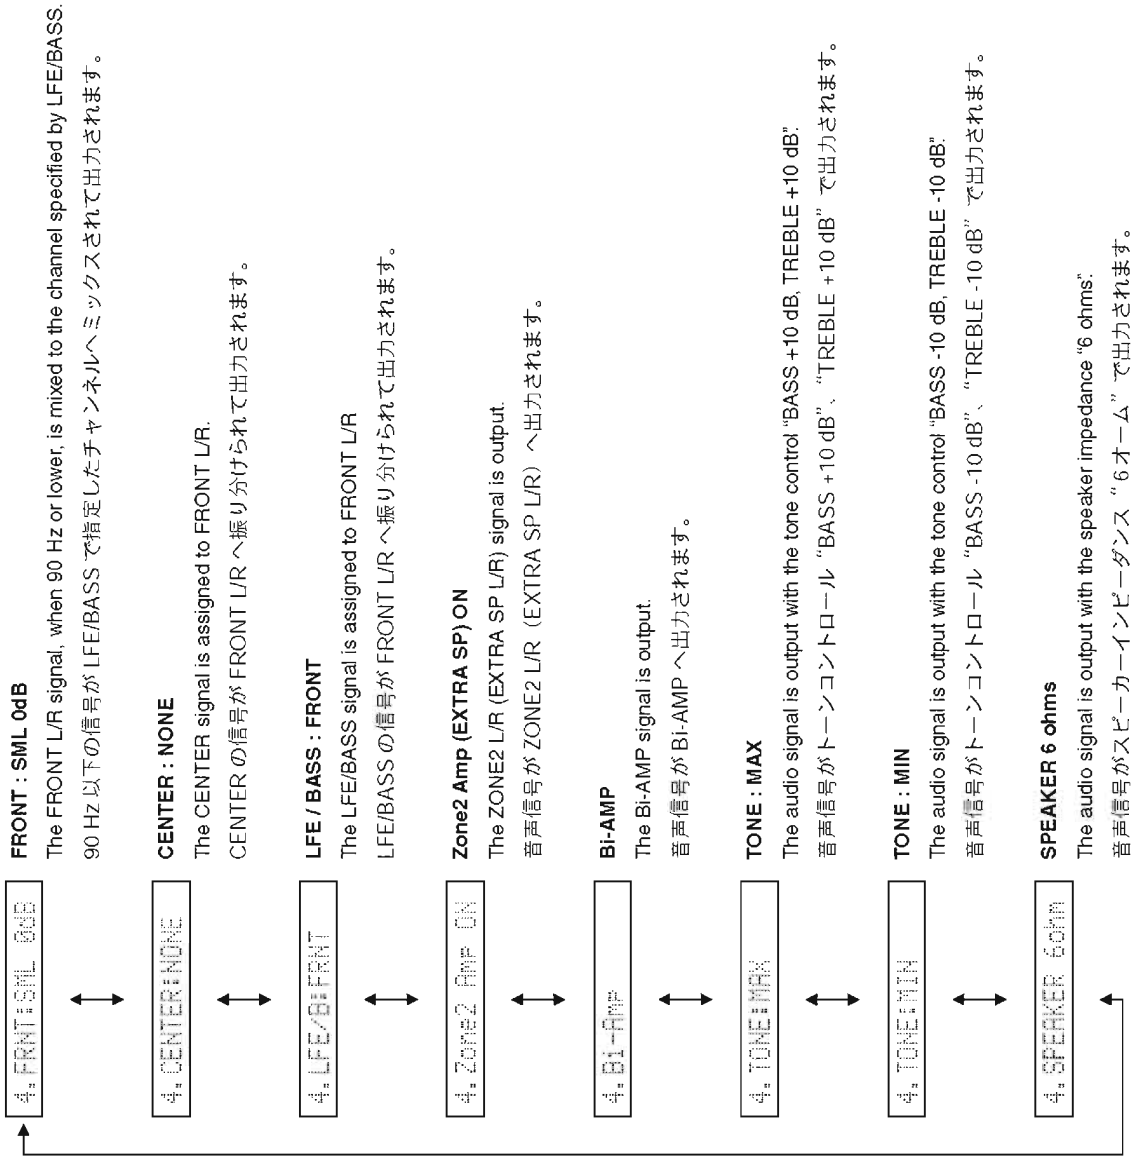

INPUT: AV5 ANALOG  
SPEAKER OUT: 1 KHZ, SUBWOOFER OUTPUT: 50 Hz

Sub-menu	Input level	Volume	SPEAKER OUT				SUBWOOFER OUTPUT
			FRONT L/R	CENTER	SURROUND L/R	SURROUND BACK L/R	
FRNT : SML 0dB	Both ch, -20 dBm	+6.5 dB	+13.0 dBm	+13.0 dBm	+13.0 dBm	+13.0 dBm	-3.0 dBm
CENTER : NONE	Both ch, -20 dBm	+6.5 dB	+18.0 dBm	-∞	+13.0 dBm	+13.0 dBm	-7.5 dBm
LFE/B : FRNT (50 Hz)	Both ch, -20 dBm	+6.5 dB	-∞	+13.0 dBm	+13.0 dBm	+13.0 dBm	-∞
Zone2 Amp ON	Both ch, -20 dBm	+6.5 dB	+13.0 dBm	+13.0 dBm	+13.0 dBm	-∞ (*)	-7.5 dBm
Bi-AMP	Both ch, -20 dBm	+6.5 dB	+13.0 dBm	+13.0 dBm	+13.0 dBm	+13.0 dBm	-7.5 dBm
TONE : MAX	Both ch, -20 dBm	+6.5 dB	+14.0 dBm	+13.0 dBm	+13.0 dBm	+13.0 dBm	-7.5 dBm
TONE : MIN	Both ch, -20 dBm	+6.5 dB	+12.0 dBm	+13.0 dBm	+13.0 dBm	+13.0 dBm	-7.5 dBm
SPEAKER 6 ohms	Both ch, -20 dBm	+6.5 dB	+13.0 dBm	+13.0 dBm	+13.0 dBm	+13.0 dBm	-7.5 dBm

(\*) ZONE2 L/R (EXTRA SP L/R) SPEAKER OUT: +13.0 dBm

### 5. MULTI CH-INPUT

The input source "MULTI CHANNEL INPUT" is selected.  
Using the sub-menu, it is possible to select the 6 ohms/8 ohms.

### 5. MULTI CH-INPUT

入力ソース"MULTI CHANNEL INPUT"が選択されます。  
サブメニューにより、6 オーム/8 オームが選択可能です。

#### 8 ch INPUT 6 ohms

5.8ch INPUT\_60

#### 8 ch INPUT 6 ohms

INPUT: MULTI CH INPUT  
SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

Input level	Volume	SPEAKER OUT						SUB- WOOFER OUTPUT
		FRONT	CENTER	SURROUND	SURROUND BACK	PRESENCE	ZONE2	
Both ch, -20 dBm	+6.5 dB	+13.0 dBm	+13.0 dBm	+13.0 dBm	+13.0 dBm	-∞	-∞	-16.5 dBm

#### 8 ch INPUT 8 ohms

5.8ch INPUT\_60

#### 8 ch INPUT 8 ohms

INPUT: MULTI CH INPUT  
SPEAKER OUT: 1 kHz, SUBWOOFER OUTPUT: 50 Hz

Input level	Volume	SPEAKER OUT						SUB- WOOFER OUTPUT
		FRONT	CENTER	SURROUND	SURROUND BACK	PRESENCE	ZONE2	
Both ch, -20 dBm	+6.5 dB	+13.0 dBm	+13.0 dBm	+13.0 dBm	+13.0 dBm	-∞	-∞	-16.5 dBm

**LIM / PLDET / THM**

**LIM:** Setting value of LIM (Limiter control)

\* Do not change the value settings because this menu is only for the use of development staff.

**PLDET:** Power limiter detection

The A/D conversion value during operation is displayed.

(Reference voltage: 3.3 V=255)

**THM:** Temperature protection detection

The A/D conversion value during operation is displayed.

(Reference voltage: 3.3 V=255)

**LIM / PLDET / THM**

**LIM:** LIM (リミッター制御) の設定値


※ 開発スタッフ専用メニューですので、設定値の変更は行わないでください。

**PLDET:** パワーリミッターの検出

動作時の A/D 変換値が表示されます。  
(基準電圧：3.3 V = 255)

**THM:** 温度プロテクションの検出

動作時の A/D 変換値が表示されます。  
(基準電圧：3.3 V = 255)




**6. MIC CHECK**

The signals input through the microphone are output to only FRONT L via A/D and D/A.

**6. MIC CHECK**

マイクから入力された信号が A/D - D/A 経由で FRONT L のみへ出力されます。



### 7. FL/OSD CHECK


This menu is used to check the FL display and video control sections. When checking the video control section, connect a TV monitor to this unit with a component video cable, S video cable and video pin cable.

Using the sub-menu, the FL display section or video control section varies as shown below.


### 7. FL/OSD CHECK

FL表示部および映像表示部のチェックプログラムです。映像制御部をチェックする場合には、TVモニターと本機をコンポーネント/Dビデオケーブル、Sビデオケーブル、ビデオ用ピンケーブルで接続します。サブメニューにより、FL表示部と映像表示部の選択が以下のように連動して変わります。

#### Checking FL display section / FL表示部のチェック

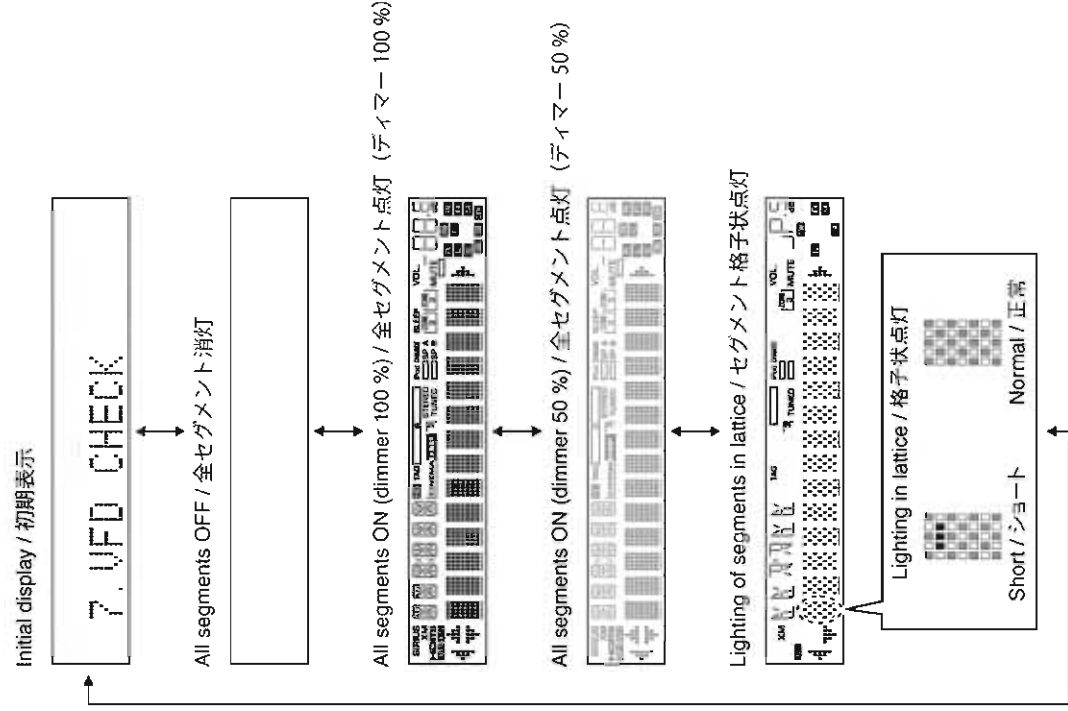

#### Check of the Video control section. (Monitor out) / 映像表示部のチェック (モニター出力)

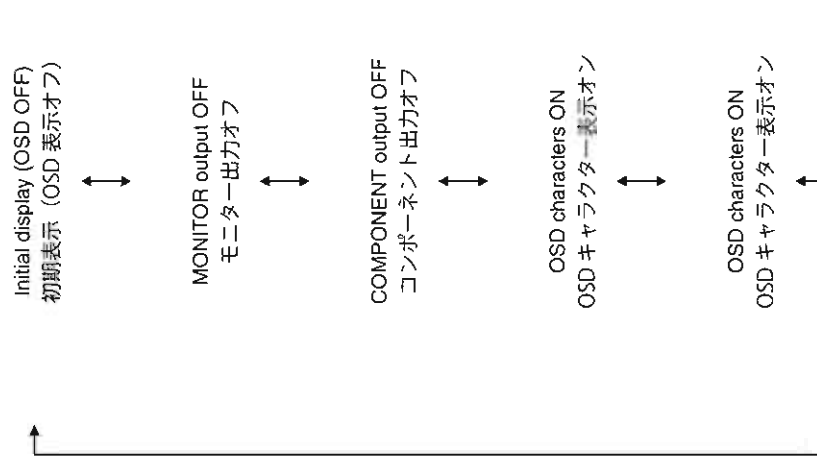

OSD characters / OSD キャラクター表示

OSD 256 CHAR PATTERN

```

. ! " # $ % & ' ( ) * + , - . /
: ; < = > ? @ A B C D E F G
H I J K L M N O P Q R S T U V W X Y Z [ \ ] ^
_ ` a b c d e f g h i j k l m n o p q r s t u v w
x y z { | } ~ ¡ ¢ £ ¤ ¥ ¦ § ¨ © ª « ¬ ® ¯ ° ±
² ³ ´ µ ¶ · ¸ ¹ º » ¼ ½ ¾ ¿ À Á Â Ã Ä Å Æ Ç È É
Ê Ë Ì Í Î Ï Ð Ñ Ò Ó Ô Õ Ö × Ø Ù Ú Û Ü Ý Þ ß à á â
ã ä å æ ç è é ê ë ì í î ï ð ñ ò ó ô õ ö ÷ ø ù ú û
ü ý þ ÿ
    
```



Segment conditions of the FL driver and the FL tube are checked by turning ON and OFF all segments. Next, the operation of the FL driver is checked by using the dimmer control. Then a short between segments next to each other is checked by turning ON and OFF all segments alternately (in lattice). (In the above example, the segments in the second row from the top are shorted.)

全セグメント消灯・全セグメント点灯により FL ドライバー、FL 管のセグメントの不良を確認します。次に、ディママーコントロールによって FL ドライバーの動作チェックを行います。さらに全セグメントを交互（格子状）に点灯／消灯することで、隣り合うセグメントのショートをチェックします。（前記の例は、上から 2 列目のセグメントがショートしています。）

## 8. MANUAL TEST

The built-in noise generator of DSP outputs the test noise through the channels specified by using the sub-menu.

The noise frequency for LFE is 30 to 80 Hz. Other than that, the noise frequency is 500 Hz to 2 kHz.

## 8. MANUAL TEST

DSP 内蔵のノイズ発生回路によって、サブメニューで指定したチャンネルへテストノイズが出力されます。

LFE 用のノイズ周波数は 30 ～ 80 Hz、それ以外はノイズ周波数 500 Hz ～ 2 kHz となります。

### TEST ALL

The test noise is output from all channels.

### TEST ALL

全チャンネルからテストノイズが出力されます。

8. TEST ALL

## 9. A/D DATA CHECK

This menu is used to display the A/D conversion value of the microprocessor which detects panel keys of this unit and protection functions by using the sub-menu.

When KO/K1 menu is selected, keys become non-operable due to detection of the values of all keys. However, it is possible to advance to the next main menu by turning the "PROGRAM" knob of this unit.

- \* The figures in the diagram are given as reference only.

### PS1/PS2

**PSx:** Power supply voltage protection detection

#### PS1

Voltage detects: AC\_BL, AC\_12, AC\_5, ±12 and +5V

Normal value: 38 to 128

(Reference voltage: 3.3 V=255)

#### PS2

Voltage detects: -5 and +5V

Normal value: 31 to 125

(Reference voltage: 3.3 V=255)

- \* If PS1 or PS2 becomes out of the normal value range, the protection function works to turn off the power.

PS1:089 2:078

## 9. A/D DATA CHECK

本機パネルキー、プロテクションなどを検出して、マイコンのA/D変換値を、サブメニューで表示します。

K0/K1のメニューにすると、全キーの値を検出するためキー操作はできなくなりますが、本機の"PROGRAM"ツマミを回すことにより、次のメインメニューに進めることができます。

- ※ 図中の数値は参考例です。

### PS1/PS2

**PSx:** 電源電圧プロテクションの検出

#### PS1

検出電圧: AC\_BL, AC\_12, AC\_5, ±12, +5V

正常値: 38 ~ 128

(基準電圧: 3.3 V = 255)

#### PS2

検出電圧: -5V, +5V

正常値: 31 ~ 125

(基準電圧: 3.3 V = 255)

- ※ PS1またはPS2が正常値を外れるとプロテクションが働き、電源が切れます。

### DC/TH

**DC:** Power amplifier DC (DC voltage) output is detected.

Normal value: 23 to 70

(Reference voltage: 3.3 V=255)

**TH:** Temperature on the heatsink is detected.

Normal value: 0 to 124

(Reference voltage: 3.3 V=255)

- \* If DC or TH becomes out of the normal value range, the protection function works to turn off the power.

DC:046 TH:111

### DC/TH

**DC:** パワーアンプDC (直流電圧) 出力の検出

正常値: 23 ~ 70

(基準電圧: 3.3 V = 255)

**TH:** ヒートシンク温度の検出

正常値: 0 ~ 124

(基準電圧: 3.3 V = 255)

- ※ DCまたはTHが正常値を外れるとプロテクションが働き、電源が切れます。

**IMP/PL**

**IMP:** 8 or 6 ohms impedance setup detection  
 IMP 8: 8 ohms setting  
 IMP 6: 6 ohms setting

**TH/PL**

**IMP:** インピーダンス設定の検出  
 (このモデルには適用されません。)

**PL:** PLDET (Power amplifier output voltage detection)

The power amplifier output voltage is detected and the power amplifier input voltage is controlled according to the detected output voltage.  
 (Reference voltage: 3.3 V=255)

**PL:** PLDET (パワーアンプ出力電圧の検出)

パワーアンプ出力電圧を検出して、パワーアンプ入力電圧を制御します。  
 (基準電圧：3.3 V = 255)

IMP:6 PL:255

U, C, T, K, A, B, G, E, F models (Reference voltage: 3.3 V=255)

	During normal operation	Value for starting limiter operation	Value for canceling limiter operation
PLDET (8 ohms/6 ohms)	255 / 255	87 / 146	125 / 171
LIM (Limiter control)	H	L	H

R, L models (Reference voltage: 3.3 V=255)

	During normal operation	Value for starting limiter operation	Value for canceling limiter operation
PLDET (8 ohms/6 ohms)	255 / 255	100 / 100	131 / 131
LIM (Limiter control)	H	L	H

J model (基準電圧：3.3 V = 255)

	通常値	リミッタ動作開始値	リミッタ動作解除値
PLDET (8 ohms/6 ohms)	255 / 255	100 / 100	131 / 131
LIM (リミッター制御)	H	L	H

**DST/DK**

**DST:** Destination detection  
 (Reference voltage: 3.3 V=255)

**DST/DK**

**DST:** 仕向け先の検出  
 (基準電圧：3.3 V = 255)

**DK:** DOCK type detection  
 (Reference voltage: 3.3 V=255)

**DK:** DOCK タイプの検出  
 (基準電圧：3.3 V = 255)

DST:027 DK:255

Destination detection for AD port

Pull-up resistance 10 k-ohms

Ohm (R3809 VIDEO PCB)	0.0 k	1.2 k	2.7 k	4.7 k	6.8 k	10.0 k	15.0 k	47.0 k	100.0 k
A/D value (3.3 V=255)	0 - 15	15 - 46	46 - 69	69 - 92	92 - 115	115 - 139	139 - 177	185 - 224	224 - 247
DEST (139 pin)	J	U	C	R	T	K	A	B, G, E, F	L

DOCK detection for AD port (IC20 Microprocessor pin no. 128)

Pull-up resistance 10 k-ohms

DOCK type (DKID 141 pin)	Bluetooth	iPod	No connect
A/D value (3.3 V=255)	5 - 25	120 - 140	255

## RX-V765/HTR-6270/AX-V765

## K0/K1

**K0/K1:** KEY0/KEY1 (Panel key of this unit)

When the A/D conversion value of the panel key becomes out of the specified range (standard value  $\pm 4$ ), normal operation will not be available.

In this case, check the constant of voltage dividing resistor, solder condition, etc. Refer to the table below.

(Reference voltage: 3.3 V=255)

K0:255	K1:255
--------	--------

## K0/K1

**K0/K1:** KEY0/KEY1 (本機パネルキー)

パネルキーのA/D値が規定範囲（基準値 $\pm 4$ ）から外れると、正常な動きをしません。

下表をご覧になり、各キーの分圧抵抗の定数、ハンダ不良等の確認をしてください。

(基準電圧：3.3 V = 255)

## RX-V765/HTR-6270

Displayed / 表示	K0
0 - 11	SCENE RADIO
12 - 32	SCENE CD
33 - 54	SCENE TV
55 - 75	SCENE BD/DVD
76 - 95	ZONE2 ON/OFF
96 - 118	ZONE2 CONTROL
119 - 142	—
143 - 162	—
181 - 197	MAIN ZONE ON/OFF
198 - 229	TONE CONTROL
255	KEY OFF

Displayed / 表示	K1
0 - 11	PURE DIRECT
12 - 32	STRAIGHT / EFFECT
33 - 54	INFO
55 - 77	MEMORY
78 - 98	PRESET ◀
99 - 120	PRESET ▶
121 - 143	CATEGORY ◀ FM
144 - 165	CATEGORY ▶ AM
166 - 185	TUNING CH ◀
186 - 205	TUNING CH ▶
206 - 225	—
226 - 245	—
255	KEY OFF

## AX-V765

Displayed / 表示	K0
0 - 11	SCENE RADIO
12 - 32	SCENE CD
33 - 54	SCENE TV
55 - 75	SCENE BD/DVD
76 - 95	SLEEP
96 - 118	MUTE
119 - 142	—
143 - 162	—
181 - 197	STANDBY/ON
198 - 229	TONE CONTROL
255	KEY OFF

Displayed / 表示	K1
0 - 11	PURE DIRECT
12 - 32	STRAIGHT / EFFECT
33 - 54	INFO
55 - 77	MEMORY
78 - 98	PRESET ◀
99 - 120	PRESET ▶
121 - 143	FM
144 - 165	AM
166 - 185	TUNING ◀
186 - 205	TUNING ▶
206 - 225	—
226 - 245	—
255	KEY OFF

## 10. VIDEO CHECK


## 10. VIDEO CHECK

### I2C check

The I2C (Inter integrated circuit) bus line connection is checked.

### I2C check

I2C (Inter integrated circuit) bus line connection is checked.

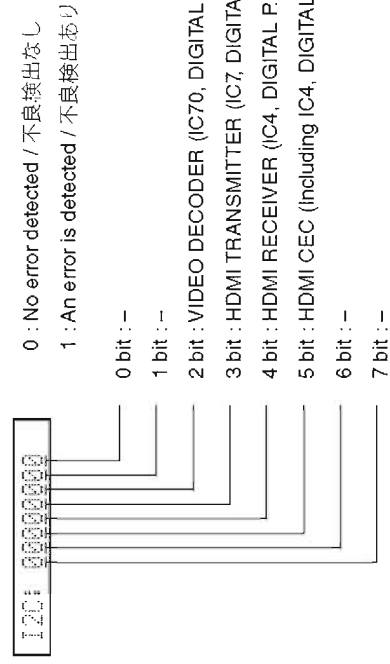


### Digital component

The video signal is converted and output as shown below.

### Digital component

映像信号が以下のように変換され、出力されます。

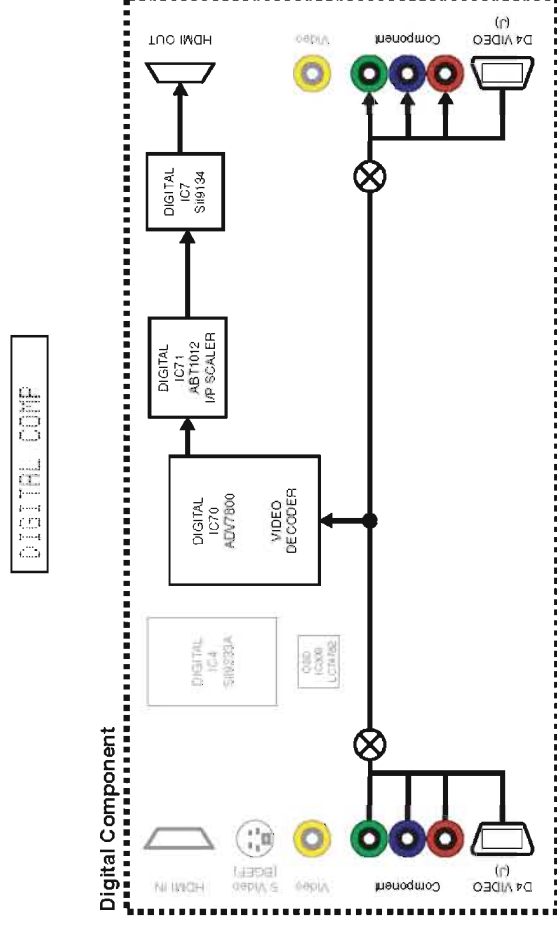


**Digital CVBS (Video)**

**Digital CVBS (Video)**

The video signal is converted and output as shown below.

映像信号が以下のように変換され、出力されます。

DIGITAL CVBS

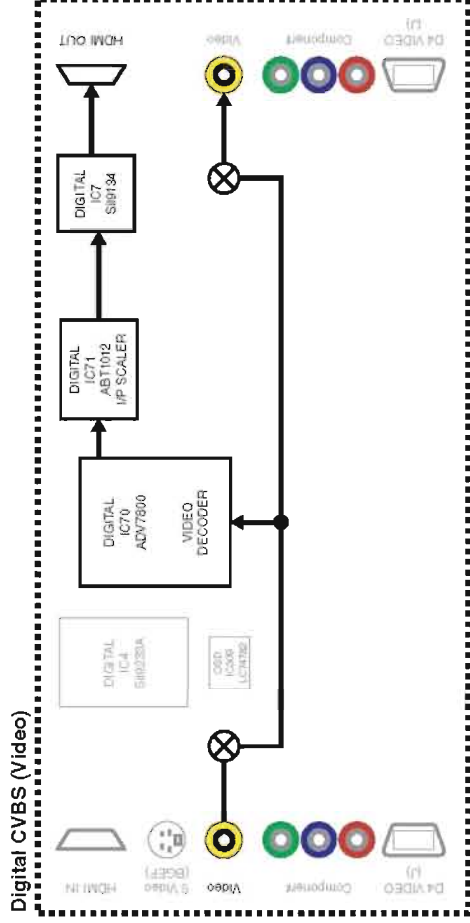


**Digital Y/C (S-Video) (B, G, E, F models)**

**Digital Y/C (S-Video) (B, G, E, F models)**

The video signal is converted and output as shown below.

DIGITAL Y/C

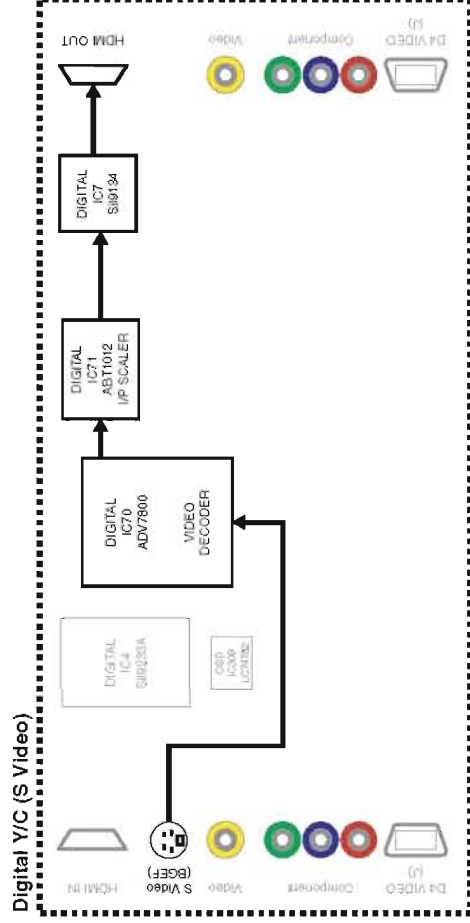


**Analog bypass**

The video signal is converted and output as shown below.

**Analog bypass**

映像信号が以下のように変換され、出力されます。

ANALOG BYPASS

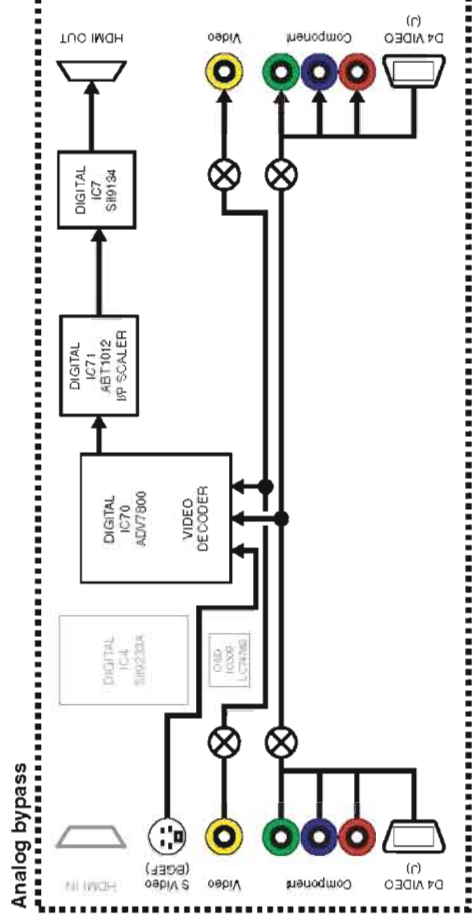

**Test pattern**

Not applied to these models.

**Test pattern**

このモデルには適用されません。

TEST PATTERN

**Video information**

The information of input video signal is displayed.

**Video information**


入力されている映像信号の情報が表示されます。

Example / 例

VIDEO IN 480i

### 11. XM STATUS (U model)


This menu is used to check the output of XM Radio Antenna.

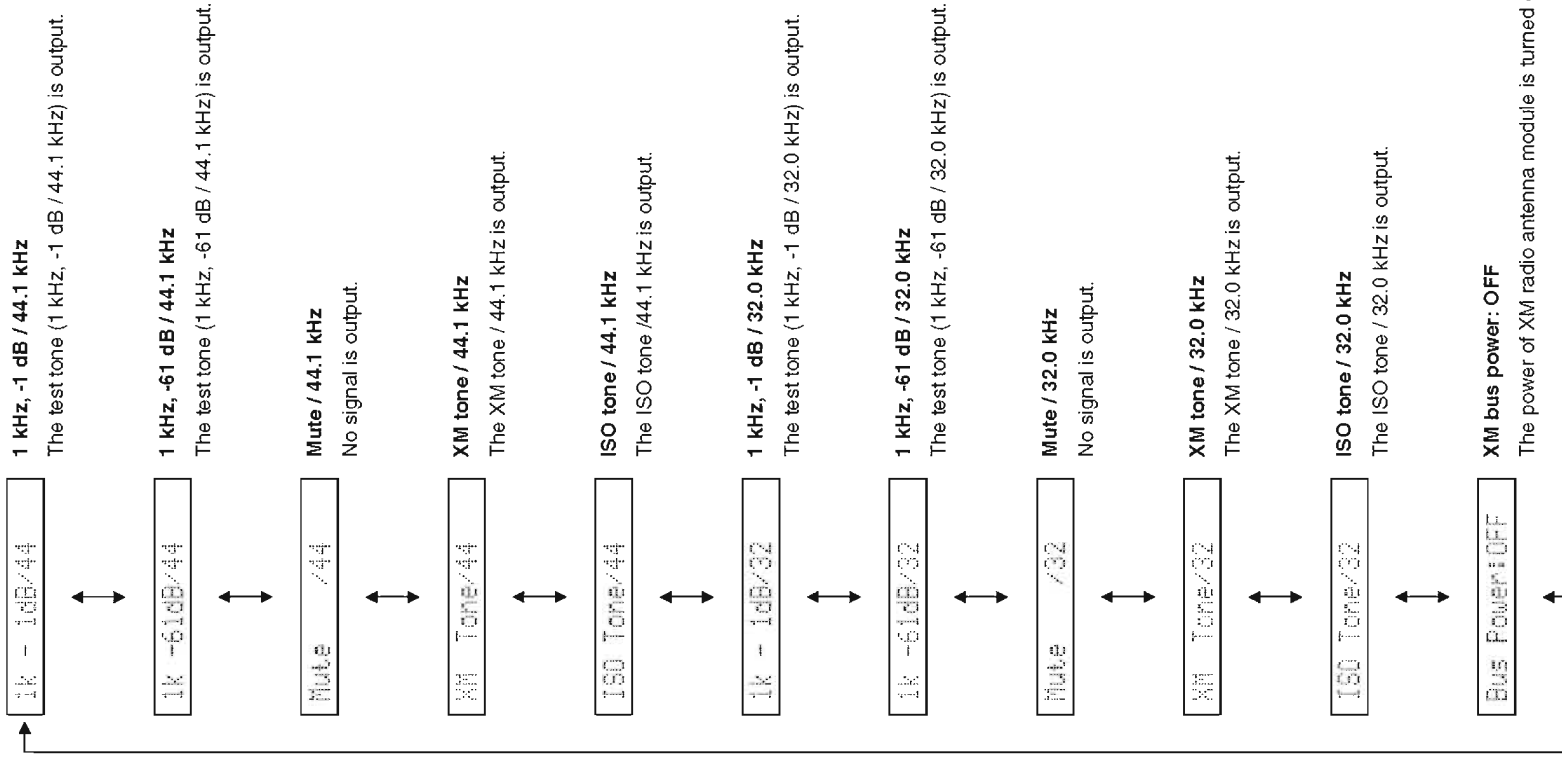



### 12. SIRIUS (U model)

The SIRIUS information are displayed.

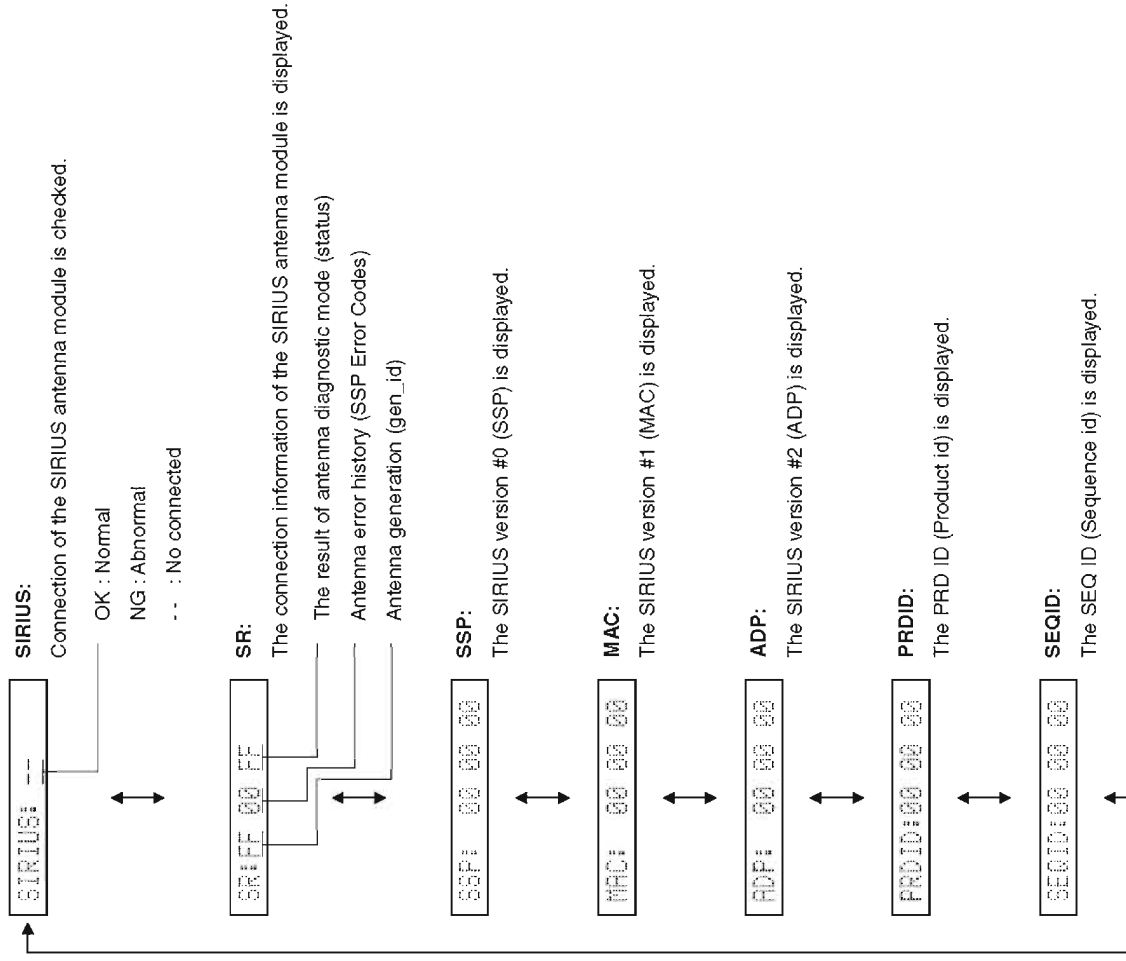

### 13. HD RADIO (U model)

Not applied to these models.

CPU version

HD CPU Ver

DSP version

DSP

### 14. DOCK


This menu is used to check the DOCK connector without the iPod itself.

With the power to this unit turned off, short between pins No. 14 (TX) and No. 18 (RX), between pins No. 1 (PWR) and No. 17 (ACCPW), between pins No. 4 (PDET) and No. 8 (DGND). Also, connect a 10 k-ohms, 1/4 W resistor between pins NO. 21 (DKID) and No. 8 (DGND). (Make sure that the power is turned off when shorting pins.)

Start up the self-diagnostic function and select this menu.

The check result is displayed according to the following display specifications.

**Note)** Be sure to return the shorted pins to their original condition after executing this test.

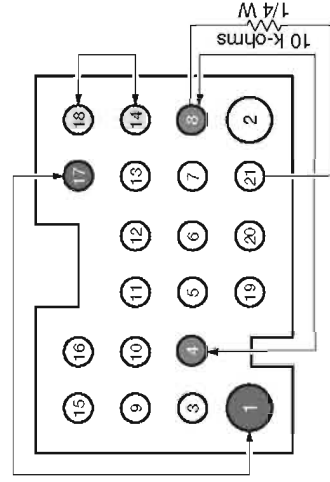

DOCK CONNECTOR

DOCK: NG NNNN

All Y / すべて Y = "OK"  
Others / その他 = "NG"

### 14. DOCK

iPod 本体無しで、DOCK コネクタの検査を行うメニューです。

本機の電源を切った状態で、DOCK コネクタの 14 ピン (TX) と 18 ピン (RX)、1 ピン (PWR) と 17 ピン (ACCPW)、4 ピン (PDET) と 8 ピン (DGND) をショートさせます。また、21 ピン (DKID) と 8 ピン (DGND) の間に 10 k Ω、1/4 W 抵抗を接続します。(ショートさせる時は、必ず電源を切ってください。) ダイアグを起動して本メニューを選択します。

下記表示仕様に従って、チェック結果が表示されます。

**注意)** 検査後、ショートしたピンを必ず元の状態に戻してください。

Check item / チェック項目	Short pins / ショートピン	Result / 結果	Display / 表示
UART loop back test / UART ループバックテスト	Pins No.14 (TX) - No.18 (RX)	OK	Y
		NG	N
iPAP (iPod accessory power) detection / iPAP (iPod accessory power) 検出	Pins No.1 (PWR) - No.17 (ACCPW) pin No. 114	High = YES	Y
		Low = No	N
iPDET (iPod installation to DOCK) detection / iPDET (iPod installation to DOCK) 検出	Pins No.4 (PDET) - No.8 (DGND) pin No. 8	Low = installed / 装着	Y
		High = not installed / 非装着	N
DKID (DOCK ID) detection / DKID (DOCK ID) 検出	Pins No.21 (DKID) - No.8 (DGND) IC20 pin No. 141 * 10 k-ohms, 1/4 W pull down	10 k-ohms, 1/4 W pull down	Y
		Other	N

### BT VERSION

The DOCK (Bluetooth module) version is displayed.

### BT VERSION

DOCK (Bluetooth module) のバージョンが表示されます。


BT U:-----

### 15. HDMI INFORMATION

The HDMI informations are displayed.

### 15. HDMI INFORMATION

HDMI の情報が表示されます。

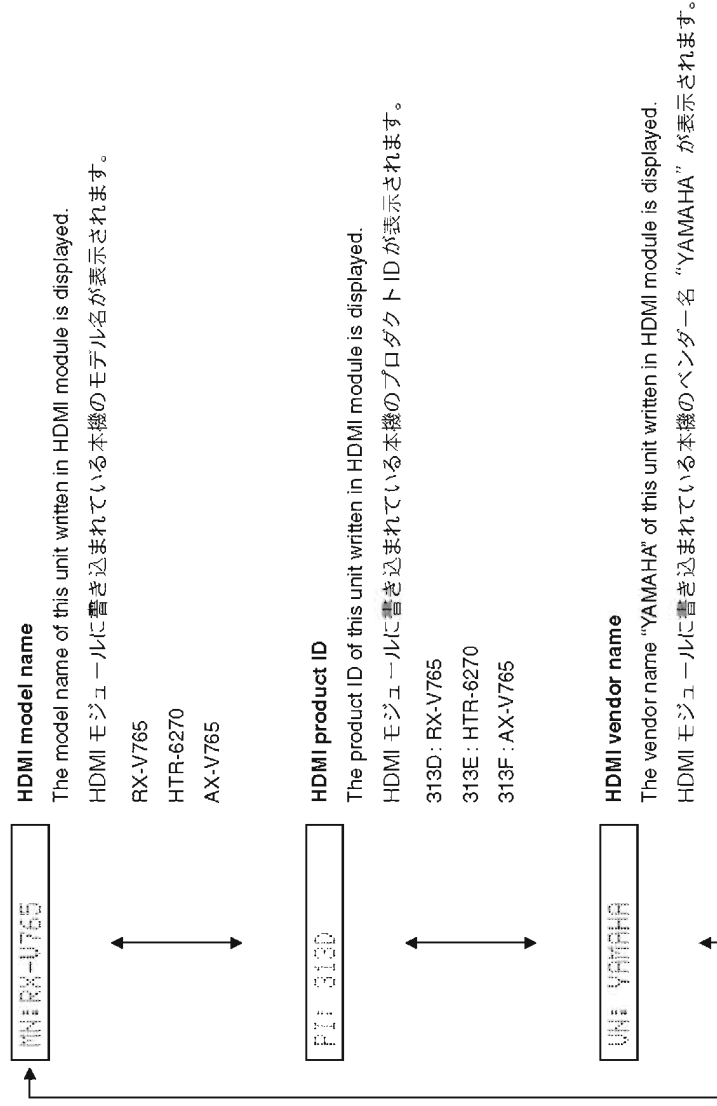

## 16. HDMI SELECT



Using the sub-menu, the selected input signal is output to HDMI OUT.


\* Support audio is set to "OTHER".

## 16. HDMI SELECT

サブメニューにより、選択された入力信号が HDMI OUT へ出力されます。

※ SUPPORT AUDIO は "OTHER" に設定されます。

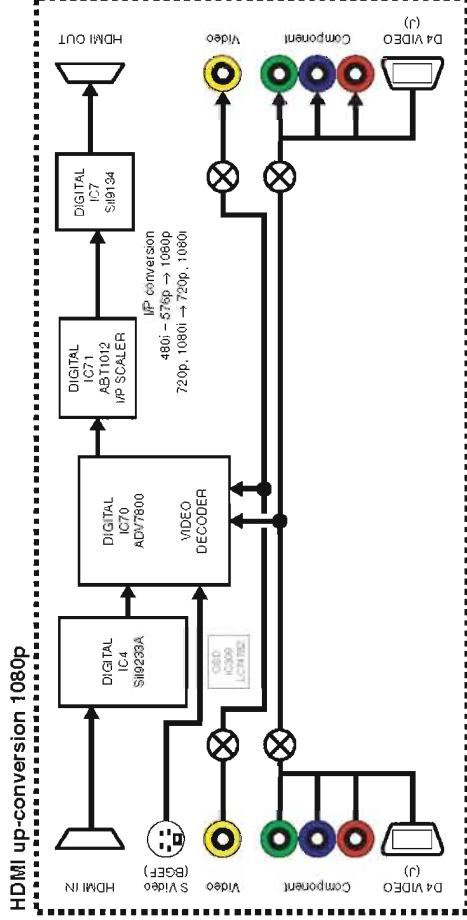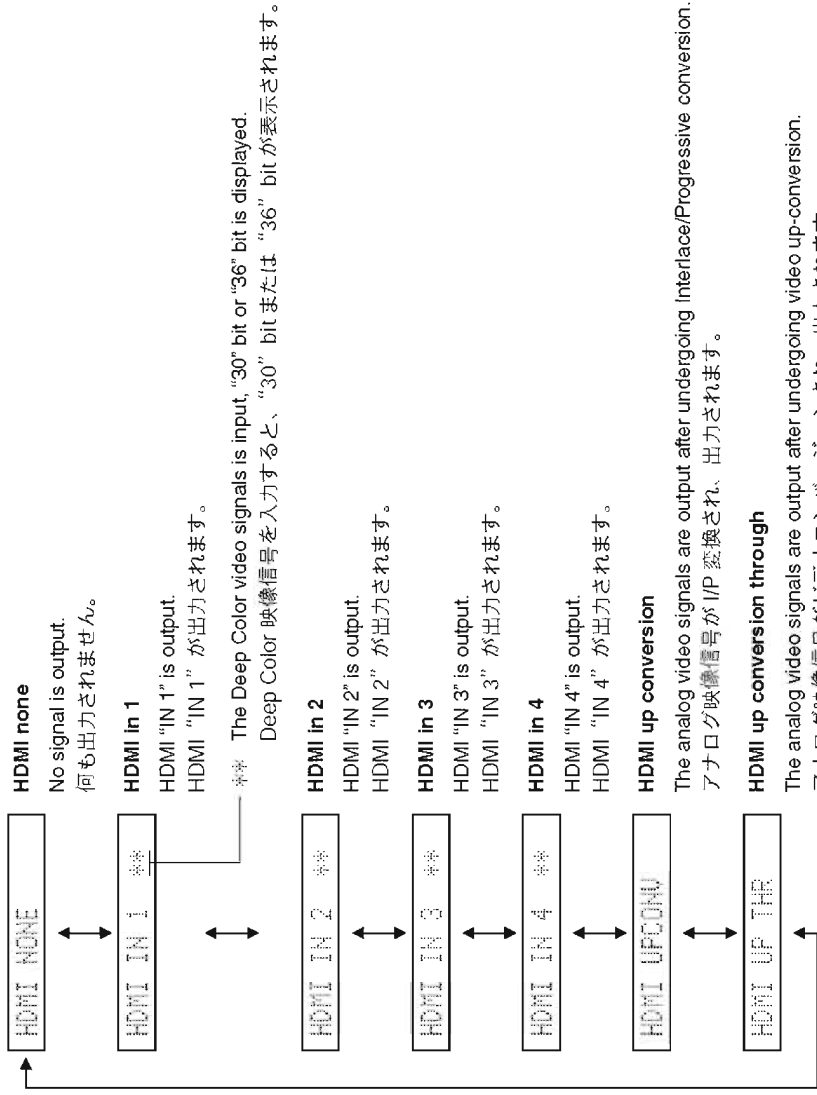

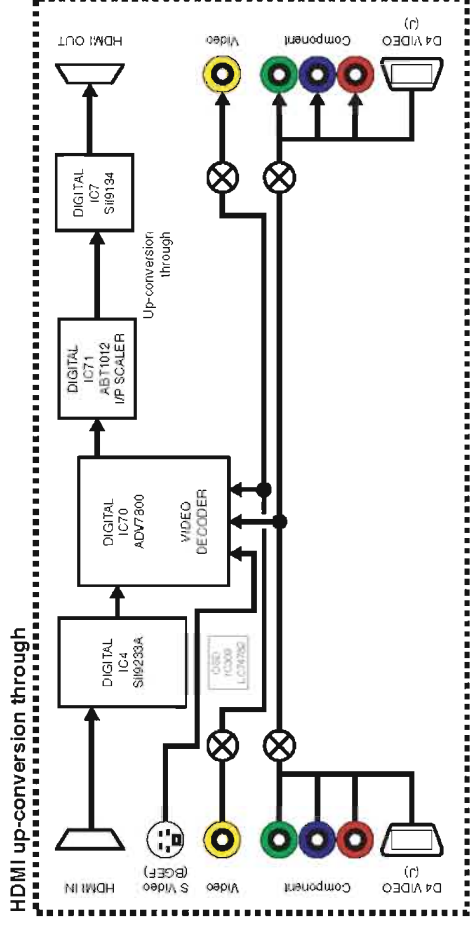

**17. USB**

Not applied to these models.

**17. USB**

このモデルには適用されません。

USB file 1

17:USB file 1

USB file 1

USB file 2

17:USB file 2

USB file 2

**18. IF STATUS (Input function status)**

Not applied to these models.

**18. IF STATUS (Input function status)**

このモデルには適用されません。

DSP status

DST:7700020000

DSP status

### 19. BUS CHECK

Communication and bus line connection between devices on the DSP P.C.B. are checked.

### 19. BUS CHECK

DSP P.C.B.内のデバイス間の通信とバスラインの接続をチェックします。

#### TI (DSP) BUS check

Communication and bus line connection between microprocessor (IC20) and TI (DSP, IC44) are checked.

#### TI (DSP) BUS check

マイコン (IC20) と TI (DSP, IC44) の通信・バスラインの接続をチェックします。

TI BUS:NoEr

**NoEr :** No error detected.

**Boot :** When "Boot" is displayed for a few seconds or "Boot" and "NoEr" are displayed alternately, there is possibility that an error occurs.

**NoEr :** 不良検出なし

**Boot :** "Boot" が数秒間表示されるまたは "Boot" と "NoEr" が交互に表示される場合は、異常が発生している可能性があります。

#### BF LOOP :

Not applied to these models.

#### BF LOOP :

このモデルには適用されません。

BF LOOP:

### 20. NO MENU (Invalidity)

Invalidity

### 20. NO MENU (Invalidity)

### 21. PROTECTION HISTORY


The history of protection function is displayed.

Select this menu and press the "STRAIGHT" key, and the history will be erased.

### 21. PROTECTION HISTORY

過去のプロテクション履歴が表示されます。

サブメニューを選んでから、"STRAIGHT" キーを押すと履歴は消去されます。

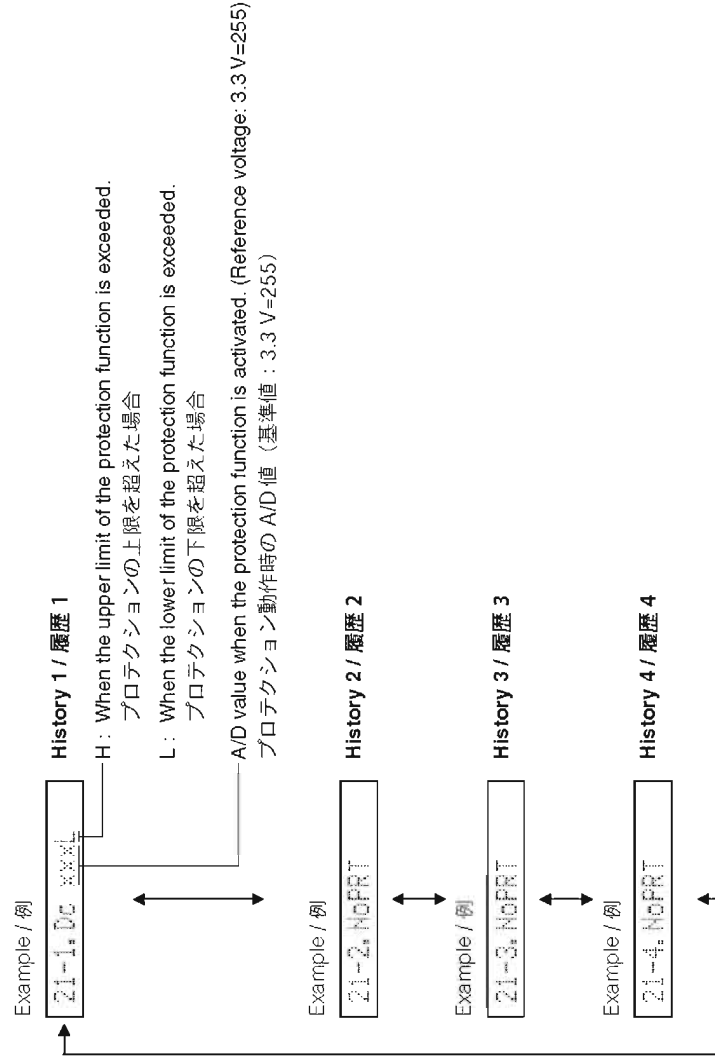

**22. NO MENU (Invalidity)****22. NO MENU (Invalidity)**

Invalidity

**23. UPDATE**

Not applied to these models.

**23. UPDATE**

このモデルには適用されません。

**UPDATE TI****UPDATE TI**

23.UPDATE TI

**24. FACTORY PRESET**

This menu is used to reserve and inhibit initialization of the back-up IC.

**24. FACTORY PRESET**

バックアップ用 IC（音場プログラムのパラメーターやセットメニュー内容等）の初期化を予約／禁止します。

24.PRESET INHI



24.PRESET RESV

**PRESET INHIBIT** (Initialization inhibited) / **PRESET INHIBIT** (初期化禁止)

Back-up IC initialization is not executed. Select this sub-menu to protect the values set by the user.

バックアップ IC の初期化は行われません。ユーザーの設定値を保護するときは、こちらを選択してください。

**PRESET RESERVED** (Initialization reserved) / **PRESET RESERVED** (初期化予約)

Initialization of the back-up IC is reserved. (Actually, initialization is executed the next time that the power is turned on.) Select this sub-menu to reset to the original factory settings or to reset the back-up IC. Any protection history will be cleared.

バックアップ IC の初期化が予約されます。（実際に初期化されるのは、次回の電源投入時です。）工場出荷時やバックアップ IC をリセットしたいときは、こちらを選択してください。このとき、プロテクション履歴も初期化されます。

**CAUTION:** Before setting to the PRESET RESERVED, write down the existing preset memory content of the tuner.**注意：** PRESET RESERVED を選んで初期化をする前に、チューナーのユーザーメモリー内容を書き写してください。

(This is because setting to the PRESET RESERVED will cause the user memory content to be erased.)

(初期化をすると、ユーザーメモリーの内容は消えてしまいます。)

## 25. ROM VER/SUM/PORT

The firmware version, checksum values, model name and destination are displayed.

The checksum is obtained by adding the data at every 8-bit for each program area and expressing the result as a 4-figure hexadecimal data.


\* The figures in the diagram are given as reference only.

## 25. ROM VER/SUM/PORT

ファームウェアのバージョン、チェックサム、モデル名、仕向け先が表示されます。

チェックサムは、プログラムエリア別にデータを8ビットごとに加算していき、4桁の16進データで現したものです。

※ 図中の数値は参考例です。

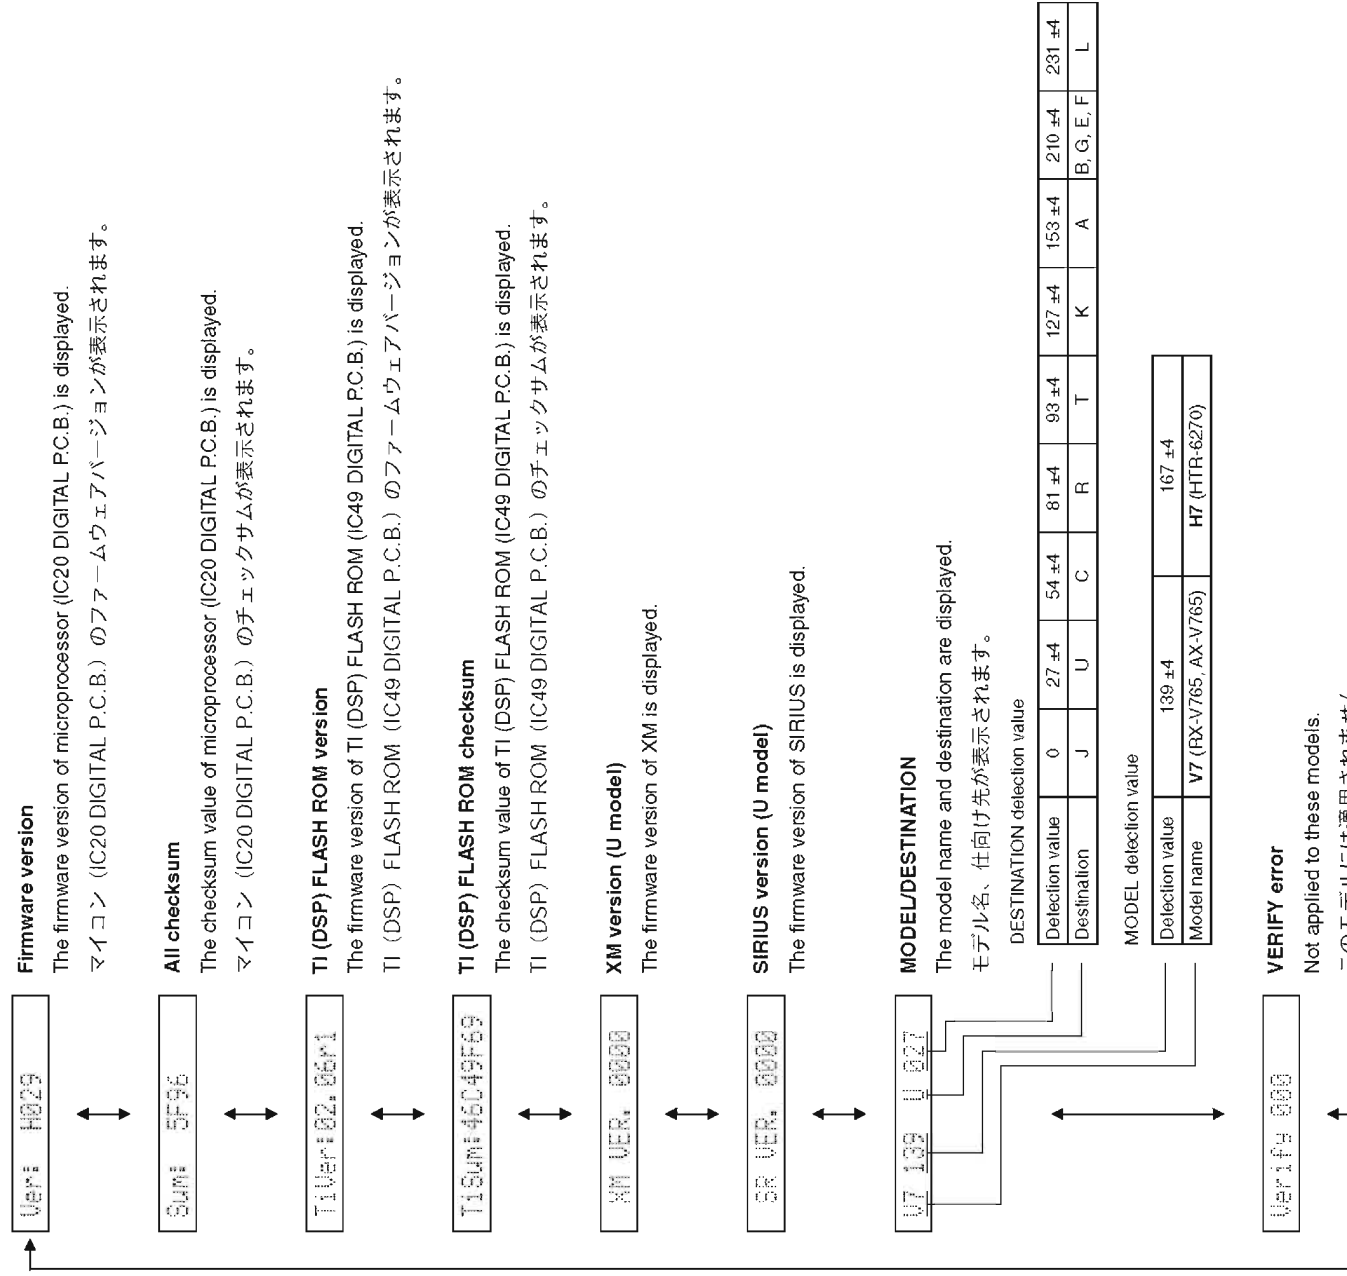




## ■ CONFIRMATION OF IDLING CURRENT OF AMP UNIT / アンプユニットのアイドリング電流の確認


- 電源投入直後、R1152 (SURROUND BACK Rch)、R1154 (SURROUND Rch)、R1150 (FRONT Rch)、R1148 (CENTER)、R1149 (FRONT Lch)、R1153 (SURROUND Lch)、R1151 (SURROUND BACK Lch) の端子間電圧を測定し、0.1 mV から 10.0 mV の間であることを確認してください。
- 電圧が 10 mV を超えている場合は、R1104 (SURROUND BACK Rch)、R1106 (SURROUND Rch)、R1102 (FRONT Rch)、R1100 (CENTER)、R1101 (FRONT Lch)、R1105 (SURROUND Lch)、R1103 (SURROUND BACK Lch) をカットし、電圧を再確認してください。

### 注意


- パワーアンプ修理後に 10.0mV を超えている場合は、抵抗をカットする前に故障箇所を調べてください。
- 60 分後、電圧が 0.2 mV ~ 15.0 mV であることを確認してください。



R1152 (SURROUND BACK Rch)  
R1154 (SURROUND Rch)  
R1150 (FRONT Rch)  
R1148 (CENTER)  
R1149 (FRONT Lch)  
R1153 (SURROUND Lch)  
R1151 (SURROUND BACK Lch)



R1104 (SURROUND BACK Rch)  
R1106 (SURROUND Rch)  
R1102 (FRONT Rch)  
R1100 (CENTER)  
R1101 (FRONT Lch)  
R1105 (SURROUND Lch)  
R1103 (SURROUND BACK Lch)

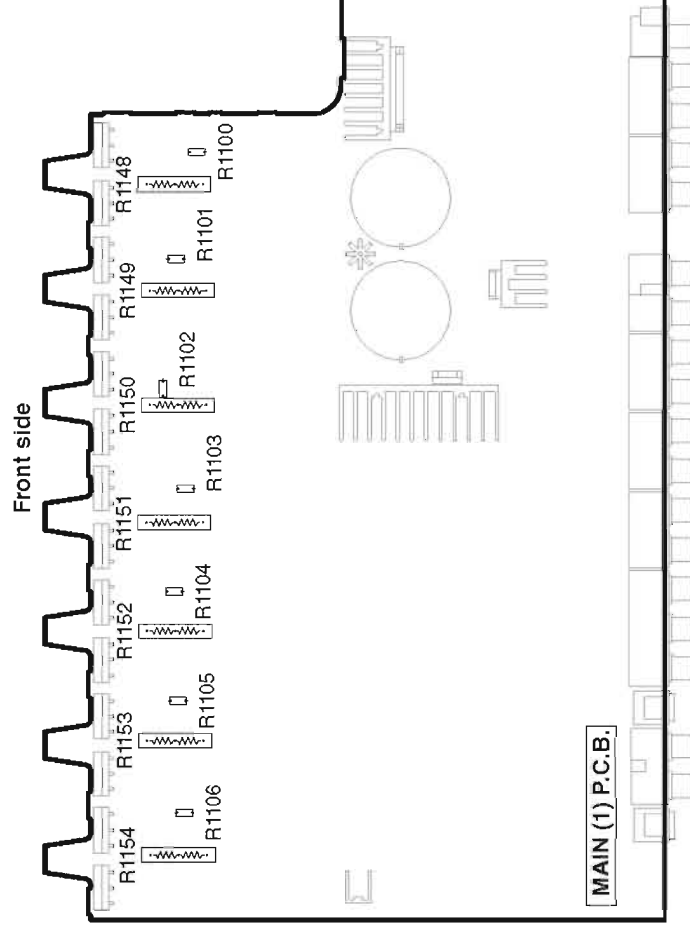

## ■ DISPLAY DATA

- V4001 : 18-MT-09GNK (OPERATION P.C.B.)







## ● PIN CONNECTION

Pin No.	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35
Connection	F2	NX	NP	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24	P25	P26	P27	P28	P29	P30	P31	

Pin No.	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
Connection	P32	P33	P34	P35	P36	NX	NX	NX	NX	NX	NX	NX	18G	17G	16G	15G	14G	13G	12G	11G	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G	NP	NP	NP	NP	F1

Note : 1) F1, F2 ..... Filament pin 2) NP ..... No pin 3) NX ..... No extend pin 4) 1G-18G ..... Grid pin

## ● GRID ASSIGNMENT

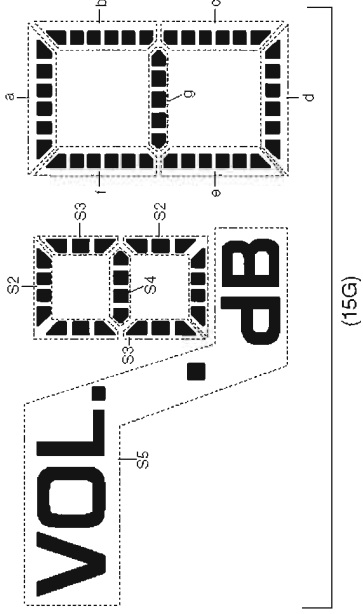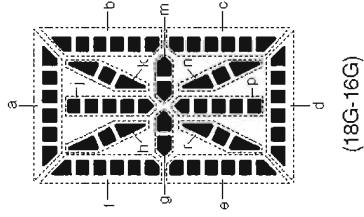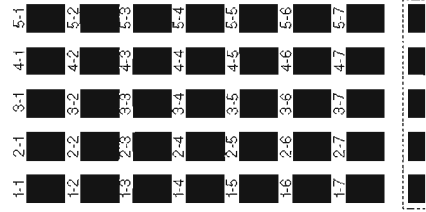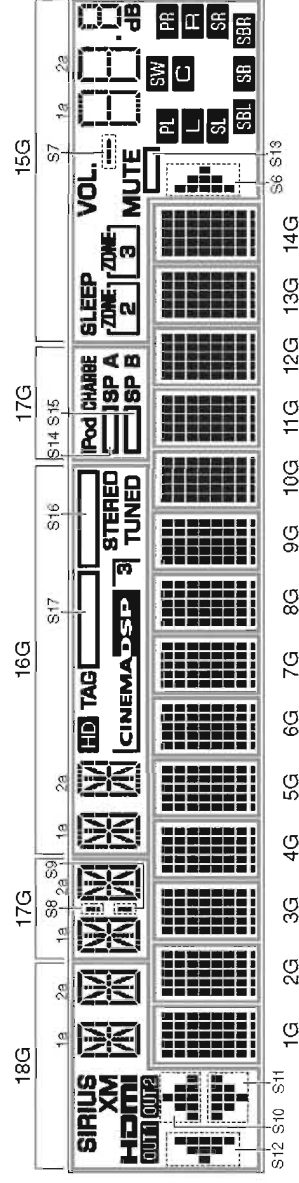

● ANODE CONNECTION



	18G	17G	16G	15G	1G-14G
P1	1a	1a	1a	S5	1-1
P2	1h	1h	1h	S7	2-1
P3	1j	1j	1j	1d	3-1
P4	1k	1k	1k	2d	4-1
P5	1b	1b	1b	S2	5-1
P6	1f	1f	1f	1e	1-2
P7	1m	1m	1m	2e	2-2
P8	1g	1g	1g	S3	3-2
P9	1c	1c	1c	1c	4-2
P10	1e	1e	1e	2c	5-2
P11	1r	1r	1r	S4	1-3
P12	1p	1p	1p	1g	2-3
P13	1n	1n	1n	2g	3-3
P14	1d	1d	1d	1f	4-3
P15	2a	2a	2a	2f	5-3
P16	2h	2h	2h	1b	1-4
P17	2j	2j	2j	2b	2-4
P18	2k	2k	2k	1a	3-4
P19	2b	2b	2b	2a	4-4
P20	2f	2f	2f	<b>PL</b>	5-4
P21	2m	2m	2m	<b>SW</b>	1-5
P22	2g	2g	2g	<b>RR</b>	2-5
P23	2c	2c	2c	<b>L</b>	3-5
P24	2e	2e	2e	<b>C</b>	4-5
P25	2r	2r	2r	<b>R</b>	5-5
P26	2p	2p	2p	<b>SL</b>	1-6
P27	2n	2n	2n	<b>SR</b>	2-6
P28	2d	2d	2d	<b>SBL</b>	3-6
P29	<b>SIRIUS</b>	S8	<b>HD</b>	<b>BB</b>	4-6
P30	<b>XM</b>	S9	<b>TAG</b>	<b>SCR</b>	5-6
P31	<b>HDMI</b>	<b>Pod CHARGE</b>	<b>CINEMA DSP</b>	S6	1-7
P32	<b>OUT</b>	<b>BP B</b>	<b>a</b>	S13	2-7
P33	<b>OUT</b>	S15	<b>STEREO</b>	<b>MUTE</b>	3-7
P34	S12	<b>SP A</b>	<b>TUNED</b>	<b>ZONE 2</b>	4-7
P35	S10	S14	S17	<b>ZONE 3</b>	5-7
P36	S11	-	S16	<b>SLEEP</b>	S1

**IC DATA**

**IC44:** D70YE101BRFP266 (DIGITAL P.C.B.)

Decoder/Post processor

\* No replacement part available.

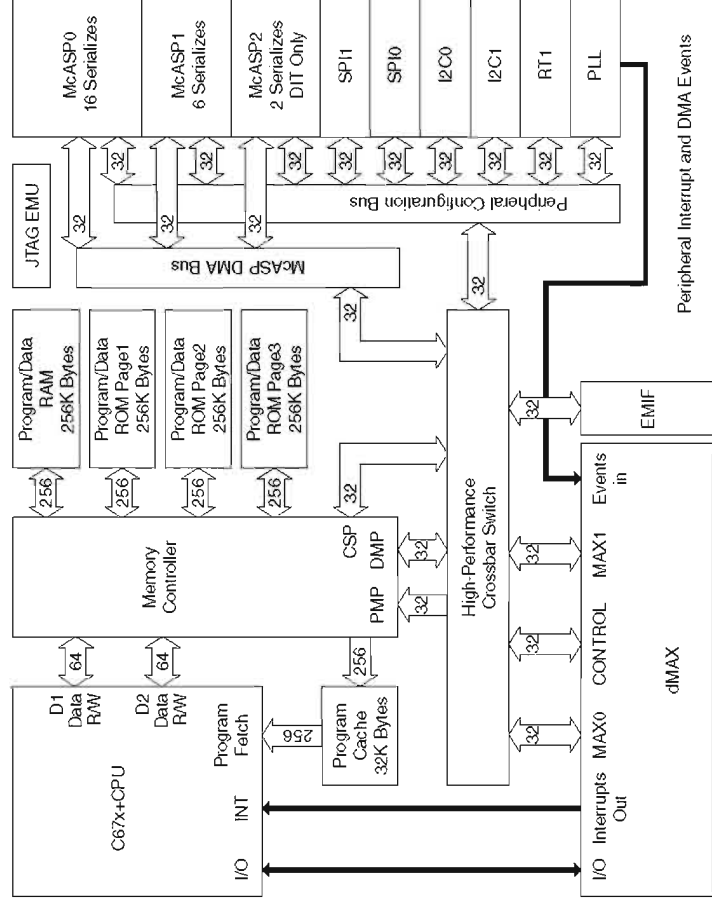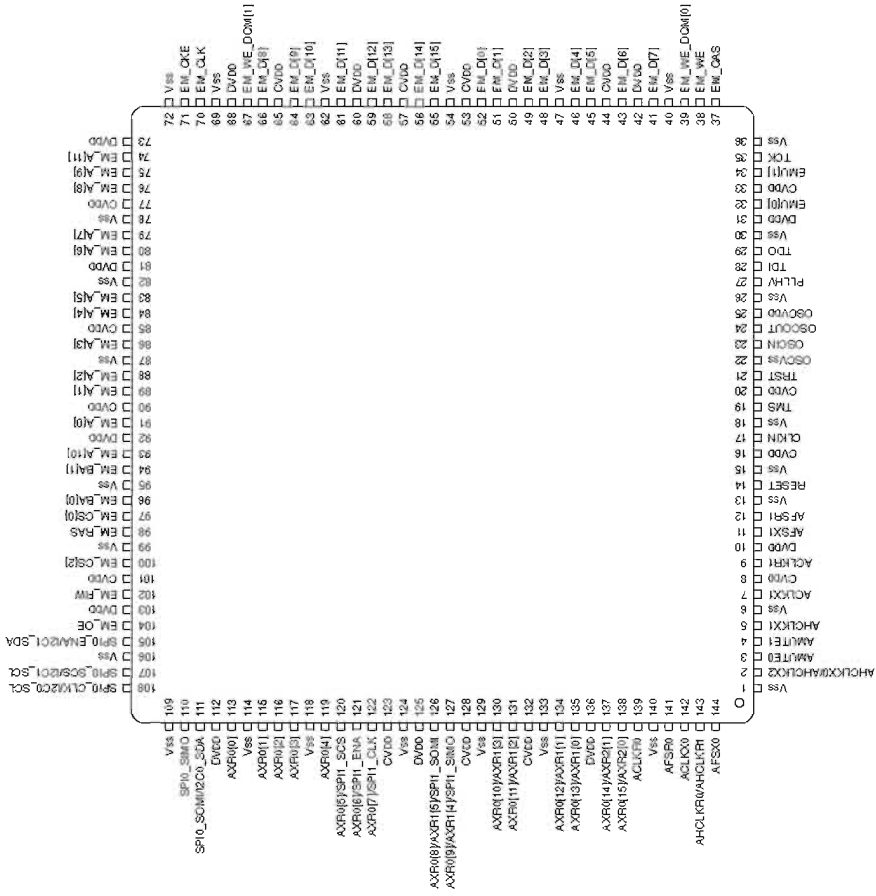



No.	Function Name (P.C.B.)	TYPE <sup>(1)</sup>	PULL <sup>(2)</sup>	GPIO <sup>(3)</sup>	Detail of Function
1	VSS				
2	AHCLKX0/AHCLKX2	IO	-	Y	McASP0 and McASP2 transmit master clock
3	AMUTE0	IO	-	Y	McASP0 mute output
4	AMUTE1	IO	-	Y	McASP1 mute output
5	AHCLKX1	IO	-	Y	McASP1 transmit master clock
6	VSS				
7	ACLKX1	IO	-	Y	McASP1 transmit bit clock
8	CVDD				
9	ACLKR1	IO	-	Y	McASP1 receive bit clock
10	DVDD				
11	AFSX1	IO	-	Y	McASP1 transmit frame Sync (L/R clock)
12	AFSR1	IO	-	Y	McASP1 receive frame Sync (L/R clock)
13	VSS				
14	RESET	IO	-	N	Device reset pin
15	VSS				
16	CVDD				
17	CLKIN	IO	-	N	Alternate clock input (3.3-V LVCMOS input)
18	VSS				
19	TMS	IO	IPU	N	Test mode select
20	CVDD				
21	TRST	IO	IPU	N	Test reset
22	OSCVSS	PWR	-	N	Oscillator Vss tap point (for filter only)
23	OSCIN	IO	-	N	1.2-V oscillator input
24	NC	O	-	N	
25	OSCVDD	PWR	-	N	Oscillator 1.2-V Vpp tap point (for filter only)
26	VSS				
27	PLLHV	PWR	-	N	PLL 3.3-V supply input (requires external filter)
28	TDI	IO	IPU	N	Test data in
29	TDO	OZ	IPU	N	Test data out
30	VSS				
31	DVDD				
32	EMU[0]	IO	IPU	N	Emulation pin 0
33	CVDD				
34	EMU[1]	IO	IPU	N	Emulation pin 1
35	TCK	IO	IPU	N	Test clock
36	Ground(Vss)				
37	EM_CAS	O	-	N	SDRAM column address strobe
38	EM_WE	O	-	N	SDRAM write enable
39	EM_WE_DQM[0]	O	-	N	Write enable or byte enable for EM_D [7:0]
40	VSS				
41	EM_D[7]	IO	-	N	EMIF data bus [lower 16-bits]
42	DVDD				
43	EM_D[6]	IO	-	N	EMIF data bus [lower 16-bits]
44	CVDD				
45	EM_D[5]	IO	-	N	EMIF data bus [lower 16-bits]
46	EM_D[4]	IO	-	N	EMIF data bus [lower 16-bits]
47	VSS				
48	EM_D[3]	IO	-	N	EMIF data bus [lower 16-bits]
49	EM_D[2]	IO	-	N	EMIF data bus [lower 16-bits]
50	DVDD				
51	EM_D[1]	IO	-	N	EMIF data bus [lower 16-bits]
52	EM_D[0]	IO	-	N	EMIF data bus [lower 16-bits]
53	CVDD				
54	VSS				
55	EM_D[15]	IO	-	N	EMIF data bus [lower 16-bits]
56	EM_D[14]	IO	-	N	EMIF data bus [lower 16-bits]
57	CVDD				
58	EM_D[13]	IO	-	N	EMIF data bus [lower 16-bits]
59	EM_D[12]	IO	-	N	EMIF data bus [lower 16-bits]
60	DVDD				
61	EM_D[11]	IO	-	N	EMIF data bus [lower 16-bits]

No.	Function Name (P.C.B.)	TYPE <sup>(1)</sup>	PULL <sup>(2)</sup>	GPIO <sup>(3)</sup>	Detail of Function
62	VSS				
63	EM_D[10]	IO	--	N	EMIF data bus [lower 16-Bits]
64	EM_D[9]	IO	--	N	EMIF data bus [lower 16-Bits]
65	CVDD				
66	EM_D[8]	IO	--	N	EMIF data bus [lower 16-bits]
67	EM_WE_DQ[M1]	O	--	N	Write enable or byte enable for EM_D [15:8]
68	DVDD				
69	VSS				
70	EM_CLK	O	--	N	SDRAM clock
71	EM_CKE	O	--	N	SDRAM clock enable
72	VSS				
73	DVDD				
74	EM_A[11]	O	--	N	EMIF address bus
75	EM_A[9]	O	--	N	EMIF address bus
76	EM_A[8]	O	--	N	EMIF address bus
77	CVDD				
78	VSS				
79	EM_A[7]	O	--	N	EMIF address bus
80	EM_A[6]	O	--	N	EMIF address bus
81	DVDD				
82	VSS				
83	EM_A[5]	O	--	N	EMIF address bus
84	EM_A[4]	O	--	N	EMIF address bus
85	CVDD				
86	EM_A[3]	O	--	N	EMIF address bus
87	VSS				
88	EM_A[2]	O	--	N	EMIF address bus
89	EM_A[1]	O	--	N	EMIF address bus
90	CVDD				
91	EM_A[0]	O	--	N	EMIF address bus
92	DVDD				
93	EM_A[10]	O	--	N	EMIF address bus
94	EM_BA[1]	O	--	N	SDRAM bank address and asynchronous memory Low-Order address
95	VSS				
96	EM_BA[0]	O	--	N	SDRAM bank address and asynchronous memory Low-Order address
97	EM_CS[0]	O	--	N	SDRAM chip select
98	EM_RAS	O	--	N	SDRAM row address strobe
99	VSS				
100	EM_CS[2]	O	--	N	Asynchronous memory chip Select
101	CVDD				
102	NC	O	--	N	Asynchronous memory read/hot write
103	DVDD				
104	EM_OE	O	--	N	SDRAM output enable
105	SPI0_ENA/I2C0_SDA	IO	--	Y	SPI0 enable (ready) or I2C1 serial data
106	VSS				
107	SPI0_ENA/I2C1_SCL	IO	--	Y	SPI0 enable (ready) or I2C1 serial clock
108	SPI0_CLK/I2C0_SCL	IO	--	Y	SPI0 serial clock or I2C0 serial clock
109	VSS				
110	SPI0_SIMO	IO	--	Y	SPI0 data pin slave in master out
111	SPI0_SOMI/I2C0_SDA	IO	--	Y	SPI0 data pin slave out master in or I2C0 serial data
112	DVDD				
113	AXR0[0]	IO	--	Y	McASP0 serial data 0
114	VSS				
115	AXR0[1]	IO	--	Y	McASP0 serial data 1
116	AXR0[2]	IO	--	Y	McASP0 serial data 2
117	AXR0[3]	IO	--	Y	McASP0 serial data 3
118	VSS				
119	AXR0[4]	IO	--	Y	McASP0 serial data 4
120	SPI1_SCS	IO	--	Y	McASP0 serial data 5 or SPI1 slave chip select
121	SPI1_ENA	IO	--	Y	McASP0 serial data 6 or SPI1 enable (ready)
122	SPI1_CLK	IO	--	Y	McASP0 serial data 7 or SPI1 serial clock

No.	Function Name (P.C.B.)	TYPE <sup>(1)</sup>	PULL <sup>(2)</sup>	GPIO <sup>(3)</sup>	Detail of Function
123	CVDD				
124	VSS				
125	DVDD				
126	/SPI1_SOMI	IO	–	Y	McASP0 serial data 8 or McASP1 serial data 5 or SPI1 data pin slave out master in
127	/SPI1_SIMO	IO	–	Y	McASP0 serial data 9 or McASP1 serial data 4 or SPI1 data pin slave in master out
128	CVDD				
129	VSS				
130	AXR0[10]	IO	–	Y	McASP0 serial data 10 or McASP1 serial data 3
131	AXR0[11]	IO	–	Y	McASP0 serial data 11 or McASP1 serial data 2
132	CVDD				
133	VSS				
134	AXR0[12]	IO	–	Y	McASP0 serial data 12 or McASP1 serial data 1
135	AXR0[13]	IO	–	Y	McASP0 serial data 13 or McASP1 serial data 0
136	DVDD				
137	AXR0[14]	IO	–	Y	McASP0 serial data 14 or McASP2 serial data 1
138	AXR0[15]	IO	–	Y	McASP0 serial data 15 or McASP2 serial data 0
139	ACLKR0	IO	–	Y	McASP0 receive bit clock
140	VSS				
141	AFSR0	IO	–	Y	McASP0 receive frame Sync (L/R clock)
142	ACLKX0	IO	–	Y	McASP0 transmit bit clock
143	AHCLKR0/AHCLKR1	IO	–	Y	McASP0 and McASP1 receive master clock
144	AFSX0	IO	–	Y	McASP0 transmit frame Sync (L/R clock)

RX-V765/HTR-6270/AX-V765

IC402: M66003-0131FP (OPERATION P.C.B.)  
FL display driver

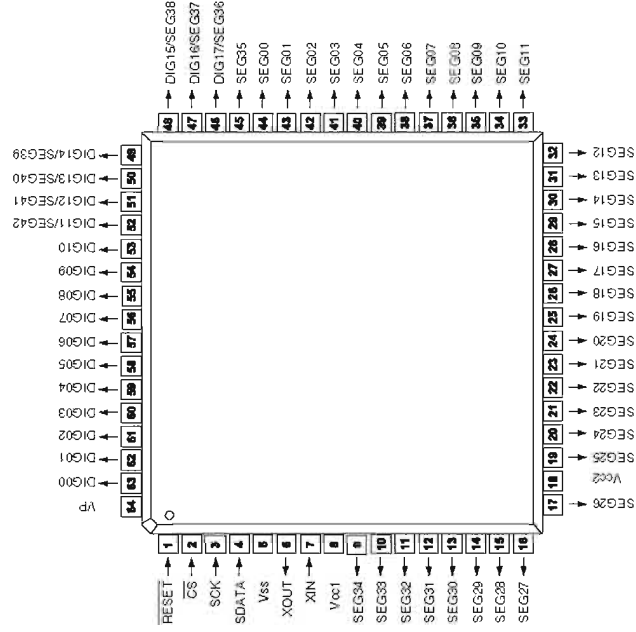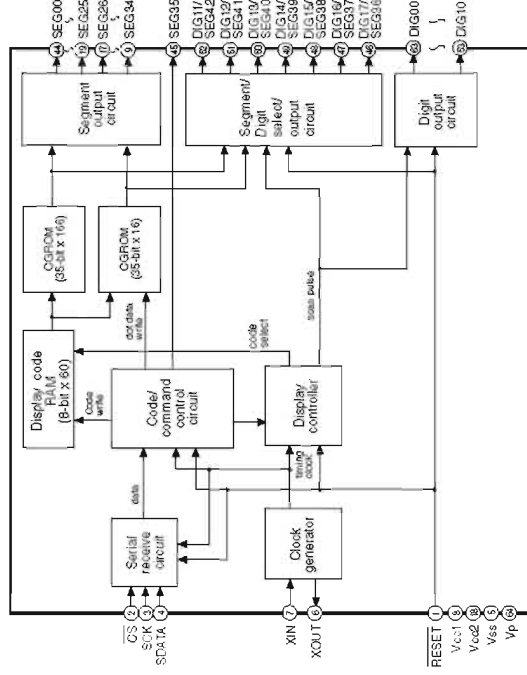



Pin No.	Port Name	Function Name	I/O	Detail of Function
1	RESET	/RESET	Reset input	When "L" M66003 is initialized.
2	CS	/CEFL	Chip select input	When "L" communication with the MCU is possible.
3	SCK	CKFL	Shift clock input	When "H", any instruction from the MCU is neglected. Serial input data is taken and shifted by the positive edge of SCK.
4	SDATA	DFTL	Serial data input	
5	Vss		GND (0V)	
6	XOUT		Clock out	When use as a CR oscillator, connect external resistor and capacitor.
7	XIN		Clock in	When use an external clock input external clock to XIN, and XOUT must be opened.



P in No.	Port Name	Function Name	I/O	Detail of Function
8	Vcc1	VDD		Positive power supply for internal logic.
9	SEG34	P11		
10	SEG33	P2		
11	SEG32	P3		
12	SEG31	P4		
13	SEG30	P5		
14	SEG29	P6		
15	SEG28	P7		
16	SEG27	P8		
17	SEG26	P9		
18	Vcc2	VDD		Positive power supply for DIG and SEG outputs.
19	SEG25	P10		
20	SEG24	P11		
21	SEG23	P12		
22	SEG22	P13		
23	SEG21	P14		
24	SEG20	P15		
25	SEG19	P16		
26	SEG18	P17		
27	SEG17	P18		
28	SEG16	P19		
29	SEG15	P20		
30	SEG14	P21		
31	SEG13	P22		
32	SEG12	P23		
33	SEG11	P24		
34	SEG10	P25		
35	SEG09	P26		
36	SEG08	P27		
37	SEG07	P28		
38	SEG06	P29		
39	SEG05	P30		
40	SEG04	P31		
41	SEG03	P32		
42	SEG02	P33		
43	SEG01	P34		
44	SEG00	P35		
45	SEG35	P36		
46	SEG36	P37		
47	DIG16/SEG37	G17		
48	DIG15/SEG38	G16		
49	DIG14/SEG39	G15		
50	DIG13/SEG40	G14		
51	DIG12/SEG41	G13		
52	DIG11/SEG42	G12		
53	DIG10	G11		
54	DIG09	G10		
55	DIG08	G9		
56	DIG07	G8		
57	DIG06	G7		
58	DIG05	G6		
59	DIG04	G5		
60	DIG03	G4		
61	DIG02	G3		
62	DIG01	G2		
63	DIG00	G1		
64	VP	VP		Negative power supply to pull down.

RX-V765/HTR-6270/AX-V765

**IC41:** LC89058WD-E (DIGITAL P.C.B.)  
Digital audio interface receiver

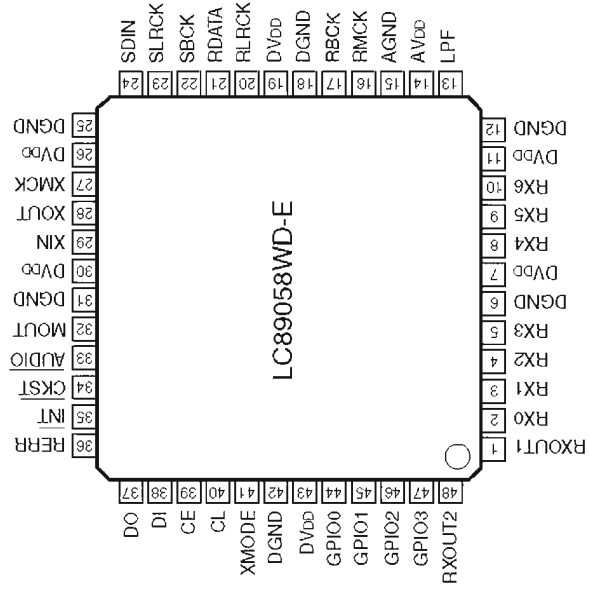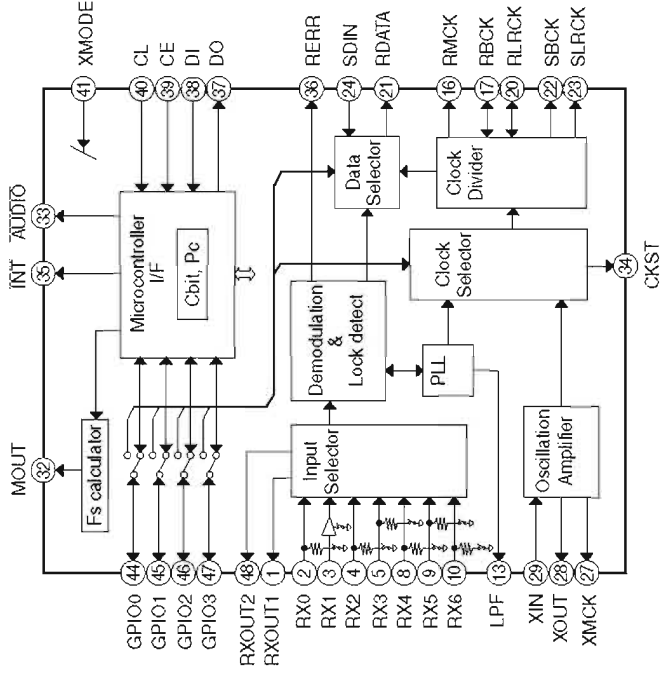

Pin No.	Function Name	I/O	Detail of Function
1	RXOUT1	O	RX0-6 input S/PDIF through output pin 1
2	RX0	I <sub>s</sub> (pd)	5V withstand voltage TIL input level compatible S/PDIF input pin (connected to GND when RX1 is set)
3	RX1	I(pd)	Co-axial compatible S/PDIF input pin (supported demodulation sampling frequency of up to 96 kHz)
4	RX2	I <sub>s</sub> (pd)	5V withstand voltage TIL input level compatible S/PDIF input pin (connected to GND when RX1 is set)
5	RX3	I <sub>s</sub> (pd)	5V withstand voltage TIL input level compatible S/PDIF input pin
6	DGND		Digital GND
7	DVDD		Digital power supply (3.3V)
8	RX4	I <sub>s</sub> (pd)	5V tolerable TIL input level compatible S/PDIF input pin
9	RX5	I <sub>s</sub> (pd)	5V tolerable TIL input level compatible S/PDIF input pin
10	RX6	I <sub>s</sub> (pd)	5V tolerable TIL input level compatible S/PDIF input pin
11	DVDD		Digital power supply (3.3V)
12	DGND		Digital GND
13	LPF	O	PLL loop filter connection pin
14	AVDD		Analog power supply (3.3V)
15	AGND		Analog GND
16	RMCK	O	R system clock output pin (VCO, 512fs, XIN)
17	RBCK	O/I	R system bit clock 1/0 pin (64fs)
18	DGND		Digital GND
19	DVDD		Digital power supply (3.3V)
20	RLRCK	O/I	R system LR clock 1/0 pin (fs)
21	RDATA	O	Serial audio data output pin
22	SBCK	O	S system bit clock output pin (16fs, 32fs, 64fs, 128fs)
23	SLRCK	O	S system LR clock output pin (fs/4, fs/2, fs, 2fs)
24	SDIN	I <sub>s</sub>	External serial audio data input pin
25	DGND		Digital GND
26	DVDD		Digital power supply (3.3V)
27	XMCK	O	Oscillation amplifier clock output pin
28	XOUT	O	Output pin connected to the resonator
29	XIN	I	External clock input pin, connected to the resonator (12.288 MHz or 24.576 MHz)
30	DVDD		Digital power supply (3.3V)
31	DGND		Digital GND
32	MOUT	I/O	Emphasis information II input fs, monitor output II chip address setting input pin
33	AUDIO	I/O	Channel status bit 1 output II chip address setting input pin
34	CKST	I/O	Clock switching transition period signal output II master/slave setting input pin
35	INT	I/O	Microcontroller interrupt signal output II pins 44-48 I/O setting input pin
36	RERR	O	PLL lock error and data error flag output pin
37	DO	O	CCB microcontroller I/F, read data output pin (3-state)
38	DI	I <sub>s</sub>	CCB microcontroller I/F, write data input pin
39	CE	I <sub>s</sub>	CCB microcontroller I/F, chip enable input pin
40	CL	I <sub>s</sub>	CCB microcontroller I/F, clock input pin
41	XMODE	I <sub>s</sub>	System reset input pin
42	DGND		Digital GND
43	DVDD		Digital power supply (3.3V)
44	GPIO0	O/I	General-purpose I/O pin II selector input pin (output referred to RMCK pin)
45	GPIO1	O/I	General-purpose I/O pin II selector input pin (output referred to RBCK pin)
46	GPIO2	O/I	General-purpose I/O pin II selector input pin (output referred to RLRCK pin)
47	GPIO3	O/I	General-purpose I/O pin II selector input pin (output referred to RDATA pin)
48	RXOUT2	O	RX0-6 input S/PDIF through output pin 2

\* Input voltage: 1 = -0.3 to 3.6V, Is = -0.3 to 5.5V

\* Output voltage: 0 = -0.3 to 3.6V

\* Pins 2, 4, 5, 8, 9, 10, 24, 38, 39, 40, and 41 have an internal pull-down resistor (Pd).

Their level is fixed when they are unselected.

\* Pins 32 and 33 are input pins for chip address setting when pin 41 is held at the low level.

\* Pin 34 serves as the input pin for designating the master or slave when pin 41 is held at the low level.


\* Pin 35 serves as the input pin for configuring the I/O of pins 44 to 47 when pin 41 is held at the low level.

\* The DVDD and AVDD pins must be held at the same level and turned on and off at the same timing to preclude latch-up conditions.

RX-V765/HTR-6270/AX-V765

IC153: R2A15220FP (MAIN P.C.B.)


8-channel electronic volume with 1:1 input selector and tone control

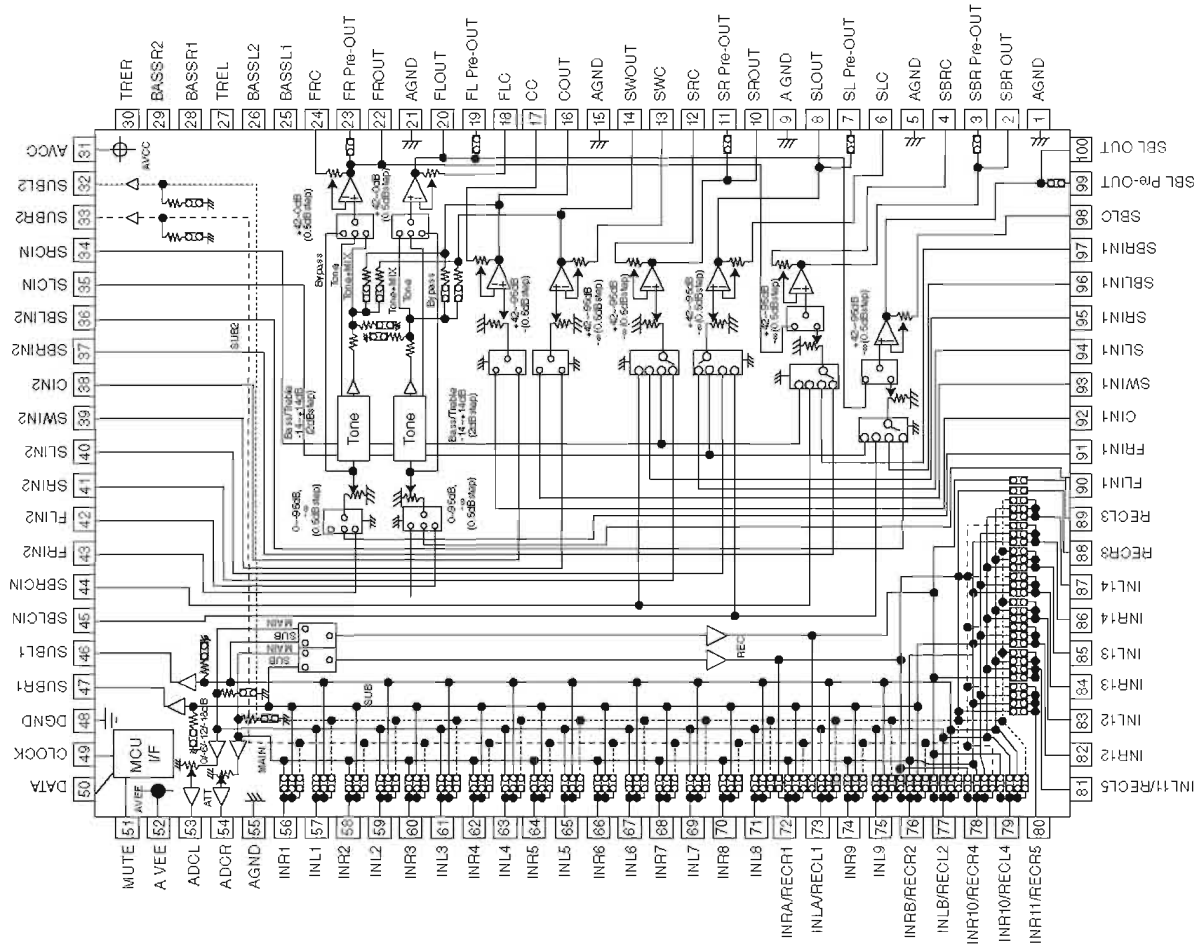


Pin No.	Port name	Function Name	Detail of Function
1	AGND	AE	Analog ground of internal circuit
2	SBROUT	VOSBL	Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel
3	SBR Pre-OUT	VOPSBL	Pre-output pin of FL/FR/SL/SR/SBL/SBR channel
4	SBRC	AE	Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume
5	AGND	AE	Analog ground of internal circuit
6	SLC	VOPSR	Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume
7	SL Pre-OUT	VOSR	Pre-output pin of FL/FR/SL/SR/SBL/SBR channel
8	SLOUT	AE	Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel
9	AGND	AE	Analog ground of internal circuit
10	SROUT	VOSL	Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel
11	SR Pre-OUT	VOPSL	Pre-output pin of FL/FR/SL/SR/SBL/SBR channel
12	SRC	AE	Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume
13	SWC	AE	Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume
14	SWOUT	VOSW	Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel
15	AGND	AE	Analog ground of internal circuit
16	COUT	VOC	Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel
17	CC	AE	Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume
18	FLC	AE	Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume
19	FL Pre-OUT	VOPFR	Pre-output pin of FL/FR/SL/SR/SBL/SBR channel
20	FLOUT	VOFR	Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel
21	AGND	POE	Analog ground of internal circuit
22	FROUT	VOFL	Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel
23	FR Pre-OUT	VOPFL	Pre-output pin of FL/FR/SL/SR/SBL/SBR channel
24	FRC	AE	Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume
25	BASSL1	AE	Frequency characteristic setting pin of L/R channel tone control (Bass)
26	BASSL2	AE	Frequency characteristic setting pin of L/R channel tone control (Bass)
27	TREL	AE	Frequency characteristic setting pin of L/R channel tone control (Treble)
28	BASSR1	AE	Frequency characteristic setting pin of L/R channel tone control (Bass)
29	BASSR2	AE	Frequency characteristic setting pin of L/R channel tone control (Bass)
30	TRER	AE	Frequency characteristic setting pin of L/R channel tone control (Treble)
31	AVCC	VCC	Positive power supply to internal circuit
32	SUBL1	N.C.	Output pin for L/R channel SUB1/SUB2 output
33	SUBL2	N.C.	Output pin for L/R channel SUB1/SUB2 output
34	SRCIN	N.C.	3rd multi input pin for SBL/SBR/SL/SR channel volume that is able to swap SBR/SBL with SR/SL
35	SLCIN	N.C.	3rd multi input pin for SBL/SBR/SL/SR channel volume that is able to swap SBR/SBL with SR/SL
36	SBLIN2	8SBR	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
37	SBRIN2	8SBL	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
38	CIN2	8C	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
39	SWIN2	8SW	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
40	SLIN2	8SR	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
41	SRIN2	8SL	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
42	FLIN2	8FR	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
43	FRIN2	8FL	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
44	SBRCIN	Z2L	3rd multi input pin for SBL/SBR/SL/SR channel volume that is able to swap SBR/SBL with SR/SL
45	SBLCIN	Z2R	3rd multi input pin for SBL/SBR/SL/SR channel volume that is able to swap SBR/SBL with SR/SL
46	SUBL1	Z2R	Output pin for L/R channel SUB1/SUB2 output
47	SUBR1	Z2L	Output pin for L/R channel SUB1/SUB2 output
48	DGND	MG	Digital ground of internal circuit
49	DATA	VOL_SCK	Input pin of control data
50	CLOCK	VOL_MOSI	Input pin of control clock
51	MUTE	AE	Outside mute control pin
52	AVEE	-	Negative power supply to internal circuit
53	ADCL	ADR	Output pin for L/R channel ADC
54	ADCR	ADL	Output pin for L/R channel ADC
55	AGND	AE	Analog ground of internal circuit
56	INR1	AU2L	Input pin of L/R channel (Input selector)
57	INL1	AU2R	Input pin of L/R channel (Input selector)

P in No.	Port name	Function Name	Detail of Function
58	INR2	AU1L	Input pin of L/R channel (Input selector)
59	INL2	AU1R	Input pin of L/R channel (Input selector)
60	INR3	AV-6L	Input pin of L/R channel (Input selector)
61	INL3	AV-6R	Input pin of L/R channel (Input selector)
62	INR4	AV-5L	Input pin of L/R channel (Input selector)
63	INL4	AV-5R	Input pin of L/R channel (Input selector)
64	INR5	PHL	Input pin of L/R channel (Input selector)
65	INL5	PHR	Input pin of L/R channel (Input selector)
66	INR6	SRL	Input pin of L/R channel (Input selector)
67	INL6	SRR	Input pin of L/R channel (Input selector)
68	INR7	IPL	Input pin of L/R channel (Input selector)
69	INL7	IPR	Input pin of L/R channel (Input selector)
70	INR8	XML	Input pin of L/R channel (Input selector)
71	INL8	XMR	Input pin of L/R channel (Input selector)
72	INRA/RECR1	AV-OUT_L	Output pin for L/R channel (input selector)/Output pin for L/R channel REC output
73	INLA/RECL1	AV-OUT_R	Output pin for L/R channel (input selector)/Output pin for L/R channel REC output
74	INR9	USBL	Input pin of L/R channel (Input selector)
75	INL9	USBR	Input pin of L/R channel (Input selector)
76	INRB/RECR2	AOL	Output pin for L/R channel (input selector)/Output pin for L/R channel REC output
77	INLB/RECL2	AOR	Output pin for L/R channel (input selector)/Output pin for L/R channel REC output
78	INR10/RECR4	TUL	Output pin for L/R channel (input selector)/Output pin for L/R channel REC output
79	INL10/RECL4	TUR	Output pin for L/R channel (input selector)/Output pin for L/R channel REC output
80	INR11/RECR5	MIC	Output pin for L/R channel (input selector)/Output pin for L/R channel REC output
81	INL11/RECL5	AE	Output pin for L/R channel (input selector)/Output pin for L/R channel REC output
82	INR12	AUXL	Input pin of L/R channel (Input selector)
83	INL12	AUXR	Input pin of L/R channel (Input selector)
84	INR13	AE	Input pin of L/R channel (Input selector)
85	INL13	AE	Input pin of L/R channel (Input selector)
86	INR14	AE	Input pin of L/R channel (Input selector)
87	INL14	AE	Input pin of L/R channel (Input selector)
88	RECR3	N.C.	Output pin for L/R channel REC output
89	RECL3	N.C.	Output pin for L/R channel REC output
90	FLIN1	DAFR	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
91	FRIN1	DAFL	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
92	CIN1	DAC	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
93	SWIN1	DASW	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
94	SLIN1	DASR	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
95	SEIN1	DASL	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
96	SBLIN1	DASBR	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
97	SBRIN1	DASBL	Multi input pin of L/R/C/SW/SL/SR/SBL/SBR channel (Multi IN 1/2)
98	SBLC	AE	Connects capacitor for reducing click noise of L/R/C/SW/SL/SR/SBL/SBR channel volume
99	SBL Pre-OUT	VOPSBR	Pre-output pin of FL/FR/SL/SR/SBL/SBR channel
100	SBL OUT	VOSBR	Output pin of FL/FR/C/SW/SL/SR/SBL/SBR channel

**IC20:** iM3087BFKBGP (DIGITAL P.C.B.)  
Microprocessor

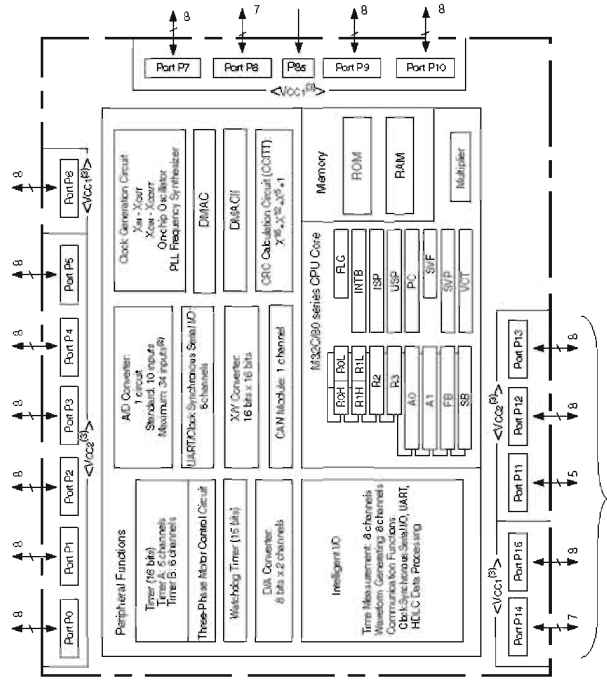

NOTES:  
 1. Port P1 to P15 are provided in the 144-pin package only.  
 2. Included in the 144-pin package only.  
 3. The supply voltage of MC32C90 (High-stability version) must be Vcc1/Vcc2.

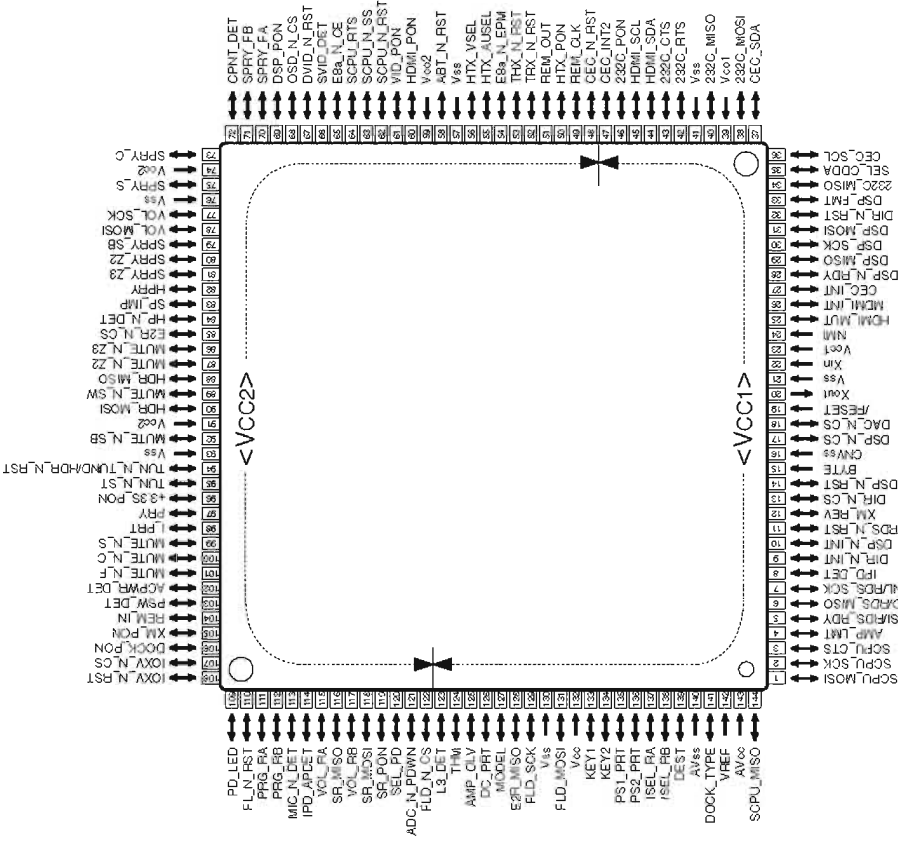

NOTES:  
 1. P70 /TR0007 /TR02 /SDA2 /SR02 /INPC16 /OUTC16  
 2. P70 and P71 are pins for the N-channel open drain output.  
 3. The supply voltage of MC32C90 must be Vcc1/Vcc2.

Pin No.	Port Name	Function Name (P.C.B.)	I/O					Detail of Function			
			Power On	Stby Thrt	Standby	Stby Sleep	Sleep		MCU Sleep		
1	TXD4										
	P96/ANEX1/TXD4/ SDA4/SRXD4	IPD_MOSI	SO	0	0	0	0	0	0	0	Asynchronous data output for iPod
2	P95										
	P94/DA1/TB4in/ CTS4/RTS4/SS4	SCPU_SCK	0	0	0	0	0	0	0	0	Input for transmission control for sub-microprocessor (clear to send)
3	DA0										
	P93/DA0/TB3in/ CTS3/RTS3/SS3	AMP_LMT	DA	1	1	1	1	1	1	1	Limiter control output
4	TXD3										
	P92/TB2in/TXD3/ SDA3/SRXD3/ OUTC20/IEou/ ISTXD2	XM_MOSI	SO	0	0	0	0	0	0	0	Asynchronous data output for XM (U model)
5	P92										
	TB2in	RDS_RDY	TMR	0	0	0	0	0	0	0	RDS RRADY input (C, R, T, K, A, B, E, F, L, J models) (G model)
6	RXD3										
	P91/TB1in/RXD3/ SCL3/STXD3/IEin/ ISRXD2	XM_MISO	SI	0	0	0	0	0	0	0	Asynchronous data input for XM (U model)
7	P91										
	RXD3	RDS_MISO	SI	0	0	0	0	0	0	0	Synchronous data input for RDS (C, R, T, K, A, B, E, F, L, J models) (G model)
8	P90										
	LCK3	RDS_SCK	SO	0	0	0	0	0	0	0	XM LINK detection (U model)
9	INT8										
	P146/INT8	IPD_DET	IRQ	IRQ	IRQ	IRQ	IRQ	IRQ	0	0	Asynchronous data input for RDS (C, R, T, K, A, B, E, F, L, J models) (G model)
10	P145										
	P145/INT7	DIR_N_INT	IRQ	0	0	0	0	0	0	0	DIR interrupt Restriction of port: INT is high edge or low edge only
11	P144										
	P144/INT6	DSP_N_INT	IRQ	0	0	0	0	0	0	0	DA70Y interrupt Restriction of port: INT is high edge or low edge only
12	P143										
	P143/INPC17/ OUTC17	XM_N_RST	0	0	0	0	0	0	0	0	XM reset (U model)
13	P143										
	P143	RDS_N_RST	0	0	0	0	0	0	0	0	RDS reset (C, R, T, K, A, B, E, F, L, J models) (G model)
14	P142										
	P142/INPC18/OUTC16	XM_REV	1	0	0	0	0	0	0	0	XM antenna revision detection H-An compatibility antenna (U model)
15	P141										
	P141	DIR_N_CS	CS	0	0	0	0	0	0	0	DIR chip select
16	P140										
	P140/INPC14/ OUTC14	DSP_N_RST	0	0	0	0	0	0	0	0	DA70Y reset
17	BYTE										
	BYTE	BYTE	MCU	MCU	MCU	MCU	MCU	MCU	MCU	MCU	Switch of width of data bus input When set to single chip mode: L (16 bit)
18	CNVss										
	CNVss	CNVss	MCU	MCU	MCU	MCU	MCU	MCU	MCU	MCU	Processor mode select Low: single chip mode High: To Flash included boot mode To boot mode with hardware reselling of P50=H, P55=L, CNVss=H
19	P87										
	P87/Xcin	DSP_N_CS	CS	0	0	0	0	0	0	0	DA70Y chip select
20	P86										
	P86/Xcout	DAC_N_CS	CS	0	0	0	0	0	0	0	DAC chip select
21	/RESET										
	/RESET	/RESET	MCU	MCU	MCU	MCU	MCU	MCU	MCU	MCU	Reset
22	Xout										
	Xout	Xout	MCU	MCU	MCU	MCU	MCU	MCU	MCU	MCU	20 MHz Ceramic resonator
23	Vss										
	Vss	Vss	MCU	MCU	MCU	MCU	MCU	MCU	MCU	MCU	GND



Pin No.	Port Name	Function Name (P.C.B.)	I/O					Detail of Function
			Power On	Stby Thrt	Standby	Stby Sleep	Sleep	
22	Xin Xin	Xin	MCU	MCU	MCU	MCU	MCU	20 MHz ceramic resonator
23	Vcc1 Vcc1	Vcc1	MCU	MCU	MCU	MCU	MCU	Microprocessor power supply
24	/NMI P85/NMI	/NMI	MCU	MCU	MCU	MCU	MCU	Unused, pull up to Vcc
25	INT2 P84/INT2	HDMI_MUT	IRQ	IRQ	○	○	○	HDMI mute input ActH: Mute
26	P83/INT1	HDMI_INT	IRQ	IRQ	○	○	○	Interrupt from HDMI RX
27	INT0 P82/INT0	CEC_N_INT	IRQ	IRQ	○	○	○	CEC microprocessor interrupt
28	P81/TA4in/U/INPC15/ OUTC15/CTS5/ RTS5/RTP23	DSP_N_RDY	I	○	○	○	○	DA70Y RDY
29	P80/TA4out/U/ ISRXD0/RXD5	DIR_WCK	I	○	○	○	○	CDDA writing DIR_WCK input
30	CLK5 P77/TA3in/INPC14/ OUTC14/ISCLK0/ CLK5/RTP22	DSP_SCK	SO	○	○	○	○	Synchronous data input for DIR, DA70Y, DAC
31	TXD5 P76/TA3out/INPC13/ OUTC13/STXD0/ TXD5	DSP_MDSI	SO	○	○	○	○	Synchronous clock output for DIR, DA70Y, DAC
32	P75 P75/TA2in/W/ INPC12/OUTC12/ ISRXD1/RTP21	DIR_N_RST	○	○	○	○	○	DIR reset
33	P74 P74/TA2out/W/ INPC11/OUTC11/ ISCLK1/RTP20	DSP_FMT	○	○	○	○	○	DA70Y full mute output H: Mute
34	P73	232C_MISO	○	○	○	○	○	CDDA writing route select
35	P72 P72/TA1out/V/CLK2 SCL2	SEL_CDDA	○	○	○	○	○	H_CDDA writing mode, L: Operational mode usually
36	P71/TA0in/TB5in/ RXD2/SCL2/STXD2/ INPC17/OUTC17/ OUTC22/ISRXD2/ IEin/RTP03	CEC_SCL	SO	SO	○	○	○	CEC microprocessor, Tuner, HDMI_EQ (SiI9185A) I2C SCL output (100 kHz device) U-com block then +3.3S, 3.3k then pull up
37	SDA2 P70/TA0out/TXD2/ SDA2/SRXD2/ INPC16/OUTC16/ OUTC20/ISTXD2/ IEout/RTP02	CEC_SDA	SIO	SIO	○	○	○	CEC microprocessor, Tuner, HDMI_EQ (SiI9185A) I2C SDA input (100 kHz device) U-com block then +3.3S, 3.3k then pull up
38	TXD1 P67/TXD1/SDA1/ SRXD1	232C_MOSI	SO	SO	SO	○	○	RS232C data output Pull up at 100 k-ohms
39	Vcc1 Vcc1	TXD	SO					E8a, ICP (In-circuit programmer) data output
40	RxD1 P66/RXD1/SCL1/ STXD1	Vcc1	MCU	MCU	MCU	MCU	MCU	Microprocessor power supply
41	Vss Vss	232C_MISO	SI	SI	SI	SI	SI	RS232C data input Pull up at 100 k-ohms
	RxD1	RXD	SI					E8a, ICP (In-circuit programmer) data input
	Vss Vss	Vss	MCU	MCU	MCU	MCU	MCU	Microprocessor GND

Pin No.	Port Name	Function Name (P.C.B.)	I/O					Detail of Function
			Power On	Stby Thrh	Standby	Stby Sleep	Sleep	
42	P65	232C_RTS	SO	SO	SO	0	0	RS232C RTS output
	P65/CLK1	E8a_SCLK	SI					E8a_IOP (in-circuit programmer) clock input Pull up at 100 k-ohms
43	CTS1	232C_CTS	SI	SI	SI	1	1	RS232C CTS input Pull down at 100 k-ohms
	P64/CTS1/RTS1/ SS1/OUTC21/ ISCLK2	E8a_BUSY	SO					E8a_IOP (in-circuit programmer) BUSY output
44	SDA0	HDMI_SDA	SIO	SIO	0	0	0	HDMI RX/TX, Video Enc/Dec I2C SCL output (400 kHz device) Pull up at HDMI block
	P63/TXD0/SDA0/ SRXD0/irDAout	HDMI_SCL	SIO	SIO	0	0	0	HDMI RX/TX: 5V tolerant
45	SCL0	HDMI_SCL	SIO	SIO	0	0	0	HDMI RX/TX, Video Enc/Dec I2C SDA input/output (400 kHz device) Pull up at HDMI block
	P62/RXD0/SCL0/ STXD0/irDAin	232C_PON	0	0	0	0	0	HDMI RX/TX: 5V tolerant H: ON, L: OFF
46	P61							
47	P60	CEC_INT2	I	I	0	0	0	CEC microprocessor interrupt
48	P80/CTS0/RTS0/ SS0/RTP00	CEC_N_RST	0	0	0	0	0	CEC microprocessor reset
	P137 P137/OUTC27	REM_CLK	SO	0	0	0	0	Clock output for remote control code generation No connection
49	ISCLK2							
	P136/OUTC21/ ISCLK2	HTX_PON	0	0	0	0	0	No use (HDMI_PON common)
50	PT35							
	P135/OUTC22/ ISRXD2/IEin	REM_OUT						
51	P134							
	P134/OUTC20/ ISTXD0/leout	HRX_N_RST	0	0	0	0	0	HDMI TX reset output L: Reset Pull down at HDMI block
52	P57							
	P57/RDY	HTX_N_RST	0	0	0	0	0	HDMI TX reset output L: Reset Pull down at HDMI block
53	P56							
	P56/ALE	E8a_N_EPM	I	I	I	I	I	E8a writing mode enable input 10 k-ohms pull down
54	P55							
	P55/HOLD	HTX_AUSEL	0	0	0	0	0	No use (HDMI Rx GPIO use)
55	P54							
	P54/HLDA/ALE	HTX_VSEL	0	0	0	0	0	No use (HDMI Rx GPIO use)
56	P133							
	P133/OUTC23	Vss	MCU	MCU	MCU	MCU	MCU	Microprocessor GND
57	Vss							
	Vss	ABT_N_RST	0	0	0	0	0	Video I/P & Scaler IC reset L: reset VID_PON=L: Low fix
58	P132							
	P132/OUTC26	Vcc2	MCU	MCU	MCU	MCU	MCU	Microprocessor power supply
59	Vcc2							
	Vcc2	HDMI_PON	0	0	0	0	0	HDMI power supply ON/OFF control H: ON, L: OFF When V2065 uses CEC microprocessor, HDMI EQ (CXB1442, Si9185A) reset may be used
60	P131							
	P131/OUTC25	VID_PON	0	0	0	0	0	Video power supply ON/OFF control H: ON, L: OFF Configured based on the Pure Direct specification
61	P130							
	P130/OUTC24	SCPU_N_RST	0	0	0	0	0	
62	P53							
63	P52							
64	P51							
65	P50							
	P50/WRL/AWR	E8a_N_CE	I	I	I	I	I	E8a enable input 10 k-ohms pull up
66	P127							
	P127	SVID_DET	I	0	0	0	0	S video detection VID_PON=L: Low fix

Pin No.	Port Name	Function Name (P.C.B.)	I/O					Detail of Function
			Power On	Stby Thrt	Standby	Stby Sleep	Sleep	
67	P126	DVID_N_RST	0	0	0	0	0	Video Enc/Dec reset
	P126	VID_PON=L						Low fix
68	P125	OSD_N_CS	CS	0	0	0	0	OSD chip select
	P125	VID_PON=L						Low fix
69	P47	DSP_PON	0	0	0	0	0	DSP power supply ON/OFF control
	P47/SC0/A23							H: ON, L: OFF
70	P46	SPRY_FA	0	0	0	0	0	Front A speaker relay control
	P46/SC1/A22							H: ON, L: OFF
71	P45	SPRY_FB	0	0	0	0	0	Front B speaker relay control
	P45/SC2/A21							H: ON, L: OFF
72	P44	CPNT_DET	0	0	0	0	0	No use
	P44/SC3/A20							
73	P43	SPRY_C	0	0	0	0	0	Center speaker relay control
	P43/A19							
74	Vcc2	Vcc2	MCU	MCU	MCU	MCU	MCU	Microprocessor power supply
	Vcc2							
75	P42	SPRY_S	0	0	0	0	0	Surround speaker relay control
	P42/A18							
76	Vss	Vss	MCU	MCU	MCU	MCU	MCU	Microprocessor GND
	Vss							
77	P41	VOL_SCK	0	0	0	0	0	Electronic volume Flip-flop synchronous clock output
	P41/A17							
78	P40	VOL_MOSI	0	0	0	0	0	Electronic volume Flip-flop synchronous data output
	P40/A16							
79	P37	SPRY_SB	0	0	0	0	0	Surround back/Bi-AMP relay control
	P37/A15/(D15)							
80	P36	SPRY_Z2	0	0	0	0	0	Zone2/Presence Speaker relay control
	P36/A14/(D14)							SPRY_Z and SPRY_FB do not become High at the same time
81	P35	SPRY_Z3	0	0	0	0	0	Zone3 speaker relay control
	P35/A13/(D13)							
82	P34	HPRY	0	0	0	0	0	Head phone relay control
	P34/A12/(D12)							
83	P33	SP_IMP	0	0	0	0	0	Speaker impedance relay control
	P33/A11/(D11)							Set to 8 ohms: Low (Relay OFF, B voltage High) Set to 6 ohms plus during rising temperature: High (Relay ON, B voltage Low)
84	P32	HP_N_DET	1	0	0	0	0	Headphone detection
	P32/A10/(D10)							L: Headphone +3.3S pull up
85	P31	E2R_N_CS	CS	CS	CS	CS	CS	EEPROM chip select
	P31/A9/(D9)							All 10 k-ohms pull up to EEPROM power
86	P124	MUTE_N_Z3	0	0	0	0	0	Zone3 line out mute control
	P124							L: Mute
87	P123	MUTE_N_Z2	0	0	0	0	0	Zone2 line out mute control
	P123/CTS6/RTS6							(U, C, R, T, K, A, G, E, F, L models)
88	P122	HDR_MISO	0	0	0	0	0	L: Mute
	P122							(B, J models)
89	P121	MUTE_N_SW	0	0	0	0	0	Subwoofer mute control
	P121/CLK6							L: Mute
90	P120	HDR_MOSI	0	0	0	0	0	
	Vcc2							
91	Vcc2	Vcc2	MCU	MCU	MCU	MCU	MCU	Microprocessor power supply
	Vcc2							
92	P30	MUTE_N_SB	0	0	0	0	0	Surround back/Bi-AMP/Zone2 mute control
	P30/A8/(D8)							L: Mute
93	Vss	Vss	MCU	MCU	MCU	MCU	MCU	Microprocessor GND
	Vss							
94	P27	TUN_N_TUND	1	0	0	0	0	FM/AM tuner TUNED input
	P27/A7/(D7)/AN27							+3.3S to 47k then pull up
95	P26	TUN_N_ST	1	0	0	0	0	FM/AM tuner STEREO detection input
	P26/A6/(D6)/AN26							+3.3S to 47k then pull up

Pin No.	Port Name	Function Name (P.C.B.)	I/O					Detail of Function
			Power On	Stby Thrh	Standby	Stby Sleep	Sleep	
96	P25 P25/A5/(D5)/AN25	+3.3S_PON	0	0	0	0	0	+3.3S power supply ON/OFF control H: ON, L: OFF AI: standby sleep, becomes L (to avoid unnecessary power consumption (Mute, pull Up)) Input (HiZ) when mechanically +3.3S power switches on (to function Mute, when power down is detected)
97	P24 P24/A4/(D4)/AN24	PRY	0	0	0	0	0	Power relay ON/OFF control H: ON, L: OFF
98	P23 P23/A3/(D3)/AN23	L_PRT	1	1	0	0	0	Overcurrent protection detection
99	P22 P22/A2/(D2)/AN22	MUTE_N_S	0	0	0	0	0	Surround mute control L: Mute
100	P21/A1/(D1)/AN21	MUTE_N_C	0	0	0	0	0	Center mute control
101	P20 P20/A0/(D0)/AN20	MUTE_N_F	0	0	0	0	0	L: Mute Front (Headphone is contained) mute control L: Mute
102	INT5 P17/D15/INT5	ACPWR_DET	IRQ	IRQ	IRQ	IRQ	0	AC power detection L: Power down
103	INT4 P16/D14/INT4	PSW_DET	IRQ	IRQ	IRQ	IRQ	0	MainZone/Input key interrupt KEY1 port distinguishes the pressed keys
104	INT3 P15/D13/INT3	REM_IN	IRQ	IRQ	IRQ	IRQ	0	Remote control pulse input
105	P14 P14/D12	XM_PON	0	0	0	0	0	XM power supply ON/OFF control H: ON, L: OFF
106	P13 P13/D11	DOCK_PON	0	0	0	0	0	DOCK power supply ON/OFF control H: ON, L: OFF
107	P12 P12/D10	IOXV_N_CS	CS	0	0	0	0	IO extended IC (for video) chip select
108	P11 P11/D9	IOXV_N_RST	0	0	0	0	0	IO extended IC (for video) reset
109	P10 P10/D8	PD_LED	0	0	0	0	0	Pure Direct LED ON/OFF control H: ON, L: OFF
110	P07 P07/D7/AN07	FLD_N_RST	0	0	0	0	0	FL driver reset
111	P06 P06/D6/AN06	PRG_RA	1	0	0	0	0	Program rotary A
112	P05 P05/D5/AN05	PRG_RB	1	0	0	0	0	Program rotary B
113	P04 P04/D4/AN04	MIC_N_DET	1	0	0	0	0	MIC detection L: MIC
114	P114 P114	IPD_APDET	1	1	1	1	1	iPod accessory power detection While iPod boots up (about two seconds) it is set at Low after the boot, it identifies To prevent pulling of iPod High output and microprocessor Low Fix output, switch to constant input
115	P113	VOL_RA	1	0	0	0	0	Volume rotary A
116	ISRXD1 P112/INPC12/ OUTC12/ISRXS1	SR_MISO	SI	1	1	1	1	Asynchronous data input for SIRIUS Serial communication is 5V TTL/CMOS logic level Pull up at 100 k-ohms To prevent pulling of SIRIUS tuner's High output and microcomputer's Low Fix output, switch to constant input (U model)
117	P111 P111/INPC11/ OUTC11/ISCLK1	VOL_RB	1	0	0	0	0	Volume rotary B
118	ISTXD1 P110/INPC10/ OUTC10/ISTXD1	SR_MOSI	SO	0	0	0	0	Asynchronous data output for SIRIUS Serial communication is 5V TTL/CMOS logic level (U model)
119	P03 P03/D3/AN03	SR_PON	0	0	0	0	0	SIRIUS radio power supply ON/OFF control H: Power ON, L: Power OFF (C, R, T, K, A, B, G, E, F, L, J models)

Pin No.	Port Name	Function Name (P.C.B.)	I/O					Detail of Function
			Power On	Stby Thrt	Standby	Stby Sleep	Sleep	
120	P02 P02/D2/AN02	SEL_PD	0	0	0	0	0	DSP Pure Direct route select H: Pure Direct ON L: Power down
121	P01 P01/D1/AN01	ADC_N_PDWN	0	0	0	0	0	ADC power down L: Power down
122	P00 P00/D0/AN00	FLD_N_CS	CS	0	0	0	0	FL driver chip select
123	ANI57 P157/ANI157/CTS6/ RTS6	L3_DET	AD	0	0	0	0	Component video aspect detection
124	ANI56 P156/ANI156/CLK6	THM	AD	AD	0	0	0	Temperature detection
125	ANI55 P155/ANI155/RXD6	AMP_OLV	AD	AD	0	0	0	Power AMP output level detection
126	ANI54 P154/ANI154/TXD6	DC_PRT	AD	AD	0	0	0	Power AMP DC detection
127	ANI53 P153/ANI153/CTS5/ RTS5	MODEL	AD	AD	0	0	0	Destination discrimination by AD value When AD is taken in at power on, there is 1m sec waiting time after AD input port setting
128	ISRXD0 P152/ANI152/ ISRXD0/RXD5	E2R_MISO	SI	SI	SI	0	0	Synchronous data input for EEPROM
129	ISCLK0 P151/ANI151/ISCLK0/ CLK5	FLD_SCK	SO	SO	SO	0	0	FL driver, OSD, IO extended IC (Video), series 1 k-ohms go into synchronous clock output for EEPROM FL driver
130	Vss Vss	Vss	MCU	MCU	MCU	MCU	MCU	Microprocessor GND
131	ISTXD0 P150/ANI150/ISTXD0/ TXD5	FLD_MOSI	SO	SO	SO	0	0	FL driver, OSD, IO extended IC (Video), series 1 k-ohms go into synchronous data output for EEPROM FL driver
132	Vcc1 Vcc1	Vcc1	MCU	MCU	MCU	MCU	MCU	Microprocessor power supply
133	AN7 P107/AN7/K10/RTP33	KEY1	AD	AD	AD	I	0	KEY1 AD value taken in During PSW_DET interruption, distinguishes the used keys which are switched to AD
134	AN6 P106/AN6/K12/RTP32	KEY2	AD	AD	AD	I	0	KEY2 AD value taken in During PSW_DET interruption, distinguishes the used keys which are switched to AD
135	AN5 P105/AN5/K11/RTP31	PS1_PRT	AD	AD	0	0	0	PS protection detection 1
136	AN4 P104/AN4/K10/RTP30	PS2_PRT	AD	AD	0	0	0	PS protection detection 2
137	P103	ISEL_RA	0	0	0	0	0	
138	P102	ISEL_RB	0	0	0	0	0	
139	AN1 P101/ANI1/RTP11	DEST	AD	AD	AD	0	0	AD destination discrimination Data is taken in when resetting is cancelled
140	AVss AVss	AVss	MCU	MCU	MCU	MCU	MCU	Microprocessor GND
141	AN0 P100/AN0/RTP10	DOCK_TYPE	AD	AD	AD	I	0	DOCK discriminate Identifies the connected DOCK type, then switches the action During IPD_DET interruption, switches to AD, make a distinction based on post-10 ms A/D value Make a distinction from IPD_DET Low edge through post-10ms A/D value
142	Vref Vref	VREF	MCU	MCU	MCU	MCU	MCU	Microprocessor power supply
143	AVcc AVcc	AVcc	MCU	MCU	MCU	MCU	MCU	Microprocessor power supply
144	RXD4 P97/ADTRG/RXD4/ SCL4/ISTXD4	IPD_MISO	SI	I	I	I	0	Asynchronous data input for iPod To prevent pulling of iPod High output and microprocessor Low Fix output, input setup

**RX-V765/HTR-6270/AX-V765**

Key detection for A/D port  
Key input (A/D) pull-up resistance 10 k-ohms

**RX-V765/HTR-6270**

Ohm	0	+10k	+10k	+1.5k	+1.5k	+2.2k	+3.3k	+4.7k	+22.0k	+33.0k
V	0 - 0.15	0.15 - 0.42	0.43 - 0.70	0.71 - 0.97	0.98 - 1.24	1.25 - 1.53	1.54 - 1.84	1.84 - 2.1	2.34 - 2.55	2.55 - 2.97
A/D value (3.3 V=255)	0 - 11	12 - 32	33 - 54	55 - 75	76 - 95	96 - 118	119 - 142	143 - 162	181 - 197	198 - 229
KEY1 (133 pin)	SCENE RADIO	SCENE CD	SCENE TV	SCENE BD/DVD	ZONE2 ON/OFF	ZONE2 CONTROL	—	—	MAIN ZONE ON/OFF	ZONE CONTROL
Ohm	0	+10k	+10k	+1.5k	+1.8k	+2.2k	+3.3k	+4.7k	+6.8k	+10.0k
V	0 - 0.15	0.15 - 0.42	0.43 - 0.70	0.71 - 0.99	1.0 - 1.27	1.28 - 1.56	1.57 - 1.86	1.86 - 2.14	2.14 - 2.4	2.4 - 2.65
A/D value (3.3 V=255)	0 - 11	12 - 32	33 - 54	55 - 77	78 - 98	99 - 120	121 - 143	144 - 165	166 - 185	186 - 205
KEY2 (134 pin)	PURE DIRECT	STRAIGHT / EFFECT	INFO	MEMORY	PRESET <	PRESET >	CATEGORY < FM	CATEGORY > AM	TUNING CH <	TUNING CH >

**AX-V765**

Ohm	0	+10k	+10k	+1.5k	+1.5k	+2.2k	+3.3k	+4.7k	+22.0k	+33.0k
V	0 - 0.15	0.15 - 0.42	0.43 - 0.70	0.71 - 0.97	0.98 - 1.24	1.25 - 1.53	1.54 - 1.84	1.84 - 2.1	2.34 - 2.55	2.55 - 2.97
A/D value (3.3 V=255)	0 - 11	12 - 32	33 - 54	55 - 75	76 - 95	96 - 118	119 - 142	143 - 162	181 - 197	198 - 229
KEY1 (133 pin)	SCENE RADIO	SCENE CD	SCENE TV	SCENE BD/DVD	SLEEP	MUTE	—	—	STANDBY/ ON	ZONE CONTROL
Ohm	0	+10k	+10k	+1.5k	+1.8k	+2.2k	+3.3k	+4.7k	+6.8k	+10.0k
V	0 - 0.15	0.15 - 0.42	0.43 - 0.70	0.71 - 0.99	1.0 - 1.27	1.28 - 1.56	1.57 - 1.86	1.86 - 2.14	2.14 - 2.4	2.4 - 2.65
A/D value (3.3 V=255)	0 - 11	12 - 32	33 - 54	55 - 77	78 - 98	99 - 120	121 - 143	144 - 165	166 - 185	186 - 205
KEY2 (134 pin)	PURE DIRECT	STRAIGHT / EFFECT	INFO	MEMORY	PRESET <	PRESET >	FM	AM	TUNING <	TUNING >

**Destination detection for A/D port**

Destination input (A/D) pull-up resistance 10 k-ohms

Ohm (R3808 VIDEO P.C.B.)	0	1.2 k	2.7 k	4.7 k	6.8 k	10.0 k	15.0 k	47.0 k	100.0 k
V	0 - 0.2	0.2 - 0.6	0.6 - 0.9	0.9 - 1.2	1.2 - 1.5	1.5 - 1.8	1.8 - 2.3	2.4 - 2.9	2.9 - 3.2
A/D value (3.3V=255)	0 - 15	15 - 46	46 - 69	69 - 92	92 - 115	115 - 139	139 - 177	185 - 224	224 - 247
DEST (139 pin)	J	U	C	R	T	K	A	B, G, E, F	L





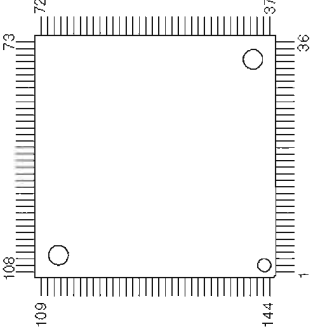

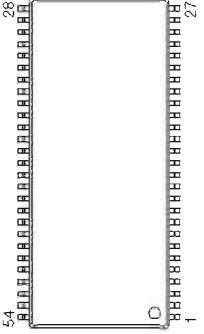

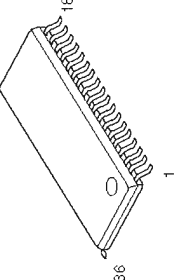













**Model detection for A/D port**











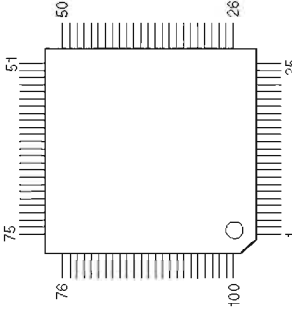









Model input (A/D) pull-up resistance 10 k-ohms

Ohm (R201 DIGITAL P.C.B.)	12.0k	18.0k
V	1.6-2.0	2.0-2.3
A/D value (3.3V=255)	123-154	155-178
MODEL (127pin)	RX-V765/AX-V765	HTR-6270

## ■ PIN CONNECTION DIAGRAMS



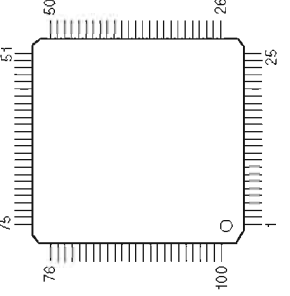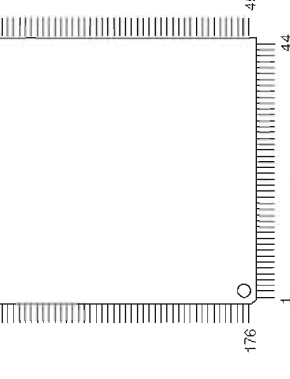

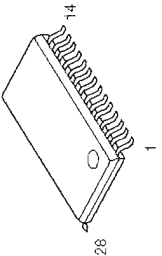








• ICS

<p>ABT1012Q100</p> 	<p>ADV7800BSTZ-80</p> 	<p>BA00JC5WT-V5</p> 	<p>BD9323EFJ-E2</p> 		
<p>D70YE101BRFP266 M3087&amp;JBG SII9233ACTU</p> 	<p>FHP3350IM14X</p> 	<p>K4S641632N-LC60000</p> 			
<p>KIA7912PI</p> 	<p>LA73050-TLM-E</p> 	<p>LC709004A-TLM-E LC74782JM-8A16-TLMC</p> 	<p>LC72725KM-UY-TLM-E</p> 		
<p>LC89058WD-E</p> 	<p>LE25LA322M-TLM-E</p> 	<p>LM19CIZ/LF</p> 	<p>M66003-0131FP-R</p> 	<p>MX29LV160DBTI-70G</p> 	
<p>NE5532DR</p> 	<p>NJM2068MD-TE2</p> 	<p>NJM2388F05</p>  <p>1. V<sub>IN</sub> 2. V<sub>OUT</sub> 3. GND 4. ON/OFF CONTROL</p>	<p>NJM2396F05</p>  <p>1. IN 2. V<sub>OUT</sub> 3. GND 4. ON/OFF CONTROL</p>	<p>NJM2581M</p> 	<p>NJM2867F3-05</p> 



















<p>NJM4565M (TE1)</p> 	<p>NJM7812FA</p>  <p>3: IN 1: OUT 2: COM</p>	<p>NJM78M05DL1A (TE1)</p>  <p>1: INPUT 2: GND 3: OUTPUT</p>	<p>PCM1680DBQR</p> 
<p>PCM1781DBQR</p> 	<p>PCM1803DBR</p> 	<p>R1172H181B-T1-F R1172H331D-T1-F R1172H501D-T1-F</p>  <p>1: CE 2: GND 3: NC 4: V<sub>DD</sub> 5: V<sub>OUT</sub></p>	<p>R1172S121D-E2-F</p> 
<p>SN74LVC245APWR</p> 	<p>SN74LVTH245APW</p> 	<p>SI9134CTU</p> 	<p>TC74HC4051AFEL</p> 
<p>TC74HC4052AF</p> 	<p>TC74HC4053AF</p> 	<p>TC74VHC157FT</p> 	<p>TC74VHCT08AFT TC74VHCU04FT</p> 
<p>TC7WZ32FK (TE85L, F)</p> 	<p>TL431ACLPR</p>  <p>1: CATHODE 2: ANODE 3: REF</p>	<p>TOP254PN</p> 	<p>TC7SH04FU-TE85L TC7SH08FU</p> 



• Diodes

<p>1N4002S 1SS133 1SS176</p> 	<p>1SS355</p> 	<p>D6SBN20</p> 	<p>DB105</p> 	
<p>HT18G P6KE200ARL</p> 	<p>MAZ8033GHL 3.4V MAZ8036GLL 3.5V</p> 	<p>MTZJ10B MTZJ12B MTZJ13B MTZJ2.4B MTZJ22C MTZJ3.3B MTZJ39D</p> 	<p>RB051L-40 UDZ5.1B</p> 	
<p>MA111 RB501V-40</p> 	<p>RLZ7.5B 7.5V</p> 	<p>RS203M-B-C-J80</p> 	<p>RS603M-B-C-J80</p> 	<p>SG10SC4M</p> 

• Transistors


<p>2N5401C-AT/P 2SA1015-Y</p> 	<p>2N5551C-AT</p> 	<p>2SA1576A</p> 	<p>2SA1695 O.P.Y 2SC4465 O.P.Y</p> 	<p>2SA1708</p> 	<p>2SA1770S/T-AN</p> 
<p>2SA949 2SC1815 Y 2SC2229</p> 	<p>2SC1740S</p> 	<p>2SC2412K</p> 	<p>2SC4081 T106</p> 	<p>2SC4614S/T-AN</p> 	<p>2SD1938F</p> 
<p>2SD1915F</p> 	<p>DTA114EKA DTA143EKA DTA144EKA DTC114EKA DTC144EKA</p> 	<p>KPA102M-AT/P</p> 	<p>KTA1046-Y-U/P KTA1837-U/P</p> 	<p>KTA1517S KTC3875S KTC3911S</p> 	<p>MCH6336-TL-E</p> 

# ■ BLOCK DIAGRAMS


## ANALOG AUDIO Section Block Diagram

**MAIN** • See page 120, 121 → SCHEMATIC DIAGRAM


**VIDEO** • See page 122-124 → SCHEMATIC DIAGRAM

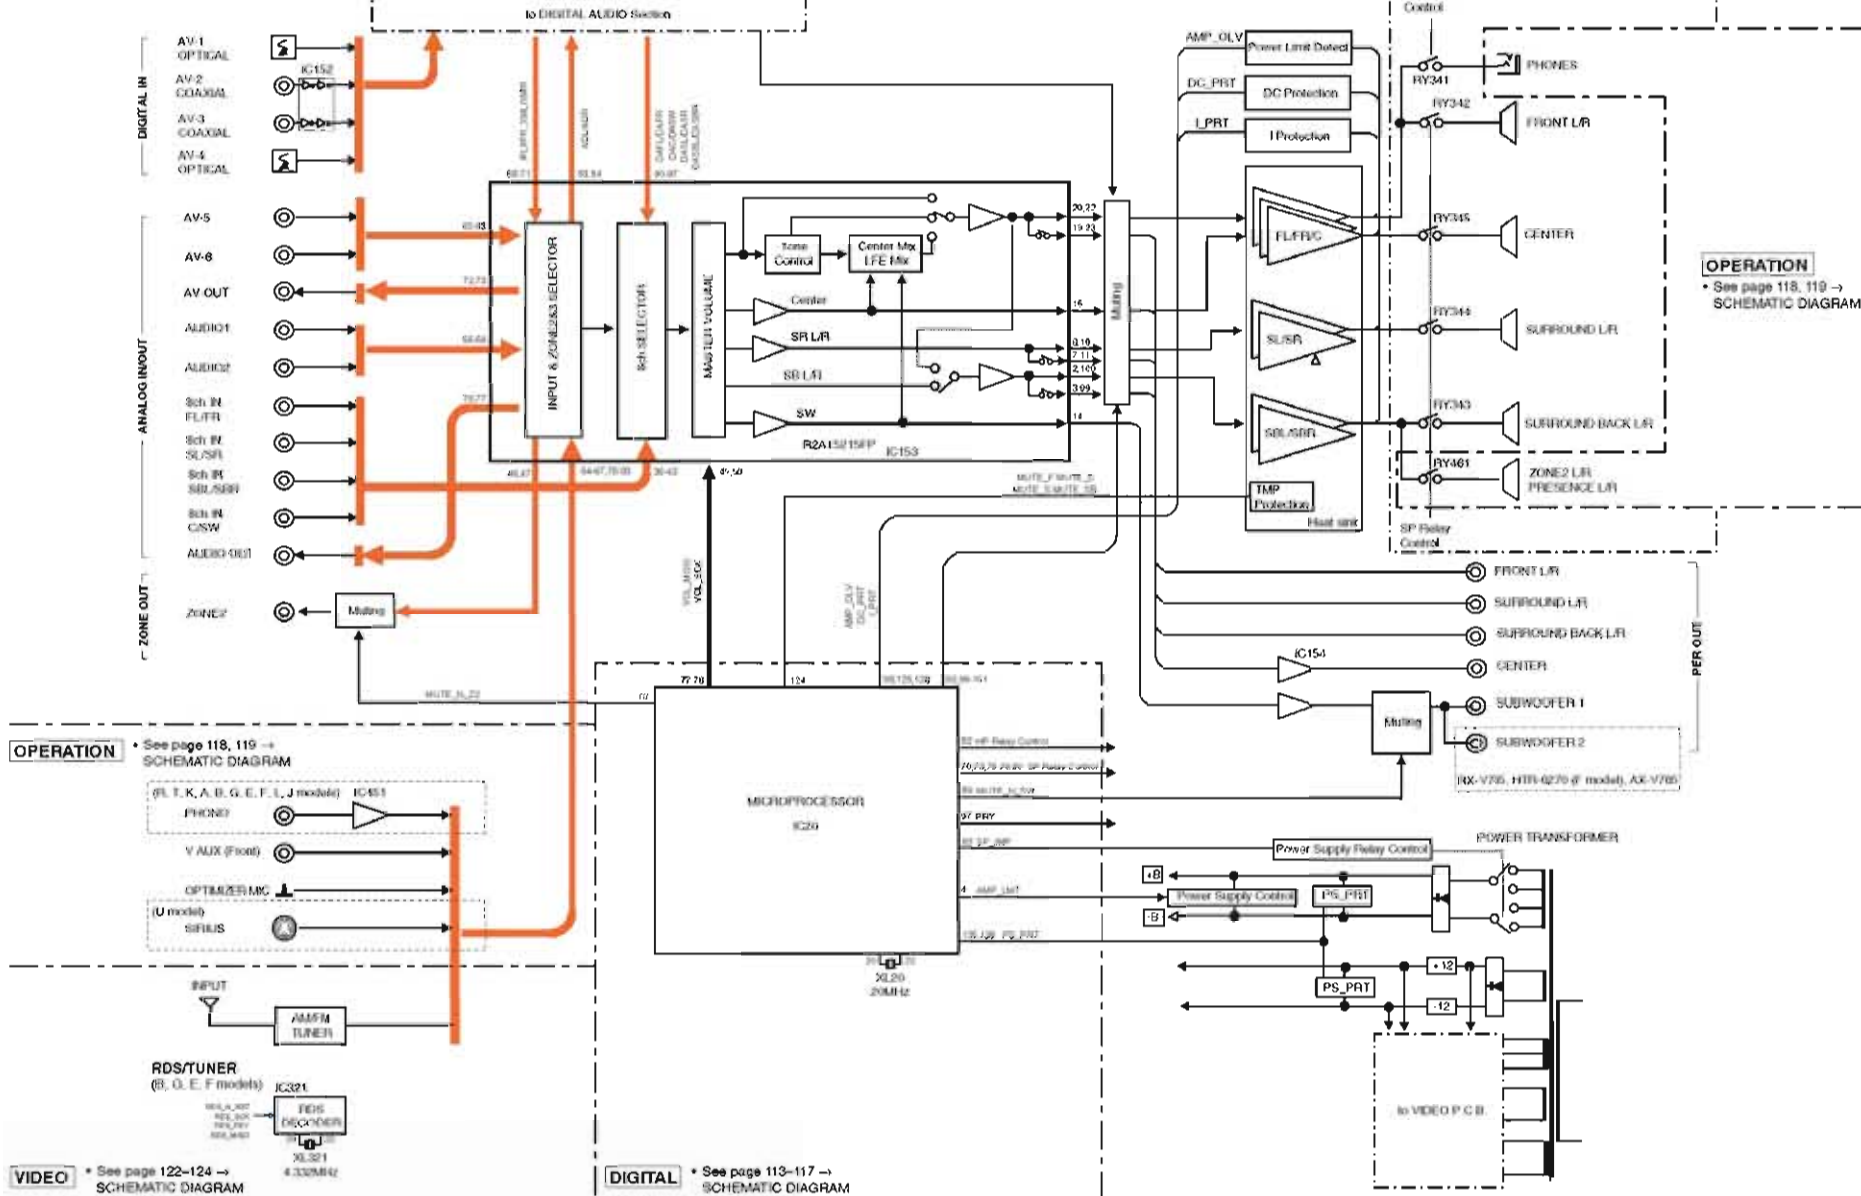


DIGITAL AUDIO Section Block Diagram

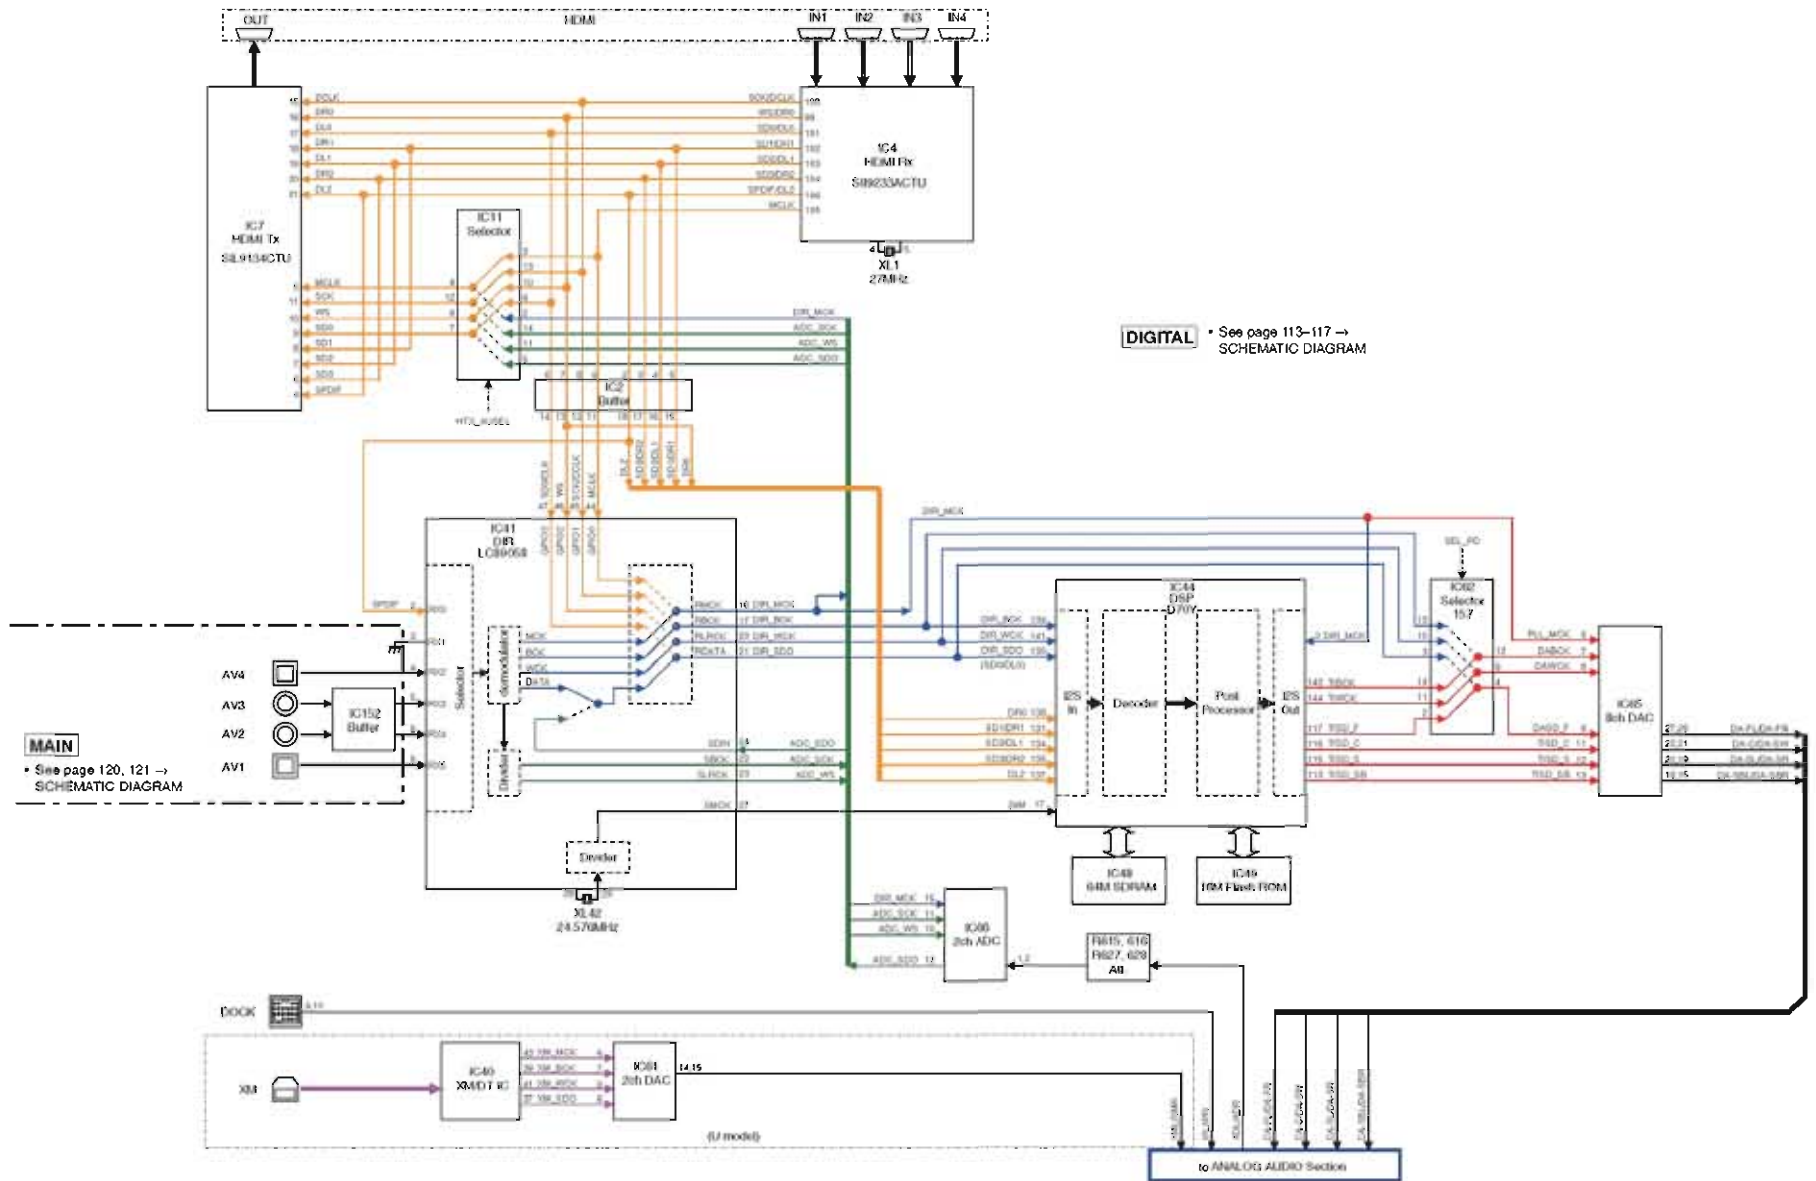

### VIDEO Section Block Diagram

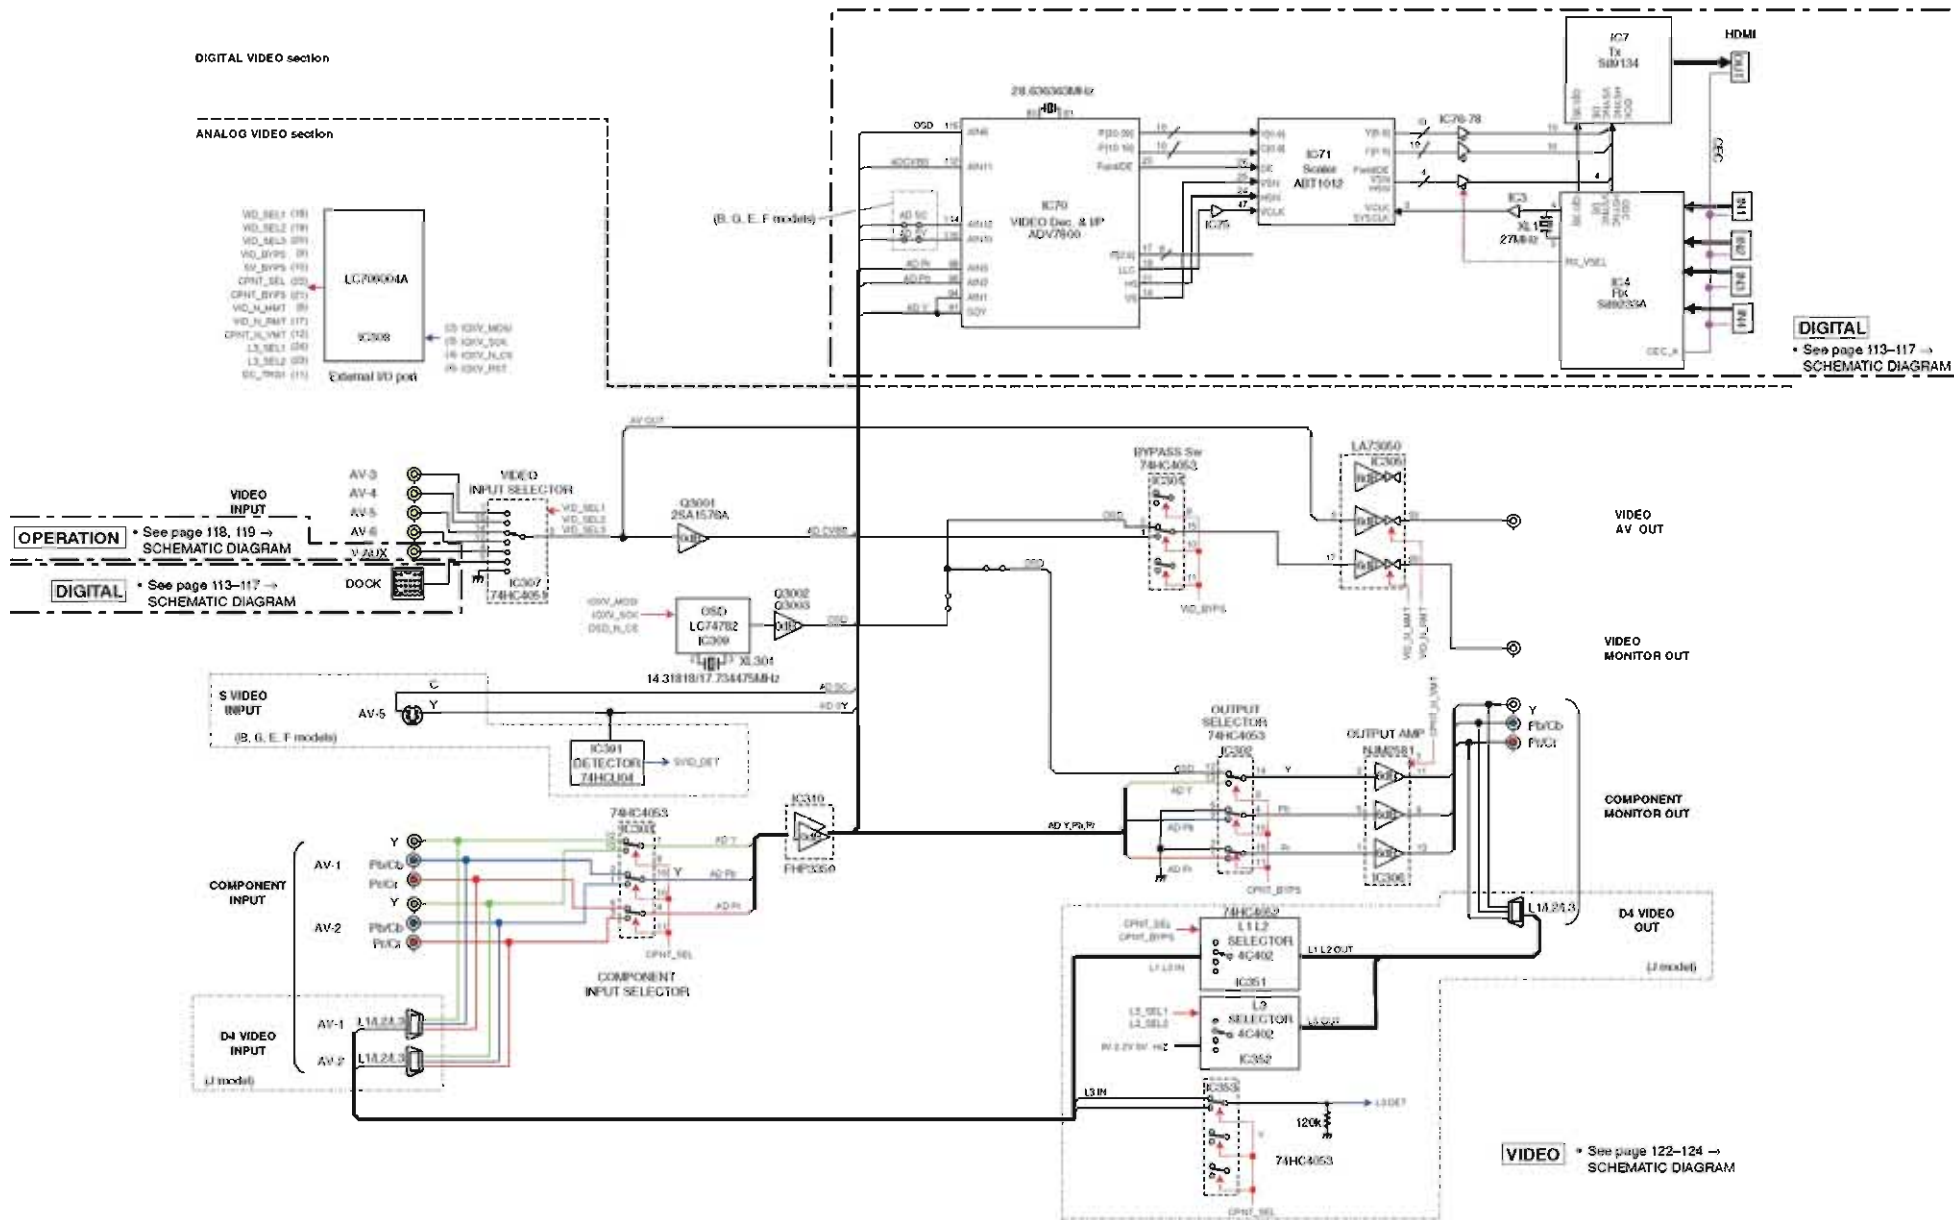

### Power Supply Section Block Diagram

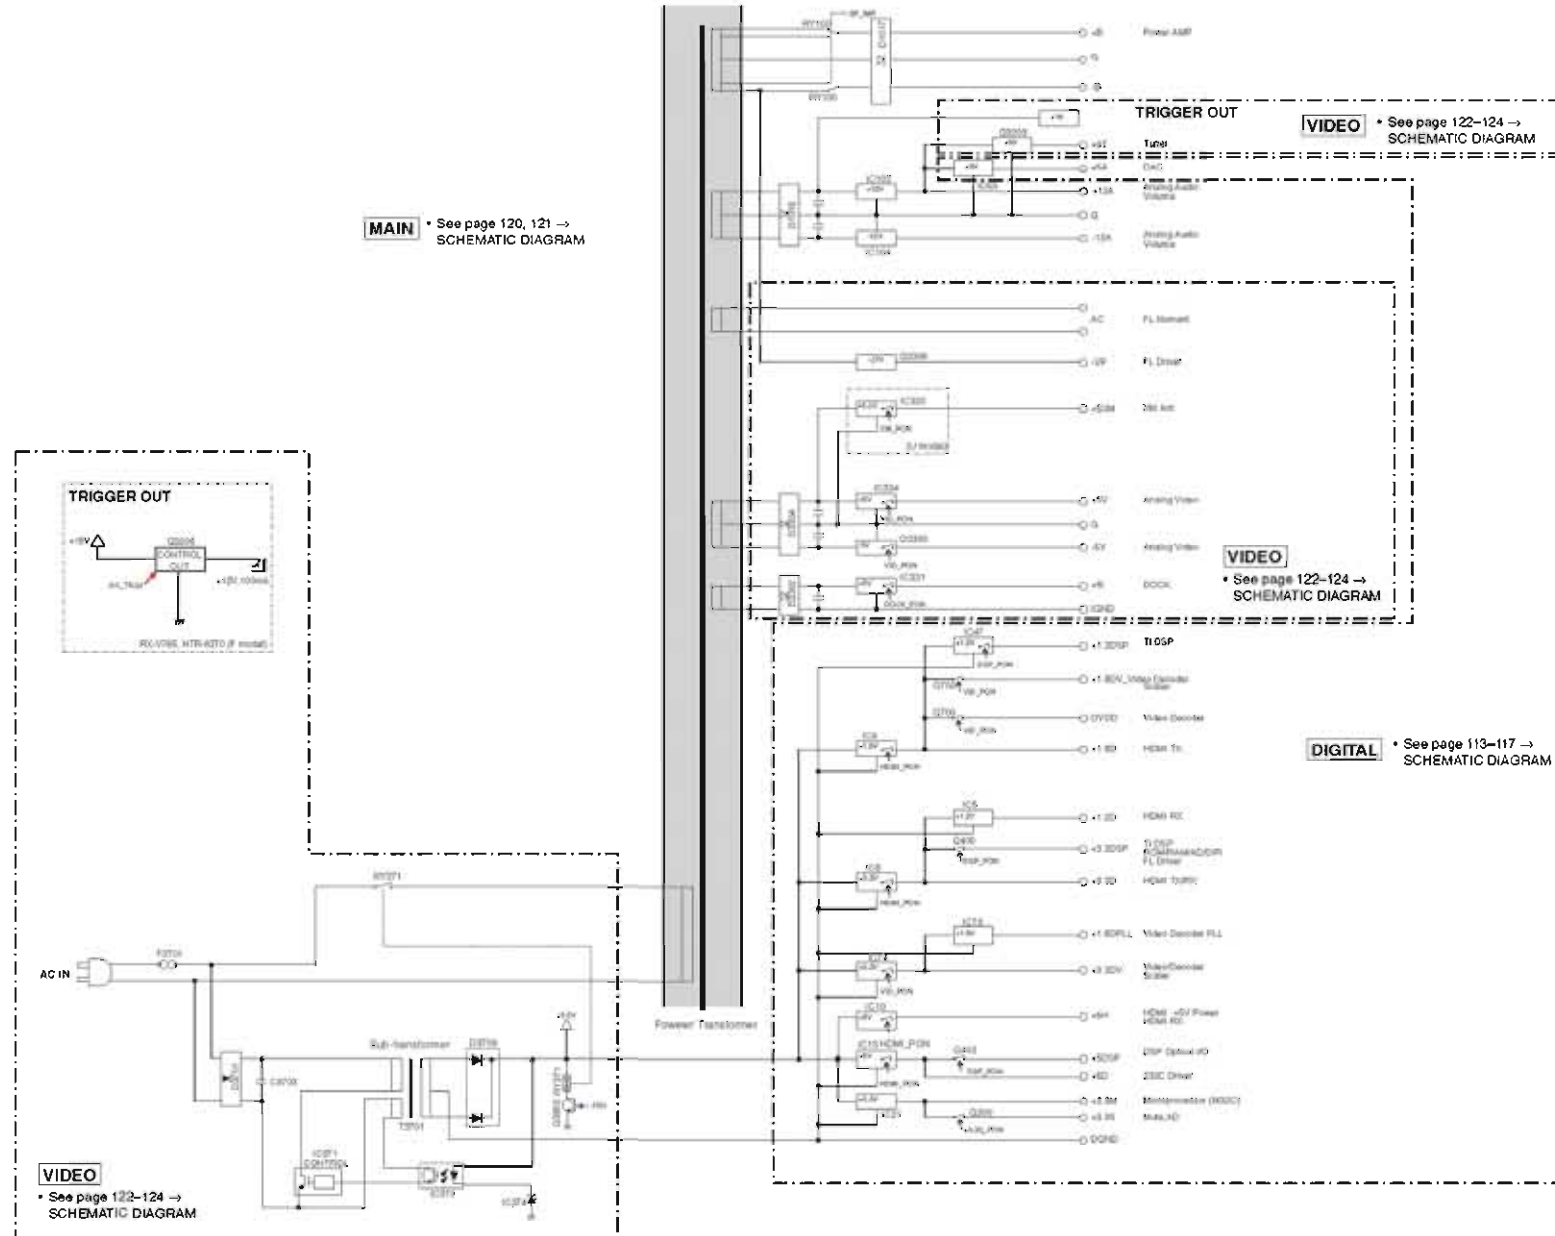


PRINTED CIRCUIT BOARDS


DIGITAL P.C.B.

(Side A)


POINT A: XL1 (Pin 5 of IC4)




POINT B: XL20 (Pin 20 of IC20)




POINT C: ① / CB24 (+3.3M), ② / CB24 (/RESET)

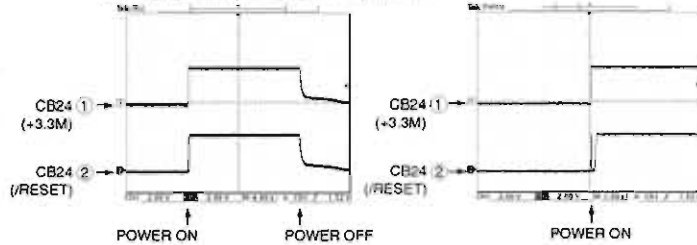



POINT D: XL41 (Pin 28 of IC40)



POINT E: XL42 (Pin 29 of IC41)




POINT F: XL70 (Pin 61 of IC70)

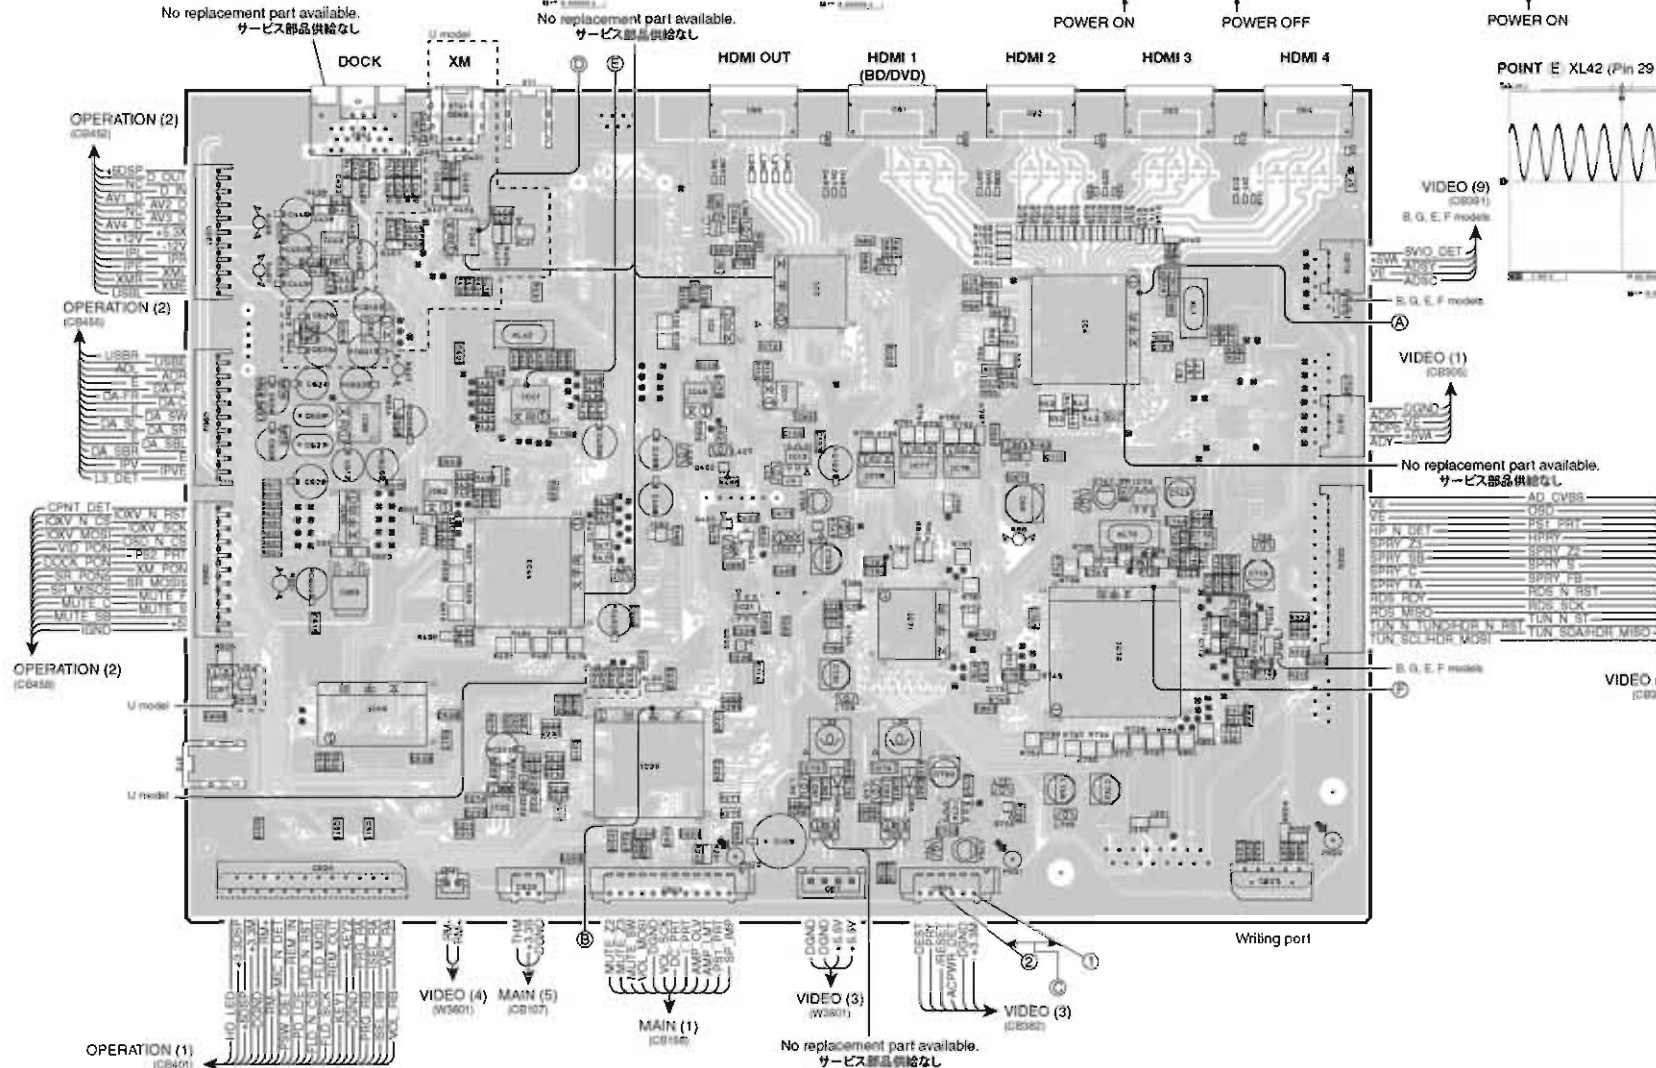

• Semiconductor Location

Ref No.	Location	Ref No.	Location
D2	G3	IC11	E4
D11	G3	IC13	E4
D12	G3	IC20	D6
D13	G3	IC21	D5
D14	G3	IC22	C6
D23	F3	IC40	C3
D24	F3	IC41	C4
D25	F3	IC43	B3
D26	F3	IC44	C5
D35	F3	IC46	D4
D36	F3	IC47	E5
D37	F3	IC49	C5
D38	E3	IC50	D5
D47	E3	IC61	C4
D48	E3	IC62	C4
D49	E3	IC63	C5
D60	D3	IC65	C5
D61	D3	IC66	C4
D62	D3	IC67	B5
D63	E6	IC68	B5
D64	E6	IC70	F5
D65	E3	IC71	E5
D200	C6	IC73	F4
D400	C3	IC74	E6
D401	C3	IC75	F6
D402	C3	IC76	E4
D403	C3	IC77	E4
IC2	D4	IC78	E4
IC4	F4	Q200	D5
IC5	F4	Q400	D5
IC7	E3	Q401	D5
IC8	E6	Q402	D4
IC9	E6	Q700	F6
IC10	D3	Q702	E5


**DIGITAL P.C.B.** (Side B)

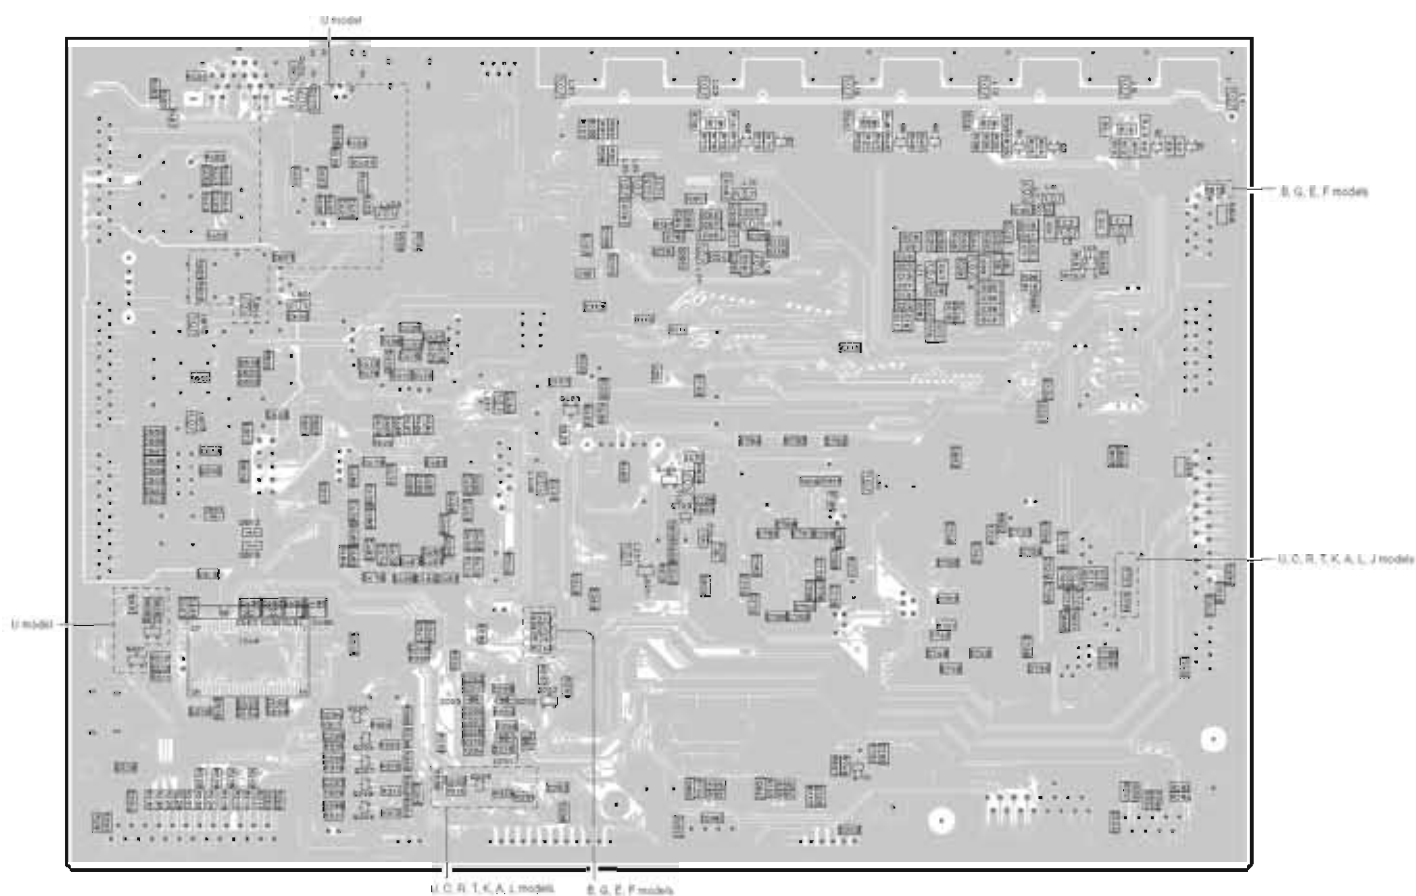

• Semiconductor Location

Ref No	Location
D201	D6
D202	D6
D203	D6
D204	D6
D404	C3
D600	C5
D602	C5
D603	C5
D702	F5
D703	F5
IC3	G4
IC48	C5
Q1	G3
Q2	G3
Q3	G3
Q4	F3
Q5	F3
Q6	F3
Q7	E3
Q8	E3
Q201	F5
Q202	D6
Q203	D6
Q205	O6
Q206	O6
Q207	O6
Q208	O6
Q209	O6
Q403	D4
Q404	F5
Q600	B5
Q601	B5
Q701	F6
Q703	F5

**OPERATION (1) P.C.B.** (Side A)

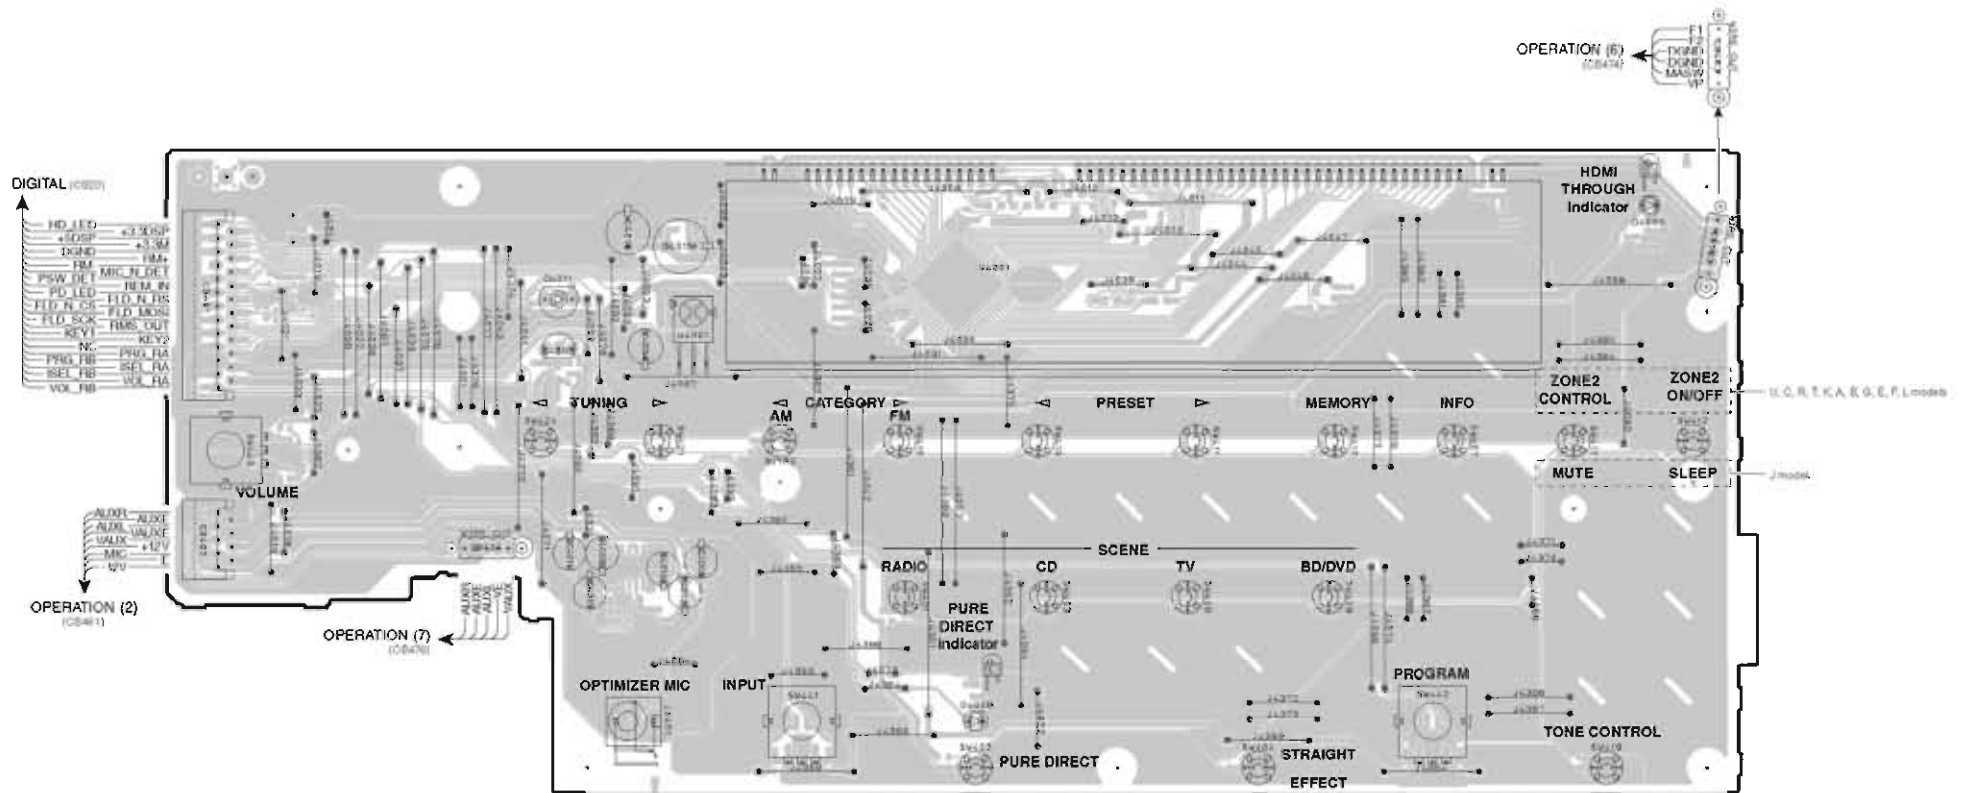


• Semiconductor Location

Ref No.	Location
D4009	F5
D4009	I3
D4011	D3
D4005	D3




**OPERATION (1) P.C.B.** (Side B)

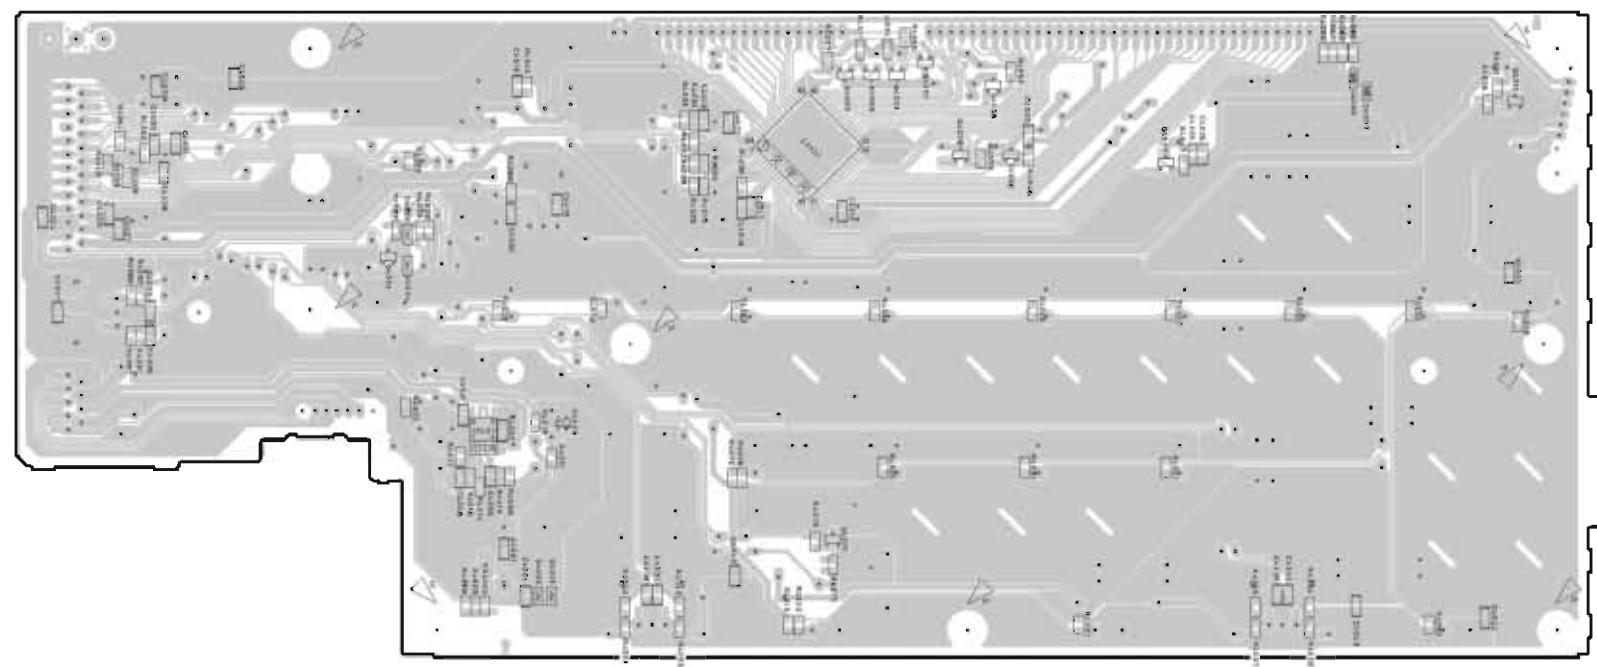


• Semiconductor Location

Ref No.	Location	Ref No.	Location	Ref No.	Location
D4001	D5	IC401	D5	Q4007	G3
D4002	D5	IC402	E3	Q4008	F3
D4003	D5	Q4001	F3	Q4009	F3
D4004	C4	Q4002	F3	Q4010	E5
D4005	C4	Q4003	F3	Q4011	I3
D4006	H3	Q4004	C4	Q4012	F3
D4007	H3	Q4006	F3		

**OPERATION (2) P.C.B. (Side A)**

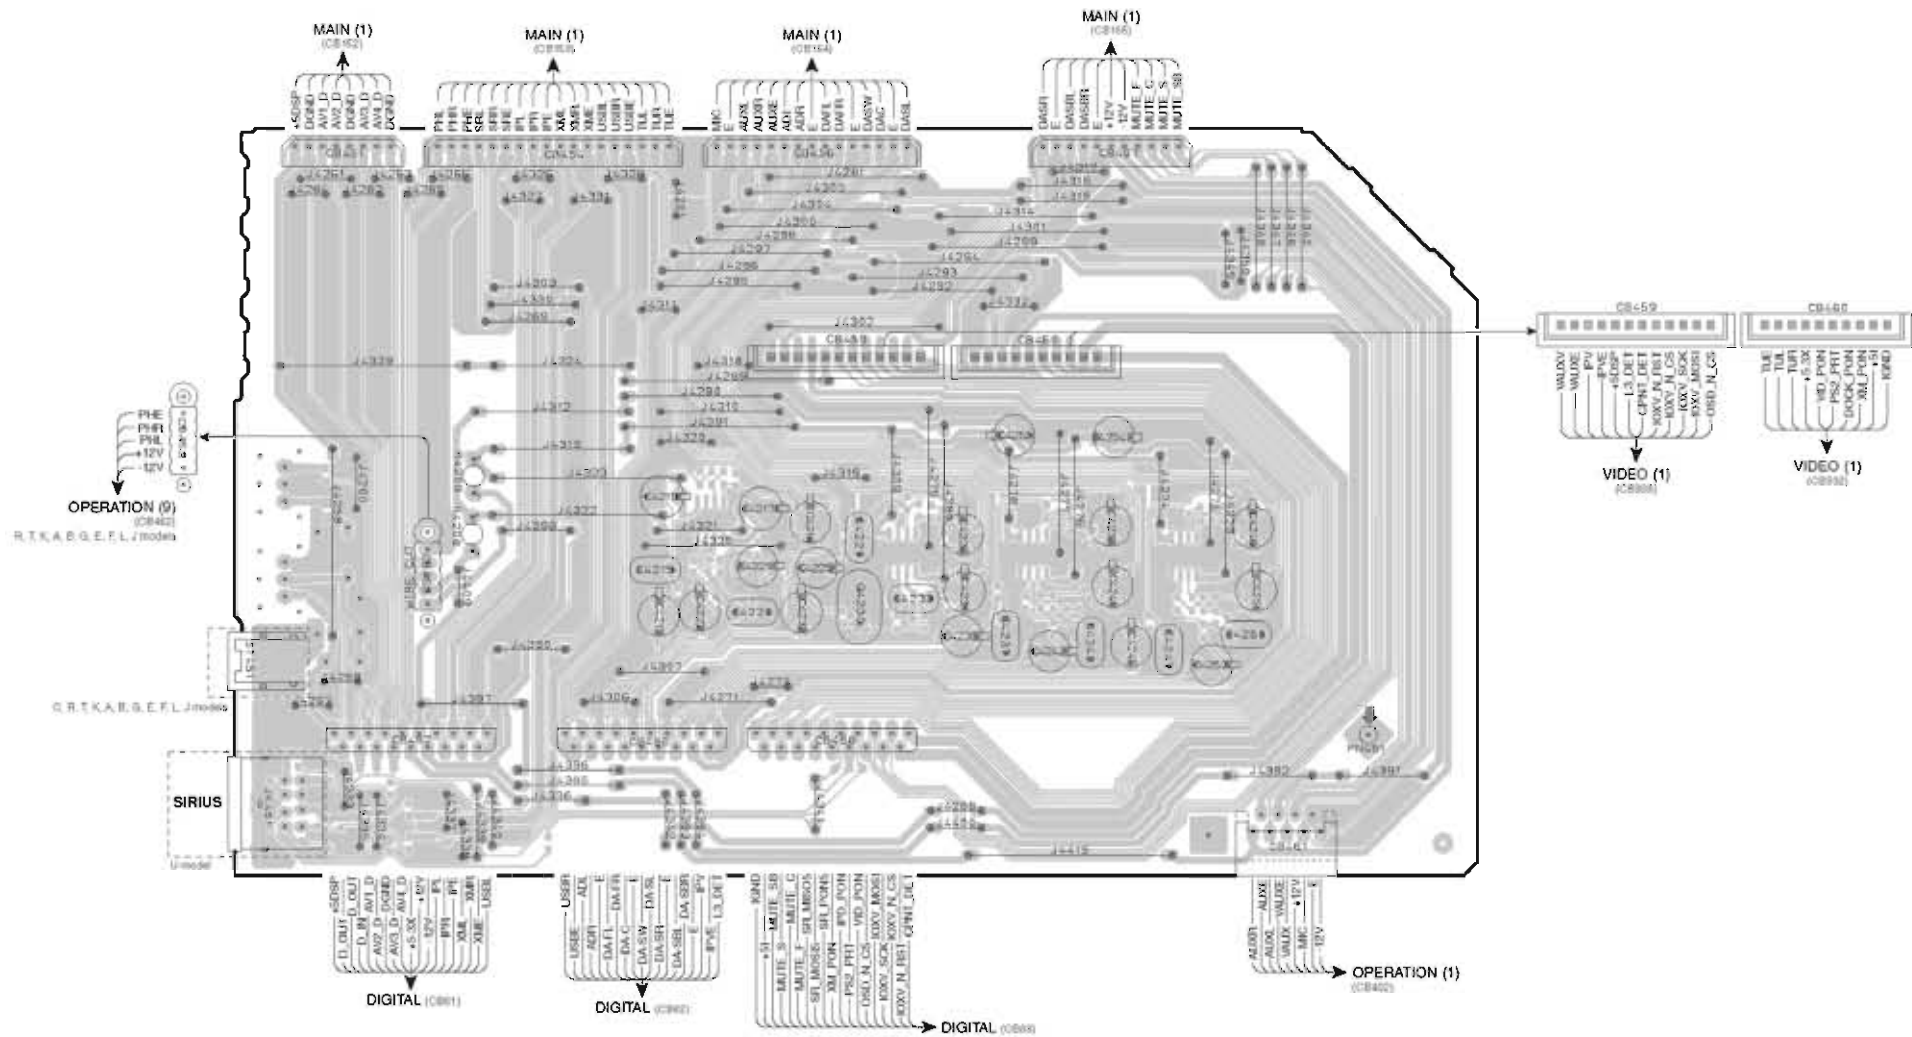


**OPERATION (2) P.C.B.** (Side B)

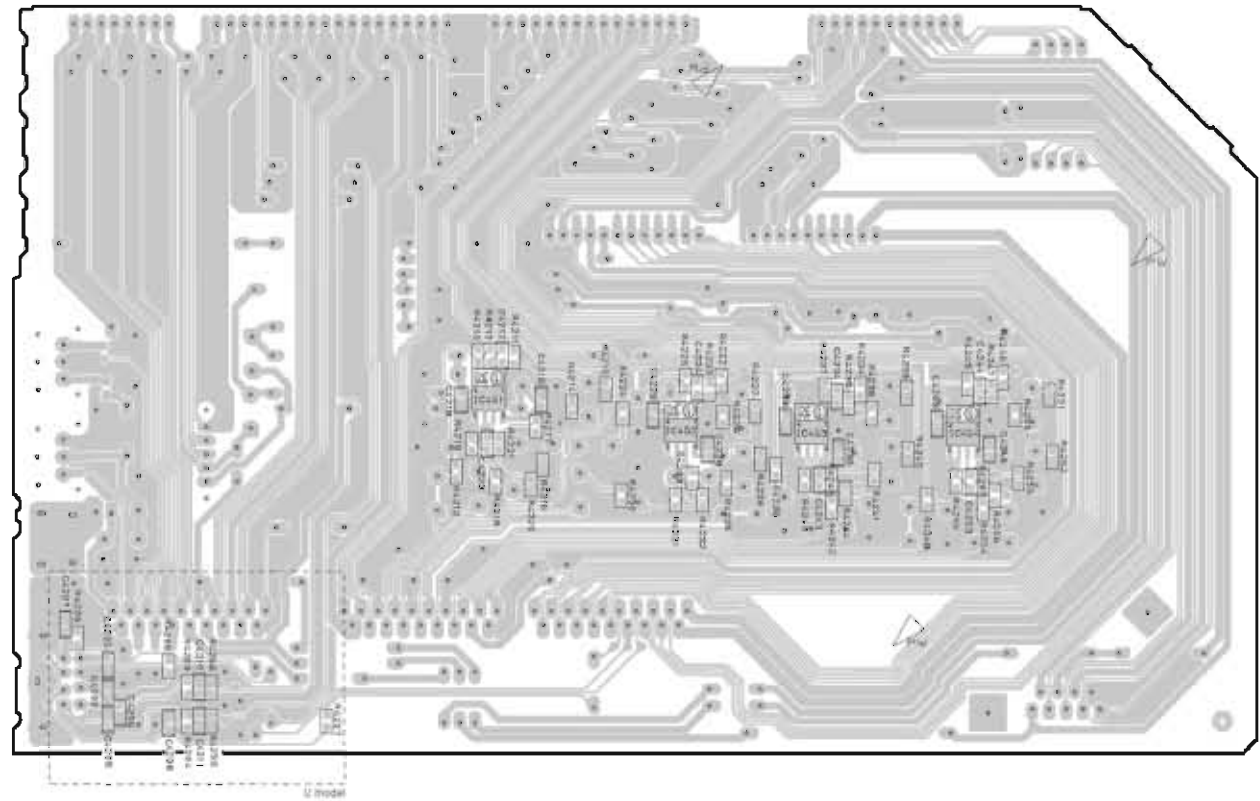


• Semiconductor Location

Ref No.	Location
IC451	D4
IC452	D4
IC453	E4
IC454	F4


OPERATION (3) P.C.B. (Side A)

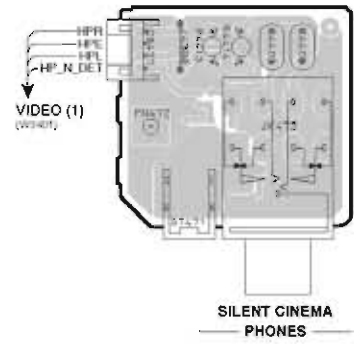


OPERATION (6) P.C.B. (Side A)

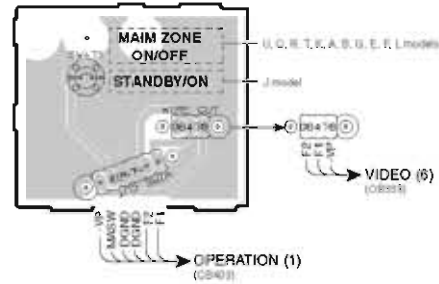

OPERATION (7) P.C.B. (Side A)

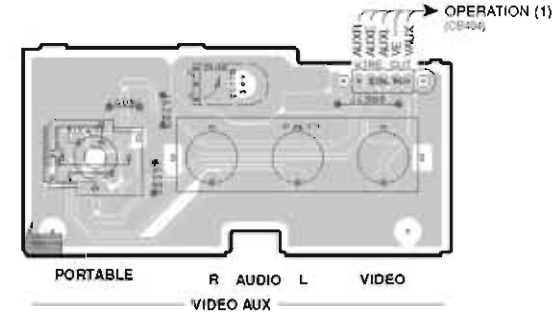


OPERATION (8) P.C.B. (Side A)

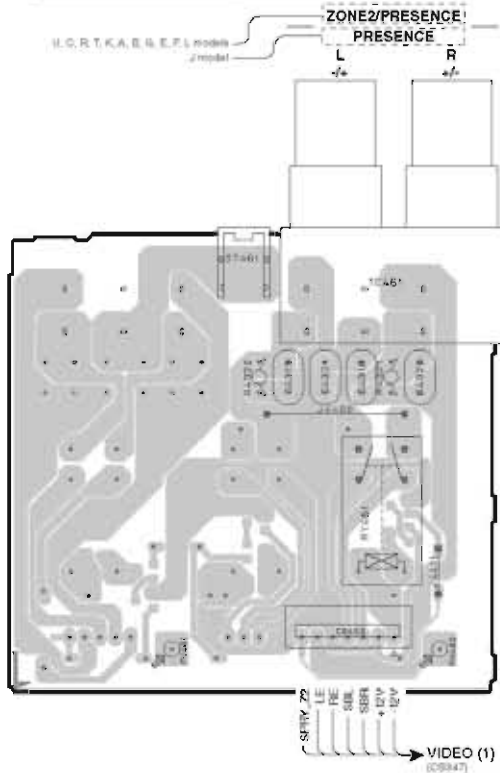


OPERATION (9) P.C.B. (Side A)

R, T, K, A, B, G, E, F, L, J models

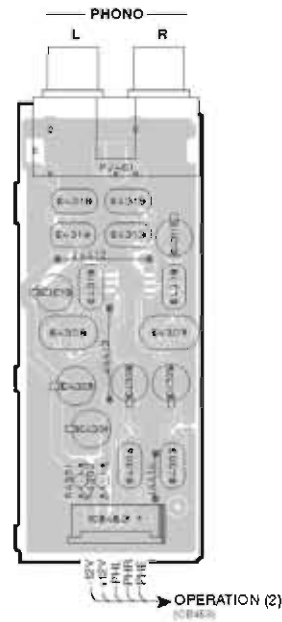


OPERATION (10) P.C.B. (Side A)

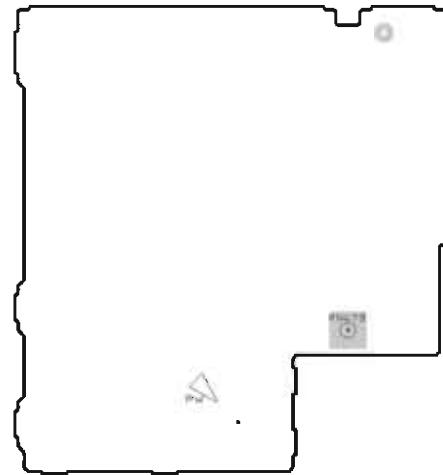


OPERATION (11) P.C.B. (Side A)


J model

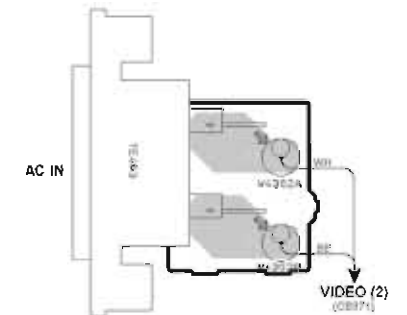

**OPERATION (3) P.C.B.** (Side B)




**OPERATION (6) P.C.B.** (Side B)



**OPERATION (7) P.C.B.** (Side B)




**OPERATION (8) P.C.B.** (Side B)

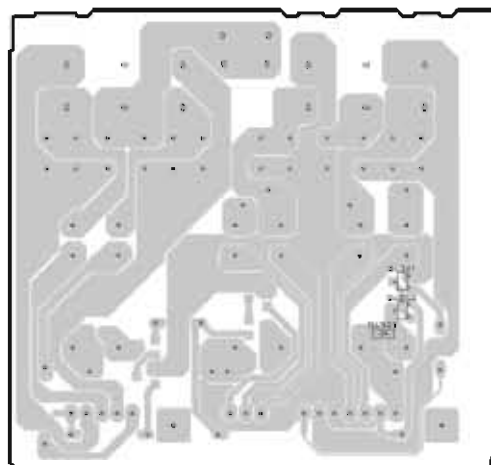


**OPERATION (9) P.C.B.** (Side B)

R, T, K, A, B, G, E, F, L, J models

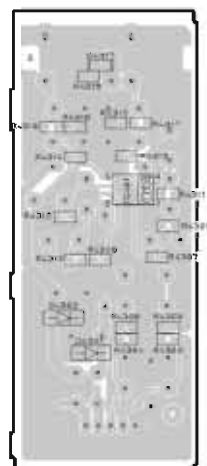


**OPERATION (10) P.C.B.** (Side B)

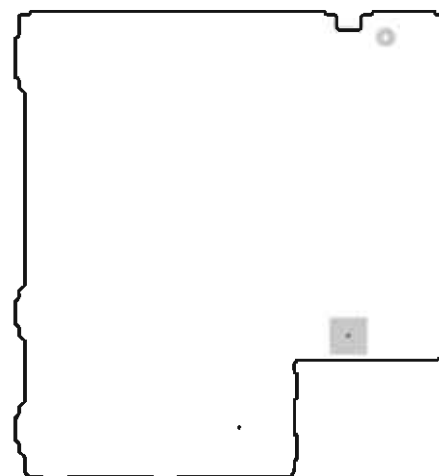

**OPERATION (11) P.C.B.** (Side B)


J model




• Semiconductor Location

Ref No.	Location
D4301	D6
D4302	D6
D4303	C6
D4401	B2
D4402	B2
D4406	H2
D4407	H2
D4409	H2
D4411	H2
IC461	D5
Q4301	C6
Q4302	C6

**MAIN (1) P.C.B. (Side A)**

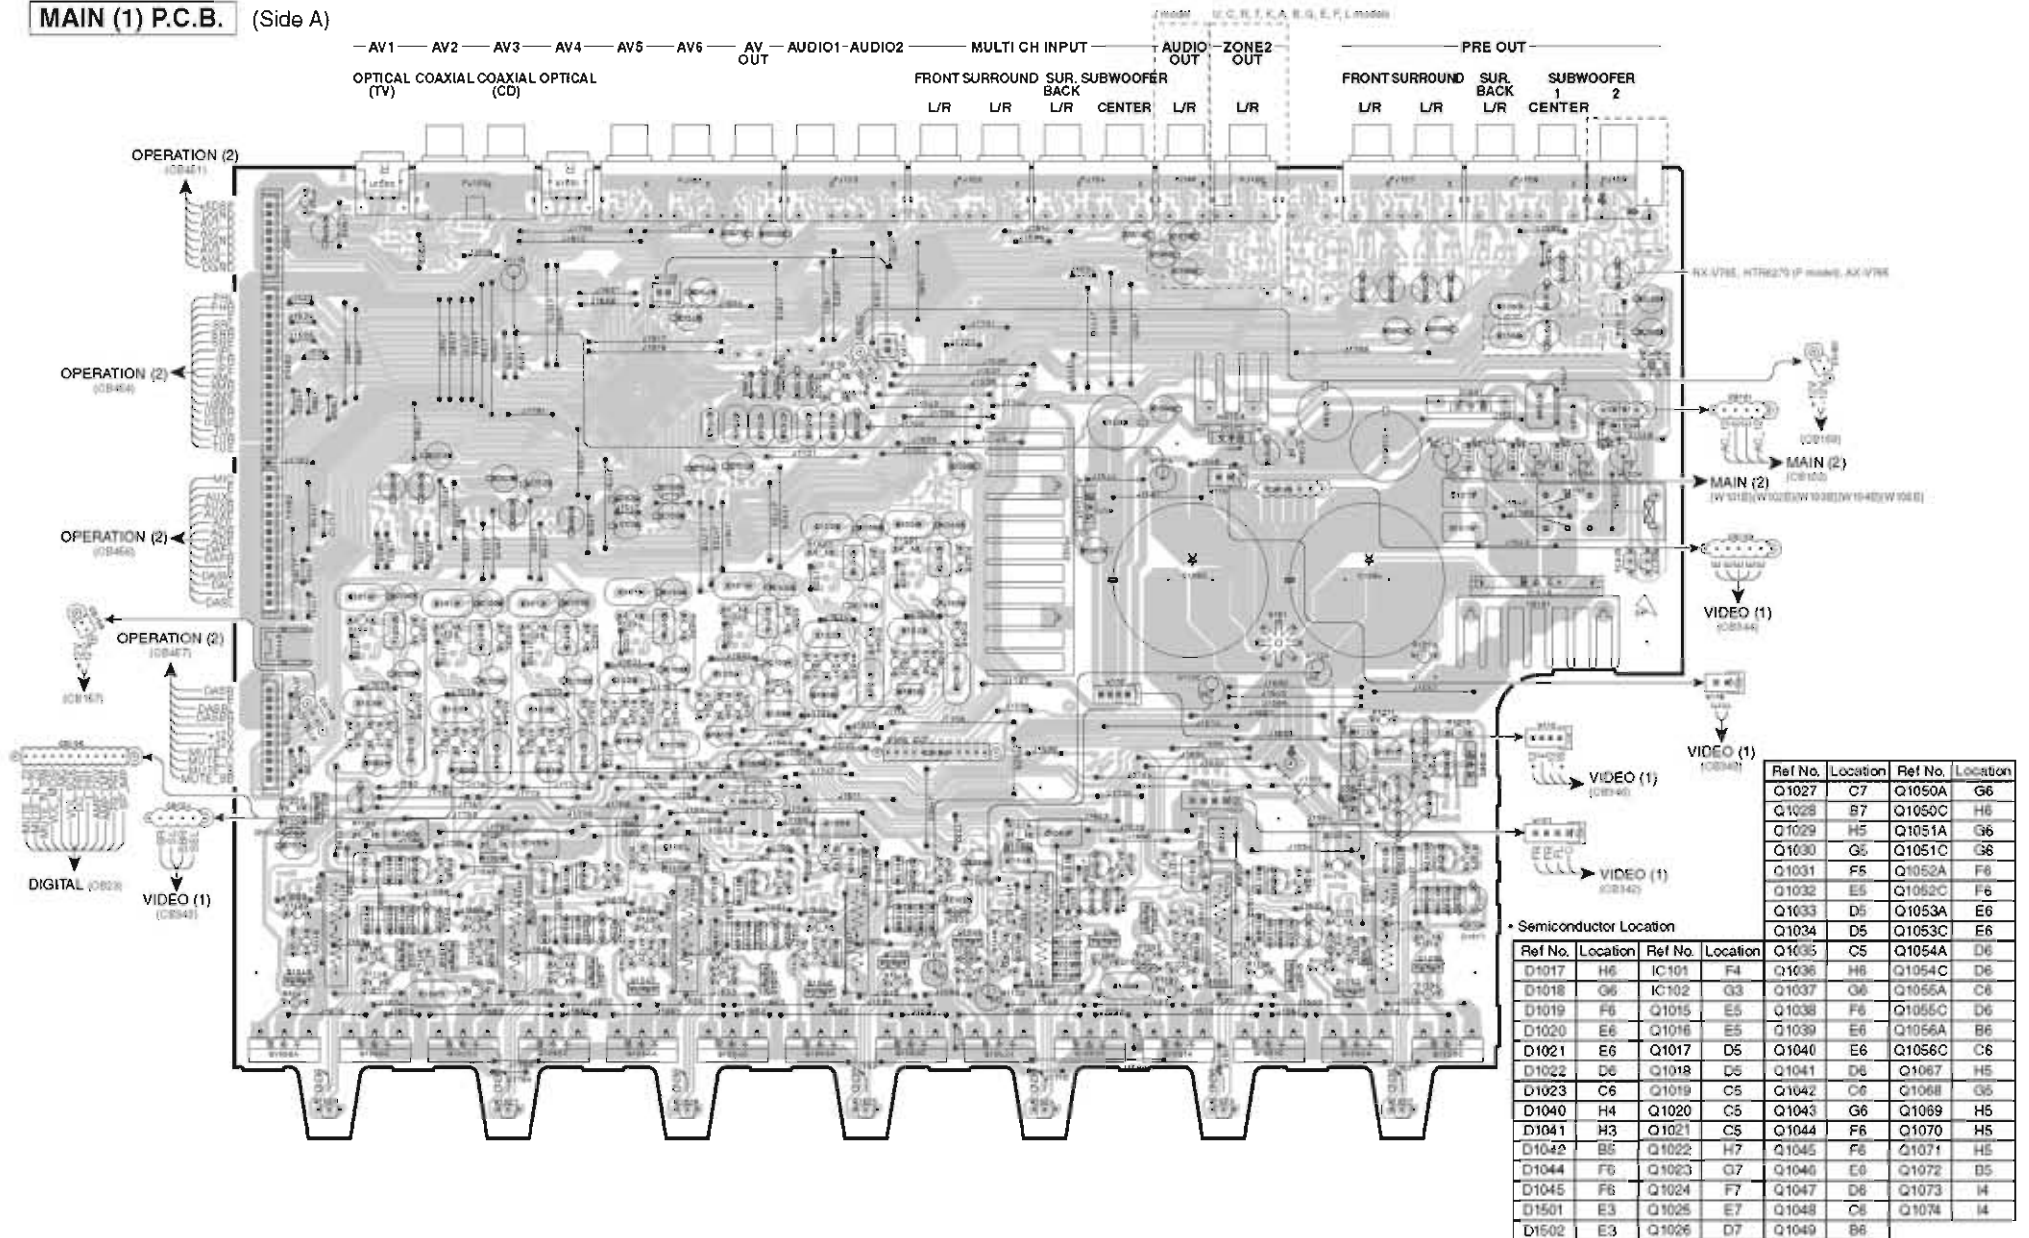

**MAIN (1) P.C.B.** (Side B)

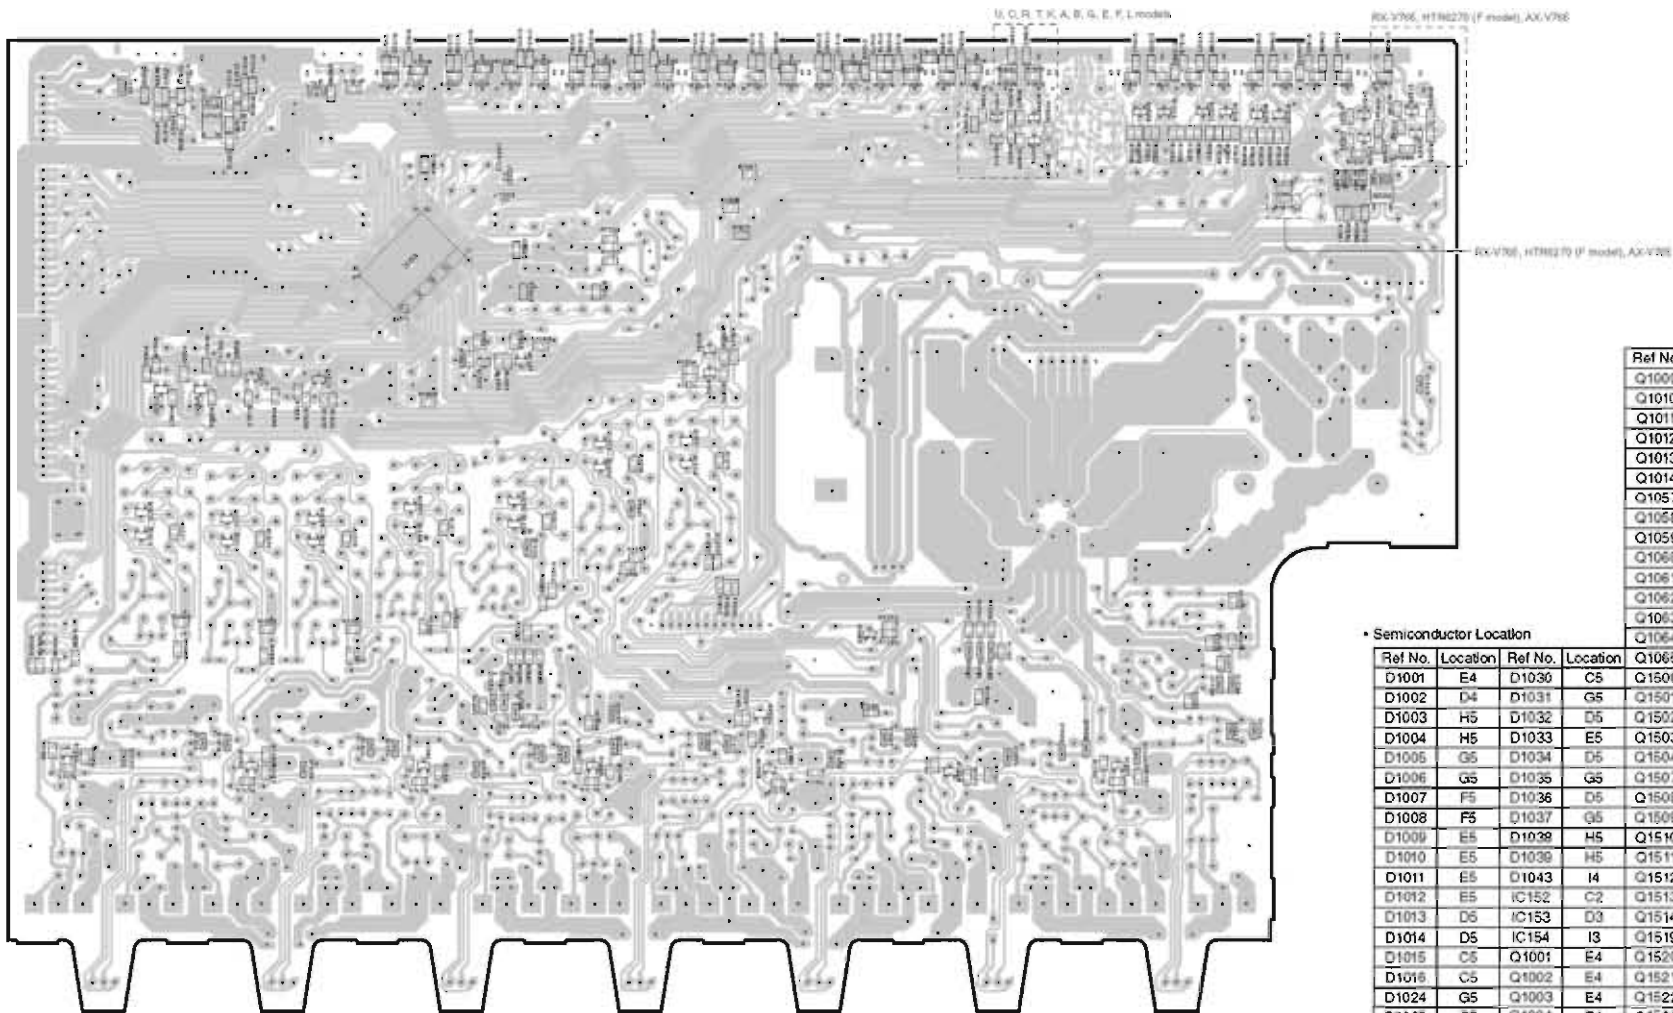


Ref No.	Location
Q1009	C4
Q1010	C4
Q1011	C4
Q1012	C4
Q1013	C4
Q1014	C4
Q1057	G6
Q1058	F6
Q1059	F6
Q1060	E8
Q1061	D6
Q1062	C6
Q1063	B5
Q1064	F5

• Semiconductor Location


Ref No.	Location	Ref No.	Location	Ref No.	Location
D1001	E4	D1030	C5	Q1065	F5
D1002	D4	D1031	G5	Q1500	H2
D1003	H5	D1032	D5	Q1501	D4
D1004	H5	D1033	E5	Q1502	D4
D1005	G5	D1034	D5	Q1503	G2
D1006	G5	D1035	G5	Q1504	E4
D1007	F5	D1036	D5	Q1507	I2
D1008	F5	D1037	G5	Q1508	H3
D1009	E5	D1038	H5	Q1509	I2
D1010	E5	D1039	H5	Q1510	H2
D1011	E5	D1040	H5	Q1511	G2
D1012	E5	D1041	I4	Q1512	G3
D1013	D5	IC152	C2	Q1513	G2
D1014	D5	IC153	D3	Q1514	G3
D1015	C5	IC154	I3	Q1519	H2
D1016	C5	Q1001	E4	Q1520	C4
D1024	G5	Q1002	E4	Q1521	C4
D1025	G5	Q1003	E4	Q1522	H2
D1026	F5	Q1004	E4	Q1523	H2
D1027	E5	Q1005	D4	Q1524	C4
D1028	D6	Q1006	D4	Q1525	C4
D1029	C6	Q1007	D4	Q1526	H2
		Q1008	D4	Q1527	E4

**MAIN (2) P.C.B.** (Side A)

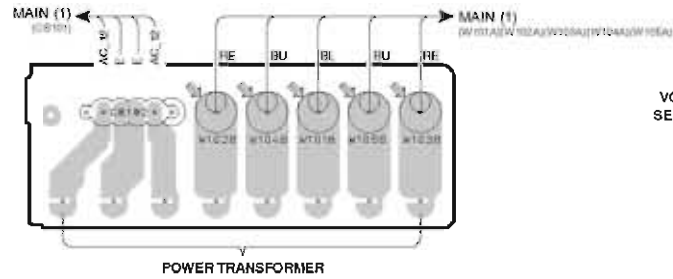

**MAIN (3) P.C.B.** (Side A)

R, L models

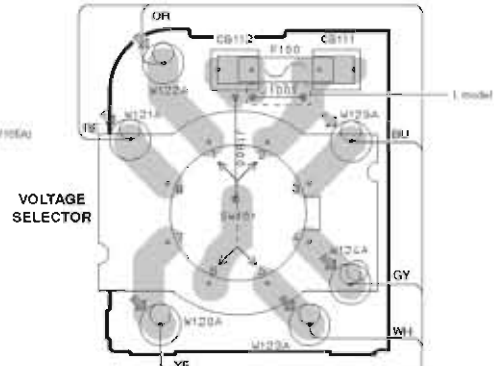


VOLTAGE SELECTOR


230-240V	1-2-5-6
220V	2-3-6-7
110V	3-4-7-8
120V	4-5-8-1

**MAIN (4) P.C.B.** (Side A)


R, L models

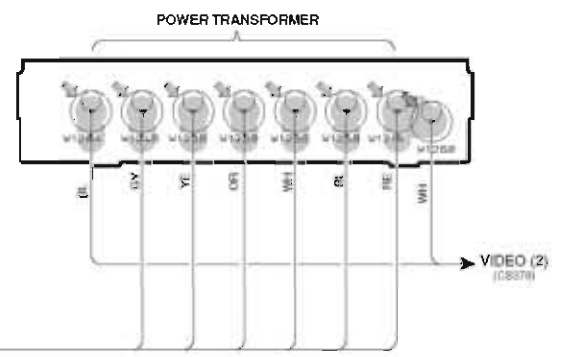

**MAIN (5) P.C.B.** (Side A)

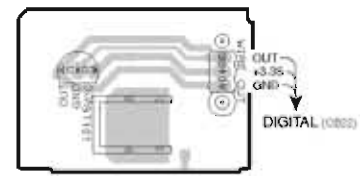

**MAIN (6) P.C.B.** (Side A)

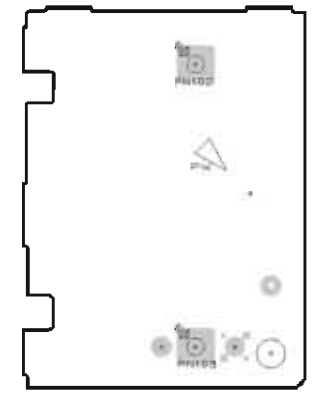

Semiconductor Location


Ref No	Location
IC103	C5



A B C D E F G H I J


1  
2  
3  
4  
5  
6  
7

**MAIN (2) P.C.B.** (Side B)

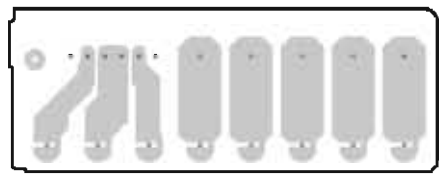

**MAIN (3) P.C.B.** (Side B)

R, L models




**MAIN (4) P.C.B.** (Side B)


R, L models




**MAIN (5) P.C.B.** (Side B)




**MAIN (6) P.C.B.** (Side B)

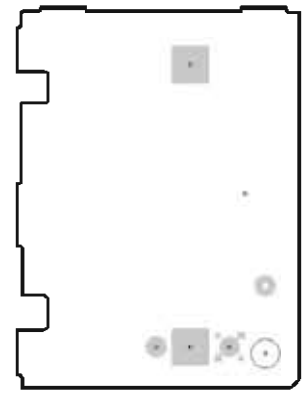

**VIDEO (1) P.C.B. (Side A)**

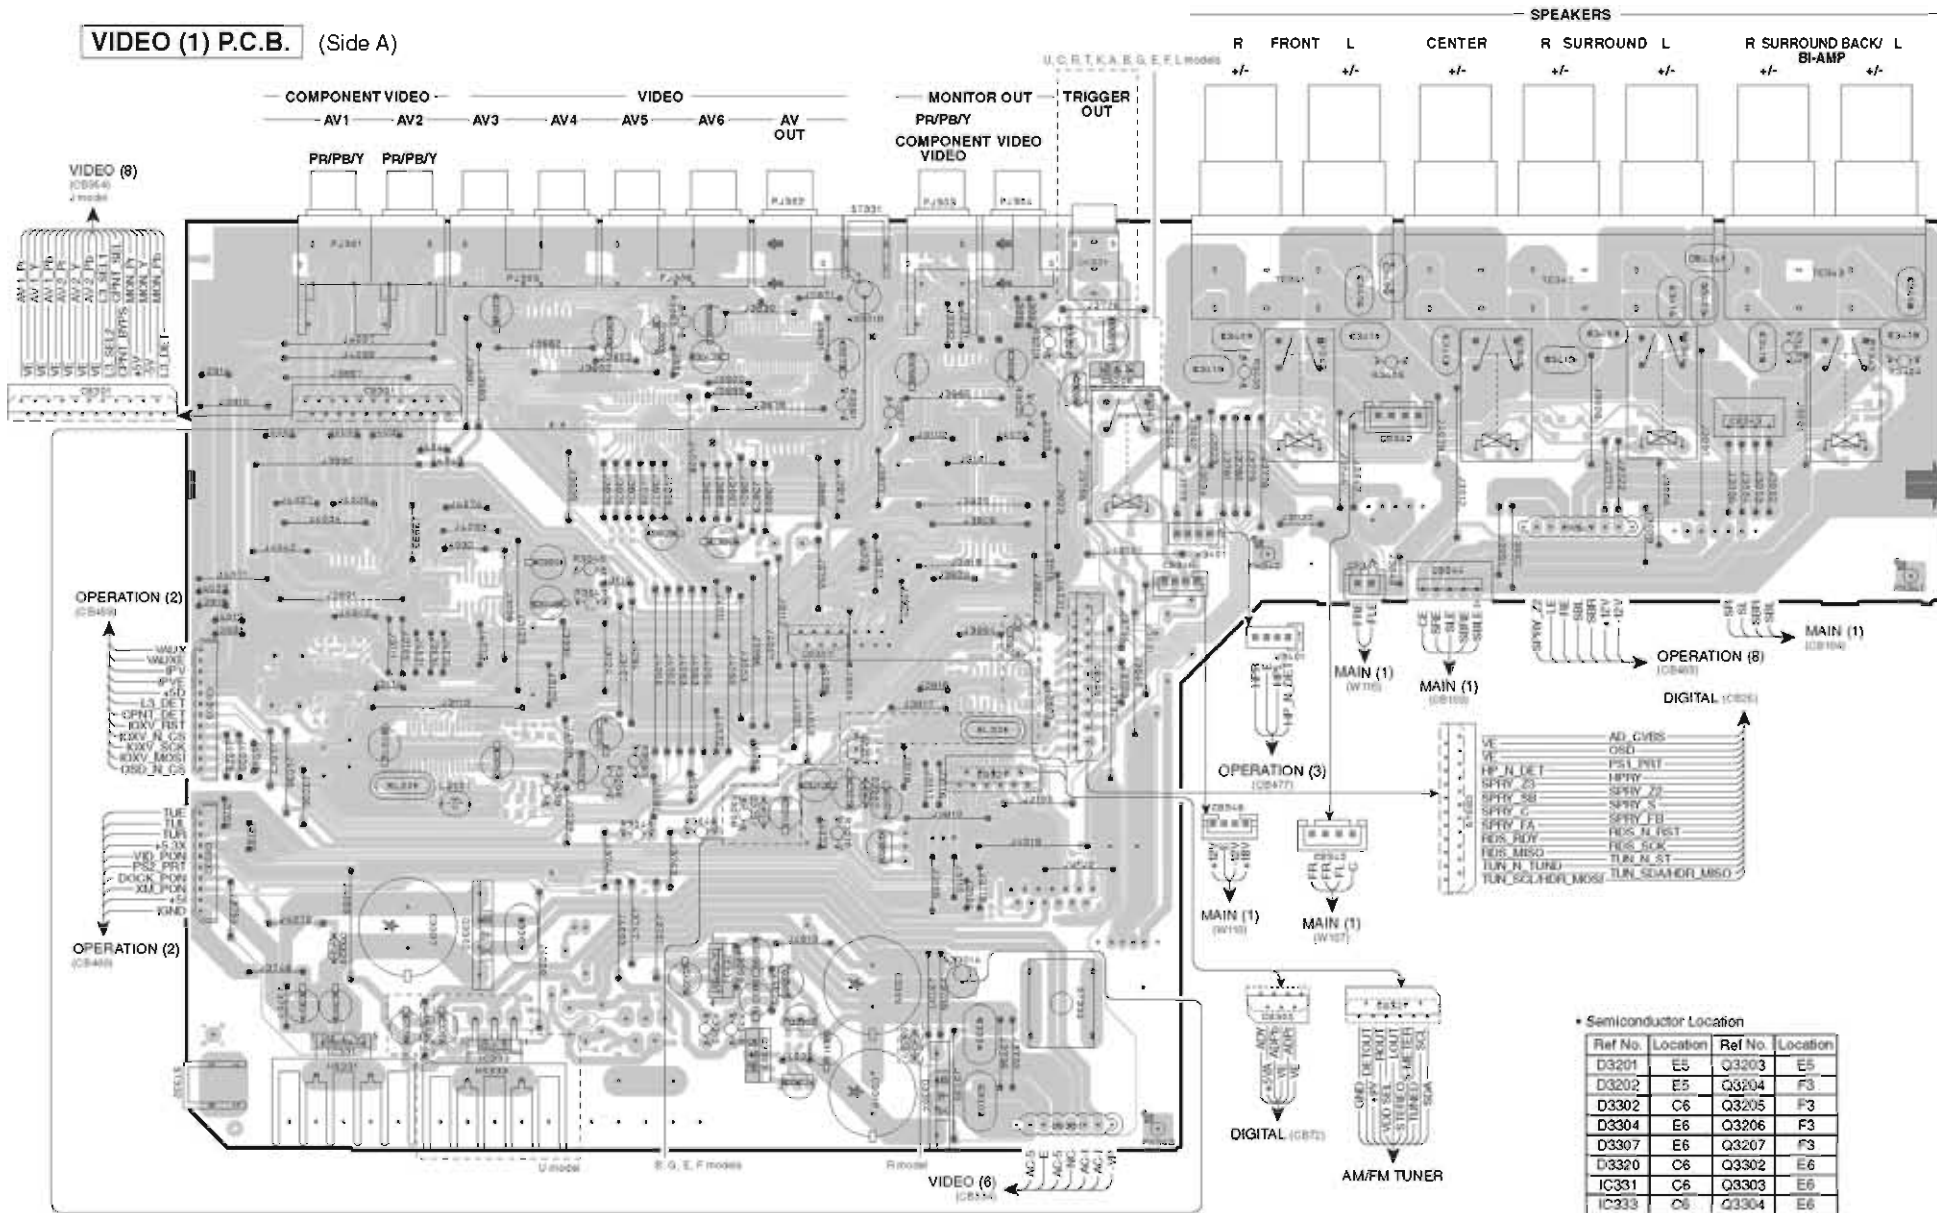


**VIDEO (1) P.C.B.** (Side B)

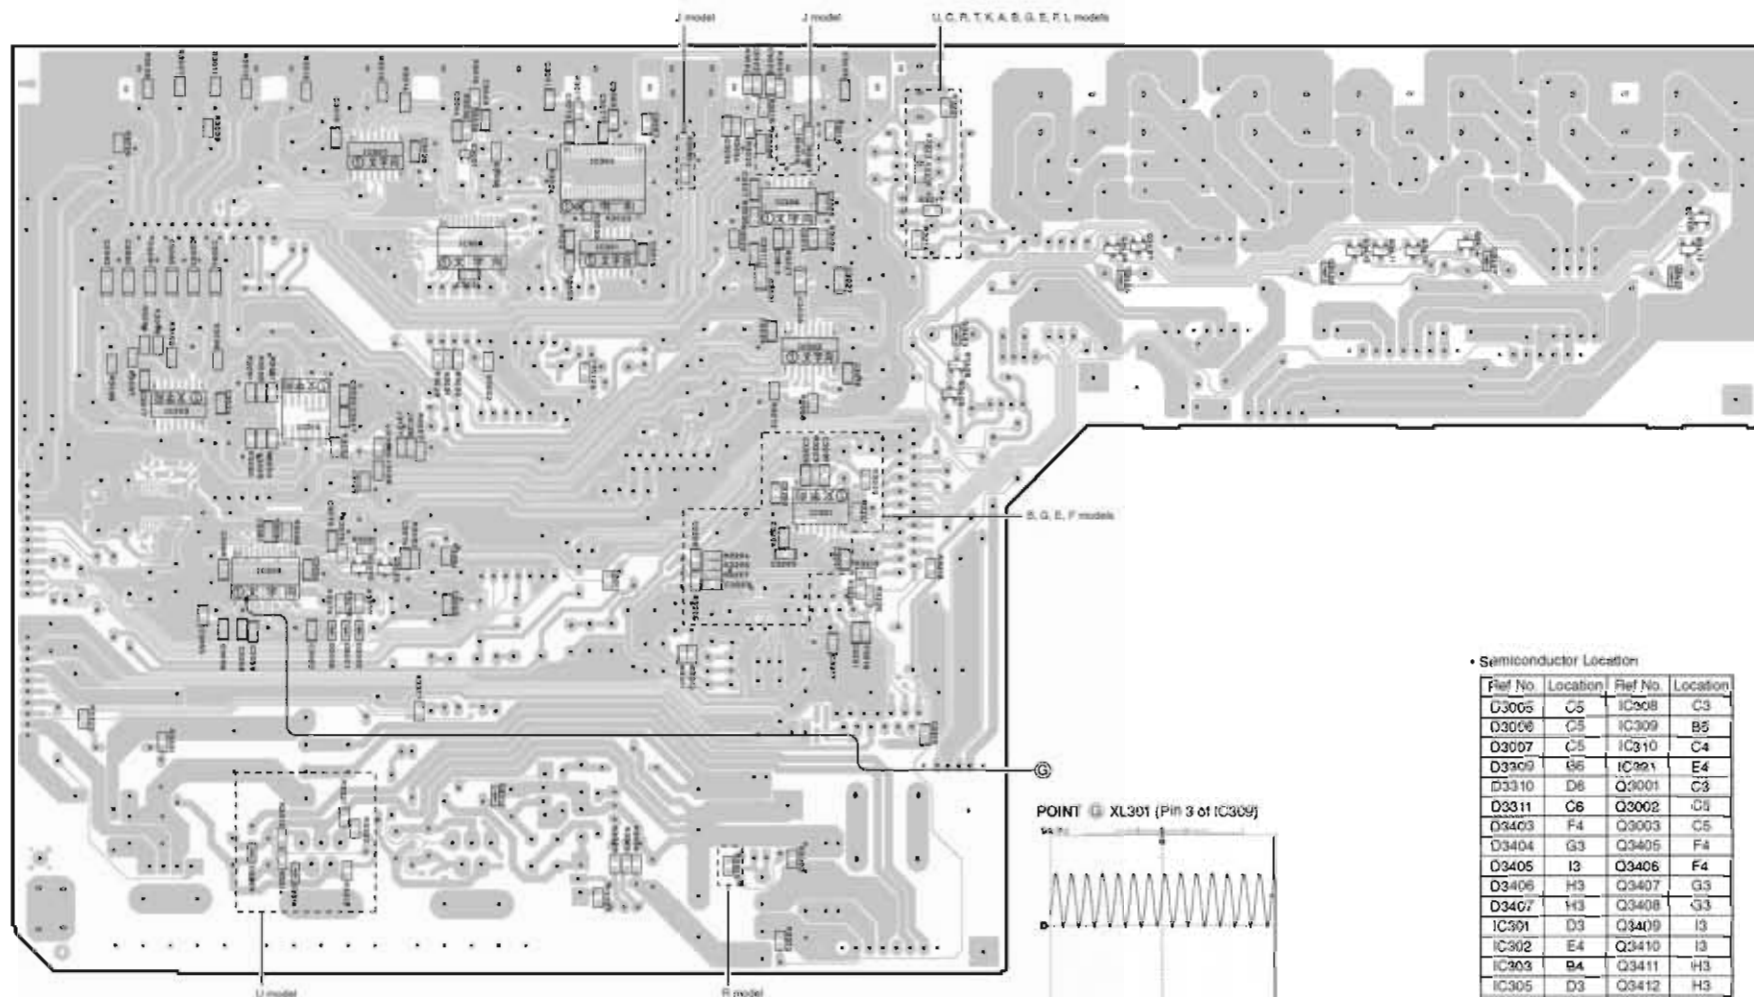


• Semiconductor Location

Ref No.	Location	Ref No.	Location
D3005	C5	IC308	C3
D3006	C5	IC309	B5
D3007	C5	IC310	C4
D3409	B6	IC291	E4
D3310	D6	Q3001	C3
D3311	C6	Q3002	C3
D3403	F4	Q3003	C5
D3404	G3	Q3405	F4
D3405	I3	Q3406	F4
D3406	H3	Q3407	G3
D3407	H3	Q3408	G3
IC301	D3	Q3409	I3
IC302	E4	Q3410	I3
IC303	B4	Q3411	H3
IC305	D3	Q3412	H3
IC308	E3	Q3413	H3
IC307	C3	Q3414	H3

VIDEO (2) P.C.B. (Side A)

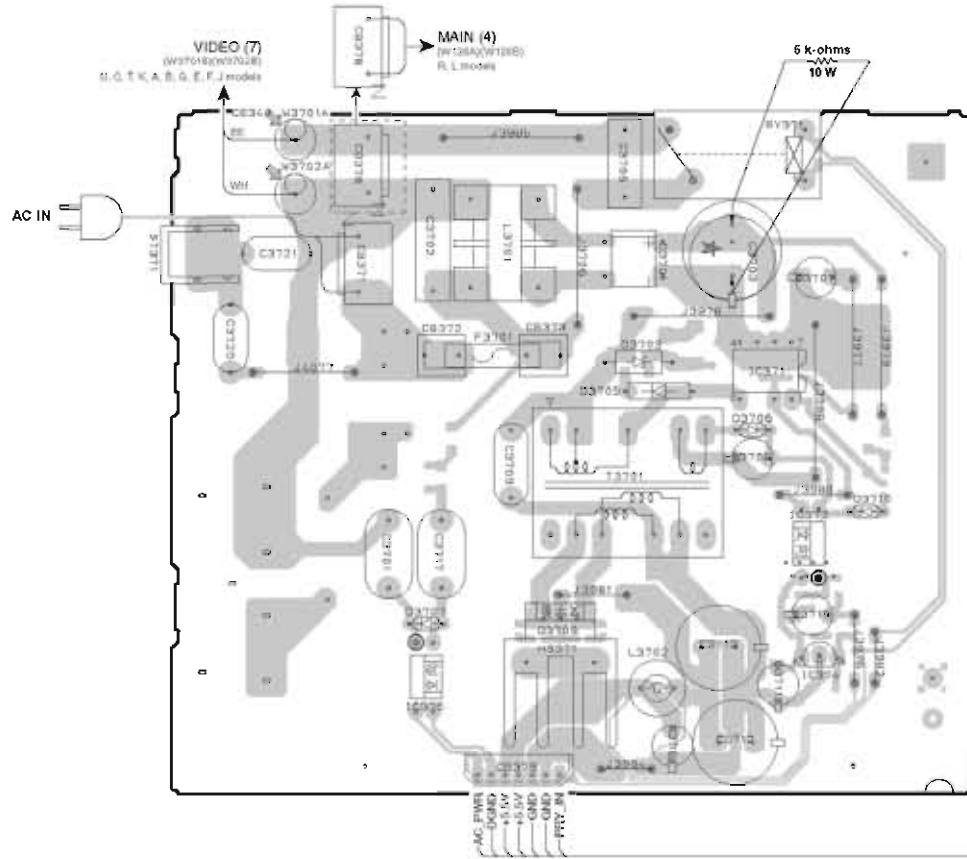

VIDEO (3) P.C.B. (Side A)

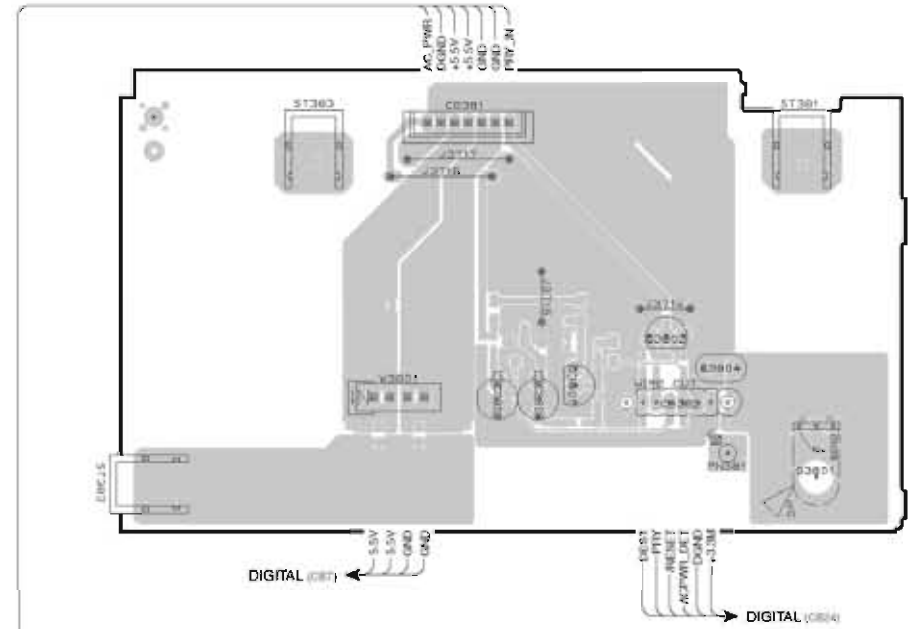

• Semiconductor Location

Ref No.	Location	Ref No.	Location	Ref No.	Location
D3701	D3	D3709	D4	IC374	E5
D3703	D3	D3710	E4	IC375	C5
D3705	D3	IC371	E2	Q3801	I4
D3706	E4	IC372	E4	Q3802	I4
D3707	C4				

Notes)

Safety measures


- Some internal parts in this product contain high voltages and are dangerous. Be sure to take safety measures during servicing, such as wearing insulating gloves.
- Note that positions indicated below are dangerous even after the power is turned off because an electric charge remains and a high voltage continues to exist there. Before starting any repair work, perform discharge by connecting a discharge resistor (5k-ohms/10W) between terminals at following positions. The time required for discharging is about 30 seconds.  
C3703 on VIDEO (2) P.C.B.

注意)


安全対策

- この製品の内部には高電圧部分があり危険です。修理の際は、絶縁性の手袋を使用するなど安全対策を行ってください。
- 下記箇所には電源をOFFにした後も電圧が残り、高電圧が維持されており危険です。修理作業前に放電用抵抗 (5kΩ/10W) を下記箇所の端子間に接続して放電してください。放電所要時間は約 30 秒間です。  
VIDEO (2) P.C.B. の C3703

**VIDEO (2) P.C.B.** (Side B)

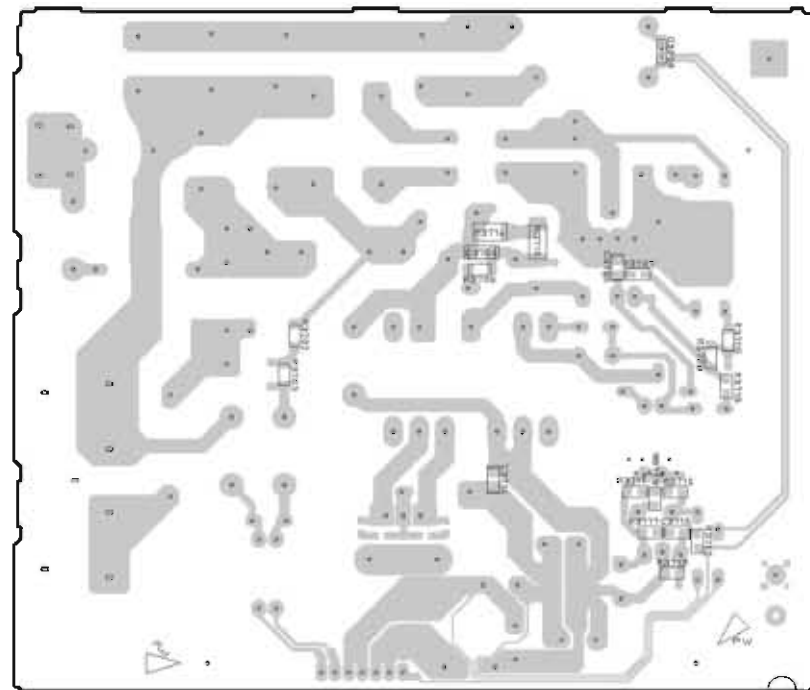


**VIDEO (3) P.C.B.** (Side B)

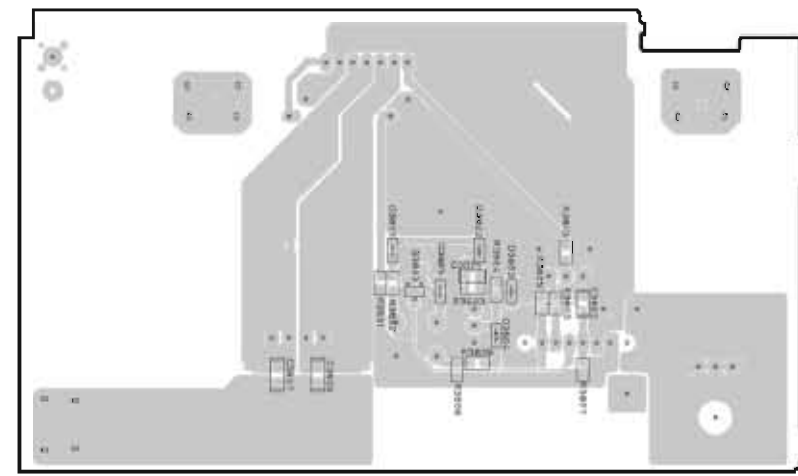


• Semiconductor Location

Part No.	Location
D3708	D2
D3801	H4
D3802	H4
D3803	H4
D3804	H4
D3805	H4
Q3803	H4

**VIDEO (4) P.C.B.** (Side A)

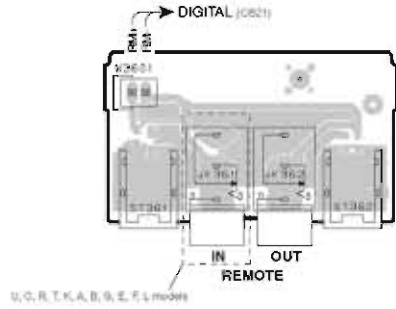


**VIDEO (6) P.C.B.** (Side A)

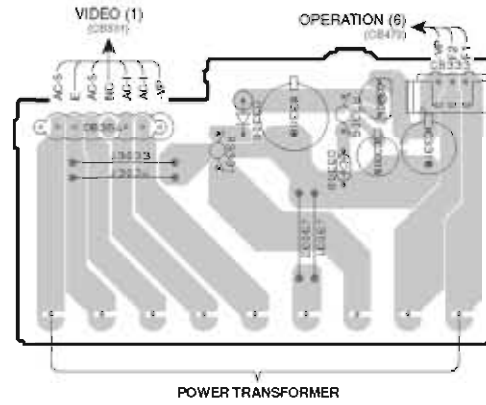


**VIDEO (7) P.C.B.** (Side A)

U, C, T, K, A, B, G, E, F, J models

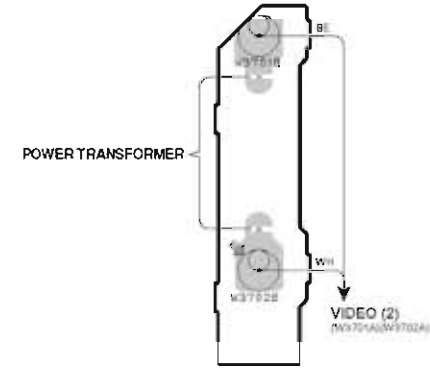


**VIDEO (8) P.C.B.** (Side A)

J model

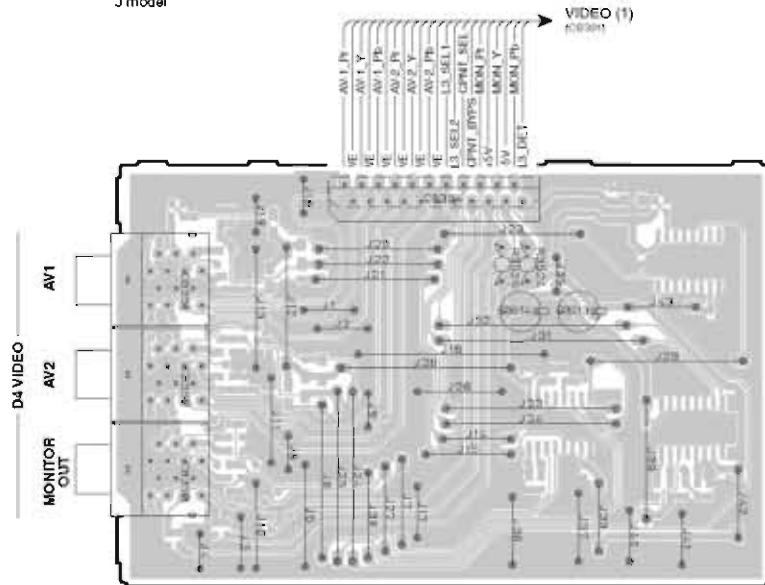

**VIDEO (9) P.C.B.** (Side A)


B, G, E, F models

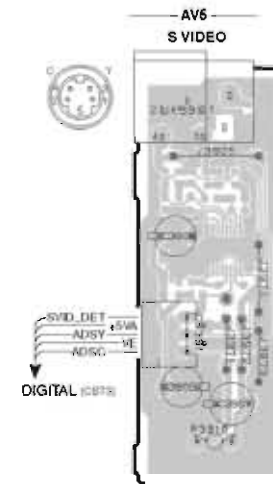


• Semiconductor Location

Ref No.	Location
D3306	E3
D3308	F3
Q3301	F3

**VIDEO (4) P.C.B.** (Side B)



**VIDEO (6) P.C.B.** (Side B)

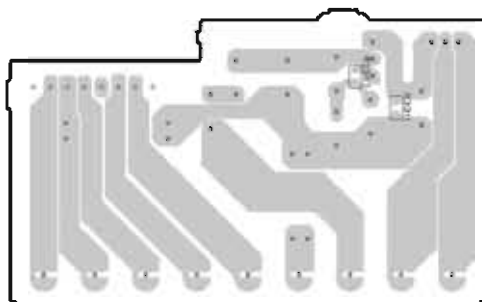


**VIDEO (7) P.C.B.** (Side B)

U, C, T, K, A, B, G, E, F, J models




**VIDEO (8) P.C.B.** (Side B)

J model

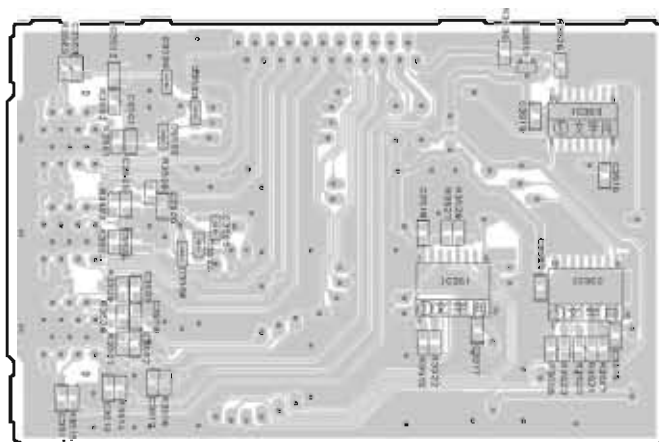


**VIDEO (9) P.C.B.** (Side B)

B, G, E, F models


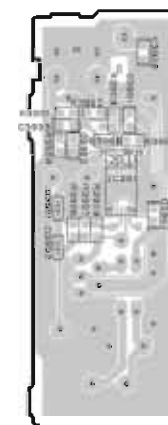


• Semiconductor Location






Ref No	Location
D3501	C6
D3502	C6
D3503	C6
D3504	C6
D3505	C6
D3506	C6
D3801	A3
D3802	B3
D3901	C6
D3902	C6
IC351	D6
IC352	E6
IC353	E6
IC391	H6
Q3501	E5



MEMO











MEMO





SCHEMATIC DIAGRAMS  
DIGITAL 1/5

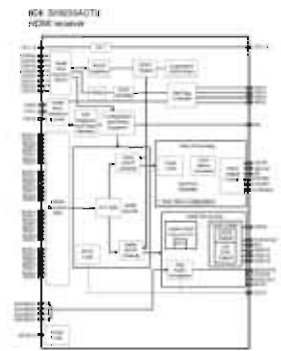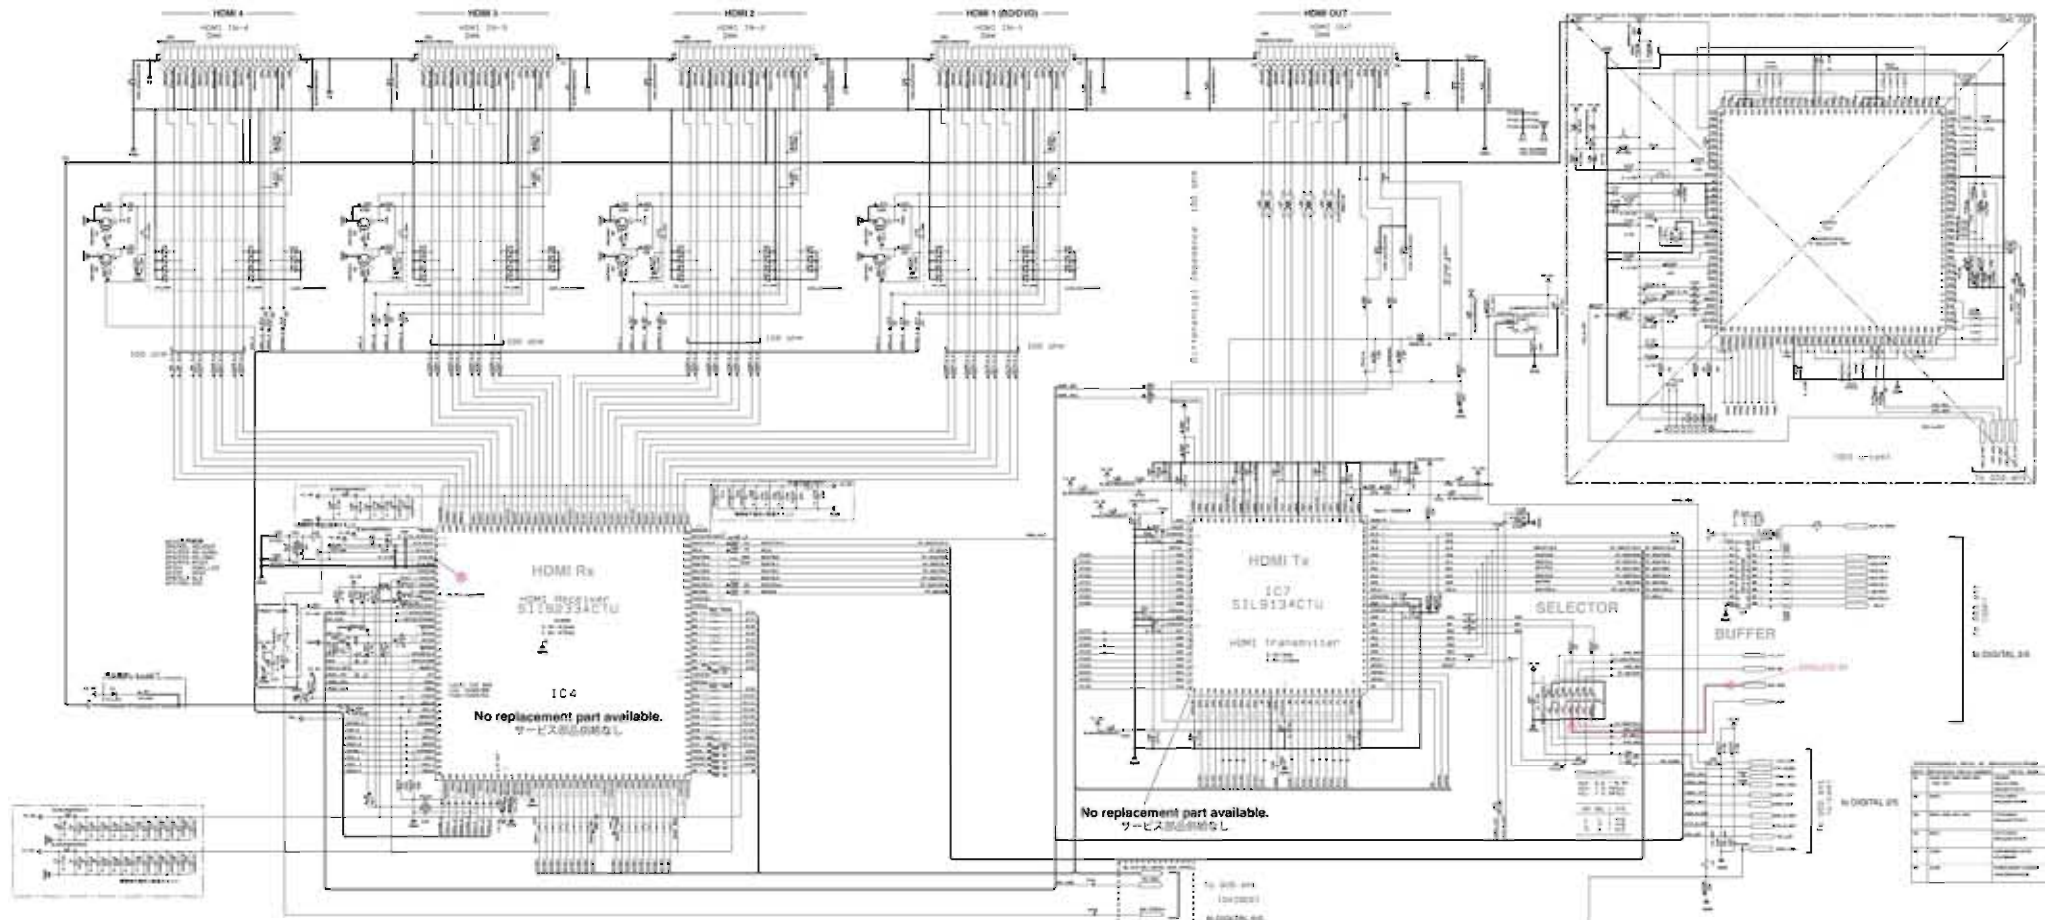

- All voltages are measured with a 100ΩV 3C electronic voltmeter.
- Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally specified.
- Schematic diagram is subject to change without notice.
- 全ての電圧は100ΩV 3C電子電圧計で測定した値です。
- 特殊な特性を有する部品はΔで示され、必ず同等の仕様品で交換してください。
- 回路図は予告なく変更される場合があります。

Page 114 (14/15)
4. OPERATION (I)\_C0401

Page 114 (15/15)
4. VIDEO (I)\_C0401








Page 120 (1/1)
4. MAIN (I)\_C0401

Page 121 (1/1)
4. MAIN (I)\_C0401

Page 124 (1/1)
4. VIDEO (I)\_C0401

Page 125 (1/1)
4. VIDEO (I)\_C0401

Table with 2 columns: Signal Name, Description. Lists various digital signals like DATA\_0, DATA\_1, DATA\_2, DATA\_3, DATA\_4, DATA\_5, DATA\_6, DATA\_7, DATA\_8, DATA\_9, DATA\_10, DATA\_11, DATA\_12, DATA\_13, DATA\_14, DATA\_15, DATA\_16, DATA\_17, DATA\_18, DATA\_19, DATA\_20, DATA\_21, DATA\_22, DATA\_23, DATA\_24, DATA\_25, DATA\_26, DATA\_27, DATA\_28, DATA\_29, DATA\_30, DATA\_31, DATA\_32, DATA\_33, DATA\_34, DATA\_35, DATA\_36, DATA\_37, DATA\_38, DATA\_39, DATA\_40, DATA\_41, DATA\_42, DATA\_43, DATA\_44, DATA\_45, DATA\_46, DATA\_47, DATA\_48, DATA\_49, DATA\_50, DATA\_51, DATA\_52, DATA\_53, DATA\_54, DATA\_55, DATA\_56, DATA\_57, DATA\_58, DATA\_59, DATA\_60, DATA\_61, DATA\_62, DATA\_63, DATA\_64, DATA\_65, DATA\_66, DATA\_67, DATA\_68, DATA\_69, DATA\_70, DATA\_71, DATA\_72, DATA\_73, DATA\_74, DATA\_75, DATA\_76, DATA\_77, DATA\_78, DATA\_79, DATA\_80, DATA\_81, DATA\_82, DATA\_83, DATA\_84, DATA\_85, DATA\_86, DATA\_87, DATA\_88, DATA\_89, DATA\_90, DATA\_91, DATA\_92, DATA\_93, DATA\_94, DATA\_95, DATA\_96, DATA\_97, DATA\_98, DATA\_99, DATA\_100, DATA\_101, DATA\_102, DATA\_103, DATA\_104, DATA\_105, DATA\_106, DATA\_107, DATA\_108, DATA\_109, DATA\_110, DATA\_111, DATA\_112, DATA\_113, DATA\_114, DATA\_115, DATA\_116, DATA\_117, DATA\_118, DATA\_119, DATA\_120, DATA\_121, DATA\_122, DATA\_123, DATA\_124, DATA\_125, DATA\_126, DATA\_127, DATA\_128, DATA\_129, DATA\_130, DATA\_131, DATA\_132, DATA\_133, DATA\_134, DATA\_135, DATA\_136, DATA\_137, DATA\_138, DATA\_139, DATA\_140, DATA\_141, DATA\_142, DATA\_143, DATA\_144, DATA\_145, DATA\_146, DATA\_147, DATA\_148, DATA\_149, DATA\_150, DATA\_151, DATA\_152, DATA\_153, DATA\_154, DATA\_155, DATA\_156, DATA\_157, DATA\_158, DATA\_159, DATA\_160, DATA\_161, DATA\_162, DATA\_163, DATA\_164, DATA\_165, DATA\_166, DATA\_167, DATA\_168, DATA\_169, DATA\_170, DATA\_171, DATA\_172, DATA\_173, DATA\_174, DATA\_175, DATA\_176, DATA\_177, DATA\_178, DATA\_179, DATA\_180, DATA\_181, DATA\_182, DATA\_183, DATA\_184, DATA\_185, DATA\_186, DATA\_187, DATA\_188, DATA\_189, DATA\_190, DATA\_191, DATA\_192, DATA\_193, DATA\_194, DATA\_195, DATA\_196, DATA\_197, DATA\_198, DATA\_199, DATA\_200, DATA\_201, DATA\_202, DATA\_203, DATA\_204, DATA\_205, DATA\_206, DATA\_207, DATA\_208, DATA\_209, DATA\_210, DATA\_211, DATA\_212, DATA\_213, DATA\_214, DATA\_215, DATA\_216, DATA\_217, DATA\_218, DATA\_219, DATA\_220, DATA\_221, DATA\_222, DATA\_223, DATA\_224, DATA\_225, DATA\_226, DATA\_227, DATA\_228, DATA\_229, DATA\_230, DATA\_231, DATA\_232, DATA\_233, DATA\_234, DATA\_235, DATA\_236, DATA\_237, DATA\_238, DATA\_239, DATA\_240, DATA\_241, DATA\_242, DATA\_243, DATA\_244, DATA\_245, DATA\_246, DATA\_247, DATA\_248, DATA\_249, DATA\_250, DATA\_251, DATA\_252, DATA\_253, DATA\_254, DATA\_255, DATA\_256, DATA\_257, DATA\_258, DATA\_259, DATA\_260, DATA\_261, DATA\_262, DATA\_263, DATA\_264, DATA\_265, DATA\_266, DATA\_267, DATA\_268, DATA\_269, DATA\_270, DATA\_271, DATA\_272, DATA\_273, DATA\_274, DATA\_275, DATA\_276, DATA\_277, DATA\_278, DATA\_279, DATA\_280, DATA\_281, DATA\_282, DATA\_283, DATA\_284, DATA\_285, DATA\_286, DATA\_287, DATA\_288, DATA\_289, DATA\_290, DATA\_291, DATA\_292, DATA\_293, DATA\_294, DATA\_295, DATA\_296, DATA\_297, DATA\_298, DATA\_299, DATA\_300, DATA\_301, DATA\_302, DATA\_303, DATA\_304, DATA\_305, DATA\_306, DATA\_307, DATA\_308, DATA\_309, DATA\_310, DATA\_311, DATA\_312, DATA\_313, DATA\_314, DATA\_315, DATA\_316, DATA\_317, DATA\_318, DATA\_319, DATA\_320, DATA\_321, DATA\_322, DATA\_323, DATA\_324, DATA\_325, DATA\_326, DATA\_327, DATA\_328, DATA\_329, DATA\_330, DATA\_331, DATA\_332, DATA\_333, DATA\_334, DATA\_335, DATA\_336, DATA\_337, DATA\_338, DATA\_339, DATA\_340, DATA\_341, DATA\_342, DATA\_343, DATA\_344, DATA\_345, DATA\_346, DATA\_347, DATA\_348, DATA\_349, DATA\_350, DATA\_351, DATA\_352, DATA\_353, DATA\_354, DATA\_355, DATA\_356, DATA\_357, DATA\_358, DATA\_359, DATA\_360, DATA\_361, DATA\_362, DATA\_363, DATA\_364, DATA\_365, DATA\_366, DATA\_367, DATA\_368, DATA\_369, DATA\_370, DATA\_371, DATA\_372, DATA\_373, DATA\_374, DATA\_375, DATA\_376, DATA\_377, DATA\_378, DATA\_379, DATA\_380, DATA\_381, DATA\_382, DATA\_383, DATA\_384, DATA\_385, DATA\_386, DATA\_387, DATA\_388, DATA\_389, DATA\_390, DATA\_391, DATA\_392, DATA\_393, DATA\_394, DATA\_395, DATA\_396, DATA\_397, DATA\_398, DATA\_399, DATA\_400, DATA\_401, DATA\_402, DATA\_403, DATA\_404, DATA\_405, DATA\_406, DATA\_407, DATA\_408, DATA\_409, DATA\_410, DATA\_411, DATA\_412, DATA\_413, DATA\_414, DATA\_415, DATA\_416, DATA\_417, DATA\_418, DATA\_419, DATA\_420, DATA\_421, DATA\_422, DATA\_423, DATA\_424, DATA\_425, DATA\_426, DATA\_427, DATA\_428, DATA\_429, DATA\_430, DATA\_431, DATA\_432, DATA\_433, DATA\_434, DATA\_435, DATA\_436, DATA\_437, DATA\_438, DATA\_439, DATA\_440, DATA\_441, DATA\_442, DATA\_443, DATA\_444, DATA\_445, DATA\_446, DATA\_447, DATA\_448, DATA\_449, DATA\_450, DATA\_451, DATA\_452, DATA\_453, DATA\_454, DATA\_455, DATA\_456, DATA\_457, DATA\_458, DATA\_459, DATA\_460, DATA\_461, DATA\_462, DATA\_463, DATA\_464, DATA\_465, DATA\_466, DATA\_467, DATA\_468, DATA\_469, DATA\_470, DATA\_471, DATA\_472, DATA\_473, DATA\_474, DATA\_475, DATA\_476, DATA\_477, DATA\_478, DATA\_479, DATA\_480, DATA\_481, DATA\_482, DATA\_483, DATA\_484, DATA\_485, DATA\_486, DATA\_487, DATA\_488, DATA\_489, DATA\_490, DATA\_491, DATA\_492, DATA\_493, DATA\_494, DATA\_495, DATA\_496, DATA\_497, DATA\_498, DATA\_499, DATA\_500, DATA\_501, DATA\_502, DATA\_503, DATA\_504, DATA\_505, DATA\_506, DATA\_507, DATA\_508, DATA\_509, DATA\_510, DATA\_511, DATA\_512, DATA\_513, DATA\_514, DATA\_515, DATA\_516, DATA\_517, DATA\_518, DATA\_519, DATA\_520, DATA\_521, DATA\_522, DATA\_523, DATA\_524, DATA\_525, DATA\_526, DATA\_527, DATA\_528, DATA\_529, DATA\_530, DATA\_531, DATA\_532, DATA\_533, DATA\_534, DATA\_535, DATA\_536, DATA\_537, DATA\_538, DATA\_539, DATA\_540, DATA\_541, DATA\_542, DATA\_543, DATA\_544, DATA\_545, DATA\_546, DATA\_547, DATA\_548, DATA\_549, DATA\_550, DATA\_551, DATA\_552, DATA\_553, DATA\_554, DATA\_555, DATA\_556, DATA\_557, DATA\_558, DATA\_559, DATA\_560, DATA\_561, DATA\_562, DATA\_563, DATA\_564, DATA\_565, DATA\_566, DATA\_567, DATA\_568, DATA\_569, DATA\_570, DATA\_571, DATA\_572, DATA\_573, DATA\_574, DATA\_575, DATA\_576, DATA\_577, DATA\_578, DATA\_579, DATA\_580, DATA\_581, DATA\_582, DATA\_583, DATA\_584, DATA\_585, DATA\_586, DATA\_587, DATA\_588, DATA\_589, DATA\_590, DATA\_591, DATA\_592, DATA\_593, DATA\_594, DATA\_595, DATA\_596, DATA\_597, DATA\_598, DATA\_599, DATA\_600, DATA\_601, DATA\_602, DATA\_603, DATA\_604, DATA\_605, DATA\_606, DATA\_607, DATA\_608, DATA\_609, DATA\_610, DATA\_611, DATA\_612, DATA\_613, DATA\_614, DATA\_615, DATA\_616, DATA\_617, DATA\_618, DATA\_619, DATA\_620, DATA\_621, DATA\_622, DATA\_623, DATA\_624, DATA\_625, DATA\_626, DATA\_627, DATA\_628, DATA\_629, DATA\_630, DATA\_631, DATA\_632, DATA\_633, DATA\_634, DATA\_635, DATA\_636, DATA\_637, DATA\_638, DATA\_639, DATA\_640, DATA\_641, DATA\_642, DATA\_643, DATA\_644, DATA\_645, DATA\_646, DATA\_647, DATA\_648, DATA\_649, DATA\_650, DATA\_651, DATA\_652, DATA\_653, DATA\_654, DATA\_655, DATA\_656, DATA\_657, DATA\_658, DATA\_659, DATA\_660, DATA\_661, DATA\_662, DATA\_663, DATA\_664, DATA\_665, DATA\_666, DATA\_667, DATA\_668, DATA\_669, DATA\_670, DATA\_671, DATA\_672, DATA\_673, DATA\_674, DATA\_675, DATA\_676, DATA\_677, DATA\_678, DATA\_679, DATA\_680, DATA\_681, DATA\_682, DATA\_683, DATA\_684, DATA\_685, DATA\_686, DATA\_687, DATA\_688, DATA\_689, DATA\_690, DATA\_691, DATA\_692, DATA\_693, DATA\_694, DATA\_695, DATA\_696, DATA\_697, DATA\_698, DATA\_699, DATA\_700, DATA\_701, DATA\_702, DATA\_703, DATA\_704, DATA\_705, DATA\_706, DATA\_707, DATA\_708, DATA\_709, DATA\_710, DATA\_711, DATA\_712, DATA\_713, DATA\_714, DATA\_715, DATA\_716, DATA\_717, DATA\_718, DATA\_719, DATA\_720, DATA\_721, DATA\_722, DATA\_723, DATA\_724, DATA\_725, DATA\_726, DATA\_727, DATA\_728, DATA\_729, DATA\_730, DATA\_731, DATA\_732, DATA\_733, DATA\_734, DATA\_735, DATA\_736, DATA\_737, DATA\_738, DATA\_739, DATA\_740, DATA\_741, DATA\_742, DATA\_743, DATA\_744, DATA\_745, DATA\_746, DATA\_747, DATA\_748, DATA\_749, DATA\_750, DATA\_751, DATA\_752, DATA\_753, DATA\_754, DATA\_755, DATA\_756, DATA\_757, DATA\_758, DATA\_759, DATA\_760, DATA\_761, DATA\_762, DATA\_763, DATA\_764, DATA\_765, DATA\_766, DATA\_767, DATA\_768, DATA\_769, DATA\_770, DATA\_771, DATA\_772, DATA\_773, DATA\_774, DATA\_775, DATA\_776, DATA\_777, DATA\_778, DATA\_779, DATA\_780, DATA\_781, DATA\_782, DATA\_783, DATA\_784, DATA\_785, DATA\_786, DATA\_787, DATA\_788, DATA\_789, DATA\_790, DATA\_791, DATA\_792, DATA\_793, DATA\_794, DATA\_795, DATA\_796, DATA\_797, DATA\_798, DATA\_799, DATA\_800, DATA\_801, DATA\_802, DATA\_803, DATA\_804, DATA\_805, DATA\_806, DATA\_807, DATA\_808, DATA\_809, DATA\_810, DATA\_811, DATA\_812, DATA\_813, DATA\_814, DATA\_815, DATA\_816, DATA\_817, DATA\_818, DATA\_819, DATA\_820, DATA\_821, DATA\_822, DATA\_823, DATA\_824, DATA\_825, DATA\_826, DATA\_827, DATA\_828, DATA\_829, DATA\_830, DATA\_831, DATA\_832, DATA\_833, DATA\_834, DATA\_835, DATA\_836, DATA\_837, DATA\_838, DATA\_839, DATA\_840, DATA\_841, DATA\_842, DATA\_843, DATA\_844, DATA\_845, DATA\_846, DATA\_847, DATA\_848, DATA\_849, DATA\_850, DATA\_851, DATA\_852, DATA\_853, DATA\_854, DATA\_855, DATA\_856, DATA\_857, DATA\_858, DATA\_859, DATA\_860, DATA\_861, DATA\_862, DATA\_863, DATA\_864, DATA\_865, DATA\_866, DATA\_867, DATA\_868, DATA\_869, DATA\_870, DATA\_871, DATA\_872, DATA\_873, DATA\_874, DATA\_875, DATA\_876, DATA\_877, DATA\_878, DATA\_879, DATA\_880, DATA\_881, DATA\_882, DATA\_883, DATA\_884, DATA\_885, DATA\_886, DATA\_887, DATA\_888, DATA\_889, DATA\_890, DATA\_891, DATA\_892, DATA\_893, DATA\_894, DATA\_895, DATA\_896, DATA\_897, DATA\_898, DATA\_899, DATA\_900, DATA\_901, DATA\_902, DATA\_903, DATA\_904, DATA\_905, DATA\_906, DATA\_907, DATA\_908, DATA\_909, DATA\_910, DATA\_911, DATA\_912, DATA\_913, DATA\_914, DATA\_915, DATA\_916, DATA\_917, DATA\_918, DATA\_919, DATA\_920, DATA\_921, DATA\_922, DATA\_923, DATA\_924, DATA\_925, DATA\_926, DATA\_927, DATA\_928, DATA\_929, DATA\_930, DATA\_931, DATA\_932, DATA\_933, DATA\_934, DATA\_935, DATA\_936, DATA\_937, DATA\_938, DATA\_939, DATA\_940, DATA\_941, DATA\_942, DATA\_943, DATA\_944, DATA\_945, DATA\_946, DATA\_947, DATA\_948, DATA\_949, DATA\_950, DATA\_951, DATA\_952, DATA\_953, DATA\_954, DATA\_955, DATA\_956, DATA\_957, DATA\_958, DATA\_959, DATA\_960, DATA\_961, DATA\_962, DATA\_963, DATA\_964, DATA\_965, DATA\_966, DATA\_967, DATA\_968, DATA\_969, DATA\_970, DATA\_971, DATA\_972, DATA\_973, DATA\_974, DATA\_975, DATA\_976, DATA\_977, DATA\_978, DATA\_979, DATA\_980, DATA\_981, DATA\_982, DATA\_983, DATA\_984, DATA\_985, DATA\_986, DATA\_987, DATA\_988, DATA\_989, DATA\_990, DATA\_991, DATA\_992, DATA\_993, DATA\_994, DATA\_995, DATA\_996, DATA\_997, DATA\_998, DATA\_999, DATA\_1000.

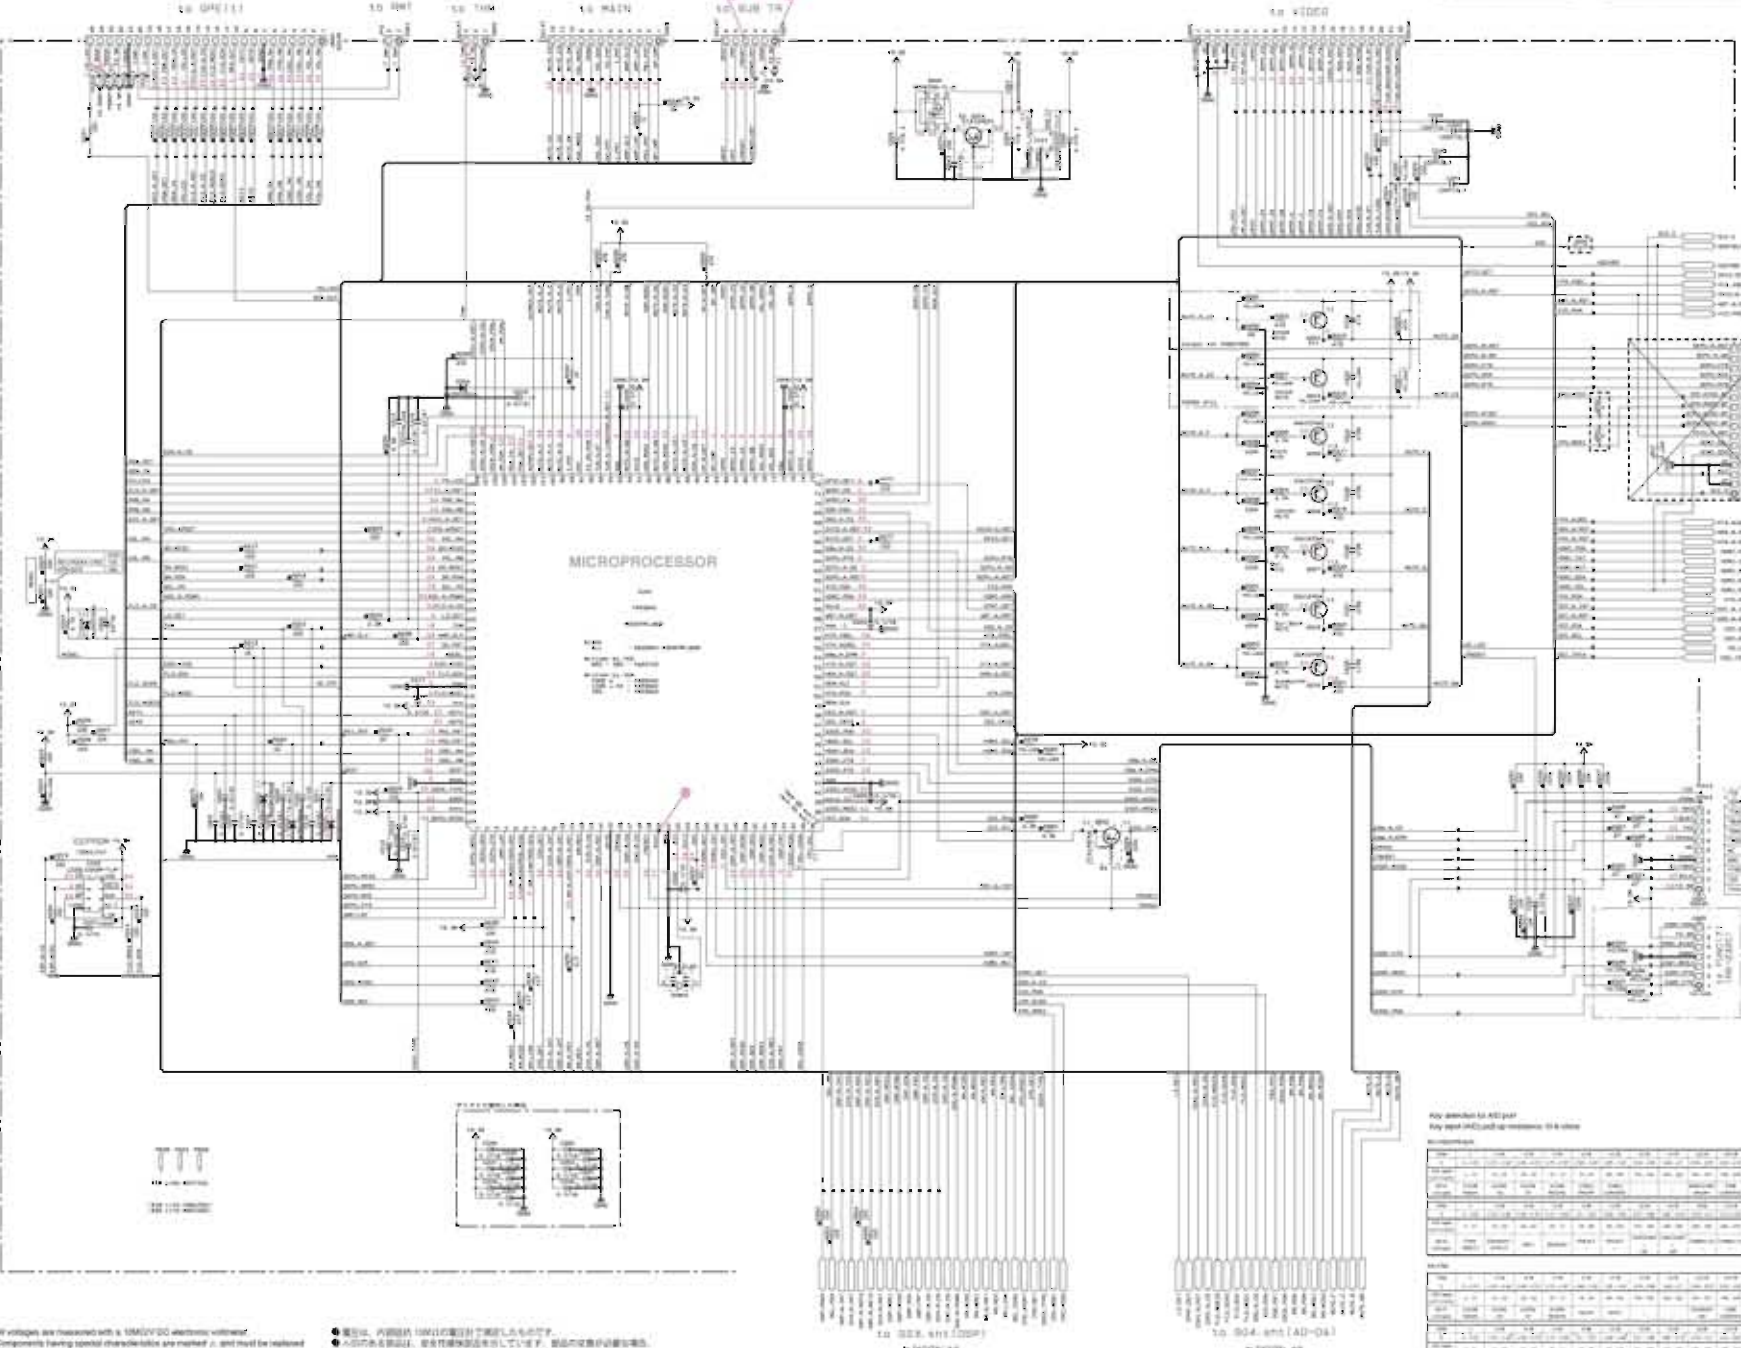

All voltages are measured with a 10MΩVCO electronic voltmeter. Components having special characteristics are marked A, and must be replaced with parts having specifications equal to those originally specified. Schematic diagrams is subject to change without notice.

● 電圧は、内蔵抵抗 10MΩVCO の電圧計で測定してください。 ● 特別な特性を有する部品は、Aでマークされています。 ● 部品交換の際は、必ず仕様書と一致する部品を使用してください。 ● 回路図は、無断で変更される場合があります。 ● 電圧は、10MΩVCOの電子電圧計で測定してください。



to 322.4112207 (to 322.4112207) to 324.811 (AD-04) to 324.811

Table with 4 columns: Pin No., Pin Name, Description, and Notes. Lists pin configurations for various components.




No replacement part available.  
7-123,815,000-2,1

No replacement part available.  
7-123,815,000-2,1


No replacement part available.  
7-123,815,000-2,1

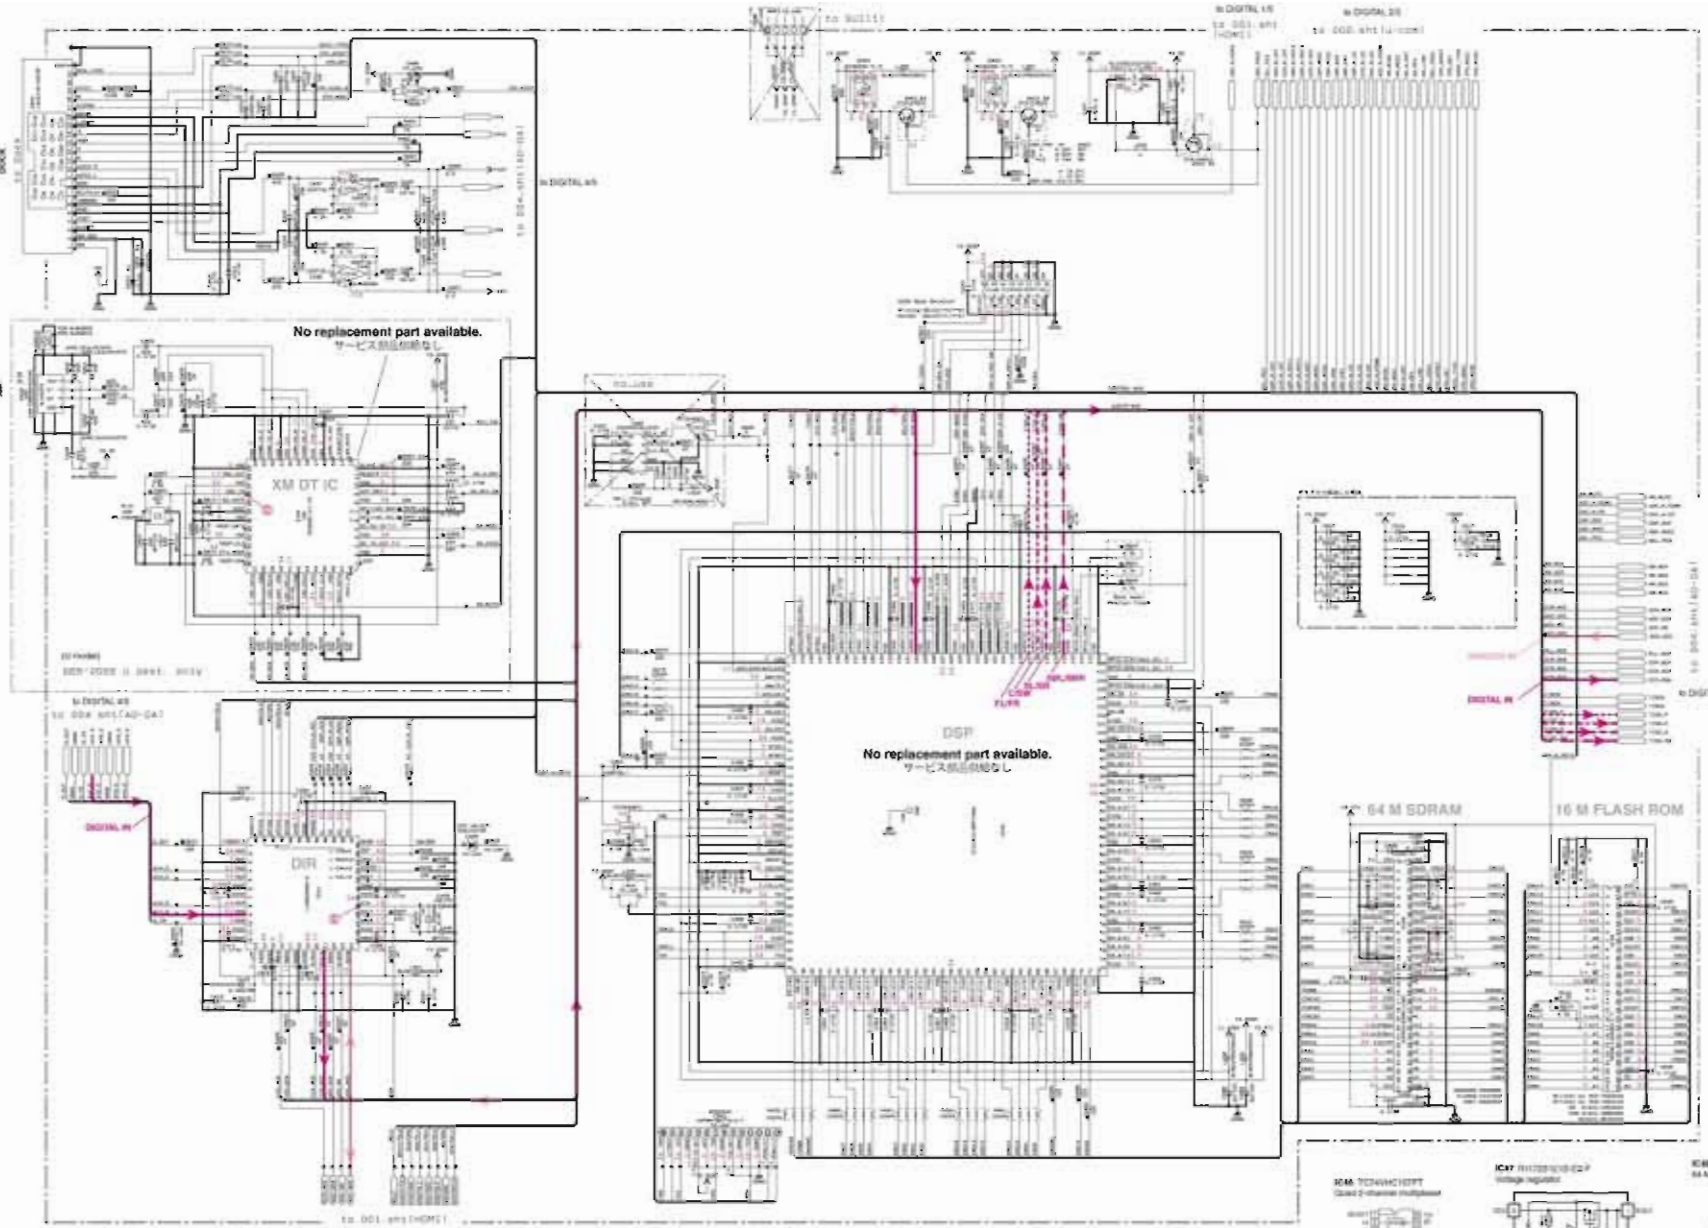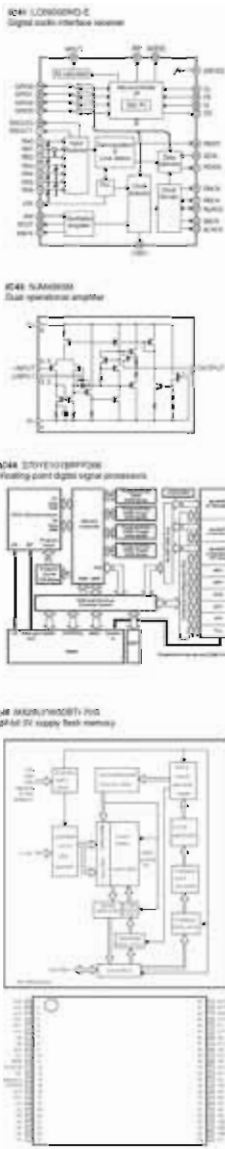

Symbol	Description	Value
(Symbol)	Resistor	100k
(Symbol)	Capacitor	100nF
(Symbol)	Inductor	10uH
(Symbol)	Diode	1N4148
(Symbol)	Transistor	2N2222
(Symbol)	IC	74VHC00
(Symbol)	IC	74VHC125
(Symbol)	IC	74VHC153
(Symbol)	IC	74VHC154
(Symbol)	IC	74VHC239
(Symbol)	IC	74VHC595
(Symbol)	IC	74VHC596
(Symbol)	IC	74VHC597
(Symbol)	IC	74VHC598
(Symbol)	IC	74VHC599
(Symbol)	IC	74VHC596
(Symbol)	IC	74VHC597
(Symbol)	IC	74VHC598
(Symbol)	IC	74VHC599

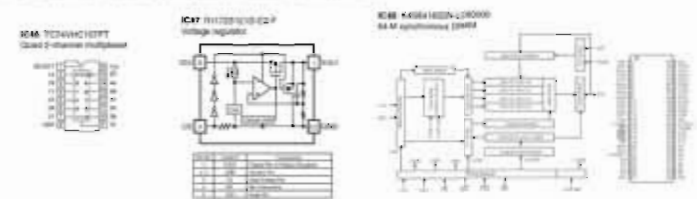

All values are measured with a 100kΩ DC electronic load.  
Components having special characteristics are marked with an asterisk and must be replaced with parts having specifications equal to those originally specified.  
Schematic Diagram is subject to change without notice.

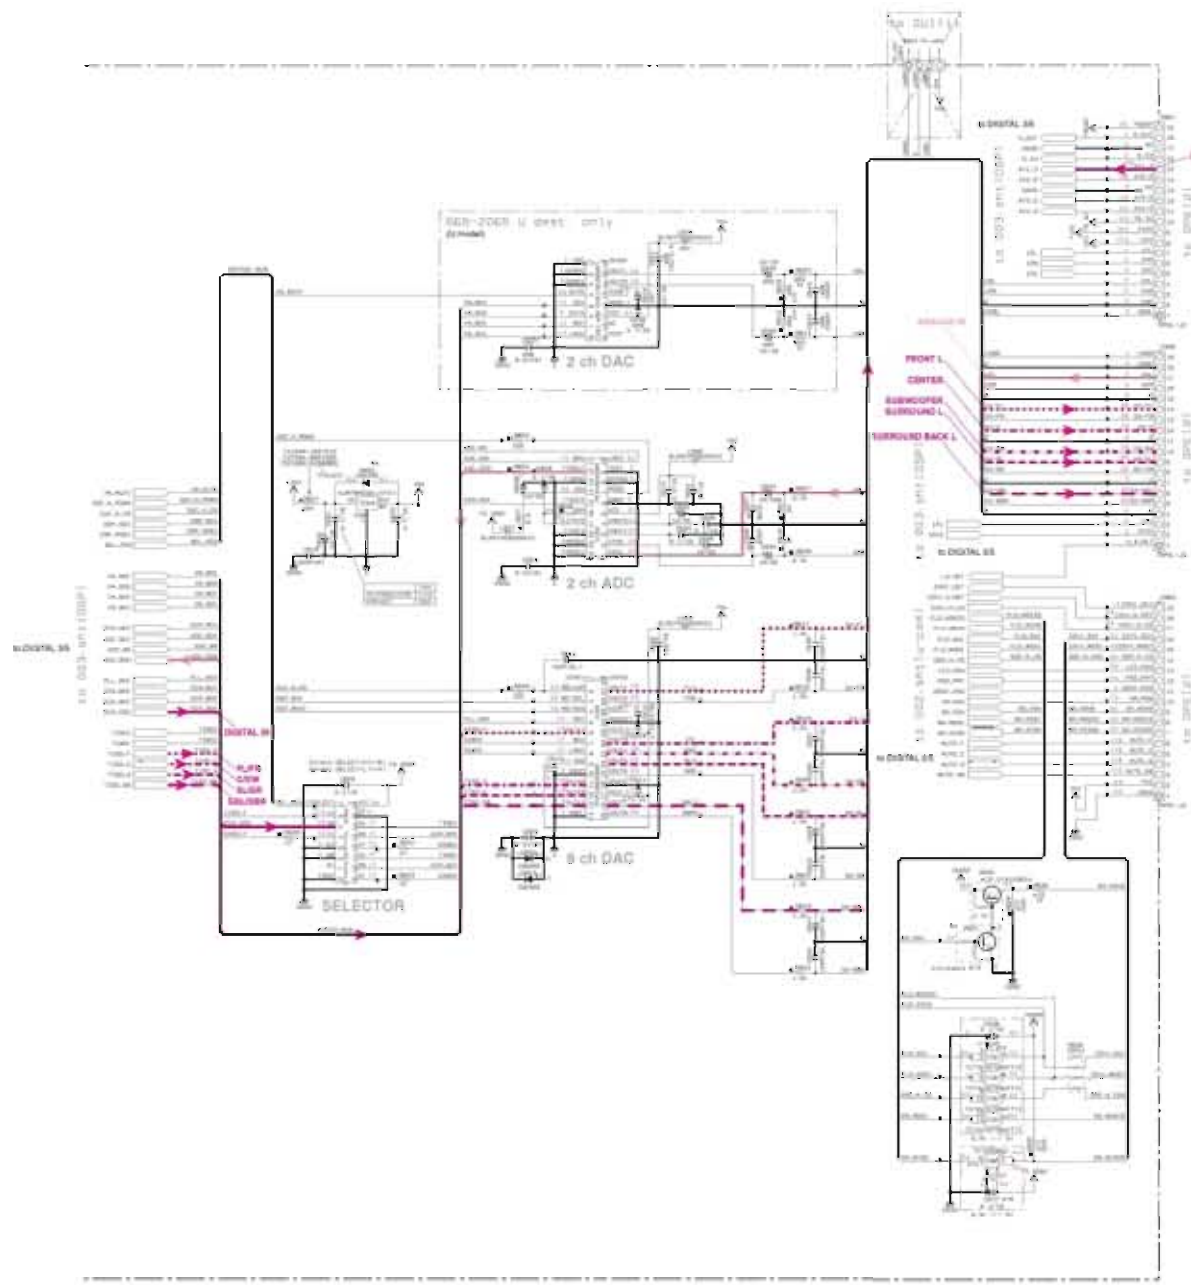


91 - 15-002, 914 (1-004)  
 920-95-004, 914 (004)  
 930-95-005, 914 (005)

IC	Part No.	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9	Pin 10	Pin 11	Pin 12	Pin 13	Pin 14	Pin 15	Pin 16	Pin 17	Pin 18	Pin 19	Pin 20	Pin 21	Pin 22	Pin 23	Pin 24	Pin 25	Pin 26	Pin 27	Pin 28	Pin 29	Pin 30	Pin 31	Pin 32	Pin 33	Pin 34	Pin 35	Pin 36	Pin 37	Pin 38	Pin 39	Pin 40
1	91-15-002	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40

IC	Part No.	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9	Pin 10	Pin 11	Pin 12	Pin 13	Pin 14	Pin 15	Pin 16	Pin 17	Pin 18	Pin 19	Pin 20	Pin 21	Pin 22	Pin 23	Pin 24	Pin 25	Pin 26	Pin 27	Pin 28	Pin 29	Pin 30	Pin 31	Pin 32	Pin 33	Pin 34	Pin 35	Pin 36	Pin 37	Pin 38	Pin 39	Pin 40
1	91-15-002	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40


NOTICE (continued)  
 1. All voltages are measured with a 100kV DC resistance unless otherwise noted.  
 2. Components having special characteristics are marked with an asterisk and must be replaced with parts having specifications equal to those originally specified.  
 3. Circuitry diagrams is subject to change without notice.

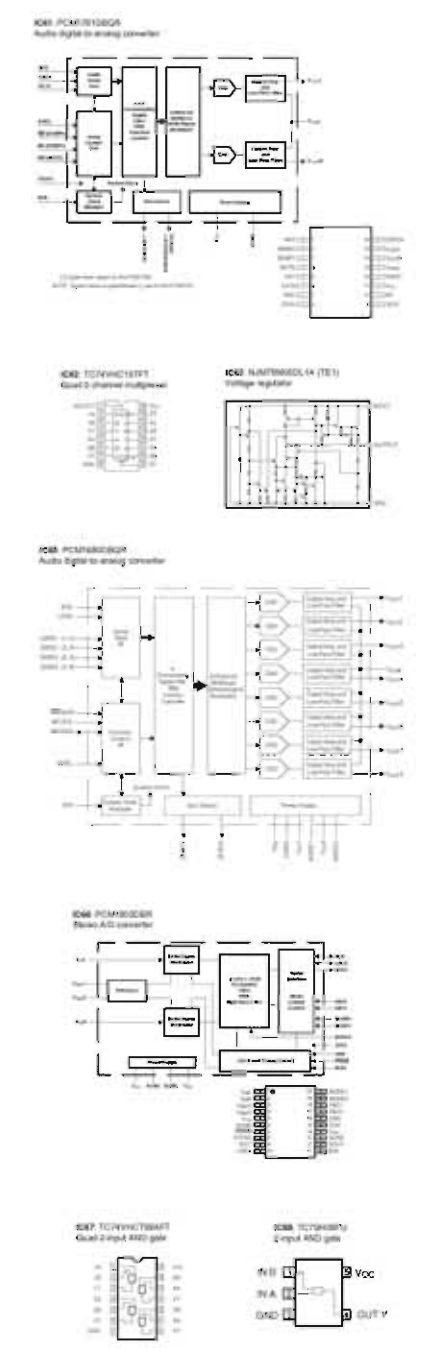


- All voltages are measured with a 100kV DC resistance unless otherwise noted.
- Components having special characteristics are marked with an asterisk and must be replaced with parts having specifications equal to those originally specified.
- Circuitry diagrams is subject to change without notice.

Page 124 (5)  
IN VIDEO (S, CSST)


Page 124 (5)  
IN VIDEO (L, CSST)

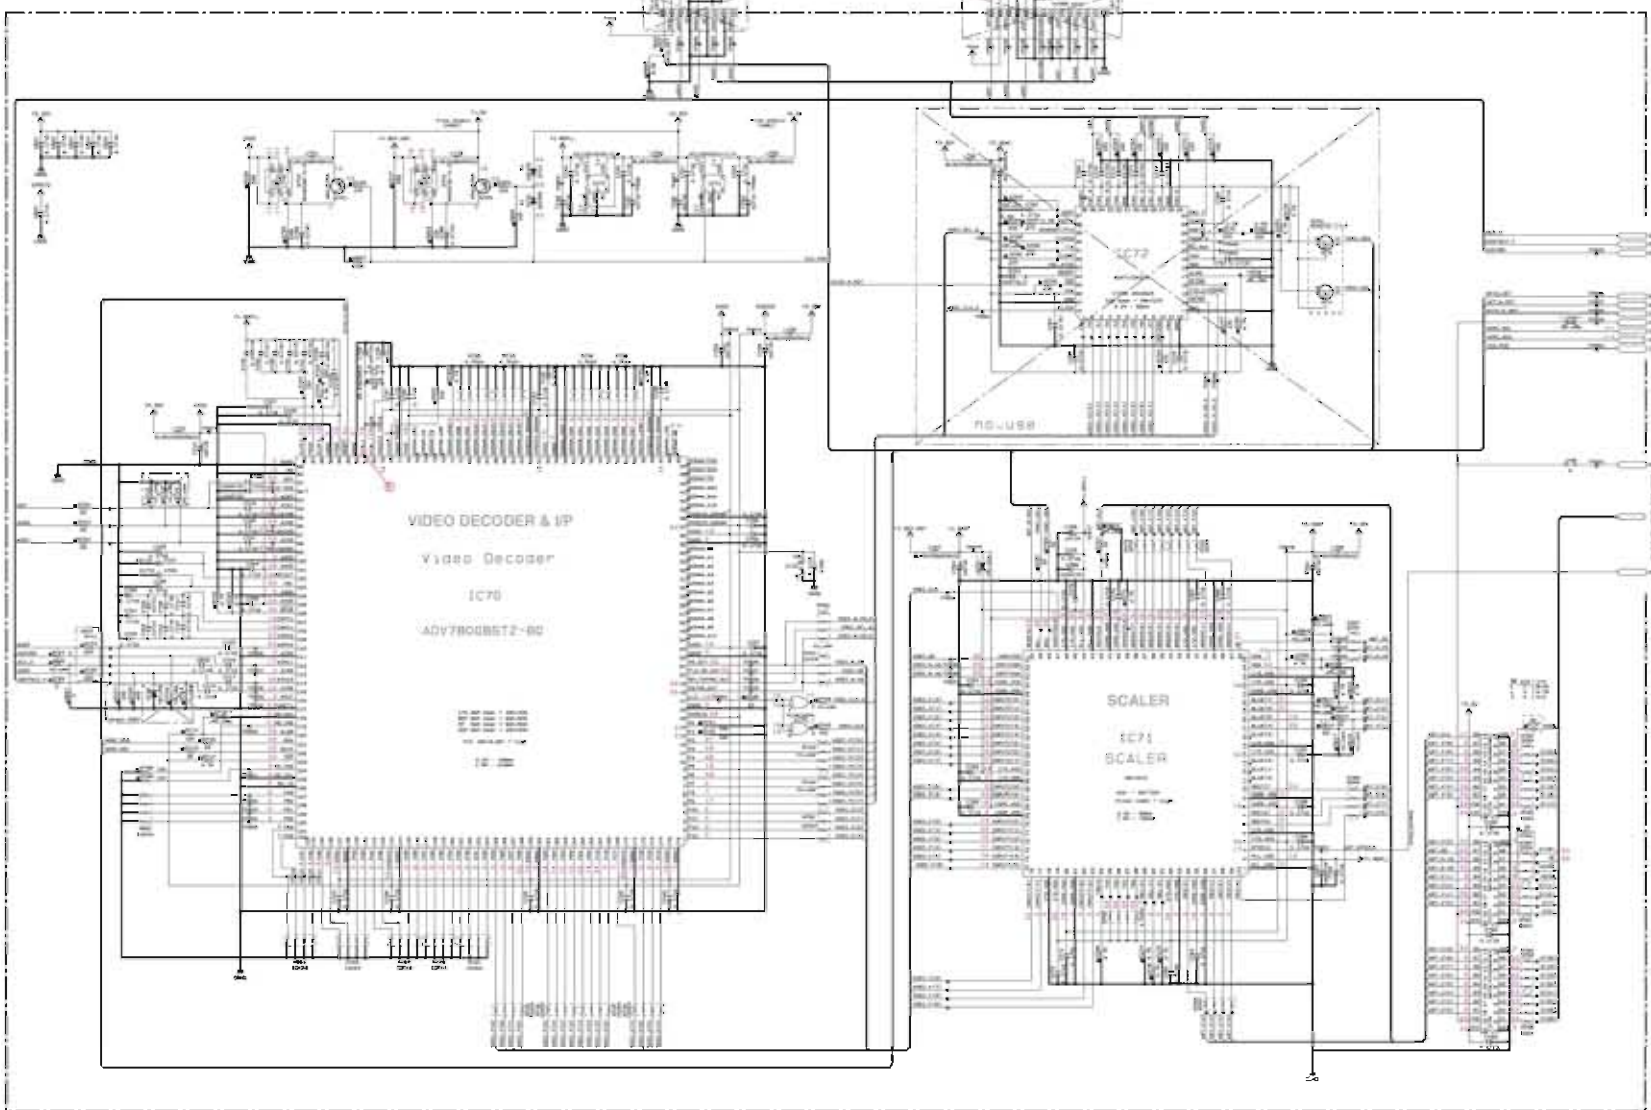


NOTE: Pin 10 (VDD) has terminals with 3-wire output.




NOTE: 10V (VDD) (P, N) Dual In-Line (DIP) package.




NOTE: AVDD (P, N) Voltage regulator.




NOTE: AVDD (P, N) Voltage regulator.



NOTE: AVDD (P, N) Voltage regulator.



DVIDEO  
DS71C03 (P, N) 3-wire  
DIGITAL (5)





Signal	Level	Unit
VDD	1.5	V
VDD	0	V
VDD	0.5	V
VDD	1.0	V
VDD	1.5	V
VDD	2.0	V
VDD	2.5	V
VDD	3.0	V
VDD	3.5	V
VDD	4.0	V
VDD	4.5	V
VDD	5.0	V
VDD	5.5	V
VDD	6.0	V
VDD	6.5	V
VDD	7.0	V
VDD	7.5	V
VDD	8.0	V
VDD	8.5	V
VDD	9.0	V
VDD	9.5	V
VDD	10.0	V

Signal	Level	Unit
VDD	1.5	V
VDD	0	V
VDD	0.5	V
VDD	1.0	V
VDD	1.5	V
VDD	2.0	V
VDD	2.5	V
VDD	3.0	V
VDD	3.5	V
VDD	4.0	V
VDD	4.5	V
VDD	5.0	V
VDD	5.5	V
VDD	6.0	V
VDD	6.5	V
VDD	7.0	V
VDD	7.5	V
VDD	8.0	V
VDD	8.5	V
VDD	9.0	V
VDD	9.5	V
VDD	10.0	V


- All voltages are measured with a 10MΩ DC electronic ohmmeter.
- Components having special characteristics are marked (J), and must be replaced with parts having specifications equal to those originally installed.
- Intermittent diagrams is subject to change without notice.

NOTE: ADV7808S12-80 (P, N) Voltage regulator.

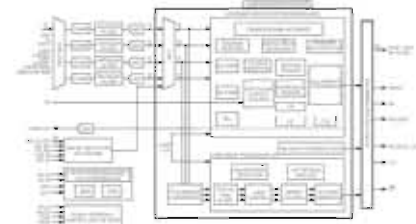

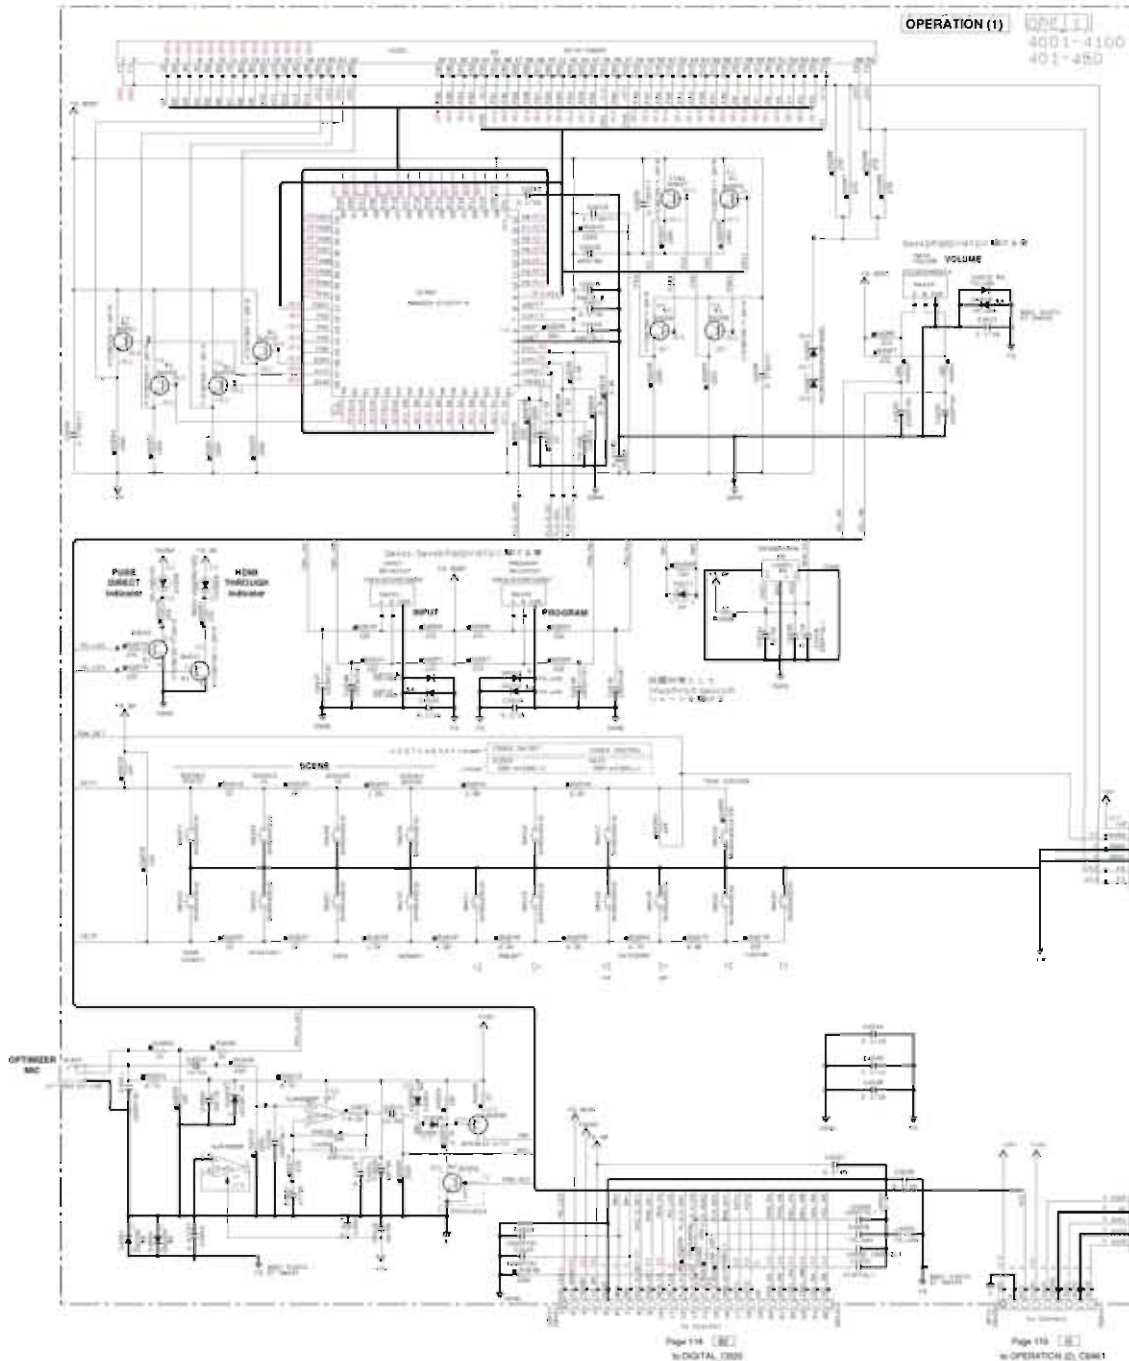


**OPERATION (1)**  
 4001-4100  
 401-450

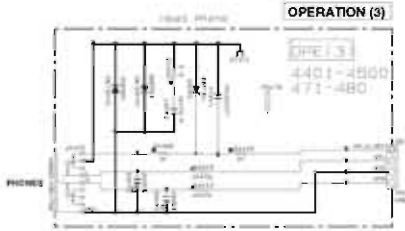


**OPERATION (3)**  
 4401-4500  
 471-480

Page 128 [A]  
 to VIDEO (L) W/M

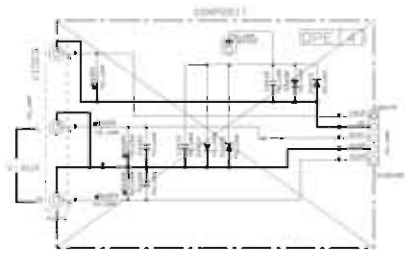



**OPERATION (7)**

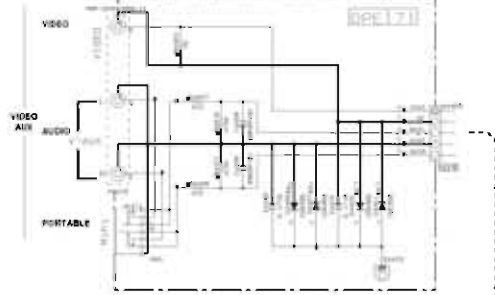

**OPERATION (10)**

Page 129 [A]  
 to VIDEO (L) W/M

**OPERATION (6)**  
 STANDBY ON



IC402 440010-410010  
 18 pin x 7 segment LED controller

Pin	Function	Notes
1	Common	Common to all LEDs
2	LED1	Red
3	LED2	Green
4	LED3	Blue
5	LED4	Yellow
6	LED5	Purple
7	LED6	Pink
8	LED7	White

IC401 40010-410010  
 18 pin x 7 segment LED controller

Pin	Function	Notes
1	Common	Common to all LEDs
2	LED1	Red
3	LED2	Green
4	LED3	Blue
5	LED4	Yellow
6	LED5	Purple
7	LED6	Pink
8	LED7	White

IC402 440010-410010  
 18 pin x 7 segment LED controller

Pin	Function	Notes
1	Common	Common to all LEDs
2	LED1	Red
3	LED2	Green
4	LED3	Blue
5	LED4	Yellow
6	LED5	Purple
7	LED6	Pink
8	LED7	White

NOTICE

1	...
2	...
3	...
4	...
5	...
6	...
7	...
8	...

• All voltages are measured with a 10MΩ DC electronic voltmeter.  
 • Components having special characteristics are marked with an asterisk and their values are given in parentheses.  
 • Dimensions are subject to change without notice.


• RESISTOR VALUES ARE IN OHMS UNLESS OTHERWISE SPECIFIED.  
 • CAPACITOR VALUES ARE IN PICO-FARADS UNLESS OTHERWISE SPECIFIED.  
 • ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

Pin 1-18 (A) to VIDEO (L) W/M

Pin	Signal	Level	Notes
1	...	...	...
2	...	...	...
3	...	...	...
4	...	...	...
5	...	...	...
6	...	...	...
7	...	...	...
8	...	...	...


OPERATION (2)

OPER (2)  
4301-4300  
451-460

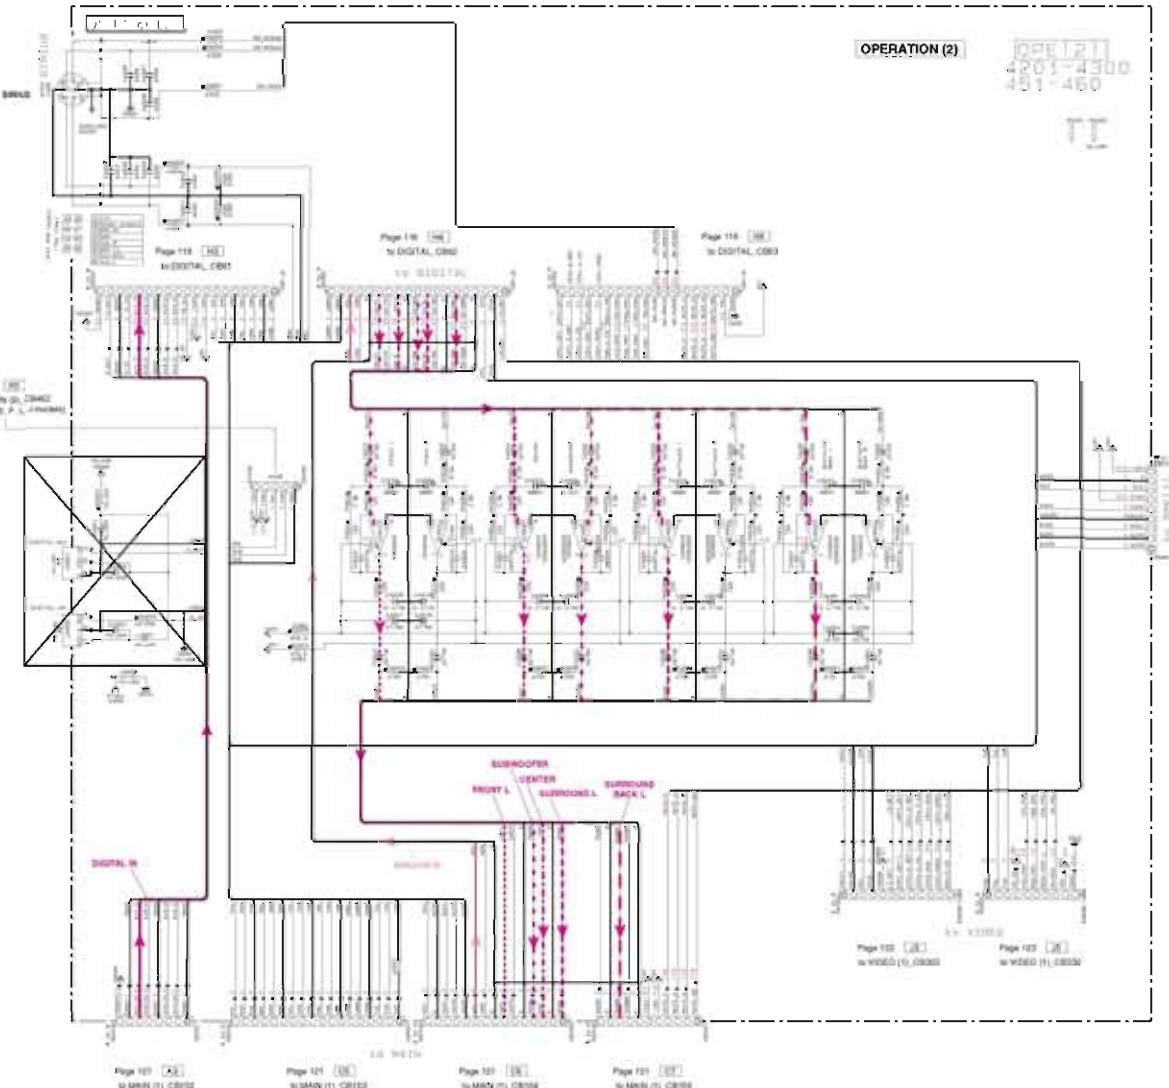

OPERATION (8)


OPER (8)  
4301-4400  
461-470

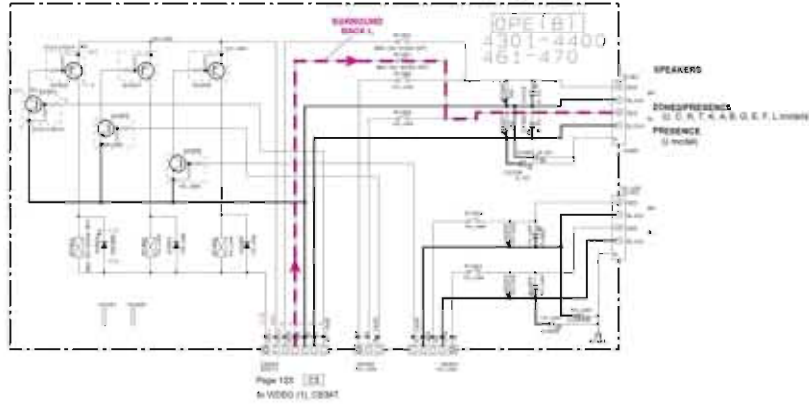

OPERATION (9)

Page 118 (to OPERATION (1) CBMT)

(to OPERATION (2) CBMT)

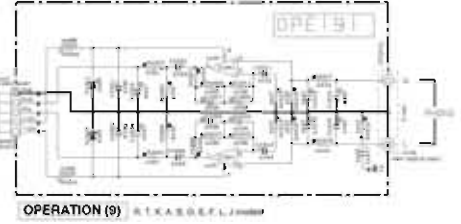

OPERATION (11)


Page 124 (to MAIN (2) CBMT)




OPERATION (1)		OPERATION (2)		OPERATION (3)		OPERATION (4)		OPERATION (5)		OPERATION (6)		OPERATION (7)		OPERATION (8)		OPERATION (9)		OPERATION (10)		OPERATION (11)	
REF	VALUE	REF	VALUE	REF	VALUE	REF	VALUE	REF	VALUE	REF	VALUE	REF	VALUE	REF	VALUE	REF	VALUE	REF	VALUE	REF	VALUE
...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...

...	...
...	...
...	...

...	...
...	...
...	...






- All voltages are measured with a 100kV DC multimeter unless noted.
- Components having special characteristics are marked (S) and must be replaced with parts having specifications equal to those originally specified.
- Schematic diagrams are subject to change without notice.
- BENCH POWER SUPPLY MUST BE PRESENT.
- APT-10000, BENCH POWER SUPPLY, BENCH OSCILLOSCOPE, 10-100MHz (100MHz) BANDWIDTH, 100MHz, 100MHz.
- BENCH POWER SUPPLY, BENCH OSCILLOSCOPE, 100MHz, 100MHz.

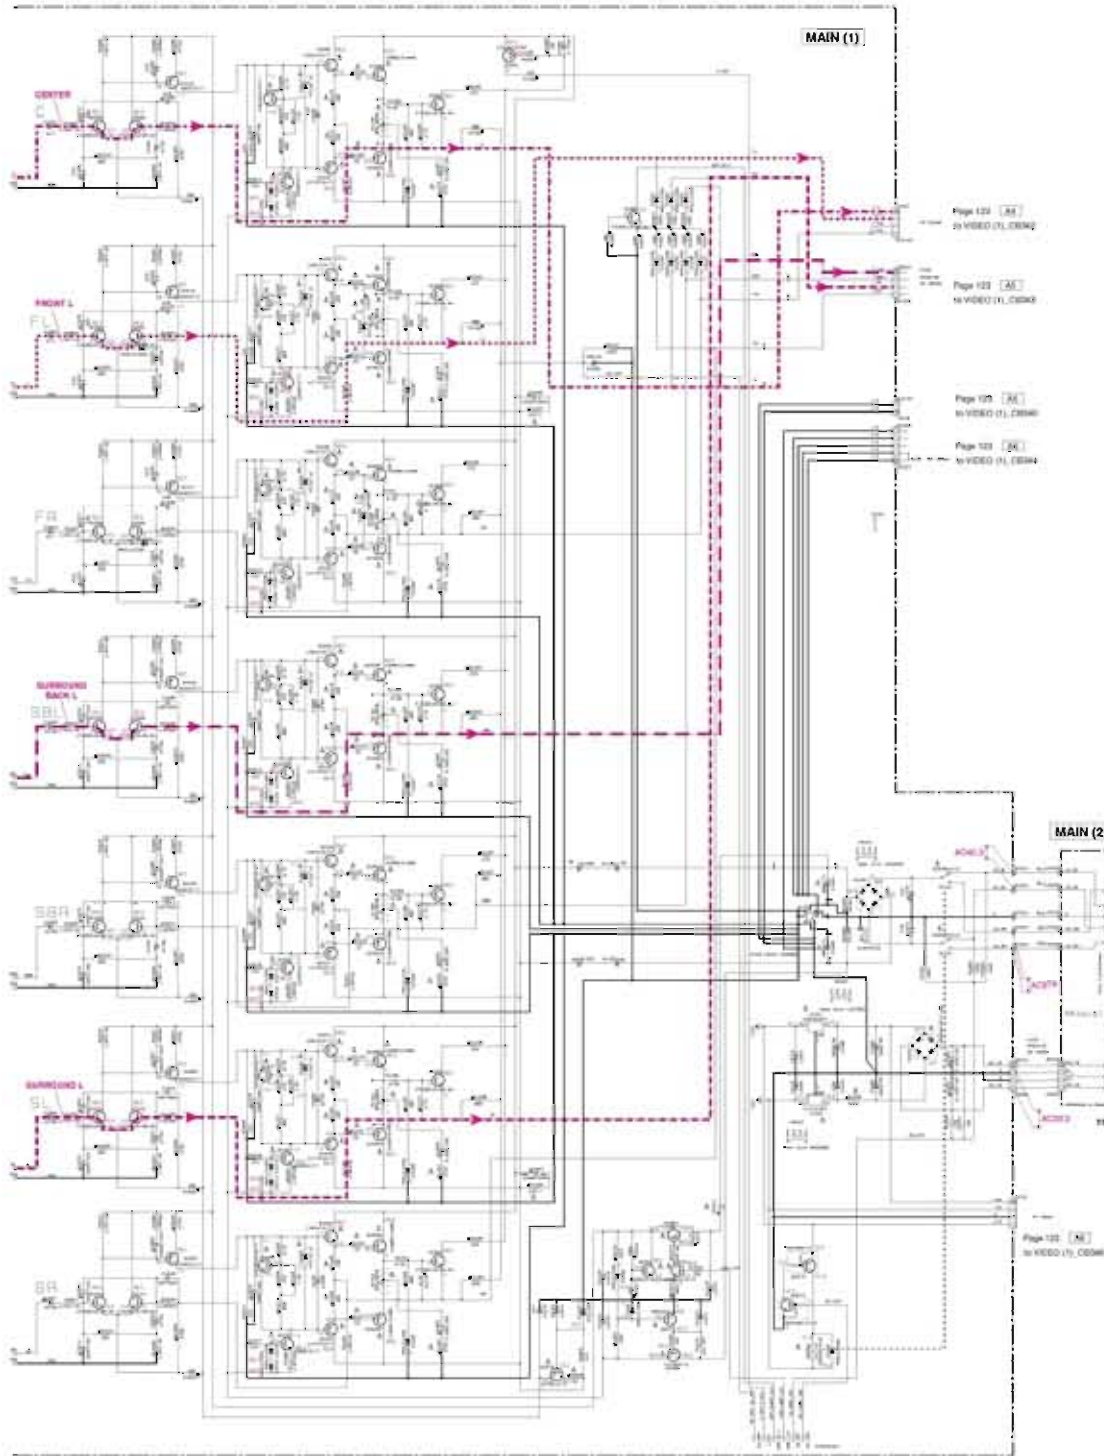


Page	Ref	Description
Page 121	(A)	2x VIDEO (1), CB504
Page 122	(A)	4x VIDEO (1), CB504
Page 123	(A)	4x VIDEO (1), CB504
Page 124	(A)	4x VIDEO (1), CB504

Page	Ref	Description
Page 125	(A)	4x VIDEO (1), CB504
Page 126	(A)	4x VIDEO (1), CB504
Page 127	(A)	4x VIDEO (1), CB504
Page 128	(A)	4x VIDEO (1), CB504
Page 129	(A)	4x VIDEO (1), CB504
Page 130	(A)	4x VIDEO (1), CB504
Page 131	(A)	4x VIDEO (1), CB504
Page 132	(A)	4x VIDEO (1), CB504
Page 133	(A)	4x VIDEO (1), CB504
Page 134	(A)	4x VIDEO (1), CB504
Page 135	(A)	4x VIDEO (1), CB504
Page 136	(A)	4x VIDEO (1), CB504
Page 137	(A)	4x VIDEO (1), CB504
Page 138	(A)	4x VIDEO (1), CB504
Page 139	(A)	4x VIDEO (1), CB504
Page 140	(A)	4x VIDEO (1), CB504
Page 141	(A)	4x VIDEO (1), CB504
Page 142	(A)	4x VIDEO (1), CB504
Page 143	(A)	4x VIDEO (1), CB504
Page 144	(A)	4x VIDEO (1), CB504
Page 145	(A)	4x VIDEO (1), CB504
Page 146	(A)	4x VIDEO (1), CB504
Page 147	(A)	4x VIDEO (1), CB504
Page 148	(A)	4x VIDEO (1), CB504
Page 149	(A)	4x VIDEO (1), CB504
Page 150	(A)	4x VIDEO (1), CB504

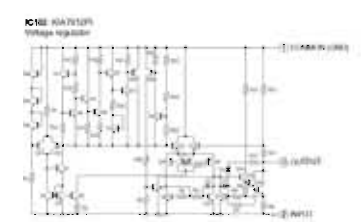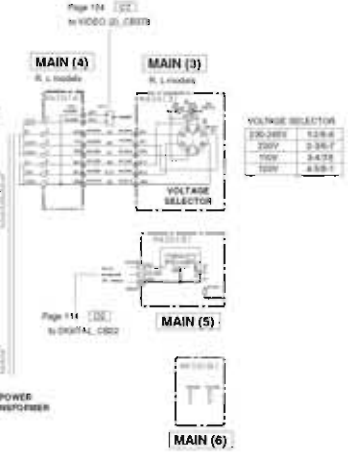

• All voltages are measured with a 100KV DC voltmeter unless otherwise specified.  
 • Components having special characteristics are marked with a triangle and their values are indicated with a suffix having specifications equal to those originally intended.  
 • Electronic Diagrams is subject to change without notice.



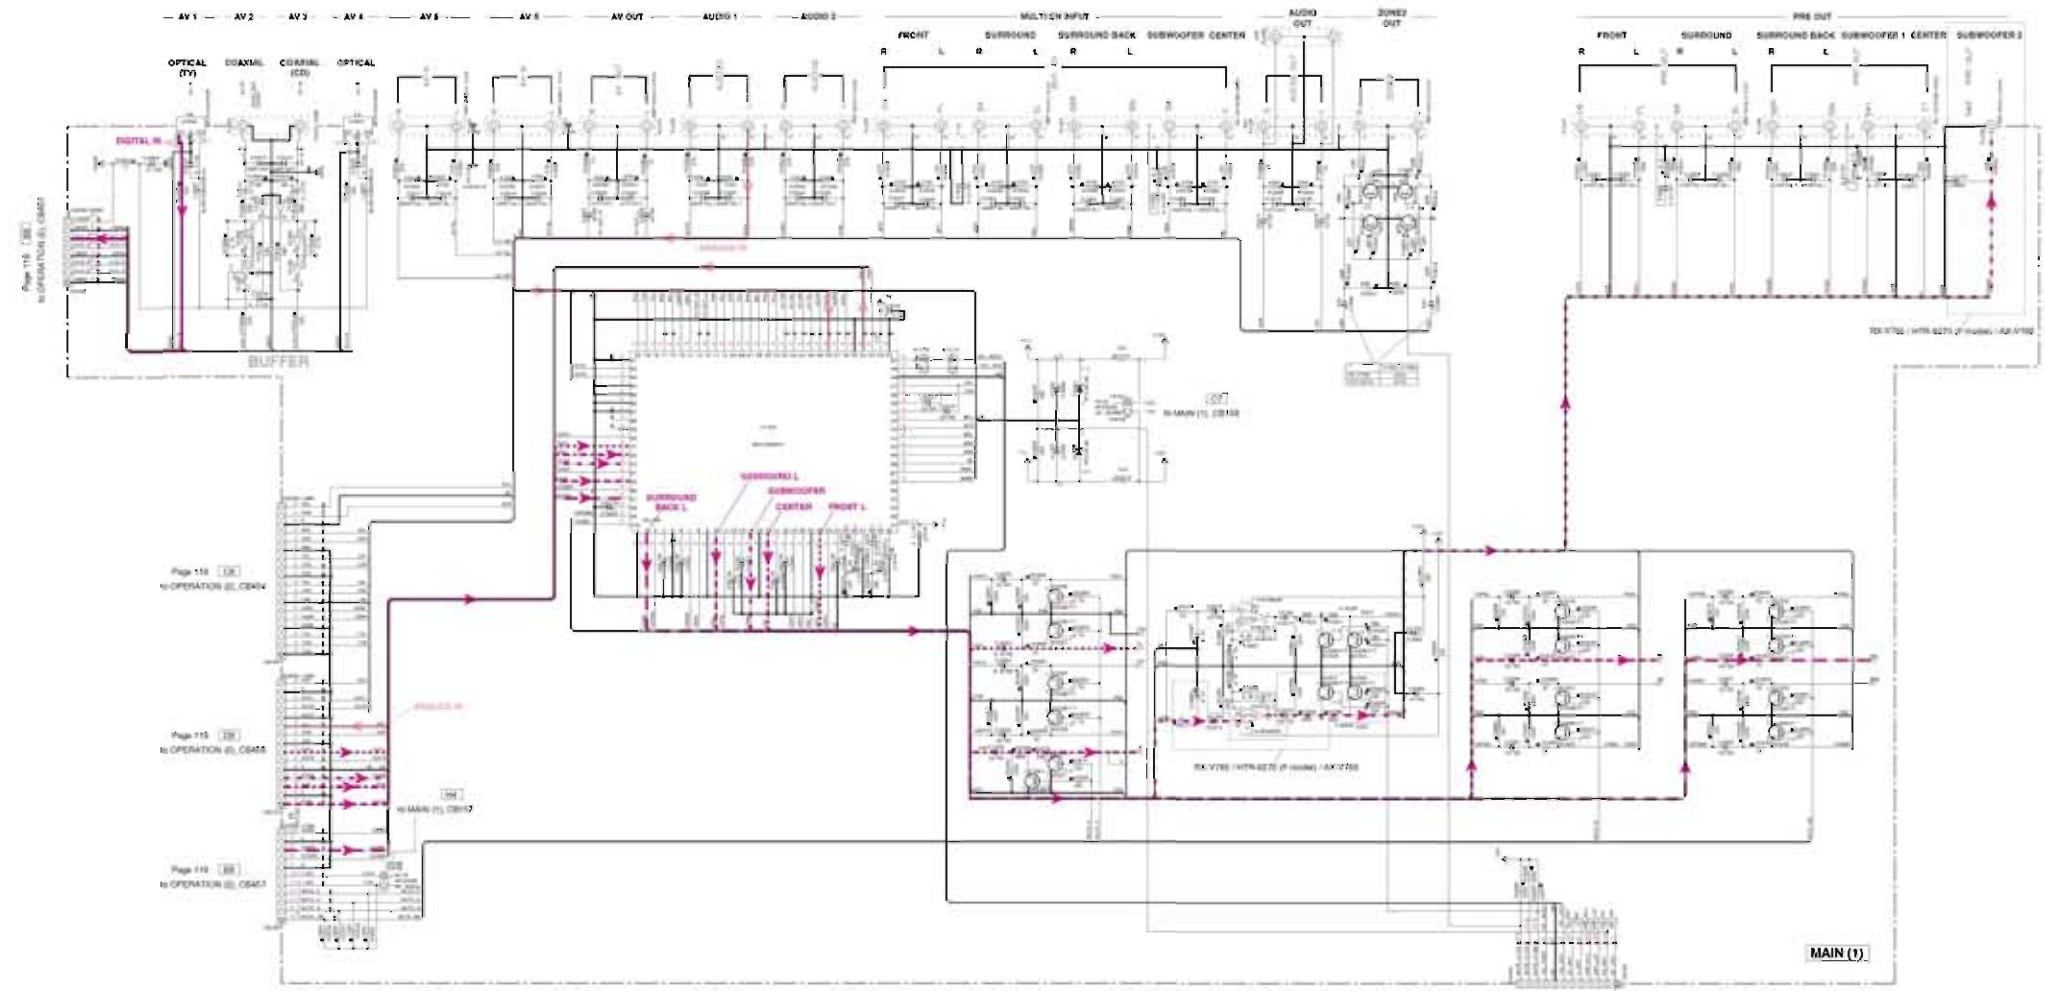

1  
2  
3  
4  
5  
6  
7  
8  
9  
10

Page 116 [C]  
to OPERATOR EL CB40


Page 116 [C]  
to OPERATOR EL CB40

Page 115 [C]  
to OPERATOR EL CB40

Page 116 [C]  
to OPERATOR EL CB40


MAIN (1)

Page 114 [C]  
to DIGITAL\_CB3











- IC150 10C42054PPT
- IC154 10A41010
- IC158 10A42010
- IC159 10A42010
- IC160 10A42010
- IC161 10A42010
- IC162 10A42010
- IC163 10A42010
- IC164 10A42010
- IC165 10A42010
- IC166 10A42010
- IC167 10A42010
- IC168 10A42010
- IC169 10A42010
- IC170 10A42010
- IC171 10A42010
- IC172 10A42010
- IC173 10A42010
- IC174 10A42010
- IC175 10A42010
- IC176 10A42010
- IC177 10A42010
- IC178 10A42010
- IC179 10A42010
- IC180 10A42010
- IC181 10A42010
- IC182 10A42010
- IC183 10A42010
- IC184 10A42010
- IC185 10A42010
- IC186 10A42010
- IC187 10A42010
- IC188 10A42010
- IC189 10A42010
- IC190 10A42010
- IC191 10A42010
- IC192 10A42010
- IC193 10A42010
- IC194 10A42010
- IC195 10A42010
- IC196 10A42010
- IC197 10A42010
- IC198 10A42010
- IC199 10A42010
- IC200 10A42010
- IC201 10A42010
- IC202 10A42010
- IC203 10A42010
- IC204 10A42010
- IC205 10A42010
- IC206 10A42010
- IC207 10A42010
- IC208 10A42010
- IC209 10A42010
- IC210 10A42010
- IC211 10A42010
- IC212 10A42010
- IC213 10A42010
- IC214 10A42010
- IC215 10A42010
- IC216 10A42010
- IC217 10A42010
- IC218 10A42010
- IC219 10A42010
- IC220 10A42010
- IC221 10A42010
- IC222 10A42010
- IC223 10A42010
- IC224 10A42010
- IC225 10A42010
- IC226 10A42010
- IC227 10A42010
- IC228 10A42010
- IC229 10A42010
- IC230 10A42010
- IC231 10A42010
- IC232 10A42010
- IC233 10A42010
- IC234 10A42010
- IC235 10A42010
- IC236 10A42010
- IC237 10A42010
- IC238 10A42010
- IC239 10A42010
- IC240 10A42010

All voltages are measured with a 10kΩV DC voltmeter unless otherwise specified.  
Components having special characteristics are marked with an asterisk (\*).  
Values in parentheses indicate values for alternate models.  
Values in brackets indicate values for alternate models.  
Values in boldface indicate values for alternate models.  
Values in italics indicate values for alternate models.

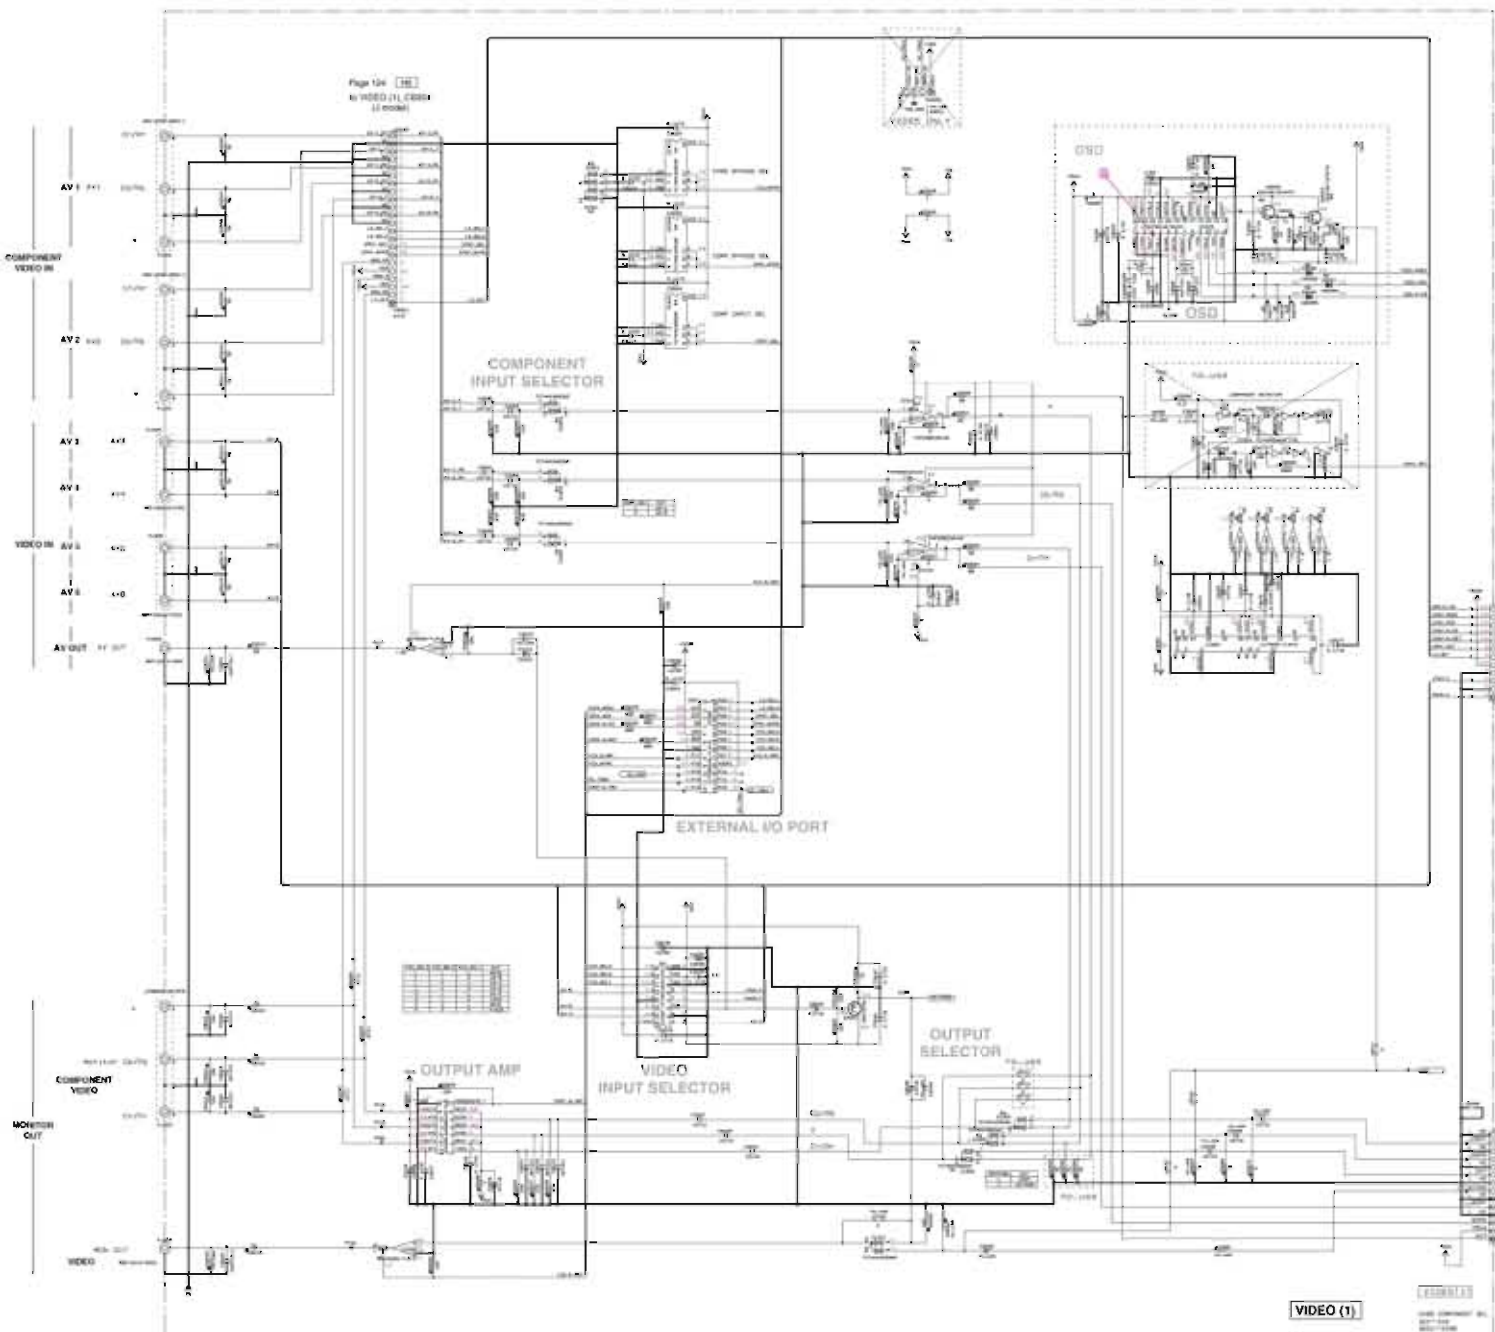

Symbol	Value	Notes
R1	10K	
R2	10K	
R3	10K	
R4	10K	
R5	10K	
R6	10K	
R7	10K	
R8	10K	
R9	10K	
R10	10K	
R11	10K	
R12	10K	
R13	10K	
R14	10K	
R15	10K	
R16	10K	
R17	10K	
R18	10K	
R19	10K	
R20	10K	
R21	10K	
R22	10K	
R23	10K	
R24	10K	
R25	10K	
R26	10K	
R27	10K	
R28	10K	
R29	10K	
R30	10K	
R31	10K	
R32	10K	
R33	10K	
R34	10K	
R35	10K	
R36	10K	
R37	10K	
R38	10K	
R39	10K	
R40	10K	
R41	10K	
R42	10K	
R43	10K	
R44	10K	
R45	10K	
R46	10K	
R47	10K	
R48	10K	
R49	10K	
R50	10K	
R51	10K	
R52	10K	
R53	10K	
R54	10K	
R55	10K	
R56	10K	
R57	10K	
R58	10K	
R59	10K	
R60	10K	
R61	10K	
R62	10K	
R63	10K	
R64	10K	
R65	10K	
R66	10K	
R67	10K	
R68	10K	
R69	10K	
R70	10K	
R71	10K	
R72	10K	
R73	10K	
R74	10K	
R75	10K	
R76	10K	
R77	10K	
R78	10K	
R79	10K	
R80	10K	
R81	10K	
R82	10K	
R83	10K	
R84	10K	
R85	10K	
R86	10K	
R87	10K	
R88	10K	
R89	10K	
R90	10K	
R91	10K	
R92	10K	
R93	10K	
R94	10K	
R95	10K	
R96	10K	
R97	10K	
R98	10K	
R99	10K	
R100	10K	

Symbol	Value	Notes
C1	100nF	
C2	100nF	
C3	100nF	
C4	100nF	
C5	100nF	
C6	100nF	
C7	100nF	
C8	100nF	
C9	100nF	
C10	100nF	
C11	100nF	
C12	100nF	
C13	100nF	
C14	100nF	
C15	100nF	
C16	100nF	
C17	100nF	
C18	100nF	
C19	100nF	
C20	100nF	
C21	100nF	
C22	100nF	
C23	100nF	
C24	100nF	
C25	100nF	
C26	100nF	
C27	100nF	
C28	100nF	
C29	100nF	
C30	100nF	
C31	100nF	
C32	100nF	
C33	100nF	
C34	100nF	
C35	100nF	
C36	100nF	
C37	100nF	
C38	100nF	
C39	100nF	
C40	100nF	
C41	100nF	
C42	100nF	
C43	100nF	
C44	100nF	
C45	100nF	
C46	100nF	
C47	100nF	
C48	100nF	
C49	100nF	
C50	100nF	

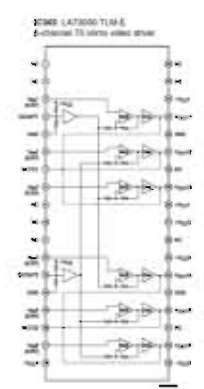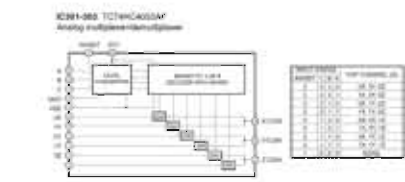


Symbol	Value	Notes
U1	IC2680	Microcontroller
U2	IC2680	RAM
U3	IC2680	ROM
U4	IC2680	Video Processor
U5	IC2680	Video Processor
U6	IC2680	Video Processor
U7	IC2680	Video Processor
U8	IC2680	Video Processor
U9	IC2680	Video Processor
U10	IC2680	Video Processor
U11	IC2680	Video Processor
U12	IC2680	Video Processor
U13	IC2680	Video Processor
U14	IC2680	Video Processor
U15	IC2680	Video Processor
U16	IC2680	Video Processor
U17	IC2680	Video Processor
U18	IC2680	Video Processor
U19	IC2680	Video Processor
U20	IC2680	Video Processor
U21	IC2680	Video Processor
U22	IC2680	Video Processor
U23	IC2680	Video Processor
U24	IC2680	Video Processor
U25	IC2680	Video Processor
U26	IC2680	Video Processor
U27	IC2680	Video Processor
U28	IC2680	Video Processor
U29	IC2680	Video Processor
U30	IC2680	Video Processor
U31	IC2680	Video Processor
U32	IC2680	Video Processor
U33	IC2680	Video Processor
U34	IC2680	Video Processor
U35	IC2680	Video Processor
U36	IC2680	Video Processor
U37	IC2680	Video Processor
U38	IC2680	Video Processor
U39	IC2680	Video Processor
U40	IC2680	Video Processor
U41	IC2680	Video Processor
U42	IC2680	Video Processor
U43	IC2680	Video Processor
U44	IC2680	Video Processor
U45	IC2680	Video Processor
U46	IC2680	Video Processor
U47	IC2680	Video Processor
U48	IC2680	Video Processor
U49	IC2680	Video Processor
U50	IC2680	Video Processor

• All voltages are measured with a 100V 20-ohm resistor.  
 • Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally specified.  
 • Schematic diagrams is subject to change without notice.


● IC2680 TLMC0101 VIDEO AMPLIFIER  
 ● IC2680 TLMC0102 VIDEO AMPLIFIER  
 ● IC2680 TLMC0103 VIDEO AMPLIFIER  
 ● IC2680 TLMC0104 VIDEO AMPLIFIER  
 ● IC2680 TLMC0105 VIDEO AMPLIFIER  
 ● IC2680 TLMC0106 VIDEO AMPLIFIER  
 ● IC2680 TLMC0107 VIDEO AMPLIFIER  
 ● IC2680 TLMC0108 VIDEO AMPLIFIER  
 ● IC2680 TLMC0109 VIDEO AMPLIFIER  
 ● IC2680 TLMC0110 VIDEO AMPLIFIER  
 ● IC2680 TLMC0111 VIDEO AMPLIFIER  
 ● IC2680 TLMC0112 VIDEO AMPLIFIER  
 ● IC2680 TLMC0113 VIDEO AMPLIFIER  
 ● IC2680 TLMC0114 VIDEO AMPLIFIER  
 ● IC2680 TLMC0115 VIDEO AMPLIFIER  
 ● IC2680 TLMC0116 VIDEO AMPLIFIER  
 ● IC2680 TLMC0117 VIDEO AMPLIFIER  
 ● IC2680 TLMC0118 VIDEO AMPLIFIER  
 ● IC2680 TLMC0119 VIDEO AMPLIFIER  
 ● IC2680 TLMC0120 VIDEO AMPLIFIER  
 ● IC2680 TLMC0121 VIDEO AMPLIFIER  
 ● IC2680 TLMC0122 VIDEO AMPLIFIER  
 ● IC2680 TLMC0123 VIDEO AMPLIFIER  
 ● IC2680 TLMC0124 VIDEO AMPLIFIER  
 ● IC2680 TLMC0125 VIDEO AMPLIFIER  
 ● IC2680 TLMC0126 VIDEO AMPLIFIER  
 ● IC2680 TLMC0127 VIDEO AMPLIFIER  
 ● IC2680 TLMC0128 VIDEO AMPLIFIER  
 ● IC2680 TLMC0129 VIDEO AMPLIFIER  
 ● IC2680 TLMC0130 VIDEO AMPLIFIER  
 ● IC2680 TLMC0131 VIDEO AMPLIFIER  
 ● IC2680 TLMC0132 VIDEO AMPLIFIER  
 ● IC2680 TLMC0133 VIDEO AMPLIFIER  
 ● IC2680 TLMC0134 VIDEO AMPLIFIER  
 ● IC2680 TLMC0135 VIDEO AMPLIFIER  
 ● IC2680 TLMC0136 VIDEO AMPLIFIER  
 ● IC2680 TLMC0137 VIDEO AMPLIFIER  
 ● IC2680 TLMC0138 VIDEO AMPLIFIER  
 ● IC2680 TLMC0139 VIDEO AMPLIFIER  
 ● IC2680 TLMC0140 VIDEO AMPLIFIER  
 ● IC2680 TLMC0141 VIDEO AMPLIFIER  
 ● IC2680 TLMC0142 VIDEO AMPLIFIER  
 ● IC2680 TLMC0143 VIDEO AMPLIFIER  
 ● IC2680 TLMC0144 VIDEO AMPLIFIER  
 ● IC2680 TLMC0145 VIDEO AMPLIFIER  
 ● IC2680 TLMC0146 VIDEO AMPLIFIER  
 ● IC2680 TLMC0147 VIDEO AMPLIFIER  
 ● IC2680 TLMC0148 VIDEO AMPLIFIER  
 ● IC2680 TLMC0149 VIDEO AMPLIFIER  
 ● IC2680 TLMC0150 VIDEO AMPLIFIER



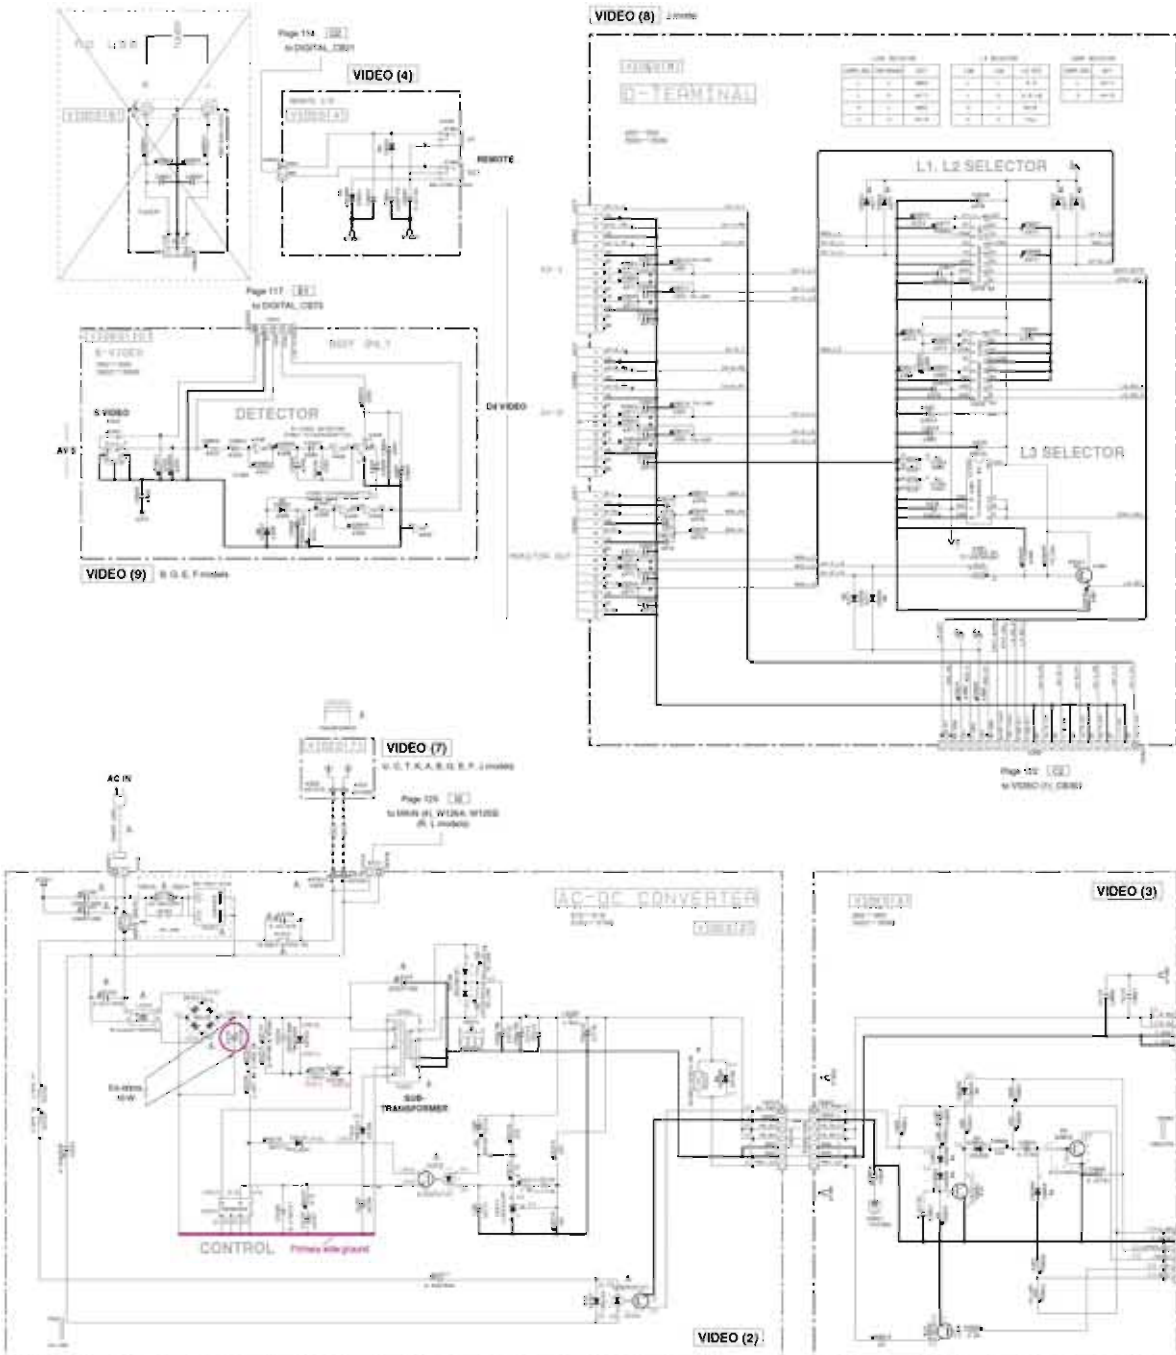

Pin	Signal	Notes
1	AVS	
2	AVC	
3	AVT	
4	AVC	
5	AVS	
6	AVT	
7	AVC	
8	AVS	
9	AVT	
10	AVC	
11	AVS	
12	AVT	
13	AVC	
14	AVS	
15	AVT	
16	AVC	
17	AVS	
18	AVT	
19	AVC	
20	AVS	
21	AVT	
22	AVC	
23	AVS	
24	AVT	
25	AVC	
26	AVS	
27	AVT	
28	AVC	
29	AVS	
30	AVT	
31	AVC	
32	AVS	
33	AVT	
34	AVC	
35	AVS	
36	AVT	
37	AVC	
38	AVS	
39	AVT	
40	AVC	
41	AVS	
42	AVT	
43	AVC	
44	AVS	
45	AVT	
46	AVC	
47	AVS	
48	AVT	
49	AVC	
50	AVS	
51	AVT	
52	AVC	
53	AVS	
54	AVT	
55	AVC	
56	AVS	
57	AVT	
58	AVC	
59	AVS	
60	AVT	
61	AVC	
62	AVS	
63	AVT	
64	AVC	
65	AVS	
66	AVT	
67	AVC	
68	AVS	
69	AVT	
70	AVC	
71	AVS	
72	AVT	
73	AVC	
74	AVS	
75	AVT	
76	AVC	
77	AVS	
78	AVT	
79	AVC	
80	AVS	
81	AVT	
82	AVC	
83	AVS	
84	AVT	
85	AVC	
86	AVS	
87	AVT	
88	AVC	
89	AVS	
90	AVT	
91	AVC	
92	AVS	
93	AVT	
94	AVC	
95	AVS	
96	AVT	
97	AVC	
98	AVS	
99	AVT	
100	AVC	

Pin	Signal	Notes
1	AVS	
2	AVC	
3	AVT	
4	AVC	
5	AVS	
6	AVT	
7	AVC	
8	AVS	
9	AVT	
10	AVC	
11	AVS	
12	AVT	
13	AVC	
14	AVS	
15	AVT	
16	AVC	
17	AVS	
18	AVT	
19	AVC	
20	AVS	
21	AVT	
22	AVC	
23	AVS	
24	AVT	
25	AVC	
26	AVS	
27	AVT	
28	AVC	
29	AVS	
30	AVT	
31	AVC	
32	AVS	
33	AVT	
34	AVC	
35	AVS	
36	AVT	
37	AVC	
38	AVS	
39	AVT	
40	AVC	
41	AVS	
42	AVT	
43	AVC	
44	AVS	
45	AVT	
46	AVC	
47	AVS	
48	AVT	
49	AVC	
50	AVS	
51	AVT	
52	AVC	
53	AVS	
54	AVT	
55	AVC	
56	AVS	
57	AVT	
58	AVC	
59	AVS	
60	AVT	
61	AVC	
62	AVS	
63	AVT	
64	AVC	
65	AVS	
66	AVT	
67	AVC	
68	AVS	
69	AVT	
70	AVC	
71	AVS	
72	AVT	
73	AVC	
74	AVS	
75	AVT	
76	AVC	
77	AVS	
78	AVT	
79	AVC	
80	AVS	
81	AVT	
82	AVC	
83	AVS	
84	AVT	
85	AVC	
86	AVS	
87	AVT	
88	AVC	
89	AVS	
90	AVT	
91	AVC	
92	AVS	
93	AVT	
94	AVC	
95	AVS	
96	AVT	
97	AVC	
98	AVS	
99	AVT	
100	AVC	

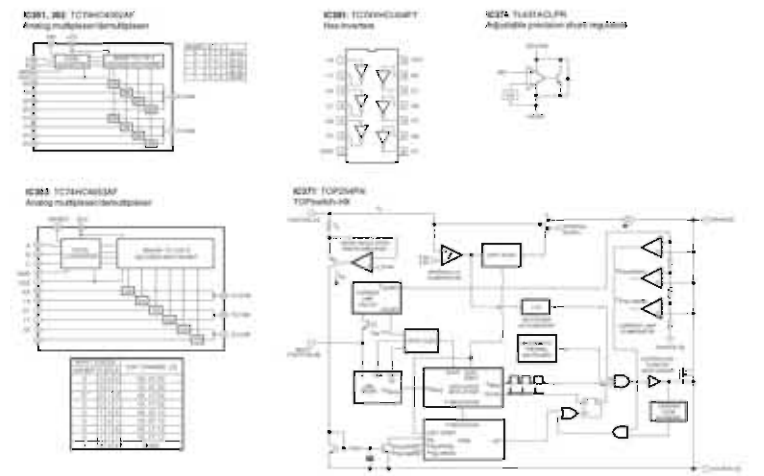

- All voltages are measured with a heavy DC load on the system.
- Components having special characteristics are marked with an asterisk.
- Dimensions are in millimeters unless otherwise specified.
- Dimensions are subject to change without notice.

## ■ REPLACEMENT PARTS LIST

- ELECTRICAL COMPONENT PARTS

### WARNING

- Components having special characteristics are marked  $\Delta$  and must be replaced with parts having specifications equal to those originally installed.
- $\Delta$ 印のある部分は、安全確保部品を示しています。部品の交換が必要な場合、パーツリストに記載されている部品を使用してください。
- 部品価格ラゲは、予告なく変更することがあります。

### ABBREVIATIONS IN THIS LIST ARE AS FOLLOWS:

C.AE.L.CHIP : CHIP ALUMI ELECTROLYTIC CAP  
 C.CE : CERAMIC CAP  
 C.CE.ARRAY : CERAMIC CAP ARRAY  
 C.CE.CHIP : CHIP CERAMIC CAP  
 C.CE.ML : MULTILAYER CERAMIC CAP  
 C.CE.M.CHIP : CHIP MULTILAYER CERAMIC CAP  
 C.CE.SAFETY : RECOGNIZED CERAMIC CAP  
 C.CE.TUBLR : CERAMIC TUBULAR CAP  
 C.CE.SMI : SEMI CONDUCTIVE CERAMIC CAP  
 C.EL : ELECTROLYTIC CAP  
 C.MICA : MICA CAP  
 C.ML.FLM : MULTILAYER FILM CAP  
 C.M.P : METALLIZED PAPER CAP  
 C.MYLAR : MYLAR FILM CAP  
 C.MYLAR.ML : MULTILAYER MYLAR FILM CAP  
 C.PAPER : PAPER CAPACITOR  
 C.PLS : POLYSTYRENE FILM CAP  
 C.POL : POLYESTER FILM CAP  
 C.POLY : POLYETHYLENE FILM CAP  
 C.PP : POLYPROPYLENE FILM CAP  
 C.TNTL : TANTALUM CAP  
 C.TNTL.CHIP : CHIP TANTALUM CAP  
 C.TRIM : TRIMMER CAP  
 CN : CONNECTOR  
 CN.BS.PIN : CONNECTOR, BASE PIN  
 CN.CANNON : CONNECTOR, CANNON  
 CN.DIN : CONNECTOR, DIN  
 CN.FLAT : CONNECTOR, FLAT CABLE  
 CN.POST : CONNECTOR, BASE POST  
 COIL.MX.AM : COIL, AM MIX  
 COIL.AT.FM : COIL, FM ANTENNA  
 COIL.DT.FM : COIL, FM DETECT  
 COIL.MX.FM : COIL, FM MIX  
 COIL.OUTPT : OUTPUT COIL  
 DIOD.ARRAY : DIODE ARRAY  
 DIODE.BRG : DIODE BRIDGE  
 DIODE.CHP : CHIP DIODE  
 DIODE.VAR : VARACTOR DIODE  
 DIOD.Z.CHP : CHIP ZENER DIODE  
 DIODE.ZENR : ZENER DIODE  
 DSCR.CE : CERAMIC DISCRIMINATOR  
 FER.BEAD : FERRITE BEADS  
 FER.CORE : FERRITE CORE  
 FET.CHP : CHIP FET  
 FL.DSPLY : FLUORESCENT DISPLAY  
 FLTR.CE : CERAMIC FILTER  
 FLTR.COMB : COMB FILTER MODULE  
 FLTR.LC.RF : LC FILTER, EMI  
 GND.MTL : GROUND TERMINAL  
 GND.TERM : GROUND TERMINAL  
 HOLDER.FUS : FUSE HOLDER  
 IC.PRTCT : IC PROTECTOR  
 JUMPER.CN : JUMPER CONNECTOR  
 JUMPER.TST : JUMPER, TEST POINT  
 L.DTCT : LIGHT DETECTING MODULE

L.EMIT : LIGHT EMITTING MODULE  
 LED.DSPLY : LED DISPLAY  
 LED.INFRD : LED, INFRARED  
 MODUL.RF : MODULATOR, RF  
 PHOT.CPL : PHOTO COUPLER  
 PHOT.INTR : PHOTO INTERRUPTER  
 PHOT.REFLT : PHOTO REFLECTOR  
 PIN.TEST : PIN, TEST POINT  
 PLST.RIVET : PLASTIC RIVET  
 R.ARRAY : RESISTOR ARRAY  
 R.CAR : CARBON RESISTOR  
 R.CAR.CHIP : CHIP RESISTOR  
 R.CAR.FP : FLAME PROOF CARBON RESISTOR  
 R.FUS : FUSIBLE RESISTOR  
 R.MTL.CHIP : CHIP METAL FILM RESISTOR  
 R.MTL.FLM : METAL FILM RESISTOR  
 R.MTL.OXD : METAL OXIDE FILM RESISTOR  
 R.MTL.PLAT : METAL PLATE RESISTOR  
 R.SNR.CE : CERAMIC RESONATOR  
 R.SNR.CRY : CRYSTAL RESONATOR  
 R.TW.CEM : TWIN CEMENT FIXED RESISTOR  
 R.CEMENT : CEMENT RESISTOR  
 SCR.BND.HD : BIND HEAD B-TIGHT SCREW  
 SCR.BW.HD : BW HEAD TAPPING SCREW  
 SCR.CUP : CUP TIGHT SCREW  
 SCR.TERM : SCREW TERMINAL  
 SCR.TR : SCREW, TRANSISTOR  
 SUPRT.PCB : SUPPORT, P.C.B.  
 SURG.PRTCT : SURGE PROTECTOR  
 SW.TACT : TACT SWITCH  
 SW.LEAF : LEAF SWITCH  
 SW.LEVER : LEVER SWITCH  
 SW.MICRO : MICRO SWITCH  
 SW.PUSH : PUSH SWITCH  
 SW.RT.ENC : ROTARY ENCODER  
 SW.RT.MTR : ROTARY SWITCH WITH MOTOR  
 SW.RT : ROTARY SWITCH  
 SW.SLIDE : SLIDE SWITCH  
 TERM.SP : SPEAKER TERMINAL  
 TERM.WRAP : WRAPPING TERMINAL  
 THRMST.CHP : CHIP THERMISTOR  
 TR.CHP : CHIP TRANSISTOR  
 TR.DGT : DIGITAL TRANSISTOR  
 TR.DGT.CHIP : CHIP DIGITAL TRANSISTOR  
 TRANS : TRANSFORMER  
 TRANS.PULS : PULSE TRANSFORMER  
 TRANS.PWR : POWER TRANSFORMER ASSY  
 TUNER.AM : TUNER PACK, AM  
 TUNER.FM : TUNER PACK, FM  
 TUNER.PK : FRONT-END TUNER PACK  
 VR : ROTARY POTENTIOMETER  
 VR.MTR : POTENTIOMETER WITH MOTOR  
 VR.SW : POTENTIOMETER WITH ROTARY SW  
 VR.SLIDE : SLIDE POTENTIOMETER  
 VR.TRIM : TRIMMER POTENTIOMETER

## P.C.B. DIGITAL

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
* CB1-4	WR436100	P. C. B.	V765	J	PCB DIGITAL	04
* CB6	WR436200	P. C. B.	V765	U	PCB DIGITAL	04
* CB7	WR436300	P. C. B.	V765	CRITAL	PCB DIGITAL	01
* CB20	WR436800	P. C. B.	6270	C	PCB DIGITAL	02
* CB21	WR436400	P. C. B.	V765	BGEF	PCB DIGITAL	01
* CB22	WR436900	P. C. B.	6270	F	PCB DIGITAL	01
CB23	WM462600	CN. HDMI			コネクタ HDMI	01
CB24	WM462600	CN. HDMI			コネクタ HDMI	01
CB25	LB918040	CN. BS. PIN			ベース付ポスト	01
CB27	VP082900	CN. BS. PIN	25P		FCCコネクタ-	02
CB28	VB389800	CN. BS. PIN	2P		ベースピン	01
CB29	VK024700	CN. BS. PIN	3P		ワイヤートラップ	01
CB30	VK025600	CN. BS. PIN	12P		ワイヤートラップ	01
CB31	VF728300	CN	6P		コネクタ-	01
CB32	VQ045200	CN. BS. PIN	22P		FCCコネクタ-	01
CB33	VQ047200	CN. BS. PIN	9P		FCCコネクタ-	01
CB34	WJ458700	CN. XM	4P, CAM-D96	U	XMコネクタ	01
CB35	V9356900	CN. JE	19P SE		Jエコネクタ-プラグ	01
CB36	VQ044200	CN. BS. PIN	6P		FCCコネクタ-	01
CB37	VQ044100	CN. BS. PIN	5P		FCCコネクタ-	01
CB38	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB39	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB40	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB41	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB42	US063100	C. CE. CHIP	1000pF 50V B		チップセラコン	01
CB43	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB44	US063100	C. CE. CHIP	1000pF 50V B		チップセラコン	01
CB45	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB46	WD758300	C. CE. CHIP	10uF 10V	BGEF	チップセラコン	01
CB47	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB48	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB49	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB50	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB51	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB52	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB53	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB54	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB55	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB56	US063100	C. CE. CHIP	1000pF 50V B		チップセラコン	01
CB57	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB58	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB59	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB60	WG251600	C. CE. CHIP	4.7uF 6.3V		チップセラコン	01
CB61	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB62	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB63	WG251600	C. CE. CHIP	4.7uF 6.3V		チップセラコン	01
CB64	WF027470	C. EL. CHIP	47uF 10V		チップケミコン	01
CB65	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB66	WJ344400	C. CE. CHIP	22uF 6.3V		チップセラコン	01
CB67	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB68	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB69	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB70	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB71	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB72	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB73	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB74	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB75	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB76	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01
CB77	WD758300	C. CE. CHIP	10uF 10V		チップセラコン	01
CB78	US135100	C. CE. CHIP	0.1uF 16V		チップセラコン	01

\* New Parts \* 新規部品

P.C.B. DIGITAL

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
C79-80	US062220	C. CE. CHP	220pF		チップセラコン	01
C81-82	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C83	US063330	C. CE. CHP	3300pF		チップセラコン	01
C84	US063470	C. CE. CHP	4700pF		チップセラコン	01
C85	US063120	C. CE. CHP	1200pF		チップセラコン	01
C86	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C87	US063120	C. CE. CHP	1200pF		チップセラコン	01
C88-90	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C91-92	WD758300	C. CE. CHP	10uF		チップセラコン	01
C93	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C94	WD758300	C. CE. CHP	10uF		チップセラコン	01
C97-101	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C102	UR267470	C. EL	47uF		ケミコン	01
C103	WG251600	C. CE. CHP	4. 7uF		チップセラコン	01
C104	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C105	WH772100	C. EL	1000uF		ケミコン	04
C106-124	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C136	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C137-138	US062470	C. CE. CHP	470pF		チップセラコン	01
C200	UR837330	C. EL	33uF		ケミコン	01
C201	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C202	US064100	C. CE. CHP	0. 01uF		チップセラコン	01
C204-205	US064100	C. CE. CHP	0. 01uF		チップセラコン	01
C207-211	US064100	C. CE. CHP	0. 01uF		チップセラコン	01
C212	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C214	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C215-216	US064100	C. CE. CHP	0. 01uF		チップセラコン	01
C217	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C218-219	US064100	C. CE. CHP	0. 01uF		チップセラコン	01
C220-225	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C226	WG251600	C. CE. CHP	4. 7uF		チップセラコン	01
C228-229	WG251600	C. CE. CHP	4. 7uF		チップセラコン	01
C231	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C232	US046100	C. CE. CHP	1uF		チップセラコン	01
C232	US046100	C. CE. CHP	1uF		チップセラコン	01
C234-238	US046100	C. CE. CHP	1uF		チップセラコン	01
C239-242	US062100	C. CE. CHP	100pF		チップセラコン	01
C243	US064100	C. CE. CHP	0. 01uF		チップセラコン	01
C244-254	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C400-401	WD758300	C. CE. CHP	10uF		チップセラコン	01
C402-403	US064100	C. CE. CHP	0. 01uF		チップセラコン	01
C404	US060800	C. CE. CHP	8pF		チップセラコン	01
C405-406	US035100	C. CE. CHP	0. 1uF		チップセラコン	01
C407	US060800	C. CE. CHP	8pF		チップセラコン	01
C408-409	US035100	C. CE. CHP	0. 1uF		チップセラコン	01
C410	WG251600	C. CE. CHP	4. 7uF		チップセラコン	01
C411	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C412	US035100	C. CE. CHP	0. 1uF		チップセラコン	01
C413-414	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C415	US044220	C. CE. CHP	0. 022uF		チップセラコン	01
C416	US062100	C. CE. CHP	100pF		チップセラコン	01
C418	US062220	C. CE. CHP	220pF		チップセラコン	01
C419	WG251600	C. CE. CHP	4. 7uF		チップセラコン	01
C420	US062220	C. CE. CHP	220pF		チップセラコン	01
C421	US035100	C. CE. CHP	0. 1uF		チップセラコン	01
C422	US062220	C. CE. CHP	220pF		チップセラコン	01
C424-425	US135100	C. CE. CHP	0. 1uF		チップセラコン	01

\* New Parts \* 新規部品

P.C.B. DIGITAL

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
C426	US062220	C. CE. CHIP			チップセラコン	01
C427	US035100	C. CE. CHIP		U	チップセラコン	01
C430	UR067470	C. EL			ケミコン	01
C431	US062100	C. CE. CHIP			チップセラコン	01
C432-433	US062220	C. CE. CHIP			チップセラコン	01
C434-436	US135100	C. CE. CHIP			チップセラコン	01
C437-438	US062100	C. CE. CHIP			チップセラコン	01
C439	US061100	C. CE. CHIP			チップセラコン	01
C440	US060800	C. CE. CHIP			チップセラコン	01
C441-442	US062390	C. CE. CHIP			チップセラコン	01
C443-444	US035100	C. CE. CHIP		U	チップセラコン	01
C445-446	UR837100	C. EL			ケミコン	01
C447-448	US135100	C. CE. CHIP			チップセラコン	01
C449-450	UR237470	C. EL			ケミコン	01
C451	US062100	C. CE. CHIP			チップセラコン	01
C452	UR067100	C. EL			ケミコン	01
C453	US126100	C. CE. CHIP			チップセラコン	01
C454-472	US135100	C. CE. CHIP			チップセラコン	01
C473	US062680	C. CE. CHIP			チップセラコン	01
C474-476	US135100	C. CE. CHIP			チップセラコン	01
C477	WG251600	C. CE. CHIP			チップセラコン	01
C478-484	US135100	C. CE. CHIP			チップセラコン	01
C485	WG251600	C. CE. CHIP			チップセラコン	01
C486	US135100	C. CE. CHIP			チップセラコン	01
C488-489	UU297220	C. EL			ケミコン	01
C491-493	US135100	C. CE. CHIP			チップセラコン	01
C494-496	US063100	C. CE. CHIP			チップセラコン	01
C497-498	US135100	C. CE. CHIP			チップセラコン	01
C499-502	US063100	C. CE. CHIP			チップセラコン	01
C503-519	US135100	C. CE. CHIP			チップセラコン	01
C600	WK041800	C. EL	V765		ケミコン	01
C600	V7887600	C. EL	6270		ケミコン	01
C601-603	US135100	C. CE. CHIP			チップセラコン	01
C604-605	US064100	C. CE. CHIP			チップセラコン	01
C606	UR067100	C. EL		U	ケミコン	01
C607	US064100	C. CE. CHIP			チップセラコン	01
C608-609	US135100	C. CE. CHIP			チップセラコン	01
C610	US126100	C. CE. CHIP			チップセラコン	01
C611	US062100	C. CE. CHIP			チップセラコン	01
C612	UR067100	C. EL			ケミコン	01
C613-614	US126100	C. CE. CHIP			ケミコン	01
C615	UR237100	C. EL		U	チップセラコン	01
C616-617	US135100	C. CE. CHIP		U	チップセラコン	01
C618	US063100	C. CE. CHIP			チップセラコン	01
C619	US135100	C. CE. CHIP			チップセラコン	01
C620	UR348100	C. EL		U	ケミコン	01
C621	UR218100	C. EL			ケミコン	01
C622	UR067100	C. EL			チップセラコン	01
C623	US135100	C. CE. CHIP			ケミコン	01
C624	WK041800	C. EL			チップセラコン	01
C625	US135100	C. CE. CHIP			チップセラコン	01
C626	UR067100	C. EL			ケミコン	01
C627-628	WJ603600	C. MYLAR			マイラーコン	01
C629-630	UR837100	C. EL		U	ケミコン	01
C633-634	UR067100	C. EL			ケミコン	01
C635-642	US062100	C. CE. CHIP			チップセラコン	01
C643-644	US663330	C. CE. CHIP		U	チップセラコン	01

\*: New Parts \* 新規部品



P.C.B. DIGITAL

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
C700-702	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C703-704	WD758300	C. CE. CHP	10uF	10V	チップセラコン	01
C705-706	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C707-708	WD758300	C. CE. CHP	10uF	10V	チップセラコン	01
C709-710	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C711-712	US064100	C. CE. CHP	0. 01uF	50V B	チップセラコン	01
C713	UF037220	C. EL. CHP	22uF	16V	チップケミコン	01
C714-717	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C718	US034390	C. CE. CHP	0. 039uF	16V B	チップセラコン	01
C719-721	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C722-723	US063100	C. CE. CHP	1000pF	50V B	チップセラコン	01
C724-725	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C726	US064100	C. CE. CHP	0. 01uF	50V B	チップセラコン	01
C727	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C728	US064100	C. CE. CHP	0. 01uF	50V B	チップセラコン	01
C729	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C730	VZ243400	C. CE. CHP	0. 33uF	16V	チップセラコン	01
C731	VZ281900	C. CE. CHP	0. 47uF	16V K	チップセラ	01
C732	US034820	C. CE. CHP	0. 082uF	16V K	チップセラコン	01
C733	US064100	C. CE. CHP	0. 01uF	50V B	チップセラコン	01
C734	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C735	US061100	C. CE. CHP	10pF	50V B	チップセラコン	01
C736	US060800	C. CE. CHP	8pF	50V B	チップセラコン	01
C737-742	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C743	UF037220	C. EL. CHP	22uF	16V	チップケミコン	01
C744-746	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C747	UF037100	C. EL. CHP	10uF	16V	チップケミコン	01
C748-749	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C750	UF037220	C. EL. CHP	22uF	16V	チップケミコン	01
C751	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C752	UF037220	C. EL. CHP	22uF	16V	チップケミコン	01
C753	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C754	UF037100	C. EL. CHP	10uF	16V	チップケミコン	01
C755-757	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C758	UF037220	C. EL. CHP	22uF	16V	チップケミコン	01
C759	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C763	UF037220	C. EL. CHP	22uF	16V	チップケミコン	01
C764-766	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C772	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C774-776	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C779	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C782-790	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C791	UF037220	C. EL. CHP	22uF	16V	チップケミコン	01
C792-794	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
C795	UF037100	C. EL. CHP	10uF	16V	チップケミコン	01
C796-797	US063100	C. CE. CHP	1000pF	50V B	チップセラコン	01
C798-799	US064100	C. CE. CHP	0. 01uF	50V B	チップセラコン	01
C800-806	US135100	C. CE. CHP	0. 1uF	16V	チップセラコン	01
D2	WE674800	D10DE	AVRL161A1R1NTB		チップバリスタ	01
D11-14	WE674800	D10DE	AVRL161A1R1NTB		チップバリスタ	01
D23-26	WE674800	D10DE	AVRL161A1R1NTB		チップバリスタ	01
D35-38	WE674800	D10DE	AVRL161A1R1NTB		チップバリスタ	01
D47-49	WE674800	D10DE	AVRL161A1R1NTB		チップバリスタ	01
D60-61	WE674800	D10DE	AVRL161A1R1NTB		チップバリスタ	01
D62	VV220700	D10DE. SHOT	AVRL161A1R1NTB		チップバリスタ	01
D63-64	V6267600	D10DE	RB501V-40		ショットキーダイオード	01
D65	WE674800	D10DE	RB501L-40		ダイオード	01
			AVRL161A1R1NTB		チップバリスタ	01

\* New Parts \* 新規部品

P.C.B. DIGITAL

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
D200-204	VU990900	DIODE.ZENR			ツェナーダイオード	01
D400-402	WE674800	DIODE		U	チップバリスタ	01
D403-404	VT332900	DIODE			ダイオード	01
D600	VT332900	DIODE			ダイオード	01
D602-603	VT332900	DIODE			ダイオード	01
D702-703	VT332900	DIODE			ダイオード	01
IC2	XZ287A00	IC			ロジックIC	02
IC3	XS775A00	IC			ロジックICフラット	01
IC5	X7195A00	IC			電源IC	04
IC10	X7741A00	IC			電源IC	02
IC11	X0199B00	IC			ロジックIC	01
IC13	YA255A00	IC			電源IC	01
IC20	X8328A00	IC.CPU	unwritten		IC CPU	10
IC21	X8194A00	IC			電源IC	03
IC22	YA398A00	IC.MEMORY			メモリアIC	
IC41	YA399A00	IC			IC	
IC43	X7378A00	IC			アンプIC	01
IC46	X0199B00	IC			ロジックIC	01
IC47	X7195A00	IC			電源IC	04
IC48	X9626B00	IC.MEMORY			メモリアIC64M	
IC49	YA541A00	IC.MEMORY	written		メモリアIC16M	
IC50	XR680A00	IC			ロジックIC	01
IC61	X7375A00	IC		U	IC	04
IC62	X0199B00	IC			ロジックIC	01
IC63	XS534A00	IC			電源IC	02
IC65	X7355A00	IC			IC	07
IC66	X7357A00	IC			IC	04
IC67	X3586B00	IC			ロジックIC	01
IC68	XR680A00	IC			ロジックIC	01
IC70	X9393A00	IC		U	ICビデオデコーダ	13
IC71	YA215A00	IC			ビデオスケーラ	
IC73	X9460A00	IC			電源IC	03
IC74	X8194A00	IC			電源IC	03
IC75	X8531A00	IC			ロジックIC	02
IC76-78	XZ283A00	IC			ロジックIC	04
Q1-8	VQ986700	TR			トランジスタ	01
Q200	WQ381000	FET			MOS FET	
Q201-202	VV655300	TR.DGT			デジタルトランジスタ	01
Q203	VR936300	TR		UCRTKABGEFL	トランジスタ	01
Q205-209	VR936300	TR			トランジスタ	01
Q400	WQ381000	FET			MOS FET	01
Q401	VV655300	TR.DGT			デジタルトランジスタ	01
Q402	WQ381000	FET			MOS FET	01
Q403	VV655000	TR.DGT			デジタルトランジスタ	01
Q404	VV655300	TR.DGT			デジタルトランジスタ	01
Q600	VV655200	TR.DGT		U	デジタルトランジスタ	01
Q601	VV655700	TR.DGT		U	デジタルトランジスタ	01
Q700	WQ381000	FET			MOS FET	01
Q701	VR936300	TR			トランジスタ	01
Q702	WQ381000	FET			MOS FET	01
Q703	VR936300	TR			トランジスタ	01
R88	V8070100	R.MTL.FLM			金属被膜抵抗	01
R201	RD357120	R.CHP	V765		チップ抵抗	01
R201	RD357180	R.CHP	6270		チップ抵抗	01
R466-467	HV753220	R.CAR.FP			不燃化カーボン抵抗	01
R601	WQ072300	R.MTL.OXD			酸化金属被膜抵抗	01
R601	V8070100	R.MTL.FLM			金属被膜抵抗	01

\* New Parts \* 新規部品

P.C.B. DIGITAL and P.C.B. OPERATION

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
R607	HV753220	R. CAR. FP			不燃化カーボン抵抗	01
ST1-2	V4040500	SCR. TERM			スクリューノターミナル	01
XL1	WR725300	RSNR. CRY5	27MHz SMD-49		水晶振動子	02
XL20	WF997400	RSNR. CE	20MHz	U	セラミック振動子	03
XL41	WR846900	RSNR. CRY5	45.1984MHz DSX321G		水晶振動子	03
XL42	V3625700	RSNR. CRY5	24.576MHz		水晶振動子	03
XL70	VZ772700	RSNR. CRY5	28.63636MHz		水晶振動子	03
	WR435100	P. C. B.	OPERATION	J	PCB OPERATION	
	WR435200	P. C. B.	OPERATION	U	PCB OPERATION	
	WR435300	P. C. B.	OPERATION	C	PCB OPERATION	
	WR435400	P. C. B.	OPERATION	RTA	PCB OPERATION	
	WR435500	P. C. B.	OPERATION	KBGEFL	PCB OPERATION	
CB401	V0045400	CN. BS. PIN	25P		FFCコネクタ	03
CB402	V0044400	CN. BS. PIN	9P		FFCコネクタ	01
CB451	V0961100	CN. BS. PIN	8P		ハウジング	01
CB452	V9357000	CN	19P TE		JECコネクタ	03
CB454	V0962100	CN. BS. PIN	18P		ハウジング	03
CB455	V9357000	CN	19P TE		JECコネクタ	01
CB456	V0961800	CN. BS. PIN	15P		ハウジング	03
CB457	V0961400	CN. BS. PIN	11P		ハウジング	03
CB458	V9357000	CN	19P TE		JECコネクタ	01
CB459	V0963300	CN. BS. PIN	12P		ウエハー	01
CB460	V0963100	CN. BS. PIN	10P		ウエハー	01
CB461	V0044400	CN. BS. PIN	9P		FFCコネクタ	01
CB462	VK026400	CN. BS. PIN	5P	JRTKABGEFL	ワイヤードラップ	01
CB463	V0585700	CN. JUMPER	7P		ジャンパーコネクタ	03
CB477	V8583300	CN. BS. PIN	4P		コネクタベースポスト	01
C4001	US063100	C. CE. CHP	1000pF		チップセラコン	01
C4002	US065100	C. CE. CHP	0.1uF	50V B	チップセラコン	01
C4003	UR067100	C. EL	10uF	50V B	ケミコン	01
C4004	US064100	C. CE. CHP	0.01uF	50V B	チップセラコン	01
C4005	UR837220	C. EL	22uF	16V	ケミコン	01
C4006	US062100	C. CE. CHP	100pF	50V B	チップセラコン	01
C4007	UR257470	C. EL	47uF	35V	ケミコン	01
C4008	US061330	C. CE. CHP	33pF	50V B	チップセラコン	01
C4009-4010	UR267220	C. EL	22uF	50V	ケミコン	01
C4011	UR067100	C. EL	10uF	50V	ケミコン	01
C4012-4013	US135100	C. CE. CHP	0.1uF	16V	チップセラコン	01
C4015	UR268220	C. EL	220uF	50V	ケミコン	01
C4016	UM388330	C. EL	330uF	6.3V	ケミコン	01
C4017	US135100	C. CE. CHP	0.1uF	16V	チップセラコン	01
C4018	US061680	C. CE. CHP	68pF	50V B	チップセラコン	01
C4019	US065100	C. CE. CHP	0.1uF	50V B	チップセラコン	01
C4020-4021	US135100	C. CE. CHP	0.1uF	16V	チップセラコン	01
C4022	US064100	C. CE. CHP	0.01uF	50V B	チップセラコン	01
C4023-4024	US063100	C. CE. CHP	1000pF	50V B	チップセラコン	01
C4025-4026	US065100	C. CE. CHP	0.1uF	50V B	チップセラコン	01
C4027	US135100	C. CE. CHP	0.1uF	16V	チップセラコン	01
C4028	US062100	C. CE. CHP	100pF	50V B	チップセラコン	01
C4030	US062100	C. CE. CHP	100pF	50V B	チップセラコン	01
C4031	US062470	C. CE. CHP	470pF	50V B	チップセラコン	01
C4032	US135100	C. CE. CHP	0.1uF	16V	チップセラコン	01
C4033	US063100	C. CE. CHP	1000pF	50V B	チップセラコン	01
C4034	UM417100	C. EL	10uF	50V	ケミコン	01

\* New Parts \* 新規部品

P.C.B. OPERATION

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
C4035	US135100	C. CE. CHIP			チップセラコン	01
C4036-4040	US063100	C. CE. CHIP	16V		チップセラコン	01
C4041-4046	US135100	C. CE. CHIP	50V B		チップセラコン	01
C4202	US063100	C. CE. CHIP	16V	U	チップセラコン	01
C4205-4211	US062220	C. CE. CHIP	1000pF		チップセラコン	01
C4212	US062100	C. CE. CHIP	220pF	U	チップセラコン	01
C4213	UR267100	C. EL	100pF		チップセラコン	01
C4214	WK041800	C. EL	10uF		ケミコン	01
C4215	WJ603500	C. MYLAR	16V		ケミコン	01
C4216	US135100	C. CE. CHIP	680pF		マイラーコン	01
C4217	UR267470	C. EL	0.1uF		チップセラコン	01
C4218	US135100	C. CE. CHIP	47uF		ケミコン	01
C4219	UR267470	C. EL	0.1uF		チップセラコン	01
C4220	WJ603500	C. MYLAR	47uF		ケミコン	01
C4221	WK041800	C. EL	680pF		マイラーコン	01
C4222	UR267100	C. EL	10uF		ケミコン	01
C4223-4224	US062100	C. CE. CHIP	100pF		チップセラコン	01
C4225	UR267100	C. EL	50V B		ケミコン	01
C4226	WK041800	C. EL	10uF		ケミコン	01
C4227	WJ603500	C. MYLAR	16V		ケミコン	01
C4228-4229	US135100	C. CE. CHIP	680pF		マイラーコン	01
C4230	WJ605800	C. MYLAR	0.1uF		チップセラコン	01
C4231-4232	UR267100	C. EL	0.047uF		マイラーコン	01
C4233	WJ604700	C. MYLAR	10uF		ケミコン	01
C4234	US062100	C. CE. CHIP	6800pF		マイラーコン	01
C4235	UR267100	C. EL	100pF		チップセラコン	01
C4236	WK041800	C. EL	10uF		ケミコン	01
C4237	WJ603500	C. MYLAR	16V		ケミコン	01
C4238-4239	US135100	C. CE. CHIP	680pF		マイラーコン	01
C4240	WJ603500	C. MYLAR	0.1uF		チップセラコン	01
C4241	WK041800	C. EL	680pF		マイラーコン	01
C4242	UR267100	C. EL	10uF		ケミコン	01
C4243-4244	US062100	C. CE. CHIP	10uF		チップセラコン	01
C4245	UR267100	C. EL	100pF		ケミコン	01
C4246	WK041800	C. EL	10uF		ケミコン	01
C4247	WJ603500	C. MYLAR	16V		マイラーコン	01
C4248-4249	US135100	C. CE. CHIP	680pF		チップセラコン	01
C4250	WJ603500	C. MYLAR	0.1uF		マイラーコン	01
C4251	WK041800	C. EL	680pF		ケミコン	01
C4252	UR267100	C. EL	10uF		チップセラコン	01
C4253	US062100	C. CE. CHIP	10uF		ケミコン	01
C4254-4255	UR067100	C. EL	100pF		ケミコン	01
C4301	UR267470	C. EL	10uF		チップセラコン	01
C4302	UR267470	C. EL	47uF	JRTKABGEFL	ケミコン	01
C4303	WJ603700	C. MYLAR	50V	JRTKABGEFL	ケミコン	01
C4304	WJ603700	C. MYLAR	50V	JRTKABGEFL	マイラーコン	01
C4305	UR267100	C. EL	1000pF	JRTKABGEFL	マイラーコン	01
C4306	UR267100	C. EL	100pF	JRTKABGEFL	ケミコン	01
C4307	WJ605600	C. MYLAR	10uF	JRTKABGEFL	ケミコン	01
C4308	WJ605600	C. MYLAR	0.033uF	JRTKABGEFL	マイラーコン	01
C4309	WJ604900	C. MYLAR	0.033uF	JRTKABGEFL	マイラーコン	01
C4310	WJ604900	C. MYLAR	9100pF	JRTKABGEFL	マイラーコン	01
C4311	UR218220	C. EL	50V	JRTKABGEFL	マイラーコン	01
C4312	UR218220	C. EL	220uF	JRTKABGEFL	マイラーコン	01
C4313	WJ603100	C. MYLAR	6.3V	JRTKABGEFL	ケミコン	01
C4314	WJ603100	C. MYLAR	6.3V	JRTKABGEFL	ケミコン	01
C4315	WJ603100	C. MYLAR	220pF	JRTKABGEFL	マイラーコン	01
			50V	RTKABGEFL	マイラーコン	01

\*- New Parts \* 新規部品

P.C.B. OPERATION

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
C4316	WJ603100	C. MYLAR	220pF	RTKABGEFL	マイラーコン	01
C4317	US064100	C. CE. CHP	0. 01uF	JRTKABGEFL	チップセラコン	01
C4318-4321	WJ605000	C. MYLAR	0. 01uF		マイラーコン	01
C4403	WJ604300	C. MYLAR	3300pF		マイラーコン	
C4406	WJ604300	C. MYLAR	3300pF		マイラーコン	
C4407	US064100	C. CE. CHP	0. 01uF		チップセラコン	01
C4408-4409	US063680	C. CE. CHP	6800pF		チップセラコン	01
C4412	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C4414	US063100	C. CE. CHP	1000pF		チップセラコン	01
C4416	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C4418	US062220	C. CE. CHP	220pF		チップセラコン	01
D4001-4002	VT332900	D. IODE	1SS355		ダイオード	01
D4003	VU171900	D. IODE. ZENR	UDZ5. 1B		ツェナーダイオード	01
D4004-4005	VT332900	D. IODE	1SS355		ダイオード	01
D4006-4007	VU991000	D. IODE. ZENR	MAZ8036GLL 3. 5V		ツェナーダイオード	01
D4008	WG760400	LED	SELK6E10C BLUE		LED	04
D4009	WR095700	LED	8224-10SDRD/S530A3		LED	01
D4011	V2598200	LED	SIR-505ST		LED	01
D4301	VV659300	D. IODE. ZENR	RLZ7. 5B	JRTKABGEFL	ツェナーダイオード	01
D4302	VV659300	D. IODE. ZENR	RLZ7. 5B	JRTKABGEFL	ツェナーダイオード	01
D4303	VT332900	D. IODE	1SS355		ダイオード	01
D4401-4402	VT332900	D. IODE	1SS355		ダイオード	01
D4406-4407	VT332900	D. IODE	1SS355		ダイオード	01
D4409	VT332900	D. IODE	1SS355		ダイオード	01
D4411	VT332900	D. IODE	1SS355		ダイオード	01
IC401	X7378A00	IC	NJM4565M(TEI)		アンプIC	01
IC402	X6386A00	IC	M66003-0131FP		IC	07
IC451-454	X5482A00	IC	NE5532DR OP AMP		アンプIC	01
IC461	X3505A00	IC	NJM2068MD-TE2	JRTKABGEFL	アンプIC	02
JK401	WC814400	JACK. MNI	JY-3554-01-130		ミニジャック	02
JK451	VV269500	CN	8P DIN	U	複合コネクタ	03
JK471	WJ117400	JACK. MNI	OPTIMIZER MIC		ミニジャック	02
JK472	V9408200	JACK. PHONE	MSJ-064-05B GR		ホーンジャック	03
PJ461	WD599600	JACK. PIN	2P MSP-252V2-06 NI		ピンジャック 2P	01
PJ461	WD599600	JACK. PIN	2P MSP-252V2-06 NI		ピンジャック 2P	01
PJ472	WJ117500	JACK. PIN	3P	JRTKABGEFL	ピンジャック	03
Q4001-4003	WC529400	TR	KTC3875S Y GR RTK		トランジスタ	01
Q4004	VV655400	TR. D6T	DTC114EKA		デジタルトランジスタ	01
Q4005	WC397700	TR	2N5401C-AT		トランジスタ	01
Q4006-4012	WC529400	TR. D6T	KTC3875S Y GR RTK		トランジスタ	01
Q4301	VV655400	TR. D6T	DTC114EKA		トランジスタ	01
Q4302	WQ072300	R. MTL. OXD	DTA114EKA		デジタルトランジスタ	01
R4208	HV753220	R. CAR. FP	2. 2Ω 1W	JKBGEFL	酸化金属被膜抵抗	01
R4209	WQ072300	R. MTL. OXD	2. 2Ω 1/4W	UCRTA	不酸化カーボン抵抗	01
R4209	HV753220	R. CAR. FP	2. 2Ω 1W	JKBGEFL	酸化金属被膜抵抗	01
R4301	WQ964700	R. MTL. OXD	2. 2Ω 1/4W	UCRTA	不酸化カーボン抵抗	01
R4301	HV755470	R. CAR. FP	470Ω 1W	JKBGEFL	酸化金属被膜抵抗	01
R4302	WQ964700	R. MTL. OXD	470Ω 1/4W	RTA	不酸化カーボン抵抗	01
R4302	HV755470	R. CAR. FP	470Ω 1W	JKBGEFL	酸化金属被膜抵抗	01
R4320-4321	HV757100	R. CAR. FP	470Ω 1/4W	RTA	不酸化カーボン抵抗	01
R4413-4414	V8071300	R. MTL. FLMI	10KΩ 1/4W	JKBGEFL	酸化金属被膜抵抗	01
RY461	WJ122400	RELAY	981-2A-24DS-SF7		金属被膜抵抗	04
ST451	V4040500	SCR. TERM	M3	JORTKABGEFL	リレー 24V	01
ST461	V4040500	SCR. TERM	M3		スクリュー/ターミナル	01
ST471	V4040500	SCR. TERM	M3		スクリュー/ターミナル	01
SW401-404	WD483100	SW. TACT	SKRGAAD010		タクト SW	01

\* New Parts \* 新規部品

P.C.B. OPERATION and P.C.B. MAIN

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
SW406-407	WD483100	SW TACT			タクト SW	01
SW409-413	WD483100	SW TACT			タクト SW	01
SW415	WD483100	SW TACT			タクト SW	01
SW417-419	WD483100	SW TACT			タクト SW	01
SW421	WD483100	SW TACT			タクト SW	01
SW424	WD483100	SW TACT			タクト SW	01
SW441-442	V9266400	SW RT. ENC			ロータリーエンコーダ	02
SW443	V9597100	SW RT. ENC			ロータリーエンコーダ	04
SW471	WD483100	SW TACT		JUCRTA	タクト SW	01
TE461	WK560800	TERM. SP	4P MST-204V1-01 NC	KBGEFL	スピーカーターミナル	04
TE461	WK560900	TERM. SP	4P MST-204V1-01 WC		スピーカーターミナル	
TE463	WB782600	AC INLET	R-30190 (26)	J	ACインレット 2P	03
U4001	WQ600700	L. DTCT	SM3385VWH6		リモコン受光ユニット	08
V4001	WQ842100	FL. DSPLY	18-MT-09GINK		発光表示管	
	V6007100	SPACER. FL	4.6/10/32		スペーサ FL	
	WR431900	P. C. B.	MAIN	J	PCB MAIN	
	WR432000	P. C. B.	MAIN	U	PCB MAIN	
	WR432000	P. C. B.	MAIN	C	PCB MAIN	
	WR432500	P. C. B.	MAIN	C	PCB MAIN	
	WR432100	P. C. B.	MAIN	R	PCB MAIN	
	WR432200	P. C. B.	MAIN	TKABGEF	PCB MAIN	
	WR432300	P. C. B.	MAIN	L	PCB MAIN	
CB111-112	WN077700	CLIP. FUSE	CLIP. PF05000-0202F	R	ヒューズクリップ	01
CB152	VQ962900	CN. BS. PIN	8P		ウエハー	03
CB153	VQ963900	CN. BS. PIN	18P		ウエハー	01
CB154	VQ963600	CN. BS. PIN	15P		ウエハー	03
CB155	VQ963200	CN. BS. PIN	11P		ウエハー	01
C1001	WK041800	C. EL	10uF 16V	JTKABGEF	ケミコン	01
C1001	UR257100	C. EL	10uF 35V	UCRL	ケミコン	01
C1002	WK041800	C. EL	10uF 16V	JTKABGEF	ケミコン	01
C1002	UR257100	C. EL	10uF 35V	UCRL	ケミコン	01
C1003	WK041800	C. EL	10uF 16V	JTKABGEF	ケミコン	01
C1003	UR257100	C. EL	10uF 35V	UCRL	ケミコン	01
C1004-1007	UR257100	C. EL	10uF 35V		ケミコン	01
C1008	WE100900	C. PP	220pF 630V	JTKABGEF	PPコン	02
C1008	WN164200	C. PP	220pF 100V	UCRL	PPコン	01
C1009	WE100900	C. PP	220pF 630V	JTKABGEF	PPコン	02
C1009	WN164200	C. PP	220pF 100V	UCRL	PPコン	01
C1010	WE100900	C. PP	220pF 630V	JTKABGEF	PPコン	02
C1010	WN164200	C. PP	220pF 100V	UCRL	PPコン	01
C1011-1014	WN164200	C. PP	220pF 100V		PPコン	01
C1015	WE100600	C. PP	120pF 630V	JTKABGEF	PPコン	01
C1015	WQ107500	C. PP	120pF 100V	UCRL	PPコン	01
C1016	WE100600	C. PP	120pF 630V	JTKABGEF	PPコン	01
C1016	WQ107500	C. PP	120pF 100V	UCRL	PPコン	01
C1017	WE100600	C. PP	120pF 630V	JTKABGEF	PPコン	01
C1017	WQ107500	C. PP	120pF 100V	UCRL	PPコン	01
C1018-1021	WQ107500	C. PP	120pF 100V		PPコン	01
C1022	WE102300	C. PP	3300pF 100V	JTKABGEFL	PPコン	01
C1022	WN164900	C. PP	3300pF 100V	UCR	PPコン	01
C1023	WE102300	C. PP	3300pF 100V	JTKABGEFL	PPコン	01
C1023	WN164900	C. PP	3300pF 100V	UCR	PPコン	01
C1024	WE102300	C. PP	3300pF 100V	JTKABGEFL	PPコン	01
C1024	WN164900	C. PP	3300pF 100V	UCR	PPコン	01

\* New Parts \* 新規部品

P.C.B. MAIN

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
C1025-1028	WN164900	C. PP			PPコン	01
C1029	UR067470	C. EL	100V		ケミコン	01
C1030-1031	UR068100	C. EL	47uF		ケミコン	01
C1032-1035	UR067470	C. EL	100uF		ケミコン	01
C1036	WE100200	C. PP	47uF	JTKABGEF	ケミコン	01
C1036	W0627600	C. CE	22pF	UCRL	セラコン	01
C1037	WE100200	C. PP	22pF	JTKABGEF	PPコン	01
C1037	W0627600	C. CE	22pF	UCRL	セラコン	01
C1038	WE100200	C. PP	22pF	JTKABGEF	PPコン	01
C1038	W0627600	C. CE	22pF	UCRL	セラコン	01
C1039-1042	W0627600	C. CE	22pF	JTKABGEF	セラコン	01
C1043-1049	WN164300	C. PP	22pF	UCRL	セラコン	01
C1050	UR397100	C. EL	330pF	JTKABGEF	PPコン	01
C1050	UR067100	C. EL	10uF	UCRL	ケミコン	03
C1051	UR397100	C. EL	10uF	JTKABGEF	ケミコン	01
C1051	UR067100	C. EL	10uF	UCRL	ケミコン	03
C1052	UR397100	C. EL	10uF	JTKABGEF	ケミコン	01
C1052	UR067100	C. EL	10uF	UCRL	ケミコン	03
C1053-1056	UR067100	C. EL	10uF	JTKABGEF	ケミコン	01
C1057-1063	WN165500	C. PP	0.022uF	UCRL	ケミコン	01
C1066-1067	WN156000	C. PP	1000pF	JTKABGEF	PPコン	01
C1068	UR866470	C. EL	4.7uF	UCRL	PPコン	01
C1069	UR838100	C. EL	100uF	JTKABGEF	ケミコン	01
C1070-1073	UR297100	C. EL	10uF	UCRL	ケミコン	01
C1074	UR267330	C. EL	33uF	JTKABGEF	ケミコン	01
C1075	WK041800	C. EL	10uF	UCRL	ケミコン	01
C1075	UR257100	C. EL	10uF	JTKABGEF	ケミコン	01
C1075	WK041800	C. EL	10uF	UCRL	ケミコン	01
C1076	UR266100	C. EL	1uF	JTKABGEF	ケミコン	01
C1078	WP421000	C. PP	0.047uF	UCRL	PPコン	01
C1078	VR324900	C. MYLAR	0.1uF	JTKABGEF	マイラーコン	01
C1079	WP421000	C. PP	0.047uF	UCRL	PPコン	01
C1079	VR324900	C. MYLAR	0.1uF	JTKABGEF	マイラーコン	01
C1080-1081	WN165500	C. PP	0.022uF	UCRL	PPコン	01
C1082	UR049330	C. EL	3300uF	JTKABGEF	ケミコン	03
C1083	UR049220	C. EL	2200uF	UCRL	ケミコン	01
C1084-1085	WN331300	C. EL	6800uF	JTKABGEF	ケミコン	07
C1086	UR049220	C. EL	2200uF	UCRL	ケミコン	01
C1087-1088	WK041800	C. EL	10uF	JTKABGEF	ケミコン	01
C1089	US135100	C. CE. CHP	0.1uF	UCRL	チップセラコン	01
C1509	UR067470	C. EL	47uF	JTKABGEF	ケミコン	01
C1510-1512	US135100	C. CE. CHP	0.1uF	UCRL	チップセラコン	01
C1513-1514	US061220	C. CE. CHP	22pF	JTKABGEF	チップセラコン	01
C1515-1516	US135100	C. CE. CHP	0.1uF	UCRL	チップセラコン	01
C1517-1520	US062220	C. CE. CHP	220pF	JTKABGEF	チップセラコン	01
C1521	UR267100	C. EL	10uF	UCRL	ケミコン	01
C1522	US061470	C. CE. CHP	47pF	JTKABGEF	チップセラコン	01
C1523	UR238100	C. EL	100uF	UCRL	ケミコン	01
C1524	US061470	C. CE. CHP	47pF	JTKABGEF	チップセラコン	01
C1525	UR267100	C. EL	10uF	UCRL	ケミコン	01
C1526-1527	UR238100	C. EL	100uF	JTKABGEF	ケミコン	01
C1528-1529	US062220	C. CE. CHP	220pF	UCRL	チップセラコン	01
C1530	UR238100	C. EL	100uF	JTKABGEF	ケミコン	01
C1531	UR267330	C. EL	33uF	UCRL	ケミコン	01
C1532-1533	UR238100	C. EL	100uF	JTKABGEF	ケミコン	01
C1534-1535	US062220	C. CE. CHP	220pF	UCRL	チップセラコン	01

△

\* New Parts \* 新規部品

P.C.B. MAIN

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
C1536	UR238100	C. EL			ケミコン	
C1537	WJ605600	C. MYLAR	16V		マイラーコン	01
C1538	VR169000	C. MYLAR	0.033uF		マイラーコン	
C1539	WJ604800	C. MYLAR	0.33uF		マイラーコン	
C1540	WJ605600	C. MYLAR	8200pF		マイラーコン	
C1541	VR169000	C. MYLAR	0.033uF		マイラーコン	01
C1542	US135100	C. CE. CHIP	0.33uF		マイラーコン	01
C1543	WJ604800	C. MYLAR	0.1uF		チップセラコン	01
C1544	US062220	C. CE. CHIP	8200pF		マイラーコン	01
C1545	US135100	C. CE. CHIP	220pF		チップセラコン	01
C1546	US062220	C. CE. CHIP	0.1uF		チップセラコン	01
C1547	UR267100	C. EL	220pF		チップセラコン	01
C1549	UR267100	C. EL	10uF		ケミコン	
C1551	US062220	C. CE. CHIP	10uF		ケミコン	01
C1552	UR267100	C. EL	220pF		チップセラコン	
C1553-1554	UR266220	C. EL	50V B		ケミコン	
C1555-1556	UR267100	C. EL	2.2uF		ケミコン	
C1557	US062220	C. CE. CHIP	10uF		ケミコン	01
C1558-1559	UR267470	C. EL	220pF	V765	チップセラコン	01
C1560	US062220	C. CE. CHIP	47uF		ケミコン	01
C1563	US062220	C. CE. CHIP	220pF		チップセラコン	01
C1566	US062220	C. CE. CHIP	220pF		チップセラコン	01
C1567	VR169200	C. MYLAR	220pF		チップセラコン	01
C1568	VR169200	C. MYLAR	0.47uF		マイラーコン	01
C1568	VR169200	C. MYLAR	0.47uF	V765	マイラーコン	01
C1569	US062220	C. CE. CHIP	0.47uF		マイラーコン	01
C1570	UR267100	C. EL	220pF		チップセラコン	01
C1571	UR267100	C. EL	10uF		ケミコン	
C1571	UR267100	C. EL	10uF	V765	ケミコン	
C1571	UR267100	C. EL	10uF		チップセラコン	01
C1572-1573	US062100	C. CE. CHIP	100pF		ケミコン	
C1574	UR267100	C. EL	10uF		ケミコン	01
C1575	US061470	C. CE. CHIP	47pF		チップセラコン	01
C1576	UR267100	C. EL	10uF		ケミコン	
C1576	UR267100	C. EL	10uF		ケミコン	
C1577	UR267100	C. EL	10uF	V765	ケミコン	
C1577	UR267100	C. EL	10uF		ケミコン	
C1578	US061470	C. CE. CHIP	47pF		チップセラコン	01
C1579	UR267100	C. EL	10uF		ケミコン	
C1580	UR267100	C. EL	10uF		ケミコン	
C1580	UR267100	C. EL	10uF	V765	ケミコン	
C1580	UR267100	C. EL	10uF		ケミコン	
C1580	UR837100	C. EL	10uF		ケミコン	01
C1581-1582	US061470	C. CE. CHIP	47pF	6270	チップセラコン	01
C1583-1584	UR267470	C. EL	47uF		ケミコン	01
C1585	UR267100	C. EL	10uF		ケミコン	01
C1585	UR267100	C. EL	10uF	V765	ケミコン	
C1585	UR837100	C. EL	10uF	6270	ケミコン	01
C1588-1591	UR267100	C. EL	10uF		ケミコン	
C1594-1595	US062470	C. CE. CHIP	470pF	V765	チップセラコン	01
C1596	US064100	C. CE. CHIP	0.01uF		チップセラコン	01
C1597-1598	US062470	C. CE. CHIP	470pF		チップセラコン	01
C1599-1602	UR267100	C. EL	10uF	V765	ケミコン	01
C1603-1604	US062470	C. CE. CHIP	470pF	6270	チップセラコン	01
C1605-1606	US064100	C. CE. CHIP	0.01uF		チップセラコン	01
C1607	US062470	C. CE. CHIP	470pF		チップセラコン	01
C1608	US064100	C. CE. CHIP	0.01uF		チップセラコン	01
C1608	US064100	C. CE. CHIP	0.01uF	V765	チップセラコン	01
C1609-1610	US064100	C. CE. CHIP	0.01uF		チップセラコン	01
D1001-1016	VR496500	DIODE CHIP	MA111 FLAT TP		チップダイオード	01

\* New Parts \* 新規部品



P.C.B. MAIN

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
△	D1017-1023	D10DE.ZENR	MTZJ5.1C 5.1V		ツェナーダイオード	01
△	D1024-1039	VR496500	MA111 FLAT TP	JTKABGEF	チップダイオード	05
△	D1040	WK611100	D6SBN20 6A 200V	UCRL	ダイオードブリッジ	03
△	D1040	WB212700	RS603M 6A 200V		ダイオードブリッジ	02
△	D1041	WH487300	RS203M 2.0A 200V		ダイオードブリッジ	01
	D1042	VG440500	MTZJ13B 13V		ツェナーダイオード	01
	D1043	VR496500	MA111 FLAT TP		チップダイオード	01
△	D1044-1045	VG435500	MTZJ2.4B 2.4V		ツェナーダイオード	01
	D1501-1502	VG438400	MTZJ6.8C 6.8V		ツェナーダイオード	01
△	F100	KB000780	T5A 250V	R	ヒューズ	02
	G101	V5995800	PLATE.GND		アースプレート	02
△	IC101	XJ608A00	NJM7812FA		IC	02
△	IC102	X4154A00	KIA7912PI		電源IC	
	IC103	YA381A00	LMI9C1Z/LF THERMAL		電源IC	01
	IC152	XZ509A00	TC74VHC04FT INVER		ロジックIC	
	IC153	YA361A00	R2A15220FP		IC	01
	IC154	X7378A00	NJM4565M(TE1)		IC	01
	PJ150	V5715300	2P OR/OR		アンブIC	01
	PJ151	V7046800	6P MSP-246V1-01NI		ピンジャック	02
	PJ152-153	V7046700	4P MSP-244V1-01NI		ピンジャック	04
	PJ154	WG674900	4P	UCRTKABGEFL	ピンジャック 4P	03
	PJ155	V7046700	4P MSP-244V1-01NI		ピンジャック	02
	PJ157	V7046700	4P MSP-244V1-01NI		ピンジャック	03
	PJ158	WG674900	4P		ピンジャック 4P	03
	PJ159	V7189700	1P	JURTKABGEFL	ピンジャック	02
	PJ159	V7189700	1P	C	ピンジャック	01
	PJ160	WC612700	2P	J	ピンジャック	01
	Q1001-1014	WC139600	KTC3911S GR BL	V765	トランジスタ	01
	Q1015-1021	V3966800	2SA949 O.Y		トランジスタ	02
△	Q1022-1028	WK432900	2SD1915F S.T		トランジスタ	01
△	Q1029-1035	VR325600	2SC2229 O.Y		トランジスタ	01
△	Q1036-1042	V4096100	2SC4614 S.T		トランジスタ	02
△	Q1043-1049	V4096000	2SA1770 S.T		トランジスタ	03
△	Q1050-1056	VR355900	A1695/C4468 OPY		ペアトランジスタ	07
	Q1057-1063	WC139600	KTC3911S GR BL		トランジスタ	01
	Q1064	WH372100	KTA1517S GR TP		トランジスタ	01
	Q1065	WC139600	KTC3911S GR BL		トランジスタ	01
△	Q1067-1068	WC292600	KTA1837-U		トランジスタ	01
△	Q1069-1070	WC398400	2N5551C-AT		トランジスタ	01
△	Q1071	WC397700	2N5401C-AT		トランジスタ	01
△	Q1072	VP872600	2SA1708 S.T		トランジスタ	01
	Q1073	WC398500	KRA102M-AT		デジタルトランジスタ	01
	Q1074	WC529200	KRG102M-AT		デジタルトランジスタ	01
	Q1500-1504	VZ725900	2SD1938F S.T		トランジスタ	01
	Q1507	VZ725900	2SD1938F S.T	JURTKABGEFL	トランジスタ	01
	Q1507	VZ725900	2SD1938F S.T	C	トランジスタ	01
	Q1508	VZ725900	2SD1938F S.T		トランジスタ	01
	Q1507	VZ725900	2SD1938F S.T	JURTKABGEFL	トランジスタ	01
	Q1509	VZ725900	2SD1938F S.T	C	トランジスタ	01
	Q1510	VZ725900	2SD1938F S.T		トランジスタ	01
	Q1511	VZ725900	2SD1938F S.T		トランジスタ	01
	Q1512	VZ725900	2SD1938F S.T	UCRTKABGEFL	トランジスタ	01
	Q1513	VZ725900	2SD1938F S.T	UCRTKABGEFL	トランジスタ	01
	Q1514	VZ725900	2SD1938F S.T	UCRTKABGEFL	トランジスタ	01
	Q1519-1527	VZ725900	2SD1938F S.T	UCRTKABGEFL	トランジスタ	01
	R1001	HL006100	1KΩ 1/2W		酸化金属膜抵抗	01
	R1002-1007	HL006100	1KΩ 1/2W		酸化金属膜抵抗	01

\* New Parts \* 新規部品

P.C.B. MAIN

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
R1008-1011	HF356180	R. CAR			カーボン抵抗	01
R1012	HL006180	R. MTL. OXD			酸化金属被膜抵抗	
R1013-1014	HF356180	R. CAR			カーボン抵抗	
R1022-1028	HF355330	R. CAR			カーボン抵抗	
R1029-1035	HL006120	R. MTL. OXD			酸化金属被膜抵抗	
R1036-1042	V8070900	R. MTL. FLM			金属被膜抵抗	01
R1043-1049	HL007330	R. MTL. OXD			酸化金属被膜抵抗	01
R1079-1085	HL005120	R. MTL. OXD			酸化金属被膜抵抗	01
R1086-1092	WG727400	R. MTL. FLM			金属被膜抵抗	01
R1093-1099	WG725600	R. MTL. FLM			金属被膜抵抗	01
R1100-1106	WG726400	R. MTL. FLM			金属被膜抵抗	01
R1107-1112	WG726200	R. MTL. FLM			金属被膜抵抗	01
R1113-1124	HV755120	R. CAR. FP			金属被膜抵抗	01
R1125	HV755120	R. CAR. FP			不燃化カーボン抵抗	01
R1125	HV755120	R. CAR. FP			不燃化カーボン抵抗	01
R1126	HV755120	R. CAR. FP			不燃化カーボン抵抗	01
R1127-1133	HF355470	R. CAR			カーボン抵抗	01
R1134-1147	HV754100	R. CAR. FP			不燃化カーボン抵抗	01
R1148-1154	WP839400	R. WW			セメント抵抗	01
R1176-1182	V8070300	R. MTL. FLM			金属被膜抵抗	
R1197-1198	V8070200	R. MTL. FLM			金属被膜抵抗	
R1211	HV754100	R. CAR. FP			不燃化カーボン抵抗	01
R1213	V8072100	R. MTL. OXD			酸化金属被膜抵抗	01
R1214	HV755560	R. CAR. FP			不燃化カーボン抵抗	01
R1219	V8072000	R. MTL. OXD			酸化金属被膜抵抗	01
R1222	HV756100	R. CAR. FP			不燃化カーボン抵抗	01
R1225	VP941900	R. MTL. OXD			酸化金属被膜抵抗	01
R1234-1235	HV754100	R. CAR. FP			不燃化カーボン抵抗	01
R1236	WG726200	R. MTL. FLM			酸化金属被膜抵抗	01
R1238	V8070300	R. MTL. FLM			不燃化カーボン抵抗	01
R1504	HV753100	R. CAR. FP			酸化金属被膜抵抗	01
R1573	WQ835700	R. MTL. OXD			不燃化カーボン抵抗	01
R1573	WA621400	R. MTL. OXD			酸化金属被膜抵抗	01
R1575	WQ835700	R. MTL. OXD			酸化金属被膜抵抗	01
R1575	WA621400	R. MTL. OXD			酸化金属被膜抵抗	01
R1664-1665	HV755100	R. CAR. FP			不燃化カーボン抵抗	01
RY101	WE648700	RELAY			リレー 24V	06
ST100	V4040500	SCR. TERM			スクリーン/ターミナル	01
ST101	WA246200	SCR. TERM			スクリーン/ターミナル	01
SW101	WB493700	VOLT. SELECT		R	電圧切替器	
SW101	WD073700	VOLT. SELECT		L	電圧切替器	
UI1500-1501	WH169900	CN. PHOTO. R			光ファイバー受信器	04
	WE774200	SCR. BND. HD			バインドBタイプネジ	01

\*- New Parts \* 新規部品

P.C.B. VIDEO

Ref No.	Part No.	Description	Remarks	Markets	部品名	ランク
* CB301	WR433700	P. C. B.	VIDEO	J	PCB VIDEO	
* CB303	WR433800	P. C. B.	VIDEO	U	PCB VIDEO	
* CB305	WR433900	P. C. B.	VIDEO	C	PCB VIDEO	
* CB306	WR434600	P. C. B.	VIDEO	C	PCB VIDEO	V765
* CB307	WR434000	P. C. B.	VIDEO	R	PCB VIDEO	6270
* CB308	WR434100	P. C. B.	VIDEO	T	PCB VIDEO	
* CB309	WR434200	P. C. B.	VIDEO	K	PCB VIDEO	
* CB310	WR434300	P. C. B.	VIDEO	A	PCB VIDEO	
* CB311	WR434400	P. C. B.	VIDEO	BGEF	PCB VIDEO	
* CB312	WR434500	P. C. B.	VIDEO	L	PCB VIDEO	
CB301	VQ047700	CN. SS. PIN	22P	J	FFCコネクタ	01
CB303	VQ961500	CN. SS. PIN	12P		ハウジング	01
CB305	VQ047000	CN. SS. PIN	6P		FFCコネクタ	01
CB321	VM859500	CN. SS. PIN	11P		FFCコネクタ	01
CB332	VQ961300	CN. SS. PIN	10P		ハウジング	01
CB333	VK024700	CN. SS. PIN	3P		ワイヤートラップ	01
CB340	LB918020	CN. SS. PIN	2P		ベース付ポスト	01
CB342	LB918040	CN. SS. PIN	4P		ベース付ポスト	01
CB343	VZ130900	CN. JUMPER	4P		ジャンパーコネクタ	01
CB344	VQ585500	CN. JUMPER	5P		ジャンパーコネクタ	02
CB346	VB390000	CN. SS. PIN	4P		ベースピン	01
CB349	VQ047700	CN. SS. PIN	22P		FFCコネクタ	01
CB351-353	WD398400	CN. DIN	14P	J	DINコネクタ	05
CB354	VQ047700	CN. SS. PIN	22P	J	FFCコネクタ	01
CB371	VG879900	CN. SS. PIN	2P		ベースピン	01
CB372-373	WN103000	CLIP, FUSE	TP0035 -31	RL	ヒューズクリップ	01
CB378	VG879900	CN. SS. PIN	2P		ベースピン	01
CB379	VQ961000	CN. SS. PIN	7P		ハウジング	02
CB381	VQ962800	CN. SS. PIN	7P		ウエハー	02
CB391	VQ044100	CN. SS. PIN	5P		FFCコネクタ	01
C3001	US062100	C. CE. CHP	100pF	BGEF	チップセラコン	01
C3002-3004	US060800	C. CE. CHP	8pF		チップセラコン	01
C3005	US062100	C. CE. CHP	100pF		チップセラコン	01
C3006	UR237470	C. EL	47uF		ケミコン	01
C3007-3008	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3009	UR237470	C. EL	47uF		ケミコン	01
C3011	US060300	C. CE. CHP	3pF		チップセラコン	01
C3012	UR837470	C. EL	47uF		ケミコン	01
C3013-3014	US060300	C. CE. CHP	3pF		チップセラコン	01
C3015-3017	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3018	UR267100	C. EL	10uF		ケミコン	01
C3019	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3020	UR267100	C. EL	10uF		ケミコン	01
C3021-3025	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3026	UR267100	C. EL	10uF		ケミコン	01
C3027	WD758300	C. CE. CHP	10uF		チップセラコン	01
C3029	WD758300	C. CE. CHP	10uF		チップセラコン	01
C3031	WD758300	C. CE. CHP	10uF		チップセラコン	01
C3033	UR837470	C. EL	47uF		ケミコン	01
C3043-3044	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3045	UR837470	C. EL	47uF		ケミコン	01
C3047	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3048	UR238220	C. EL	220uF		ケミコン	01
C3050	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3051	UR238220	C. EL	220uF		ケミコン	01
C3052	UR838100	C. EL	100uF		ケミコン	01
C3053	UR238100	C. EL	100uF		ケミコン	01

\* New Parts \* 新規部品

P.C.B. VIDEO

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
C3054	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3055	US061120	C. CE. CHP	12pF	JUCRK	チップセラコン	01
C3055	US060500	C. CE. CHP	5pF	TABGEFL	チップセラコン	01
C3056	US061180	C. CE. CHP	18pF	JUCRK	チップセラコン	01
C3056	US060700	C. CE. CHP	7pF	TABGEFL	チップセラコン	01
C3057	UR866100	C. EL	1uF		ケミコン	01
C3058	US060600	C. CE. CHP	6pF	JUCRK	チップセラコン	
C3058	US060400	C. CE. CHP	4pF	TABGEFL	チップセラコン	
C3059	US061240	C. CE. CHP	24pF		チップセラコン	01
C3061	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3062	US061240	C. CE. CHP	24pF		チップセラコン	01
C3063	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3065	UR237470	C. EL	47uF		ケミコン	01
C3067-3069	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3072	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3073	UR238220	C. EL	220uF		ケミコン	01
C3074	US061100	C. CE. CHP	10pF		チップセラコン	01
C3076	UR837100	C. EL	10uF		ケミコン	01
C3077	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3079	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3080-3085	WD758300	C. CE. CHP	10uF		チップセラコン	01
C3201	US061270	C. CE. CHP	27pF	BGEF	チップセラコン	01
C3202	UR237100	C. EL	10uF	BGEF	ケミコン	01
C3203	US061270	C. CE. CHP	27pF	BGEF	チップセラコン	01
C3204-3205	US135100	C. CE. CHP	0. 1uF		チップセラコン	01
C3206	US062560	C. CE. CHP	560pF	BGEF	チップセラコン	01
C3207-3208	US062330	C. CE. CHP	330pF	BGEF	チップセラコン	01
C3209	US135100	C. CE. CHP	0. 1uF	BGEF	チップセラコン	01
C3211	UR237470	C. EL	47uF	BGEF	ケミコン	01
C3212-3214	UR237470	C. EL	47uF		ケミコン	01
C3215	US062100	C. CE. CHP	100pF		チップセラコン	01
C3217-3218	US062100	C. CE. CHP	100pF		チップセラコン	01
C3221	US062100	C. CE. CHP	100pF		チップセラコン	01
C3303-3305	VR324900	C. MYLAR	0. 1uF		マイラーコン	01
C3307	WG601900	C. EL	10000uF		ケミコン	04
C3308	UR278100	C. EL	100uF		ケミコン	01
C3309	UR03A100	C. EL	10000uF		ケミコン	01
C3310	UR039470	C. EL	4700uF		ケミコン	03
C3311	UR266100	C. EL	1uF		ケミコン	01
C3312	UR267220	C. EL	22uF		ケミコン	01
C3314	UR266100	C. EL	1uF		ケミコン	01
C3315	UR267100	C. EL	10uF		ケミコン	
C3316	UR268100	C. EL	100uF		ケミコン	
C3317	UR266100	C. EL	1uF	U	ケミコン	01
C3318	UR237470	C. EL	47uF	U	ケミコン	01
C3319	UR266100	C. EL	1uF		ケミコン	01
C3320-3321	UR267330	C. EL	33uF		ケミコン	01
C3403-3409	WJ605000	C. MYLAR	0. 01uF		マイラーコン	01
C3410-3416	WJ605200	C. MYLAR	0. 015uF		マイラーコン	01
C3501-3509	US064100	C. CE. CHP	0. 01uF	J	チップセラコン	01
C3510-3512	US060800	C. CE. CHP	8pF	J	チップセラコン	01
C3513-3514	UR267100	C. EL	10uF	J	ケミコン	01
C3515-3520	US135100	C. CE. CHP	0. 1uF	J	チップセラコン	01
C3603-3604	US063100	C. CE. CHP	1000pF		チップセラコン	01
C3606	US064100	C. CE. CHP	0. 01uF		チップセラコン	01
C3701	WQ852400	C. POL. MTL	0. 022uF		メタライズドポリコン	01
C3702	WK005000	C. CE. SAFETY	0. 047uF		規格認定コンデンサ	01

△

\* New Parts \* 新規部品

P.C.B. VIDEO

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
△	C3703	WR082000 C. EL	100uF 220V	JUC	ケミコン	04
△	C3703	WR082100 C. EL	100uF 400V	R	ケミコン	
△	C3703	W0852500 C. EL	68uF 400V	TKABGEFL	ケミコン	
	C3704	WR182800 C. CE. CHP	2200pF 250V		チップセラコン	01
	C3705	US065100 C. CE. CHP	0.1uF 50V B		チップセラコン	01
△	C3706	V6185300 C. CE. SAFETY	0.01uF 275V		規格認定コンデンサ	01
	C3707	UR837470 C. EL	47uF 16V		ケミコン	01
	C3708	UR867100 C. EL	10uF 50V		ケミコン	01
△	C3709	W0902200 C. CE. SAFETY	2200pF 250V		規格認定コン	01
	C3710-3711	UR866100 C. EL	1uF 50V		ケミコン	03
	C3712-3713	WH777900 C. EL	1000uF 35V		ケミコン	01
	C3714	US046100 C. CE. CHP	1uF 25V		チップセラコン	01
	C3715	US135100 C. CE. CHP	0.1uF 16V		チップセラコン	01
	C3716	WH771300 C. EL	100uF 10V		ケミコン	01
	C3717	W0852400 C. POL. MTL	0.022uF 630V		メタライズドポリコン	01
△	C3720-3721	W0902300 C. CE. SAFETY	1000pF 250V		規格認定コンデンサ	01
	C3801	US064100 C. CE. CHP	0.01uF 50V B		チップセラコン	01
	C3802	V7887800 C. EL	1uF 50V		ケミコン	01
	C3803	WJ335500 C. EL	2.2uF 50V		ケミコン	01
	C3804	WJ603700 C. MYLAR	1000pF 50V		マイラーコン	01
	C3805	US064100 C. CE. CHP	0.01uF 50V B		チップセラコン	01
	C3806-3807	WD758300 C. CE. CHP	10uF 10V		チップセラコン	01
	C3901	US064100 C. CE. CHP	0.01uF 50V B	B6EF	チップセラコン	01
	C3902	US062120 C. CE. CHP	120pF 50V B	B6EF	チップセラコン	01
	C3903	US062220 C. CE. CHP	220pF 50V B	B6EF	チップセラコン	01
	C3904	US135100 C. CE. CHP	0.1uF 16V	B6EF	チップセラコン	01
	C3905	UR837470 C. EL	47uF 16V	B6EF	ケミコン	01
	C3906	UR837100 C. EL	10uF 16V	B6EF	ケミコン	01
	C3907	UR818470 C. EL	470uF 6.3V	B6EF	ケミコン	01
	C3908	US064100 C. CE. CHP	0.01uF 50V B	B6EF	チップセラコン	01
	D3005-3007	VT332900 D10DE	1SS355		ダイオード	01
	D3201	VG436100 D10DE. ZENR	MTZJ3. 3B 3. 3V	B6EF	ツェナーダイオード	01
△	D3202	VG439500 D10DE. ZENR	MTZJ10B 10V		ツェナーダイオード	01
	D3302	WH487300 D10DE. BRG	RS203M 2. 0A 200V		ダイオードブリッジ	02
△	D3304	WH487300 D10DE. BRG	RS203M 2. 0A 200V		ダイオードブリッジ	02
	D3306	VV307700 D10DE	1N4002S		ダイオード	01
	D3307	VG440200 D10DE. ZENR	MTZJ12B 12V	R	ツェナーダイオード	01
	D3308	VG444700 D10DE. ZENR	MTZ J 39D 39. 0V TP		ツェナーダイオード	01
	D3309	VT332900 D10DE	1SS355	U	ダイオード	01
	D3310	VT332900 D10DE	1SS355		ダイオード	01
	D3311	VT332900 D10DE	1SS355	U	ダイオード	01
	D3320	VG437400 D10DE. ZENR	MTZJ5. 1B 5. 1V		ツェナーダイオード	01
	D3403-3407	VT332900 D10DE	1SS355	J	ダイオード	01
	D3501-3506	VT332900 D10DE	1SS355		ダイオード	01
	D3601	VT332900 D10DE	1SS355		ダイオード	01
	D3602	VT332900 D10DE	1SS355		ダイオード	01
	D3701	WH471700 D10DE. BRG	DB105 1A 600V		ダイオード	02
	D3703	WN672400 D10DE. ZENR	P6KE200A 200V		ダイオートブリッジ	02
	D3705	W0647500 D10DE	HT18G		ダイオード	03
	D3706-3707	VD631600 D10DE	1SS133, 176	UCRTKABGEFL	ダイオード	01
	D3708	VT332900 D10DE	1SS355		ダイオード	01
	D3709	WR007000 D10DE. SCHO	10A 40V SG10SC4M		ショットキーダイオード	03
	D3710	VG442200 D10DE. ZENR	MTZJ22C 22V		ツェナーダイオード	01
	D3801-3805	VT332900 D10DE	1SS355		ダイオード	01
	D3901-3902	VT332900 D10DE	1SS355		ダイオード	01
△	F3701	WQ211200 FUSE	10A 125V	B6EF	ヒューズ	01
△	F3701	WB760600 FUSE	T6. 3A 250V	JUC R	ヒューズ	01

\* New Parts \* 新規部品

P.C.B. VIDEO

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
△ F3701	WM933100	FUSE			ヒューズ	
IC301-303	XY879A00	IC	T5A 250V TC74HC4053AF(EL)	TKABGEFL	ロジックIC	03
IC305	X6742A00	IC	LA73050-TLM-E		アンプIC	04
IC306	X2904A00	IC	NJM2581M VIDEO AMP		アンプIC	06
IC307	XY549A00	IC	TC74HC4051AFEL		ロジックIC	02
IC308	X7779A00	IC	LC709004A-TLM-E		ロジックIC	04
IC309	X7818A00	IC	LC74782-JM-8A16-TLM		IC	07
IC310	X8875A00	IC	FHP3350 IM14X		アンプIC	04
IC321	X8235A00	IC	LC72725KM	BGEF	IC	04
IC331	X8276A00	IC	NJM2396F05		電源IC	04
IC333	X8035A00	IC	BA00JC5WT-Y5	U	電源IC	04
IC334	X6143A00	IC	NJM2388F05 5.0V		電源IC	04
IC351-352	XS790A00	IC	TC74HC4052AF MPX	J	ロジックIC	02
IC353	XY879A00	IC	TC74HC4053AF(EL)	J	ロジックIC	03
IC371	YA565A00	IC	TOP254PN SW		電源IC	07
△ IC372	W0867100	PHOT. CPL	EL816 (M) (C)		フォトカブラ	01
△ IC374	YA276A00	IC	TL431AC 2.5-36V		電源IC	02
△ IC375	W0867100	PHOT. CPL	EL816 (M) (C)		フォトカブラ	01
IC391	XZ509A00	IC	TC74VHC04FT INVER	BGEF	ロジックIC	01
JK321	V9435700	JACK. MNI	MSJ-035-12APC	URTKABGEFL	モノラル ニジヤック	01
JK321	V9435700	JACK. MNI	MSJ-035-12APC	C	モノラル ニジヤック	01
JK361	V9435700	JACK. MNI	MSJ-035-12APC	UCRTKABGEFL	モノラル ニジヤック	01
JK362	V9435700	JACK. MNI	MSJ-035-12APC		モノラル ニジヤック	01
JK391	V6931000	CN. DIN	1P YKF51-5506		1連S端子	02
PJ301	W6505100	JACK. PIN	6P	BGEF	ピンジャック	04
PJ302	V7189800	JACK. PIN	1P		ピンジャック	01
PJ303	WH381400	JACK. PIN	3P JACK G. B. R		ピンジャック	03
PJ304	V7189800	JACK. PIN	1P		ピンジャック	01
PJ305-306	V7190000	JACK. PIN	2P		ピンジャック	01
Q3001	VR936300	TR	2SA1576A T106		トランジスタ	01
Q3002-3003	VV556400	TR	2SC2412K Q. R. S		トランジスタ	01
Q3201	IC174020	TR	2SC1740S QRS	BGEF	トランジスタ	01
Q3203	IC181510	TR	2SC1815 Y		トランジスタ	01
Q3204	IA101510	TR	2SA1015 Y	URTKABGEFL	トランジスタ	01
Q3204	IA101510	TR	2SA1015 Y	C	トランジスタ	01
Q3205	IC181510	TR	2SC1815 Y		トランジスタ	01
Q3205	IC181510	TR	2SC1815 Y	URTKABGEFL	トランジスタ	01
Q3206	W6538600	TR	KTA1046-Y-U/P		トランジスタ	01
Q3206	W6538600	TR	KTA1046-Y-U/P	C	トランジスタ	02
Q3207	IC181510	TR	2SC1815 Y	URTKABGEFL	トランジスタ	01
Q3207	IC181510	TR	2SC1815 Y	C	トランジスタ	01
Q3301	WC397700	TR	2N5401C-AT		トランジスタ	01
Q3302	IA101510	TR	2SA1015 Y		トランジスタ	01
Q3303	W6538600	TR	KTA1046-Y-U/P		トランジスタ	02
Q3304	IA101510	TR	2SA1015 Y	URTKABGEFL	トランジスタ	01
Q3305	IC181510	TR	2SC1815 Y		トランジスタ	01
Q3405	VV655400	TR. DGT	DTC114EKA		デジタルトランジスタ	01
Q3406	VV655000	TR. DGT	DTA114EKA		デジタルトランジスタ	01
Q3407	VV655400	TR. DGT	DTC114EKA		デジタルトランジスタ	01
Q3408	VV655000	TR. DGT	DTA114EKA		デジタルトランジスタ	01
Q3409	VV655400	TR. DGT	DTC114EKA		デジタルトランジスタ	01
Q3410	VV655000	TR. DGT	DTA114EKA		デジタルトランジスタ	01
Q3411	VV655400	TR. DGT	DTC114EKA		デジタルトランジスタ	01
Q3412	VV655000	TR. DGT	DTA114EKA		デジタルトランジスタ	01
Q3413	VV655400	TR. DGT	DTC114EKA		デジタルトランジスタ	01
Q3414	VV655000	TR. DGT	DTA114EKA		デジタルトランジスタ	01
Q3501	VV556400	TR	2SC2412K Q. R. S	J	トランジスタ	01

\* New Parts \* 新規部品

P.C.B. VIDEO


Carbon Resistors

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ラック
Q3801-3802	IC181510	TR	2SC1815 Y		トランジスタ	01
Q3803	VV655700	TR. 00T	DTC144EKA		デジタルトランジスタ	01
R3021	HV753100	R. CAR. FP	1Ω 1/4W		不燃化カーボン抵抗	01
R3025	HV753100	R. CAR. FP	1Ω 1/4W		不燃化カーボン抵抗	01
R3046-3049	HV753100	R. CAR. FP	1Ω 1/4W		不燃化カーボン抵抗	01
R3050-3061	HV753100	R. CAR. FP	1Ω 1/4W		不燃化カーボン抵抗	01
R3063	HV755470	R. CAR. FP	470Ω 1/4W		不燃化カーボン抵抗	01
R3208	HV755680	R. CAR. FP	680Ω 1/4W	BGEF	不燃化カーボン抵抗	01
R3210	HV754180	R. CAR. FP	18Ω 1/4W		不燃化カーボン抵抗	01
R3213	HV753560	R. CAR. FP	5.6Ω 1/4W	URTKABGEFL	不燃化カーボン抵抗	01
R3213	HV753560	R. CAR. FP	5.6Ω 1/4W	C	不燃化カーボン抵抗	01
R3301	HV753220	R. CAR. FP	2.2Ω 1/4W	V765	不燃化カーボン抵抗	01
R3306	HV756100	R. CAR. FP	1KΩ 1/4W		不燃化カーボン抵抗	01
R3315-3316	HV756470	R. CAR. FP	4.7KΩ 1/4W		不燃化カーボン抵抗	01
R3403-3406	HV757100	R. CAR. FP	10KΩ 1/4W		不燃化カーボン抵抗	01
R3524-3525	HV753100	R. CAR. FP	1Ω 1/4W	J	不燃化カーボン抵抗	01
R3910	HV753220	R. CAR. FP	2.2Ω 1/4W	BGEF	不燃化カーボン抵抗	01
RY341-345	WJ122400	RELAY	981-2A-24DS-SP7		リレー	04
RY371	WD904100	RELAY	DC DLS5D1-0 (MO D. 25		リレー	04
ST331-332	Y4040500	SCR. TERM	M3		スクリューターミナル	01
ST361-362	Y4040500	SCR. TERM	M3		スクリューターミナル	01
ST371	Y4040500	SCR. TERM	M3		スクリューターミナル	01
ST381-383	Y4040500	SCR. TERM	M3		スクリューターミナル	01
TE301	YA507A00	TRANS. PWR			サブトランス	07
TE341	WKS60800	TERM. SP	4P MST-204V1-01 KC	JUCRTA	スピーカーターミナル	04
TE341	WKS60900	TERM. SP	4P MST-204V1-01 KC	KBGEFL	スピーカーターミナル	04
TE342	WKS61000	TERM. SP	6P MST-207V1-01 KC	JUCRTA	スピーカーターミナル	05
TE342	WKS61100	TERM. SP	6P MST-207V1-01 KC	KBGEFL	スピーカーターミナル	05
TE343	WKS60900	TERM. SP	4P MST-204V1-01 KC	JUCRTA	スピーカーターミナル	04
TE343	WKS60900	TERM. SP	4P MST-204V1-01 KC	KBGEFL	スピーカーターミナル	04
XL301	VV949800	RSNR. CRYST	14.31818MHz	JUCRK	水晶振動子	03
XL301	WK106100	RSNR. CRYST	17.734475MHz	TABGEFL	水晶振動子	03
XL321	VZ731100	RSNR. CRYST	4.332M HC-49/U	BGEF	水晶振動子	03
	WE774200	SCR. BND. HD	3x10 MFZK2W3		バインドBタイトネジ	01







\* New Parts \* 新規部品

Value	1/4W Type Part No.	1/6W Type Part No.	Value	1/4W Type Part No.	1/6W Type Part No.
1.0 Ω	HJ35 3100	HF45 3100	11 kΩ	HF45 7110	HF45 7110
1.8 Ω	HJ35 3180	*	12 kΩ	HJ35 7120	HF45 7120
2.2 Ω	HJ35 3220	HF45 3220	13 kΩ	HF45 7130	HF45 7130
3.3 Ω	HJ35 3330	HF45 3330	15 kΩ	HF45 7150	HF45 7150
4.7 Ω	HJ35 3470	HF45 3470	18 kΩ	HF45 7180	HF45 7180
5.6 Ω	HJ35 3560	HF45 3560	22 kΩ	HF45 7220	HF45 7220
10 Ω	HF45 4100	HF45 4100	24 kΩ	HF45 7240	HF45 7240
15 Ω	HJ35 4150	HF45 4150	27 kΩ	HJ35 7270	HF45 7270
22 Ω	HF45 4220	HF45 4220	30 kΩ	HF45 7300	HF45 7300
27 Ω	HJ35 4270	HF45 4270	33 kΩ	HF45 7330	HF45 7330
33 Ω	HF45 4330	HF45 4330	36 kΩ	HF45 7360	HF45 7360
39 Ω	HJ35 4470	HF45 4390	39 kΩ	HF45 7390	HF45 7390
47 Ω	HF45 4470	HF45 4470	47 kΩ	HF45 7470	HF45 7470
56 Ω	HF45 4560	HF45 4560	51 kΩ	HF45 7510	HF45 7510
68 Ω	HF45 4680	HF45 4680	56 kΩ	HF45 7560	HF45 7560
75 Ω	HF45 4750	HF45 4750	62 kΩ	HF45 7620	HF45 7620
82 Ω	HF45 4820	HF45 4820	68 kΩ	HF45 7680	HF45 7680
91 Ω	HF45 4910	HF45 4910	82 kΩ	HF45 7820	HF45 7820
100 Ω	HF45 5100	HF45 5100	91 kΩ	HF45 7910	HF45 7910
110 Ω	HJ35 5110	HF45 5110	100 kΩ	HF45 8100	HF45 8100
120 Ω	HF45 5120	HF45 5120	110 kΩ	HF45 8110	HF45 8110
150 Ω	HF45 5150	HF45 5150	120 kΩ	HF45 8120	HF45 8120
160 Ω	HJ35 5160	*	150 kΩ	HF45 8150	HF45 8150
180 Ω	HF45 5180	HF45 5180	180 kΩ	HF45 8180	HF45 8180
200 Ω	HF45 5200	HF45 5200	220 kΩ	HJ35 8220	HF45 8220
220 Ω	HF45 5220	HF45 5220	270 kΩ	HF45 8270	HF45 8270
270 Ω	HF45 5270	HF45 5270	300 kΩ	HF45 8300	HF45 8300
330 Ω	HF45 5330	HF45 5330	330 kΩ	HF45 8330	HF45 8330
390 Ω	HF45 5390	HF45 5390	390 kΩ	HJ35 8390	HF45 8390
430 Ω	HF45 5430	HF45 5430	470 kΩ	HF45 8470	HF45 8470
470 Ω	HF45 5470	HF45 5470	560 kΩ	HJ35 8560	HF45 8560
510 Ω	HF45 5510	HF45 5510	680 kΩ	HJ35 8680	HF45 8680
560 Ω	HF45 5560	HF45 5560	820 kΩ	HJ35 8820	HF45 8820
680 Ω	HF45 5680	HF45 5680	1.0 MΩ	HF45 9100	HF45 9100
820 Ω	HF45 5820	HF45 5820	1.2 MΩ	HJ35 9120	*
910 Ω	HF45 5910	HF45 5910	1.5 MΩ	HJ35 9150	HF45 9150
1.0 kΩ	HF45 6100	HF45 6100	1.8 MΩ	HJ35 9180	HF45 9180
1.2 kΩ	HF45 6120	HF45 6120	2.2 MΩ	HJ35 9220	HF45 9220
1.5 kΩ	HF45 6150	HF45 6150	3.3 MΩ	HJ35 9330	HF45 9330
1.8 kΩ	HF45 6180	HF45 6180	3.9 MΩ	HJ35 9390	*
2.0 kΩ	HJ35 6200	HF45 6200	4.7 MΩ	HJ35 9470	HF45 9470
2.2 kΩ	HF45 6220	HF45 6220			
2.4 kΩ	HJ35 6240	HF45 6240			
2.7 kΩ	HF45 6270	HF45 6270			
3.0 kΩ	HF45 6300	HF45 6300			
3.3 kΩ	HF45 6330	HF45 6330			
3.6 kΩ	HJ35 6360	HF45 6360			
3.9 kΩ	HF45 6390	HF45 6390			
4.7 kΩ	HF45 6470	HF45 6470			
5.1 kΩ	HF45 6510	HF45 6510			
5.6 kΩ	HF45 6560	HF45 6560			
6.8 kΩ	HF45 6680	HF45 6680			
8.2 kΩ	HF45 6820	HF45 6820			
9.1 kΩ	HF45 6910	HF45 6910			
10 kΩ	HF45 7100	HF45 7100			

\* : Not available



• OVERALL ASS'Y

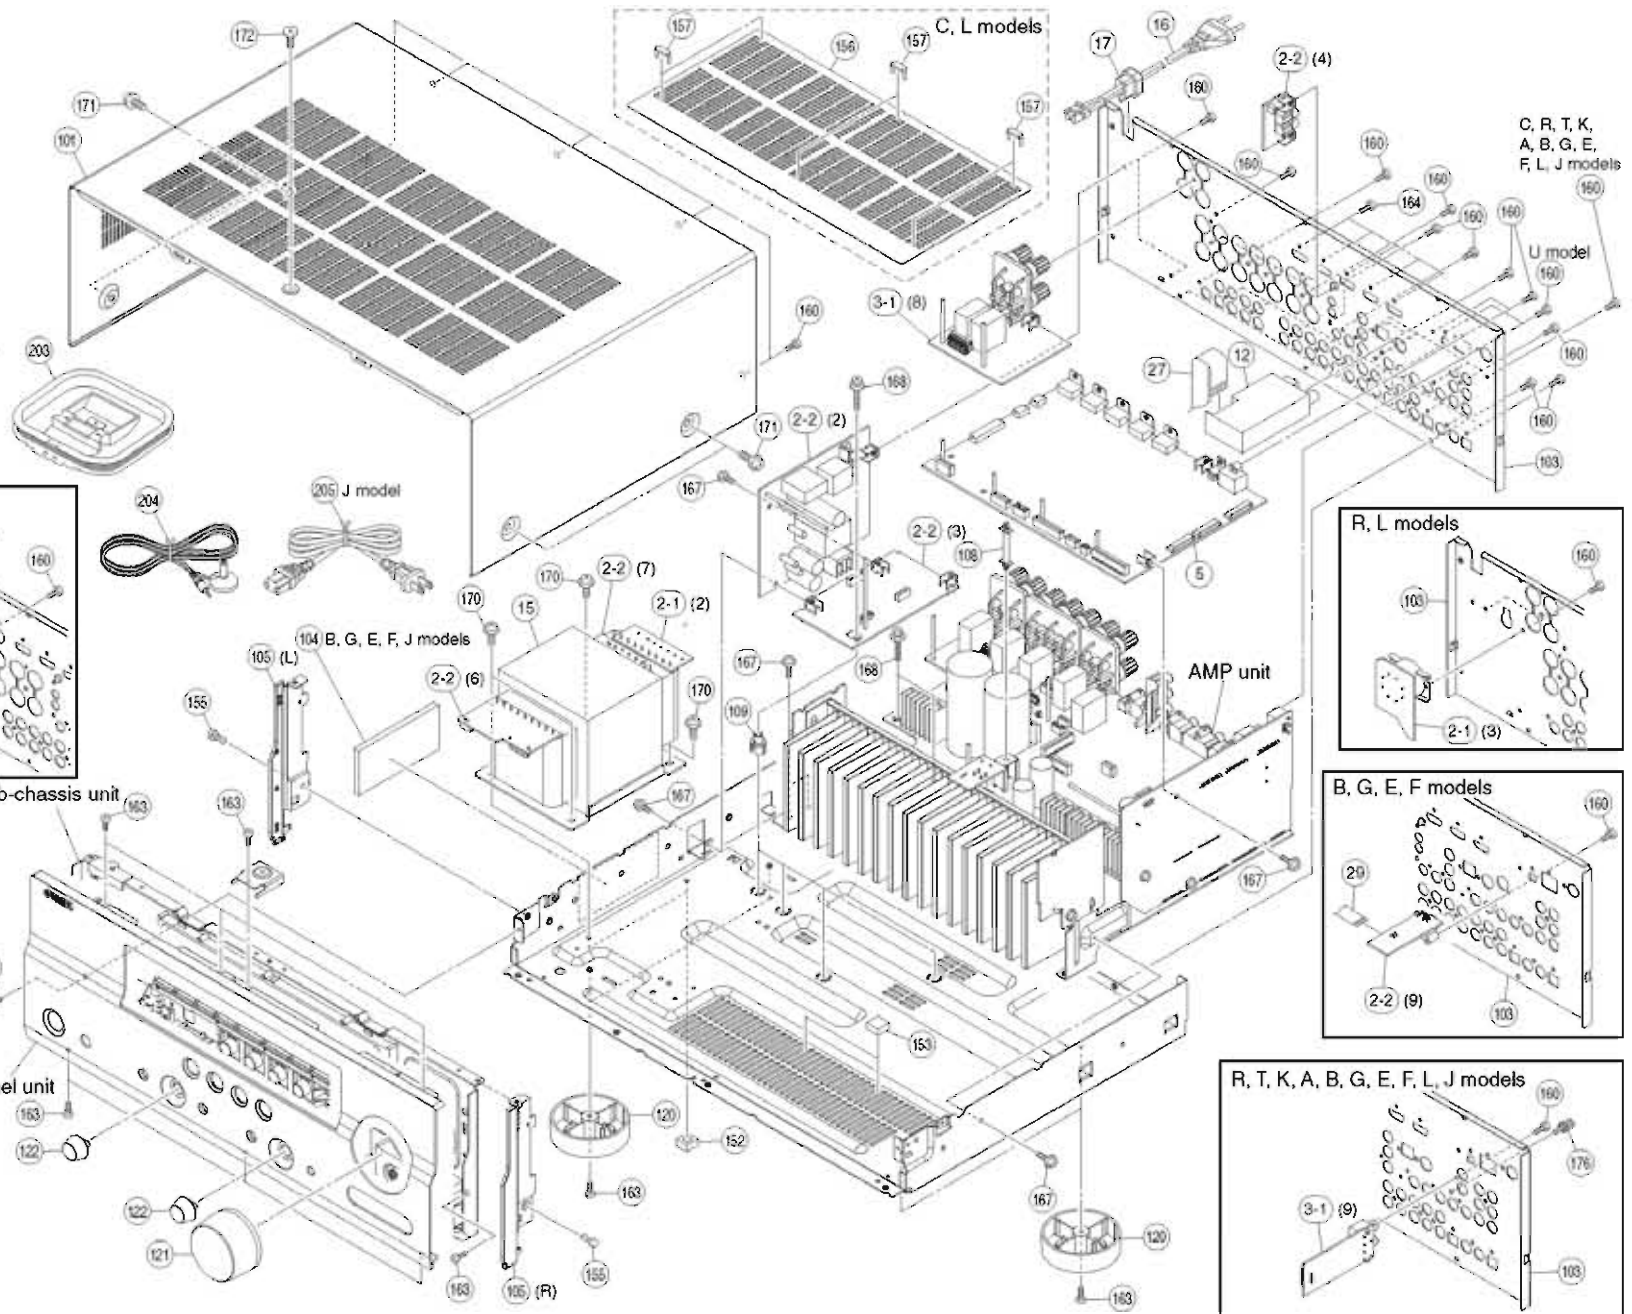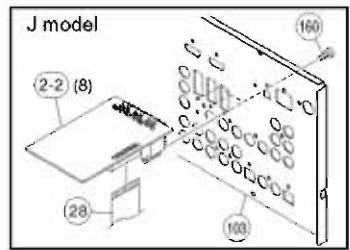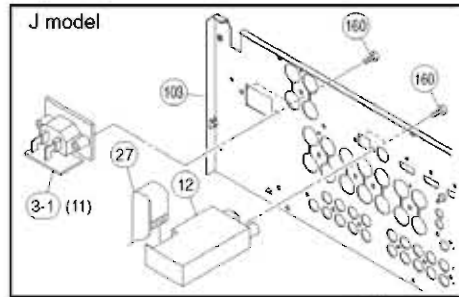




Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
* 2-1	WR431900	P.C.B. ASS'Y	MAIN	J	PCB MAIN	
* 2-1	WR432000	P.C.B. ASS'Y	MAIN	U	PCB MAIN	
* 2-1	WR432000	P.C.B. ASS'Y	MAIN	C	PCB MAIN	V765
* 2-1	WR432500	P.C.B. ASS'Y	MAIN	C	PCB MAIN	6270
* 2-1	WR432100	P.C.B. ASS'Y	MAIN	R	PCB MAIN	
* 2-1	WR432200	P.C.B. ASS'Y	MAIN	TKABGEF	PCB MAIN	
* 2-1	WR432300	P.C.B. ASS'Y	MAIN	L	PCB MAIN	
* 2-2	WR433700	P.C.B. ASS'Y	VIDEO	J	PCB VIDEO	
* 2-2	WR433800	P.C.B. ASS'Y	VIDEO	U	PCB VIDEO	
* 2-2	WR433900	P.C.B. ASS'Y	VIDEO	C	PCB VIDEO	V765
* 2-2	WR434600	P.C.B. ASS'Y	VIDEO	C	PCB VIDEO	6270
* 2-2	WR434000	P.C.B. ASS'Y	VIDEO	R	PCB VIDEO	
* 2-2	WR434100	P.C.B. ASS'Y	VIDEO	T	PCB VIDEO	
* 2-2	WR434200	P.C.B. ASS'Y	VIDEO	K	PCB VIDEO	
* 2-2	WR434300	P.C.B. ASS'Y	VIDEO	A	PCB VIDEO	
* 2-2	WR434400	P.C.B. ASS'Y	VIDEO	BGEF	PCB VIDEO	
* 2-2	WR434500	P.C.B. ASS'Y	VIDEO	L	PCB VIDEO	
* 3-1	WR435100	P.C.B. ASS'Y	OPERATION	J	PCB OPERATION	
* 3-1	WR435200	P.C.B. ASS'Y	OPERATION	U	PCB OPERATION	
* 3-1	WR435300	P.C.B. ASS'Y	OPERATION	C	PCB OPERATION	
* 3-1	WR435400	P.C.B. ASS'Y	OPERATION	RTA	PCB OPERATION	
* 3-1	WR435500	P.C.B. ASS'Y	OPERATION	KBGEFL	PCB OPERATION	
* 5	WR436100	P.C.B. ASS'Y	DIGITAL	J	PCB DIGITAL	V765
* 5	WR436200	P.C.B. ASS'Y	DIGITAL	U	PCB DIGITAL	V765
* 5	WR436300	P.C.B. ASS'Y	DIGITAL	CRTKAL	PCB DIGITAL	V765
* 5	WR436800	P.C.B. ASS'Y	DIGITAL	C	PCB DIGITAL	6270
* 5	WR436400	P.C.B. ASS'Y	DIGITAL	BGEF	PCB DIGITAL	V765
* 5	WR436900	P.C.B. ASS'Y	DIGITAL	F	PCB DIGITAL	6270
12	W0756500	AM/FM TUNER	FAEH-06-J	J	AM/FMチューナー	
12	W0756600	AM/FM TUNER	FAEH-06-A	UCRTL	AM/FMチューナー	
12	W0756700	AM/FM TUNER	FAEH-06-E	KABGEF	AM/FMチューナー	
15	YA753A00	POWER TRANSFORMER		J	電源トランス	
15	YA684A00	POWER TRANSFORMER		UC	電源トランス	
15	YA685A00	POWER TRANSFORMER		RL	電源トランス	
15	YA686A00	POWER TRANSFORMER		TK	電源トランス	
15	YA687A00	POWER TRANSFORMER		A	電源トランス	
15	YA745A00	POWER TRANSFORMER		BGEF	電源トランス	
16	W0120600	POWER CABLE	2m	UC	電源コード	
16	W0092700	POWER CABLE	2m	R	電源コード	
16	W0120680	POWER CABLE	2m	T	電源コード	
16	W0753000	POWER CABLE	2m	K	電源コード	
16	W0743700	POWER CABLE	2m	A	電源コード	
16	W0212200	POWER CABLE	2m	B	電源コード	
16	W0336900	POWER CABLE	2m	GEFL	電源コード	
17	V2438700	CORD STOPPER	(TOP)	UCRTKABGEFL	コードストッパー	02
* 27	WR285000	FLEXIBLE FLAT CABLE	1P 250mm P=1.25	J	カード電線	
* 27	WR284900	FLEXIBLE FLAT CABLE	1P 100mm P=1.25	UCRTKABGEFL	カード電線	
* 28	WR285400	FLEXIBLE FLAT CABLE	22P 100mm P=1.25	J	カード電線	
* 29	WR284700	FLEXIBLE FLAT CABLE	5P 180mm P=1.25	BGEF	カード電線	
101	W0665600	TOP COVER		GD	トップカバー	
101	W0665500	TOP COVER		BL	トップカバー	
101	W0665700	TOP COVER		TI	トップカバー	
* 103	W0685700	REAR PANEL		J	リアパネル	V765
* 103	W0685800	REAR PANEL		U	リアパネル	V765
* 103	W0685900	REAR PANEL		C	リアパネル	V765
* 103	W0686000	REAR PANEL		C	リアパネル	6270

\* New Parts \* 新規部品

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
* 103	W0686000	REAR PANEL		V765	R	リアパネル
* 103	W0686100	REAR PANEL		V765	T	リアパネル
* 103	W0686200	REAR PANEL		V765	K	リアパネル
* 103	W0686300	REAR PANEL		V765	A	リアパネル
* 103	W0686500	REAR PANEL		V765	BGEF	リアパネル
* 103	W0687000	REAR PANEL		6270	F	リアパネル
* 103	W0686600	REAR PANEL		V765	L	リアパネル
104	V3198100	DAMPER	GUARD		JBEEF	ダンパー
* 105	WR0095100	PLATE SIDE	L/R 1pair	GD		プレートサイド
* 105	WR004900	PLATE SIDE	L/R 1pair	BL		プレートサイド
* 105	WR005000	PLATE SIDE	L/R 1pair	TI		プレートサイド
* 108	WS000800	SPACER SUPPORT	LCA4-29N PIN			スペーサーサポート
109	W0664500	SUPPORT H8				サポートH8
120	V0042500	LEG	D60x21 GD	GD		レッグ
120	VS025000	LEG	D60x21 HS	BL, TI		レッグ
121	WJ181400	KNOB	D50	GD		ノブ
121	WJ181300	KNOB	D50	BL		ノブ
121	WJ181500	KNOB	D50	TI		ノブ
* 122	WR004800	KNOB	D20	GD		ノブ
* 122	WR004600	KNOB	D20	BL		ノブ
* 122	WR004700	KNOB	D20	TI		ノブ
162	W0379000	DAMPER	SCREW MASK			ダンパー
* 163	W0377400	DAMPER	14x10x10			ダンパー
165	V0068000	PUSH RIVET	P3550-B			プッシュリベット
166	W0667900	SHEET TOP		CL		シート トップ
167	WJ053800	RIVET TOP		CL		リベットトップ
168	WE774100	BIND HEAD B-TIGHT SCREW	3x8 WFN283			ボンディングBタイトネジ
163	WE774300	BIND HEAD B-TIGHT SCREW	3x8 WFN283			バインドBタイトネジ
164	WE877900	BIND HEAD S-TIGHT SCREW	3x6 WFN283			バインドSタイトネジ
167	WF002600	PH HEAD B-TIGHT SCREW	3x8 WFN283			PWヘッドBタイトネジ
168	WE774600	SCREW IC	3x18 WFN283			スクリュー IC
170	WE774700	BIND HEAD S-TIGHT SCREW	4x10 WFN283			バインドSタイトネジ
171	V0069000	PH HEAD S-TIGHT SCREW	4x8-10 WFN133	GD, TI		PWヘッドSタイトネジ
171	VH132000	PH HEAD S-TIGHT SCREW	4x8-10 WFN138L	BL		PWヘッドSタイトネジ
172	WE200400	DISH HEAD B-TIGHT SCREW	3x6 WFN133	GD, TI		DISH Bタイトネジ
172	WE200500	DISH HEAD B-TIGHT SCREW	3x6 WFN138L	BL		DISH Bタイトネジ
176	AA627310	GROUND TERMINAL			JRTKABGEFL	GNDターミナル
		ACCESSORIES				付属品
* 200	WR002300	REMOTE CONTROL	RAV289		J	リモコン
* 200	WR002400	REMOTE CONTROL	RAV290		U	リモコン
* 200	WR002500	REMOTE CONTROL	RAV291		C	リモコン
* 200	WR002600	REMOTE CONTROL	RAV292		RAL	リモコン
* 200	WR002900	REMOTE CONTROL	RAV295		TKBGEF	リモコン
206-1	AA882380	BATTERY COVER		06-2209		電池蓋
202	V6267000	INDOOR FM ANTENNA	1.4m 1pc		JUCRTL	FM室内アンテナ
202	VO47100	INDOOR FM ANTENNA	1.4m 1pc		KABGEF	FM室内アンテナ
203	VR248500	AN LOOP ANTENNA	1.0m 1pc			AMループアンテナ
204	W0649600	OPTIMIZER MICROPHONE	6.0m 1pc	EN6022L-FN1700		オーディオマイザーマイク
205	RA642300	POWER CABLE	2m 1pc		J	電源コード
		BATTERY	R03, AAA, UM-4 2pcs			単4乾電池
		SERVICE TOOLS				サービス用部品
WR492800	RS232C CONVERSION ADAPTOR	3 V3type with FFCBP				RS232C変換アダプタ
WF125400	FLEXIBLE FLAT CABLE	25P 400mm P=1.25				カード電線
WF109400	FLEXIBLE FLAT CABLE	9P 400mm P=1.25				カード電線

\* New Parts \* 新規部品

• FRONT PANEL UNIT and SUB-CHASSIS UNIT

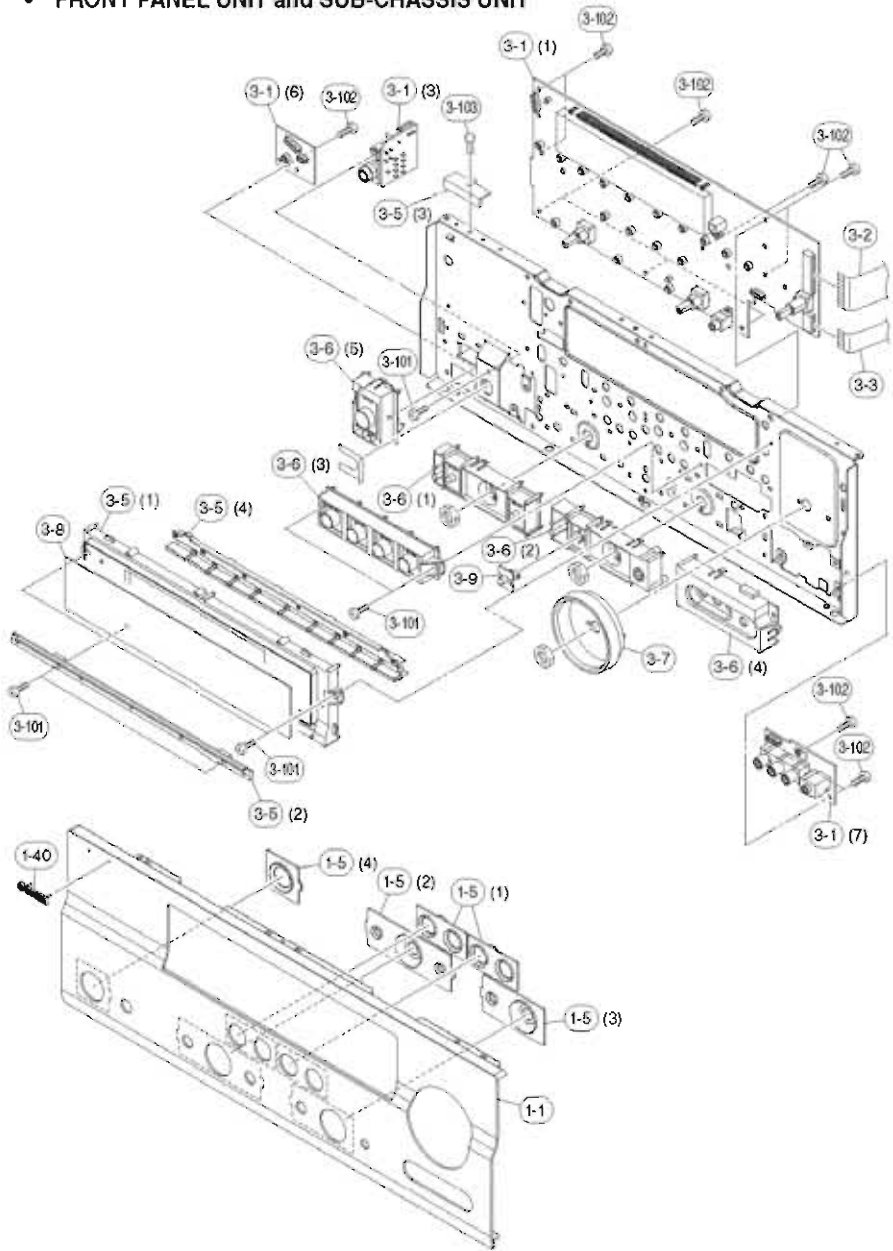


Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク	
* 1-1	WRD04400	FRONT PANEL		V765GD	T	フロントパネル	
* 1-1	WRD03700	FRONT PANEL		V765BL	J	フロントパネル	
* 1-1	WRD03300	FRONT PANEL		V765BL	U	フロントパネル	
* 1-1	WRD03400	FRONT PANEL		V765BL	CRTAB6EFL	フロントパネル	
* 1-1	WRD03600	FRONT PANEL		6270BL	CF	フロントパネル	
* 1-1	WRD04200	FRONT PANEL		V765T1	XGEFL	フロントパネル	
* 1-5	WRD06400	ESCUTCHEON		ED		エスカッション	
* 1-5	WRD06200	ESCUTCHEON		BL		エスカッション	
* 1-5	WRD06300	ESCUTCHEON		TI		エスカッション	
-40	V6D34200	EMBLEM		ED		エンブレム	03
-40	V6D34100	EMBLEM		BL, TI		エンブレム	03
* 3-1	WRH35100	P. C. B. ASS'Y	OPERATION		J	PCB OPERATION	
* 3-1	WRH35200	P. C. B. ASS'Y	OPERATION		U	PCB OPERATION	
* 3-1	WRH35300	P. C. B. ASS'Y	OPERATION		C	PCB OPERATION	
* 3-1	WRH35400	P. C. B. ASS'Y	OPERATION		RTA	PCB OPERATION	
* 3-1	WRH35500	P. C. B. ASS'Y	OPERATION		XGEFL	PCB OPERATION	
* 3-2	WRH82100	FLEXIBLE FLAT CABLE	25P 250mm P=1.25			カード電線	
* 3-3	WR284800	FLEXIBLE FLAT CABLE	9P 250mm P=1.25			カード電線	
* 3-5	WRD06800	SUB PANEL				サブパネル	
* 3-6	WS075400	BUTTON CASE		ED		ボタンケース	
* 3-6	WRD05800	BUTTON CASE		BL	J	ボタンケース	
* 3-6	WRD06500	BUTTON CASE		BL	UCRAB6EFL	ボタンケース	
* 3-6	WS075200	BUTTON CASE		BL	T	ボタンケース	
* 3-6	WRD05600	BUTTON CASE		TI		ボタンケース	
* 3-7	WRD06300	ESCUTCHEON VOLUME		ED		エスカッションVOL	
* 3-7	WRD06100	ESCUTCHEON VOLUME		BL		エスカッションVOL	
* 3-7	WRD06200	ESCUTCHEON VOLUME		TI		エスカッションVOL	
* 3-8	WRD06700	SHEET WINDOW			J	シートウインドウ	
* 3-8	WRD06500	SHEET WINDOW			U	シートウインドウ	
* 3-8	WRD06600	SHEET WINDOW			CRTAB6EFL	シートウインドウ	
* 3-8	WS075100	SHEET WINDOW			T	シートウインドウ	
* 3-9	WRD06400	LENS BUTTON				レンズボタン	
3-101	WE774300	BIND HEAD B-TIGHT SCREW	3x8 WF2K2#3			バインドBタイトネジ	01
3-102	WE774000	BIND HEAD P-TIGHT SCREW	3x8 WF2K2#3			バインドPタイトネジ	01
3-102	V0D68000	PUSH RIVET	P3555-B			プッシュリベット	01

\* New Parts \* 新規部品

• AMP UNIT

1  
2  
3  
4  
5  
6  
7

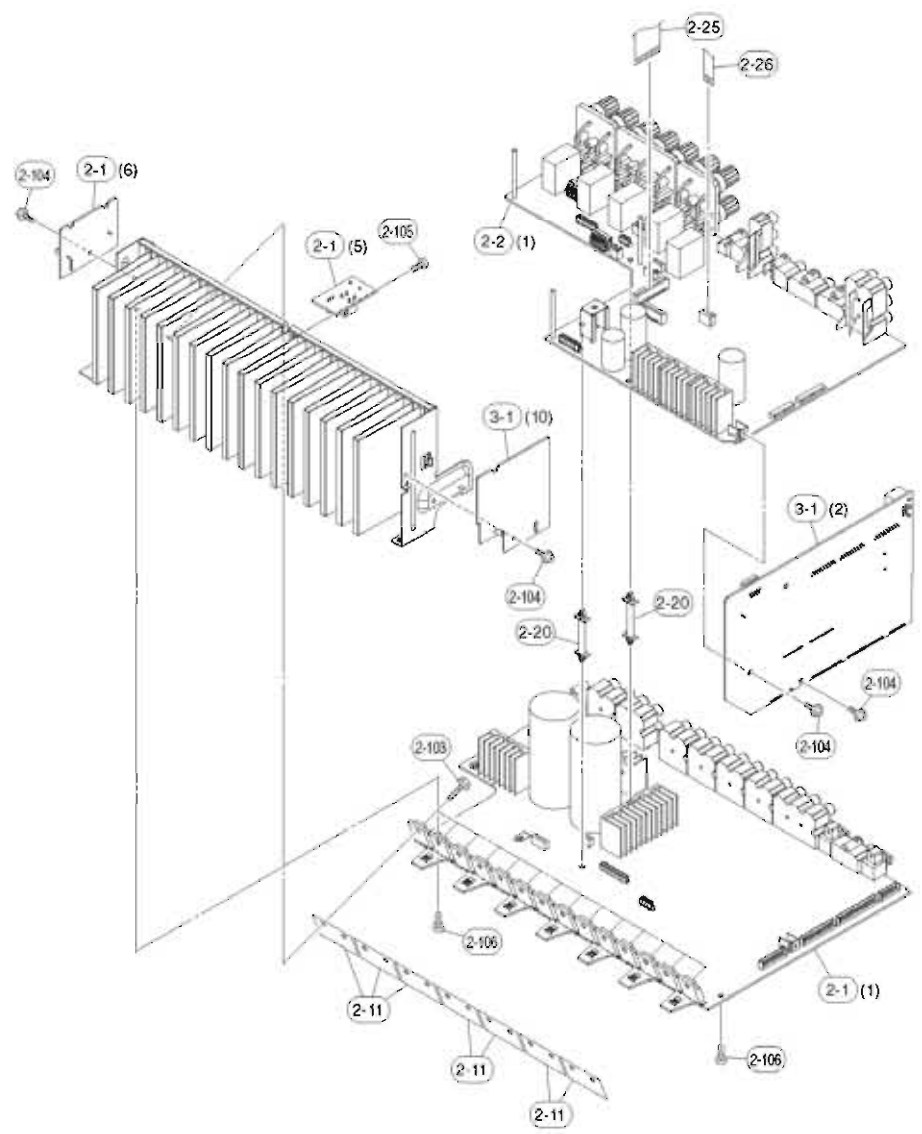

Ref No.	Part No.	Description	Remarks	Markets	部 品 名	ランク
* 2-1	WR431000	P. C. B. ASS'Y	MAIN		J PCB MAIN	
* 2-1	WR432000	P. C. B. ASS'Y	MAIN		U PCB MAIN	
* 2-1	WR437000	P. C. B. ASS'Y	MAIN	V765	C PCB MAIN	
* 2-1	WR432500	P. C. B. ASS'Y	MAIN	6270	C PCB MAIN	
* 2-1	WR432100	P. C. B. ASS'Y	MAIN		R PCB MAIN	
* 2-1	WR432200	P. C. B. ASS'Y	MAIN		TKABEEF PCB MAIN	
* 2-1	WR432300	P. C. B. ASS'Y	MAIN		L PCB MAIN	
* 2-2	WR433700	P. C. B. ASS'Y	VIDEO		J PCB VIDEO	
* 2-2	WR433800	P. C. B. ASS'Y	VIDEO		U PCB VIDEO	
* 2-2	WR433800	P. C. B. ASS'Y	VIDEO	V765	C PCB VIDEO	
* 2-2	WR434600	P. C. B. ASS'Y	VIDEO	6270	C PCB VIDEO	
* 2-2	WR434000	P. C. B. ASS'Y	VIDEO		R PCB VIDEO	
* 2-2	WR434100	P. C. B. ASS'Y	VIDEO		T PCB VIDEO	
* 2-2	WR434200	P. C. B. ASS'Y	VIDEO		X PCB VIDEO	
* 2-2	WR434300	P. C. B. ASS'Y	VIDEO		A PCB VIDEO	
* 2-2	WR434400	P. C. B. ASS'Y	VIDEO		BGEF PCB VIDEO	
* 2-2	WR434500	P. C. B. ASS'Y	VIDEO		L PCB VIDEO	
2-11	W0753200	MICA SHEET	TB-1021		マイカシート	
2-20	W5000800	SPACER SUPPORT	LGA4-20M PIN		スペーサーサポート	
* 2-25	WR285500	FLEXIBLE FLAT CABLE	22P 140mm P=1.25		カード電線	01
2-26	WP504300	FLEXIBLE FLAT CABLE	6P 180mm P=1.25		カード電線	01
2-103	WR220800	HEXAGONAL HEAD B-TIGHT SCREW	3x15 SP WFZN2W3		六角Bタイトネジ	01
2-104	WP002600	PH HEAD B-TIGHT SCREW	3x8 WFZN2W3		PWヘッドBタイトネジ	01
2-105	WE774300	BLIND HEAD B-TIGHT SCREW	3x8 WFZN2W3		バインドBタイトネジ	01
2-106	V0058600	PUSH RIVET	P3555-B		プッシュリベット	01
* 3-1	WR435100	P. C. B. ASS'Y	OPERATION		J PCB OPERATION	
* 3-1	WR435200	P. C. B. ASS'Y	OPERATION		U PCB OPERATION	
* 3-1	WR435300	P. C. B. ASS'Y	OPERATION		C PCB OPERATION	
* 3-1	WR435400	P. C. B. ASS'Y	OPERATION		RTA PCB OPERATION	
* 3-1	WR435500	P. C. B. ASS'Y	OPERATION		KBGEFL PCB OPERATION	

\* New Parts \* 新規部品


■ REMOTE CONTROL

- RAV290: U model / RAV291: C model / RAV292: R, A, L models / RAV295: T, K, B, G, E, F models / RAV289: J model


SCHEMATIC DIAGRAMS

PANELS

RAV289/RAV290/RAV291/RAV292

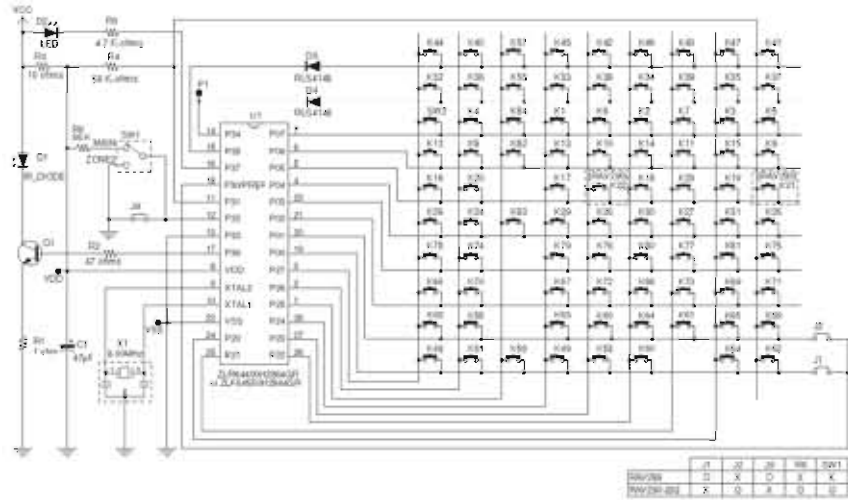

RAV295

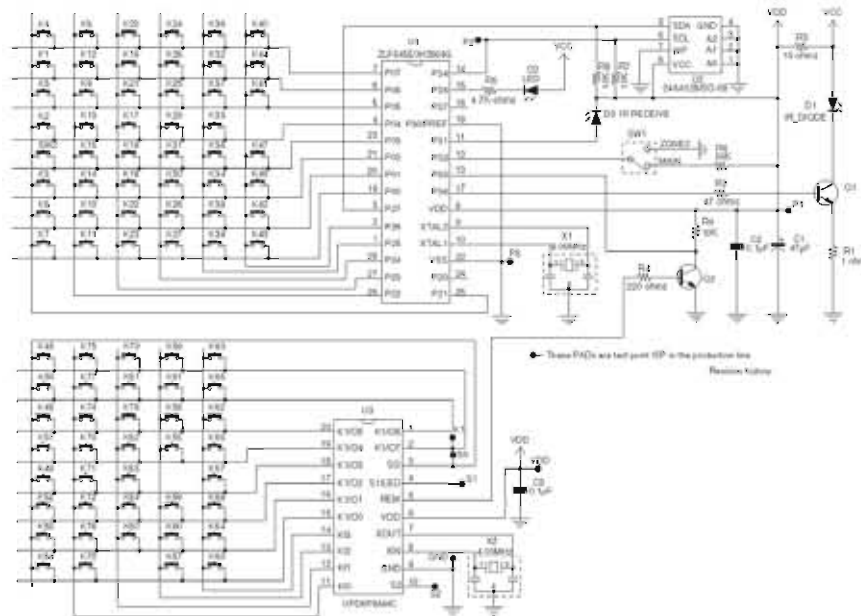


RAV290  
(U model)

RAV291  
(C model)


RAV292  
(R, A, L models)

RAV295  
(T, K, B, G, E, F models)

RAV289  
(J model)

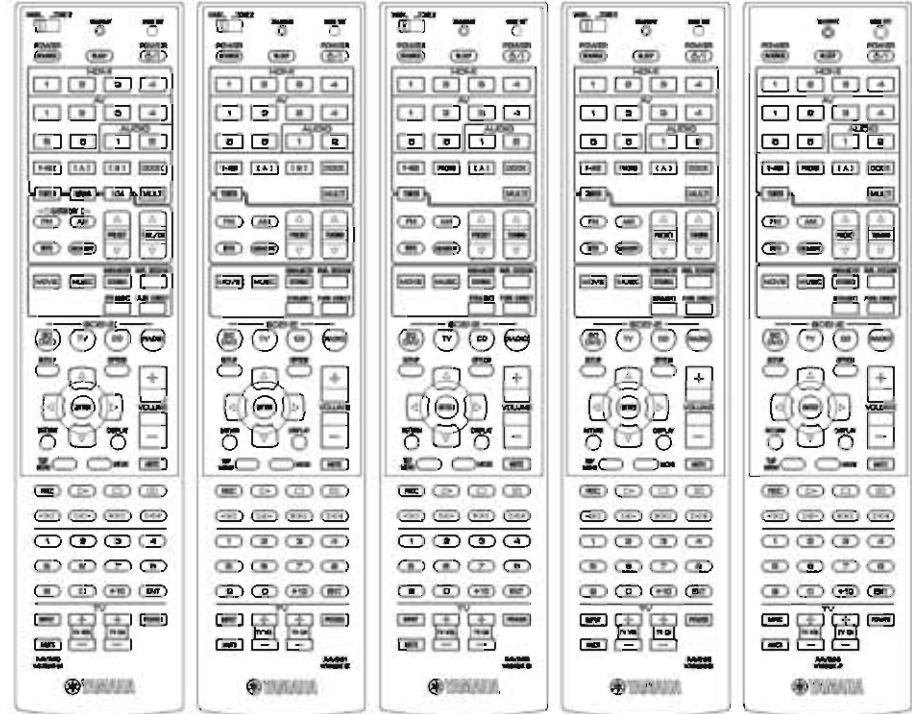

KEY NO. LAYOUT

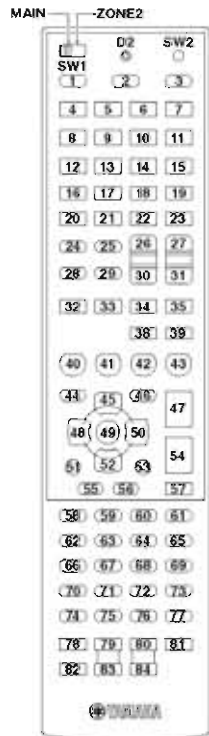

KEY CODE

GROUP	PRE SET	Key No.	FUNCTION	COM	ID1		ID2	
					MAIN	ZONE2	MAIN	ZONE2
	-	SW1	MAINZONE 2	-	[MAIN]	[ZONE2]	[MAIN]	[ZONE2]
	-	D2	TRANSMIT	-	-	-	-	-
	-	SW2	CODE SET	-	-	-	-	-
POWER	-	K2	SLEEP	O	7A-30	7A-31	7A-30CE	7A-31CF
	-	K3	POWER	O	7E-2A	7A-4S4A	7E-2AD4	7A-4S3B
INPUT 1	O	K4	HDMI 1	O	7A-4738	7A-4837	7A-4739	7A-4836
								* enter into HDMI 1 MODE
	O	K5	HDMI 2	O	7A-4A35	7A-4B34	7A-4A34	7A-4B35
								* enter into HDMI 2 MODE
	O	K6	HDMI 3	O	7A-4D32	7A-4E31	7A-4D33	7A-4E30
								* enter into HDMI 3 MODE
	O	K7	HDMI 4	O	7A-502F	7A-512E	7A-502E	7A-512F
								* enter into HDMI 4 MODE
	O	K8	AV-1	O	7A-532C	7A-542B	7A-532D	7A-542A
								* enter into AV 1 MODE
	O	K9	AV-2	O	7A-5629	7A-5728	7A-562B	7A-5729
								* enter into AV 2 MODE
	O	K10	AV-3	O	7A-5926	7A-5A25	7A-5927	7A-5A24
							* enter into AV 3 MODE	
O	K11	AV-4	O	7A-5C23	7A-5D22	7A-5C22	7A-5D23	
							* enter into AV 4 MODE	
O	K12	AV-5	O	7A-5F20	7A-601F	7A-5F21	7A-601E	
							* enter into AV 5 MODE	
O	K13	AV-6	O	7A-621D	7A-631C	7A-621C	7A-631D	
							* enter into AV 6 MODE	
O	K14	AUDIO-1	O	7A-651A	7A-6619	7A-651B	7A-6618	
							* enter into AUDIO-1 MODE	
O	K15	AUDIO-2	O	7A-6817	7A-6916	7A-6816	7A-6917	
							* enter into AUDIO-2 MODE	
O	K16	V-AUX	O	7A-65	7A-D8	7A-55AB	7A-D82B	
							* enter into V-AUX MODE	
O	K17	[A] (RAV290, 291) [PHONO] (RAV289, 292, 295)	O	7A-14	7A-D0	7A-1EA	7A-D02E	
							* enter into [A] PHONO MODE	
O	K23	MULTI CH1	O	7A-87	-	7A-8779	-	
							* enter into MULTI CH1 MODE	
INPUT 2	-	K18	[B] (RAV290, 291) [A] (RAV289, 292, 295)	O	7F01-3F	7F01-40	7F01-3FC1	7F01-40BE
							* enter into [A][B] MODE	
	-	K19	DOCK	O	7F01-4A	7F01-4B	7F01-4A34	7F01-4B35
								* enter into DOCK MODE
	-	K20	TUNER	O	7A-16	7A-D2	7A-16B	7A-D22C
								* enter into TUNER MODE
-	K21	SIRIUS (RAV290) U model	O	7A-39	7A-3A	7A-39C7	7A-3AC4	
							* enter into SIRIUS MODE	
-	K22	XM (RAV290) U model	O	7A-84	7A-B9	7A-B44A	7A-B946	
							* enter into XM MODE	
RADIO	-	K24	CATEGORY (-) FM	O	7F01-5827	7F01-5826	7F01-5826	7F01-5827
	-	K25	CATEGORY (+) AM	O	7F01-562A	7F01-5629	7F01-5629	7F01-562A
	-	K26	PRESET (+)	O	7F01-5824	7F01-5C23	7F01-5825	7F01-5C22
	-	K27	TUNING/CH (+)	O	7F01-611E	7F01-621D	7F01-611F	7F01-621C
	-	K28	INFO	O	7A-2758	7A-2857	7A-2759	7A-2856
	-	K29	MEMORY	O	7F01-6718	7F01-6817	7F01-6719	7F01-6818
	-	K30	PRESET (-)	O	7F01-5E21	7F01-5F20	7F01-5E20	7F01-5F21
	-	K31	TUNING/CH (-)	O	7F01-641B	7F01-651A	7F01-641A	7F01-651B
	-	K32	MOVE	O	7A-88	-	7A-8876	-
-	K33	MUSIC	O	7A-89	-	7A-8977	-	
-	K34	STEREOENHANCER	O	7A-84	-	7A-846A	-	
-	K35	SURL DECODE	O	7A-8D	-	7A-8D73	-	
-	K36	STRAIGHT	O	7A-56	-	7A-56A8	-	
-	K39	PURE DIRECT	O	7A-DD	-	7A-DD23	-	
RCI-NF	-	K40	RETRY	O	7A-867F	7A-817E	7A-867F	7A-817E
	-	K41	TV	O	7A-037C	7A-047B	7A-037D	7A-047A
	-	K42	CD	O	7A-0679	7A-0778	7A-067B	7A-0779
	-	K43	RADIO or GAME	O	7A-0976	7A-0A75	7A-0977	7A-0A74

GROUP	PRE SET	Key No.	FUNCTION	COM	ID1		ID2	
					MAIN	ZONE2	MAIN	ZONE2
MENU	-	K44	SETUP	O	7A-94	-	7A-947A	-
								* enter into AMP MODE
-	K46	OPTION	O	7A-9E14	-	7A-9E15	-	
							* enter into AMP MODE	
CURSOR	-	K45	UP	-	7A-9D	-	7A-9D63	-
	-	K48	LEFT	-	7A-9F	-	7A-9F61	-
	-	K49	ENTER	-	7A-DE	-	7A-DE20	-
	-	K50	RIGHT	-	7A-9E	-	7A-9E60	-
	-	K51	RETURN	-	7A-AA	-	7A-AA54	-
	-	K52	DOWN	-	7A-9C	-	7A-9C62	-
	-	K53	(DISPLAY)	-	7F01-60	7F01-60	7F01-600E	7F01-607E
	-	K47	VOLUME (+)	O	7A-1A	7A-DA	7A-1AE4	7A-DA24
VOLUME	-	K54	VOLUME (-)	O	7A-1B	7A-DB	7A-1BE5	7A-DB25
	-	K57	MUTE	O	7A-1C	7A-DC	7A-1CE2	7A-DC22
	-	K1	POWER (SOURCE)	-	-	-	-	-
SOURCE	-	K55	TOP MENU	-	-	-	-	-
	-	K56	MENU	-	-	-	-	-
	-	K58	REC	-	-	-	-	-
	-	K59	PLAY	-	-	-	-	-
	-	K60	STOP	-	-	-	-	-
	-	K61	PAUSE	-	-	-	-	-
	-	K62	REW	-	-	-	-	-
	-	K63	FF	-	-	-	-	-
	-	K64	SKIP (-)	-	-	-	-	-
	-	K65	SKIP (+)	-	-	-	-	-
10 key	-	K66	1	-	-	-	-	-
	-	K67	2	-	-	-	-	-
	-	K68	3	-	-	-	-	-
	-	K69	4	-	-	-	-	-
	-	K70	5	-	-	-	-	-
	-	K71	6	-	-	-	-	-
	-	K72	7	-	-	-	-	-
	-	K73	8	-	-	-	-	-
	-	K74	9	-	-	-	-	-
	-	K75	0	-	-	-	-	-
TV	-	K76	+10	-	-	-	-	-
	-	K77	ENT	-	-	-	-	-
	-	K78	TV INPUT	-	-	-	-	-
	-	K79	TV VOL (+)	-	-	-	-	-
	-	K80	TV CH (+)	-	-	-	-	-
	-	K81	TV POWER	-	-	-	-	-
	-	K82	TV MUTE	-	-	-	-	-
	-	K83	TV VOL (-)	-	-	-	-	-
	-	K84	TV CH (-)	-	-	-	-	-

FUNCTION CODE

Key No.	DVD				DVD				LD				CD				CD-R				MB											
	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year		
448	UP	TC-84	UP	TC-84	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30	2002 80 00 80 30

Key No.	TUNER																TAPE						TV									
	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year	Brand	Year
448	PRESET (+)	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10	70-10

## Advanced setup

The advanced setup includes more parameters for basic operation of this unit such as turning a bi-amp connection on and off and initializing user settings. This section describes what those parameters are and how to change them.

### 1 Set this unit to standby.

### 2 Press **MAIN ZONE ON/OFF** while pressing and holding **STRAIGHT** on the front panel.

The **ADVANCED SETUP** menu appears on the front panel display.



### 3 Rotate the **PROGRAM** selector to select the parameter you want to change.



• Set values are placed in XXX of the following parameters on an actual display screen.

• The default setting are marked with \*\*.

**SP IMP.** -XXX

**Choices:** 60MIN/80MIN\*

Selects output impedance of this unit according to connected speakers. When you connect 4-ohm speakers to the **FRONT** jacks of the **SPEAKERS** terminals, set "SP IMP" to "60MIN."

**REMOTE ID** -XXX

**Choices:** ID1\*/ID2

Selects a remote control ID for this unit. When using multiple Yamaha AV receivers, you can operate them with a single remote control by setting them to have the same remote control ID. By setting the receivers to have different remote control IDs, you can operate them with their respective remote controls.

**SR PIN** -XXX

**Choices:** RESET/CANCEL\*

Resets Parental lock cord when using **SIRIUS** Satellite tuner.

**BI AMP** - XXX

**Choices:** ON/OFF\*

Switches on and off of bi-amp connection of main speakers.

**SCENE IR** -XXX

**Choices:** ON\*/OFF

Selects whether or not to transmit the **SCENE** control signals to an external component connected to the **REMOTE** jacks on this unit when **BD/DVD** or **CD** **SCENE** function is selected. If "ON" is selected and a playback component that supports the **SCENE** link playback, such as a **Yamaha DVD** player, is connected to the **REMOTE OUT** jack of this unit, remote connection automatically starts playback when a different **SCENE** key is selected.

**MON. CHK** - XXXX

**Choices:** YES\*/SKIP

Adds upscaling limitation on output signals to a video monitor connected to this unit via the **HDMI OUT** jack.

**INIT** -XXXXXXXXXX

**Choices:** DSP PARAM/VIDEO/ALL/CANCEL\*

Initializes various settings stored in this unit. You can select an initialization method from the following.

**DSP PARAM:** Resets all parameters of sound field programs.

**VIDEO:** Resets video conversion settings (resolution/aspect) in the **SETUP** menu and the **OSD** menus display position.

**ALL:** Resets this unit to initial factory settings.

**CANCEL:** Initialization.

### 4 Press **STRAIGHT** a few times to select the value you want to change.

The value selected here becomes effective when this unit is turned on the next time. You can change multiple settings by repeating steps 3 and 4.

### 5 Press **MAIN ZONE ON/OFF**, turns off this system, and press **MAIN ZONE ON/OFF** again.

The value set in step 4 becomes effective, and this unit turns on. When you select initialization in step 3, the initialization is performed.


## Setting a remote control ID

Two IDs are provided for the remote control of this unit. If another Yamaha amplifier is in the same room, setting a different remote control ID to this unit prevents unwanted operation of the other amplifier.


ID1 is set for both remote control and amplifier by default.

When you change the remote control ID, display “ADVANCED SETUP” (see the previous section) and change the ID for the amplifier too.

- Each of the steps described in this section should be performed within one minute. Setting operation is automatically canceled when one minute has passed since the last step. If the operation is cancelled, start again from the beginning.

**1 Press CODE SET on the remote control using a pointed object such as the tip of a ballpoint pen.**

TRANSMIT blinks twice.

**2 Press SETUP on the remote control.**

**3 Enter the desired remote control ID code.**

To switch to ID1:

Enter “5019” using Numeric keys.

To switch to ID2:

Enter “5020” using Numeric keys.

Once the remote control code is registered,

TRANSMIT blinks twice.

If it fails, TRANSMIT blinks six times. Repeat from step 1.

☞:

- Initializing the remote control code returns it to ID1.



## 本機の基本設定 / 初期化を行う (アドバンスドセットアップメニュー)

アドバンスドセットアップメニューでは、バイアン  
プ接続の有効/無効といった本機の基本設定や、ユー  
ザー設定の初期化を行うことができます。以下の操  
作で目的の操作を行ってください。

- 1 本機の電源をスタンバイに切り替えます。
- 2 フロントパネルの**④STRAIGHT**を押しながら、**④STANDBY/ON**を押します。  
フロントパネルディスプレイにアドバンスド  
セットアップメニューが表示されます。メ  
ニューが表示されたら**④STRAIGHT**から手  
放してください。

### ADVANCED SETUP

- 3 **③PROGRAM** セレクターを回して、以下の  
中から設定したい項目を選択します。

※  
・実際のディスプレイ表示は、XXXの部分に設定値が入ります。  
・「1」のついた項目は初期設定を表します。

REMOTE ID - XXXX

選択項目: ID1\* / ID2

本機が認識するリモコンIDを設定します。ヤマ  
ハ製 AV レシーバーを複数使用する場合、各レ  
シーバーのIDを同じ設定にすると、1つのリモ  
コンですべてのレシーバーを操作できます。ID  
を分けた場合は、それぞれのリモコンで、レシー  
バーごとに操作できます。

BI AMP - XXXX

選択項目: ON / OFF\*

メインスピーカーをバイアンブ接続で使用する  
か設定します。バイアンブ接続を行う場合は、  
「ON」を選択します。

SCHEME IR - XXXX

選択項目: ON\* / OFF

本機のシーンをBD/DVDまたはCDへ切り替え  
た場合、リアパネルのREMOTE OUT端子か  
らSCENEコントロール信号を出力するかを  
選択します。「ON」に設定されている場合  
は、シーン運動再生機能に対応するヤマハ製  
DVDプレーヤーなどをREMOTE OUT端子に  
接続すると、本機のシーン切り替えに運動し  
てプレーヤーの再生が始まります。

MON. CHK - XXXXX

選択項目: YES\* / SKIP

HDMI OUT 端子に接続したテレビへの出力信  
号に、解像度変更 (アプスケーリング) の制  
限をかけます。

INIT - XXXXXXXXXX

選択項目: DSP PARAM / VIDEO / ALL / CANCEL\*

本機に記憶された各種設定を初期化します。初  
期化方法は、以下の中から選択できます。

DSP PARAM: 音場プログラムの設定  
VIDEO: セットアップメニューで行っ  
たビデオコンバージョン設定  
(解像度 / アスペクト比) およ  
び OSD の表示位置

ALL: 本機を工場出荷時の状態に戻  
します。

CANCEL: 初期化しません。

- 4 **④STRAIGHT** を何度か押して、目的の設定  
値を選びます。

ここで選択した内容は、次に電源をオンにした  
ときに実行されます。手順3と4を繰り返して、  
複数の項目を設定することも可能です。

- 5 **④STANDBY/ON** を押して電源を切り、も  
う一度**④STANDBY/ON** を押します。

手順4で行った設定が反映され、本機の電源が  
オンになります。手順3で初期化を選択した場  
合は初期化が実行されます。

### リモコンIDを設定する

本機のリモコンは、2つのID (リモコンID) からい  
ずれか1つを選ぶことができます。本機を設置して  
いる部屋で別のヤマハ製アンブをお使いの場合、本  
機側/リモコン側それぞれのリモコンIDを切り替え  
ることで、もう1台のアンブが動作するのを防止で  
きます。

工場出荷時には、リモコン側、アンブ側ともにID1  
に設定されています。  
本機のリモコンIDを切り替えた場合、「ADVANCED  
SETUP」(前項目参照) を表示して必ずアンブ側の  
IDも切り替えてください。

### ご注意

- 以下の手順はそれぞれ1分以内に行ってください。最後に操作し  
てから1分以上経過すると、設定が自動で中止されます。再度設  
定を行う場合は、手順1からやり直してください。

- 1 ボールペンなどの先の細いもので、リモコン  
の**④CODE SET** を押す。  
②**TRANSMIT** が2回点滅します。

**本機の基本設定 / 初期化を行う (アドバンスドセットアップメニュー)****2 リモコンの [SETUP] を押す。****3 希望するリモコンIDコードを入力する。**

リモコンID1に切り替える場合：

[2] **数字キー**を押して「5019」と入力します。

リモコンID2に切り替える場合：

[2] **数字キー**を押して「5020」と入力します。

登録が完了すると、コード入力後にリモコンの

[2] **TRANSMIT** が2回点滅します。





リモコンの [2] **TRANSMIT** が6回点滅した場合は、リモコンコードの入力に失敗したことを表します。もう一度手順1からやり直してください。

**※**

- リモコンコードを初期化すると、リモコンID1に戻ります。

RX-V765/HTR-6270/AX-V765

**MEMO**



**RX-V765/HTR-6270/  
AX-V765**

