


# NIKKO

# RECEIVER

# NR-320

## AM/FM STEREO RECEIVER

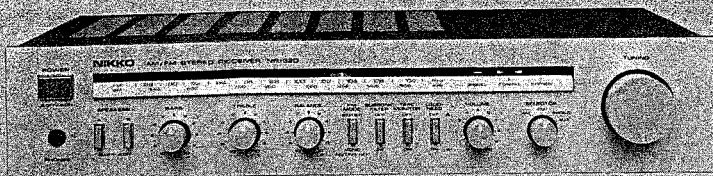

### TYPE AND VOLTAGE

W-TYPE: UL & CSA type

120V AC

## SERVICE MANUAL

### CONTENTS

SPECIFICATIONS .....	1, 2
BLOCK DIAGRAM .....	2
DISASSEMBLY .....	3
ALIGNMENT .....	4 ~ 8
DIAL CORD INSTALLATION .....	9
SCHEMATIC DIAGRAM .....	10, 11
P. C. BOARD .....	12, 13
PARTS LOCATION .....	14
PARTS LIST .....	15 ~ 17
SEMICONDUCTOR DATA,	
TRANSISTORS .....	18
DIODE, LED'S .....	18
ZENER DIODES .....	18
INTEGRATED CIRCUITS .....	19 ~ 22

## SPECIFICATIONS

### FM TUNER SECTION

Usable Sensitivity: . . . better than 17.2 dBf/12 dB $\mu$  (4  $\mu$ V)

50 dB Quieting Sensitivity:

. . . . . better than 17.2 dBf/12 dB $\mu$  (4  $\mu$ V)

Signal to Noise Ratio,

MONO: . . . . . better than 60 dB

STEREO: . . . . . better than 50 dB

Total Harmonic Distortion at 1000 Hz,

MONO: . . . . . no more than 0.3 %

STEREO: . . . . . no more than 1 %

Alternate Channel Selectivity: . . . . . better than 45 dB

Spurious Response Rejection: . . . . . better than 65 dB

Image Frequency Rejection: . . . . . better than 40 dB

IF Rejection: . . . . . better than 80 dB

AM Rejection: . . . . . better than 35 dB

Capture Ratio: . . . . . better than 3 dB

Stereo Separation,

100 Hz: . . . . . better than 28 dB

1000 Hz: . . . . . better than 35 dB

10000 Hz: . . . . . better than 25 dB

Subcarrier Suppression: . . . . . better than 30 dB

Muting Sensitivity: . . . . . 30 dB $\mu$   $\pm$  6 dB

Tuning Frequency Range: . . . . . 87.4 – 108.25 MHz

Antenna Impedance: . . . . . 300  $\Omega$  balanced &  
75  $\Omega$  unbalanced

Output Level: . . . . . 500 mV  $\pm$  3 dB

### AM TUNER SECTION

Usable sensitivity with Loop Antenna: . . . better than 40 dB

Signal to Noise Ratio: . . . . . better than 40 dB

Image Frequency Ratio,

1000 kHz: . . . . . better than 30 dB

IF Rejection: . . . . . better than 30 dB

Selectivity ( $\pm$  10 kHz): . . . . . better than 20 dB

Total Harmonic Distortion: . . . . . no more than 2 %

Tuning Frequency Range: . . . . . 520 – 1650 kHz

Output Level: . . . . . 150 mV  $\pm$  2 dB

### AUDIO AMPLIFIER SECTION

Continuous Power Output per channel,

20 – 20000 Hz (8 ohms): . . . . . more than 25 Watts

1000 Hz (8 ohms): . . . . . more than 27 Watts

Total Harmonic Distortion, 8 ohms

at Continuous Power Output: . . . no more than 0.08 %

at 1 Watt Power Output: . . . . . no more than 0.1 %

I. M. Distortion, 8 ohms

at Continuous Power Output: . . . no more than 0.08 %

IHF Power Bandwidth, 8 ohms: . . . . . 20 – 20000 Hz

Damping Factor at 1000 Hz, 8 ohms: . . . . . more than 30

Frequency Response,

PHONO to TAPE OUT (RIAA equalization):

. . . . . 30 – 15000 Hz  $\pm$  2 dB

AUX, TAPE IN to SPEAKER TERMINAL:

. . . . . 20 – 20000 Hz  $\pm$  2 dB

## Input Sensitivity for Continuous Power Output,

PHONO: .....  $2.5 \text{ mV} \pm 2 \text{ dB}$ AUX, TAPE IN: .....  $140 \text{ mV} \pm 2 \text{ dB}$ 

## PHONO Maximum Input Capability at 1000 Hz:

..... more than 100 mV

## Output Level at Continuous Power Output

TAPE OUT (input: PHONO): .....  $140 \text{ mV} \pm 2 \text{ dB}$ 

## Tone Controls,

BASS (70 Hz) Boost: .....  $+10 \text{ dB} \pm 2 \text{ dB}$ Cut: .....  $-10 \text{ dB} \pm 2 \text{ dB}$ TREBLE (10000 Hz) Boost: .....  $+9 \text{ dB} \pm 2 \text{ dB}$ Cut: .....  $-7 \text{ dB} \pm 2 \text{ dB}$ Loudness Control (Volume Control set at  $-30 \text{ dB}$  position)70 Hz: .....  $+7.5 \text{ dB} \pm 2 \text{ dB}$ Subsonic Filter, at 15 Hz: .....  $-3 \text{ dB} \pm 2 \text{ dB}$ 

## Signal to Noise Ratio with IHF-A Network,

PHONO: ..... better than 70 dB

AUX, TAPE IN: ..... better than 95 dB

## Residual Hum and Noise, 8 ohms:

..... no more than 1.0 mV

Midpoint Voltage: .....  $0 \pm 100 \text{ mV}$ 

## GENERAL

## Power Requirement,

U. S. A. &amp; Canada model: ..... AC 120 V/60 Hz

Power Consumption: ..... 140 W (CSA)

## Dimensions without knobs and feet,

Width: ..... 440 mm, 17-1/4"

Height: ..... 96 mm, 3-3/4"

Depth: ..... 300 mm, 11-3/4"

Weight without package: ..... 5.8 kg, 12.8 lbs

\*Specifications are subject to change without notice.

## BLOCK DIAGRAM

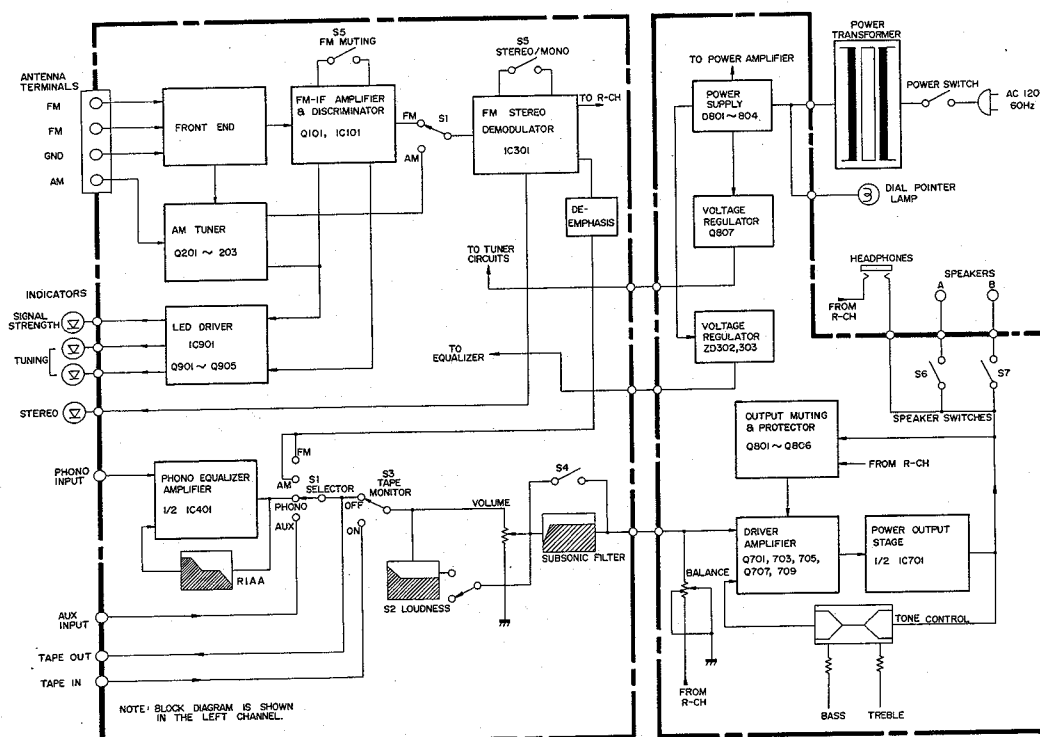


Figure 1

## DISASSEMBLY

### CABINET COVER REMOVAL

- Remove four screws from both sides of the metal cover.
- Remove two tapping screws from the rear of the metal cover.
- Lift the cover away from the unit.

### BOTTOM PLATE REMOVAL

- Remove nine tapping screws (#1 ~ #9) and two transformer screws (#10 and #11) from the bottom of the unit as shown in Photo 1.
- Lift the bottom plate away from the unit.

### FRONT PANEL REMOVAL

- Remove the bottom plate.
- Remove the tapping screws (#12 and #13) from the bottom of the unit as shown in Photo 1.
- Remove two tapping screws (#16 and #17) from the top of the unit as shown in Photo 2.
- Remove the front panel away from the unit by pulling it forward.

### POWER TRANSFORMER REMOVAL

- Remove the bottom plate.
- Disconnect all the power transformer cables.
- Remove two screws (#14 and #15) from the bottom of the unit as shown in Photo 1.
- Lift the power transformer away from the unit.

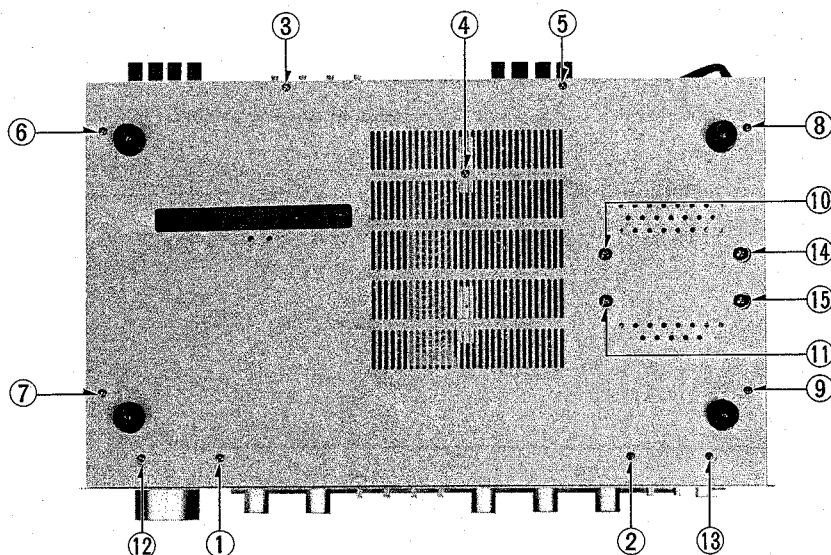


Photo 1

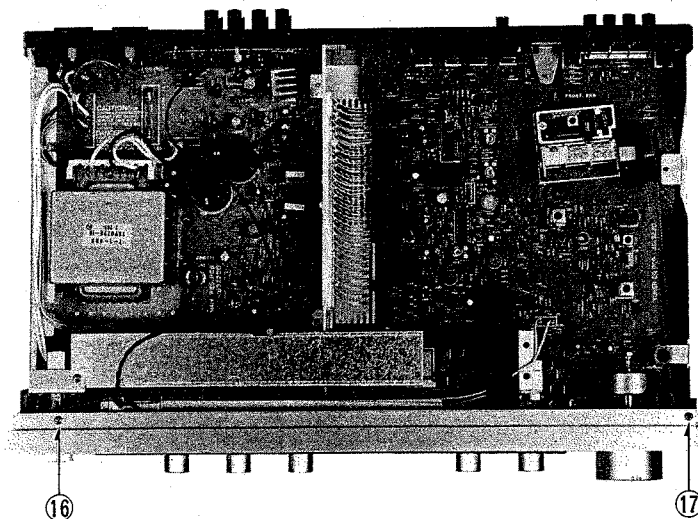


Photo 2

# ALIGNMENT

## TEST EQUIPMENTS

FM Signal Generator (FM SG)  
Oscilloscope  
AC Voltmeter  
Distortion Meter  
MPX Signal Generator (MPX SG)  
Frequency Counter  
AM Sweep Generator (AM SG)  
DC Voltmeter

## GENERAL ALIGNMENT INSTRUCTIONS

1. Always observe response curve on oscilloscope during alignment procedure.

2. Do not apply signals from FM or AM broadcast stations. Apply signals from generators only.
3. Use of excessive signal from FM SG or AM SG can cause overloading of the tuner circuits. To properly align the receiver, adjust FM SG or AM SG output level control so that response curve on oscilloscope is not distorted.
4. Input signal levels shown in the tables are measured at the antenna terminals of the receiver.
5. Allow a minimum of 10 minutes warm-up for test equipments and the receiver to be tested.
6. Turn the volume controls down to fully counter clockwise when the dummy load resistors or speakers are not connected to the speaker terminals.

## FM SECTION

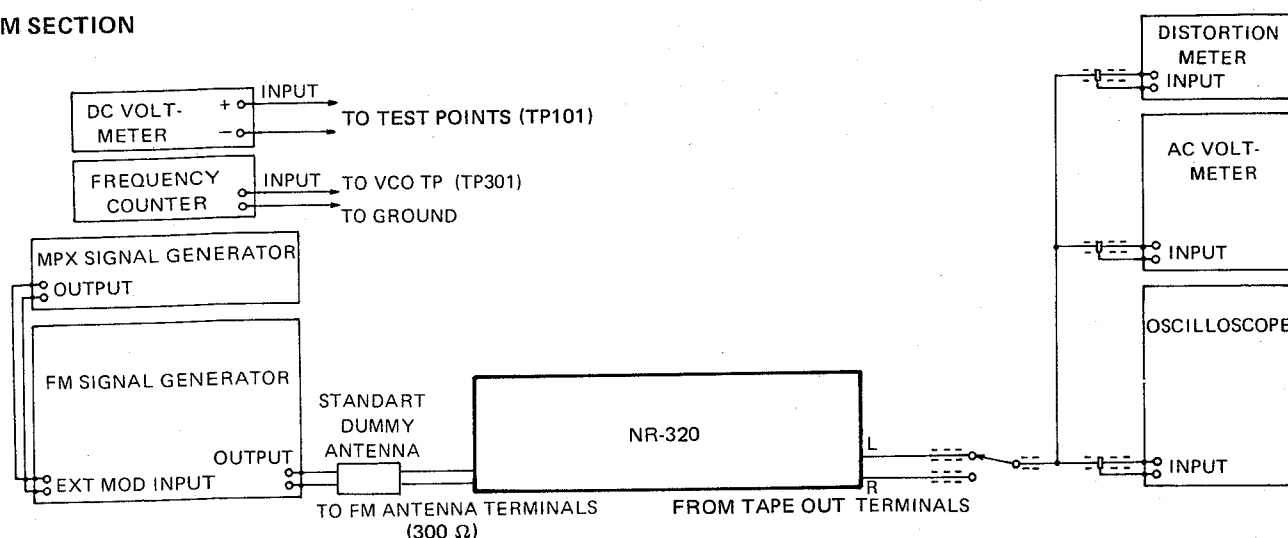


Figure 2. Test Equipment Hook-up

### NOTE:

There is no "Tuning Meter" in this receiver. In order to tune fast and accurately, a DC voltmeter is used in place of a "tuning meter". DC voltmeter may have a scale up to 2.5 – 5V, but its accuracy is not important. DC voltmeter is connected to the test points on the P.C. board.

According to characteristic of IC101, voltmeter's needle may swing backward when adjusting. In this case, simply reverse the voltmeter connections. Voltmeter's zero reading corresponds to tuning meter's mid-scale reading.

## FM IF Alignment

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE RECEIVER	DIAL POINTER POSITION	ADJUST- MENT POINT	PROCEDURE	REMARKS
1			A. POWER to "ON". B. SELECTOR to "FM". C. MODE to "MONO".	Where no signal is tuned.	Primary core of T101	Adjust until DC voltmeter indicates zero volt.	Repeat steps 1 and 2 until distortion can no longer be minimized.
2	108 MHz/ 65 dBf (60 dBμ)	400 Hz/mono (± 75 kHz)		108 MHz	Secondary core of T101	Adjust for minimum distor- tion.	

Table 1 – 1

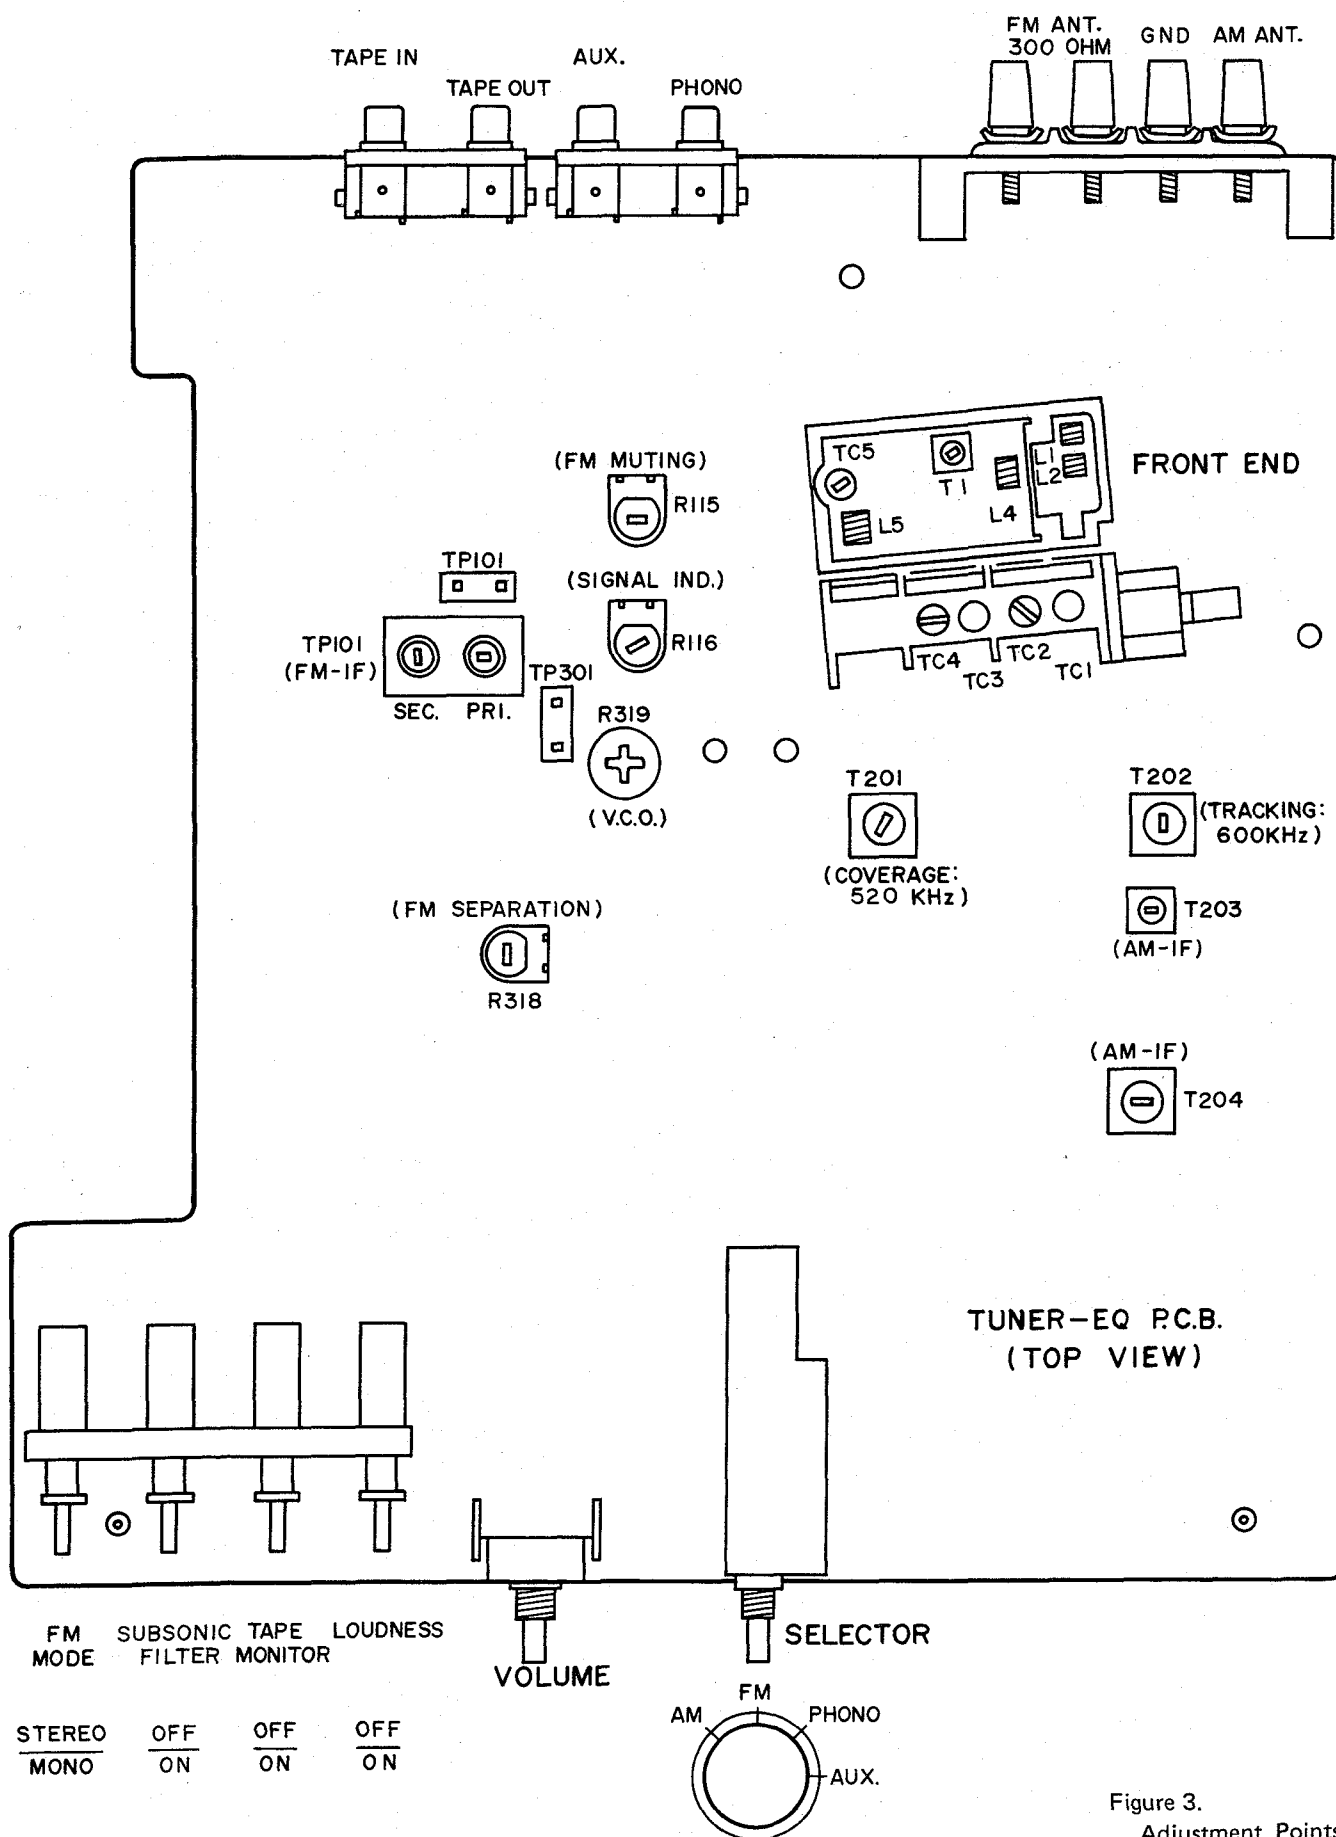


Figure 3.  
Adjustment Points

## FM Muting Alignment

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE RECEIVER	DIAL POINTER POSITION	ADJUST- MENT POINT	PROCEDURE	REMARKS
1	98 MHz/ 35 dBf (30 dBμ)	400 Hz/mono (±75 kHz)	A. POWER "ON". B. SELECTOR to "FM". C. MODE to "STEREO"	98 MHz	R115	Adjust until audio output is no longer present on oscillo- scope.	
2	98 MHz/ 65 dBf (60 dBμ)			98 MHz (See PROCE- DURE)		While slightly shifting the frequency in both higher and lower direc- tions from the recep- tion frequency, con- firm that output fades out before wave is distorted.	

Table 1 - 2

## FM Frequency Coverage and FM Tracking Alignments

These adjustments are factory preset and normally need no further adjustment.  
However, if necessary proceed as follows:

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE RECEIVER	DIAL POINTER POSITION	ADJUST- MENT POINT	PROCEDURE	REMARKS
1	108 MHz/ 15 dBf (10 dBμ)	1000 Hz/mono (±75 kHz)	A. POWER to "ON". B. SELECTOR to "FM". C. MODE to "MONO".	108 MHz	TC5	Adjust for maxi- mum AC Volt- meter deflection and for zero volt DC voltmeter indication.	
2	88 MHz/ Attenuate for response with 3% distortion.			88 MHz	L2 L4	Adjust for maxi- mum output.	Both the outputs should be equal. Repeat steps 2 and 3 once or twice.
3	108 MHz/ Attenuate for response with 3% distortion.			108 MHz	TC1 TC3		

Table 1 - 3

### Signal Strength Indicator Adjustment

1. Apply 35 dBf (30 dB $\mu$ ) signal from FM SG.
2. Adjust R116 (See Figure 3) until the signal strength indicator on the front panel lights up.
3. Confirm that the indicator goes out when the receiver is detuned.

### FM MPX Alignment

STEP	FM SG FREQUENCY/ CALIBRATION	MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE RECEIVER	DIAL POINTER POSITION	ADJUST- MENT POINT	PROCEDURE	REMARKS
1	98 MHz/ 65 dBf (60 dB $\mu$ )	(Unmodulated carrier)	A. POWER to "ON". B. SELECTOR to "FM". C. MODE to "STEREO".	98 MHz	R319	Adjust for $76 \pm 0.1$ kHz.	Both the separations (both the outputs of right and left channel) should be equal.
2		1000 Hz/stereo (Main (L) & sub (L): $\pm 67.5$ kHz/ pilot signal: $\pm 7.5$ kHz)			R318	Adjust for maximum separation (or minimum output of right channel).	
3		1000 Hz/stereo (main (R) & sub (-R): $\pm 67.5$ kHz/ pilot signal: $\pm 7.5$ kHz)				Adjust for maximum separation (or minimum output of left channel).	
4		1000 Hz/stereo [sub (L-R)]			T1	Adjust for minimum distortion.	

Table 1 - 4.

### AM SECTION

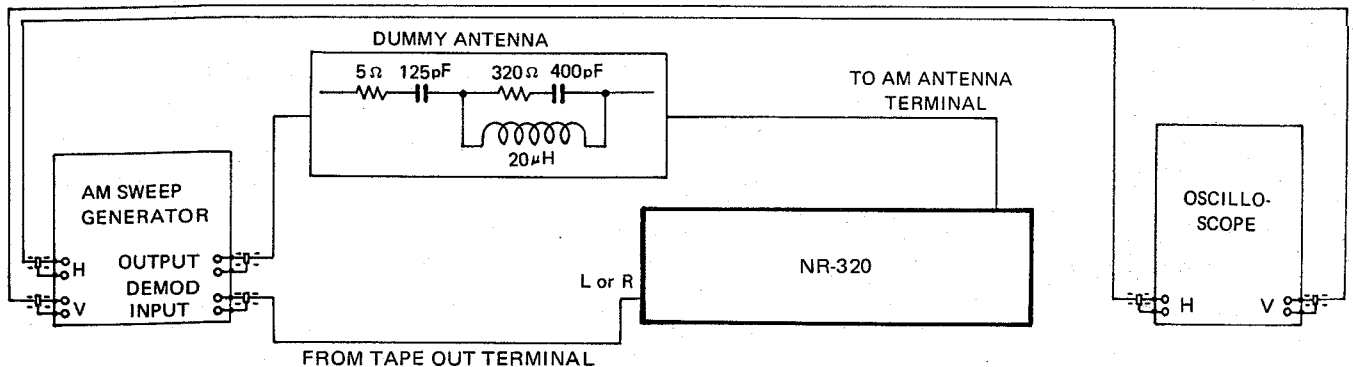


Figure 4-1 Test Equipment Hook-up (1)

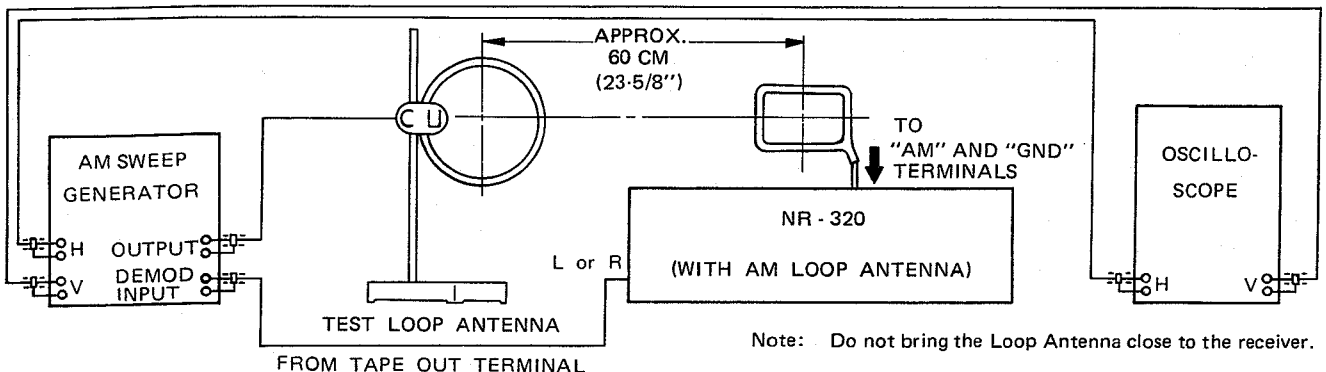


Figure 4-2 Test Equipment Hook-up (2)



AM IF Alignment

STEP	AM SG FREQUENCY/ CALIBRATION		MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE RECEIVER	DIAL POINTER POSITION	ADJUST FOR MAX. SCOPE INDICATION	REMARKS
1	450 kHz/ 50 dBμ	Set AM SG IF/ RF switch to "IF" position.	(Unmodulated carrier)	A. POWER to "ON". B. SELECTOR to "AM"	High frequency end of the dial scale.	T203	Repeat steps 1 and 2 until response curve on oscillo- scope indicates maximum waveform. Refer to Figure 5.
2						T204	

Table 2 – 1

AM Frequency Coverage and AM Tracking Alignments

These adjustments are factory preset and normally need no further adjustment. However, if necessary proceed as follows:

STEP	AM SG FREQUENCY/ CALIBRATION		MODULATING FREQUENCY/ DEVIATION	SWITCHES OF THE RECEIVER	DIAL POINTER POSITION	ADJUST FOR MAX. SCOPE INDICATION	REMARKS
1	520 kHz/ 50 dBμ	Set AM SG IF/ RF switch to "RF" position.	400 Hz/30%	A. POWER to "ON" B. SELECTOR to "AM"	Low frequ- ency end of the dial scale.	T201	Repeat steps 1 and 2 several times. Refer to Figure 6.
2	1650kHz/ 50 dBμ				High fre- quency end of the dial scale	TC4	
3	600 kHz/ 50 dBμ				600 kHz	T202	Repeat steps 3 and 4 once or twice.
4	1400kHz/ 50 dBμ				1400 kHz	TC2	

Table 2 – 2

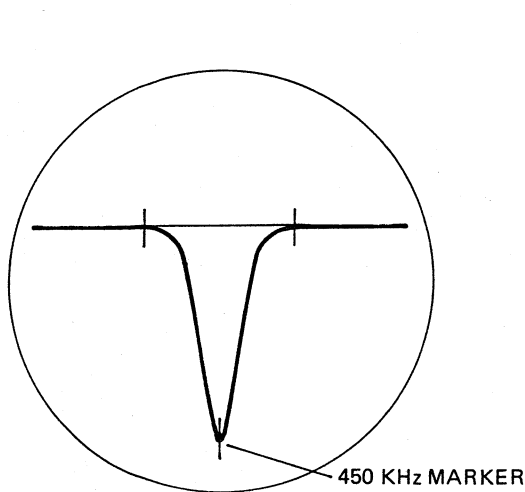


Figure 5. AM IF

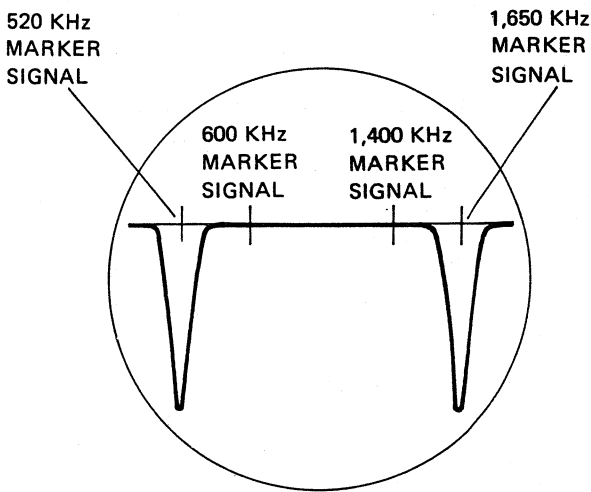


Figure 6. MW Frequency Coverage

DIAL CORD INSTALLATION

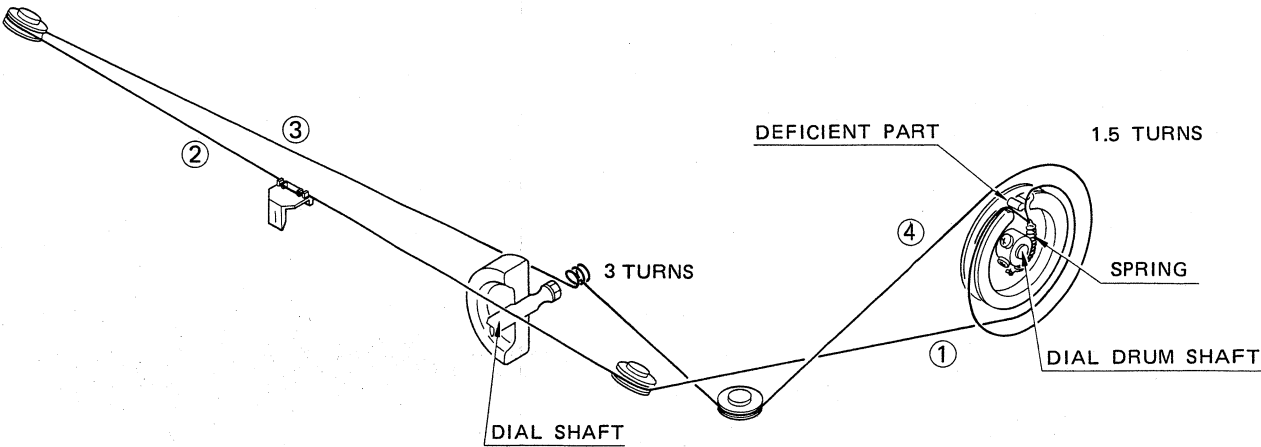


Figure 7

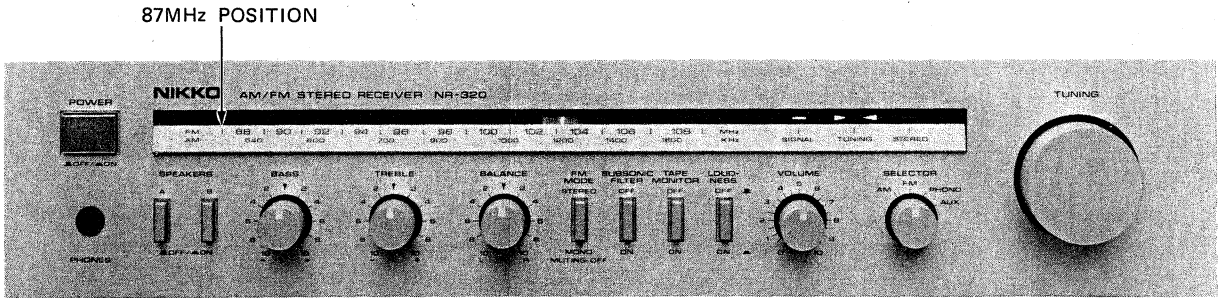



Photo 3

1. Remove an old dial cord.










2. Turn the dial drum shaft counter-clockwise until the rotor of the variable capacitor is completely out of the stator. If the deficient part of the dial drum is not in a straight line with the dial drum shaft (vertically), loosen the dial drum drive screws and adjust the dial drum to be placed on the top portion. Then re-tighten the dial drum screws.
3. String the dial drum and pulleys with a new dial cord as shown in Fig. 7 (in circled numbered order).

4. Turn the dial shaft (Tuning knob) counter-clockwise until the rotor of the variable capacitor is fully rotated in the stator. Then fix the dial pointer to the string at a reading of 87 MHz on the dial scale. (See Photo 3)

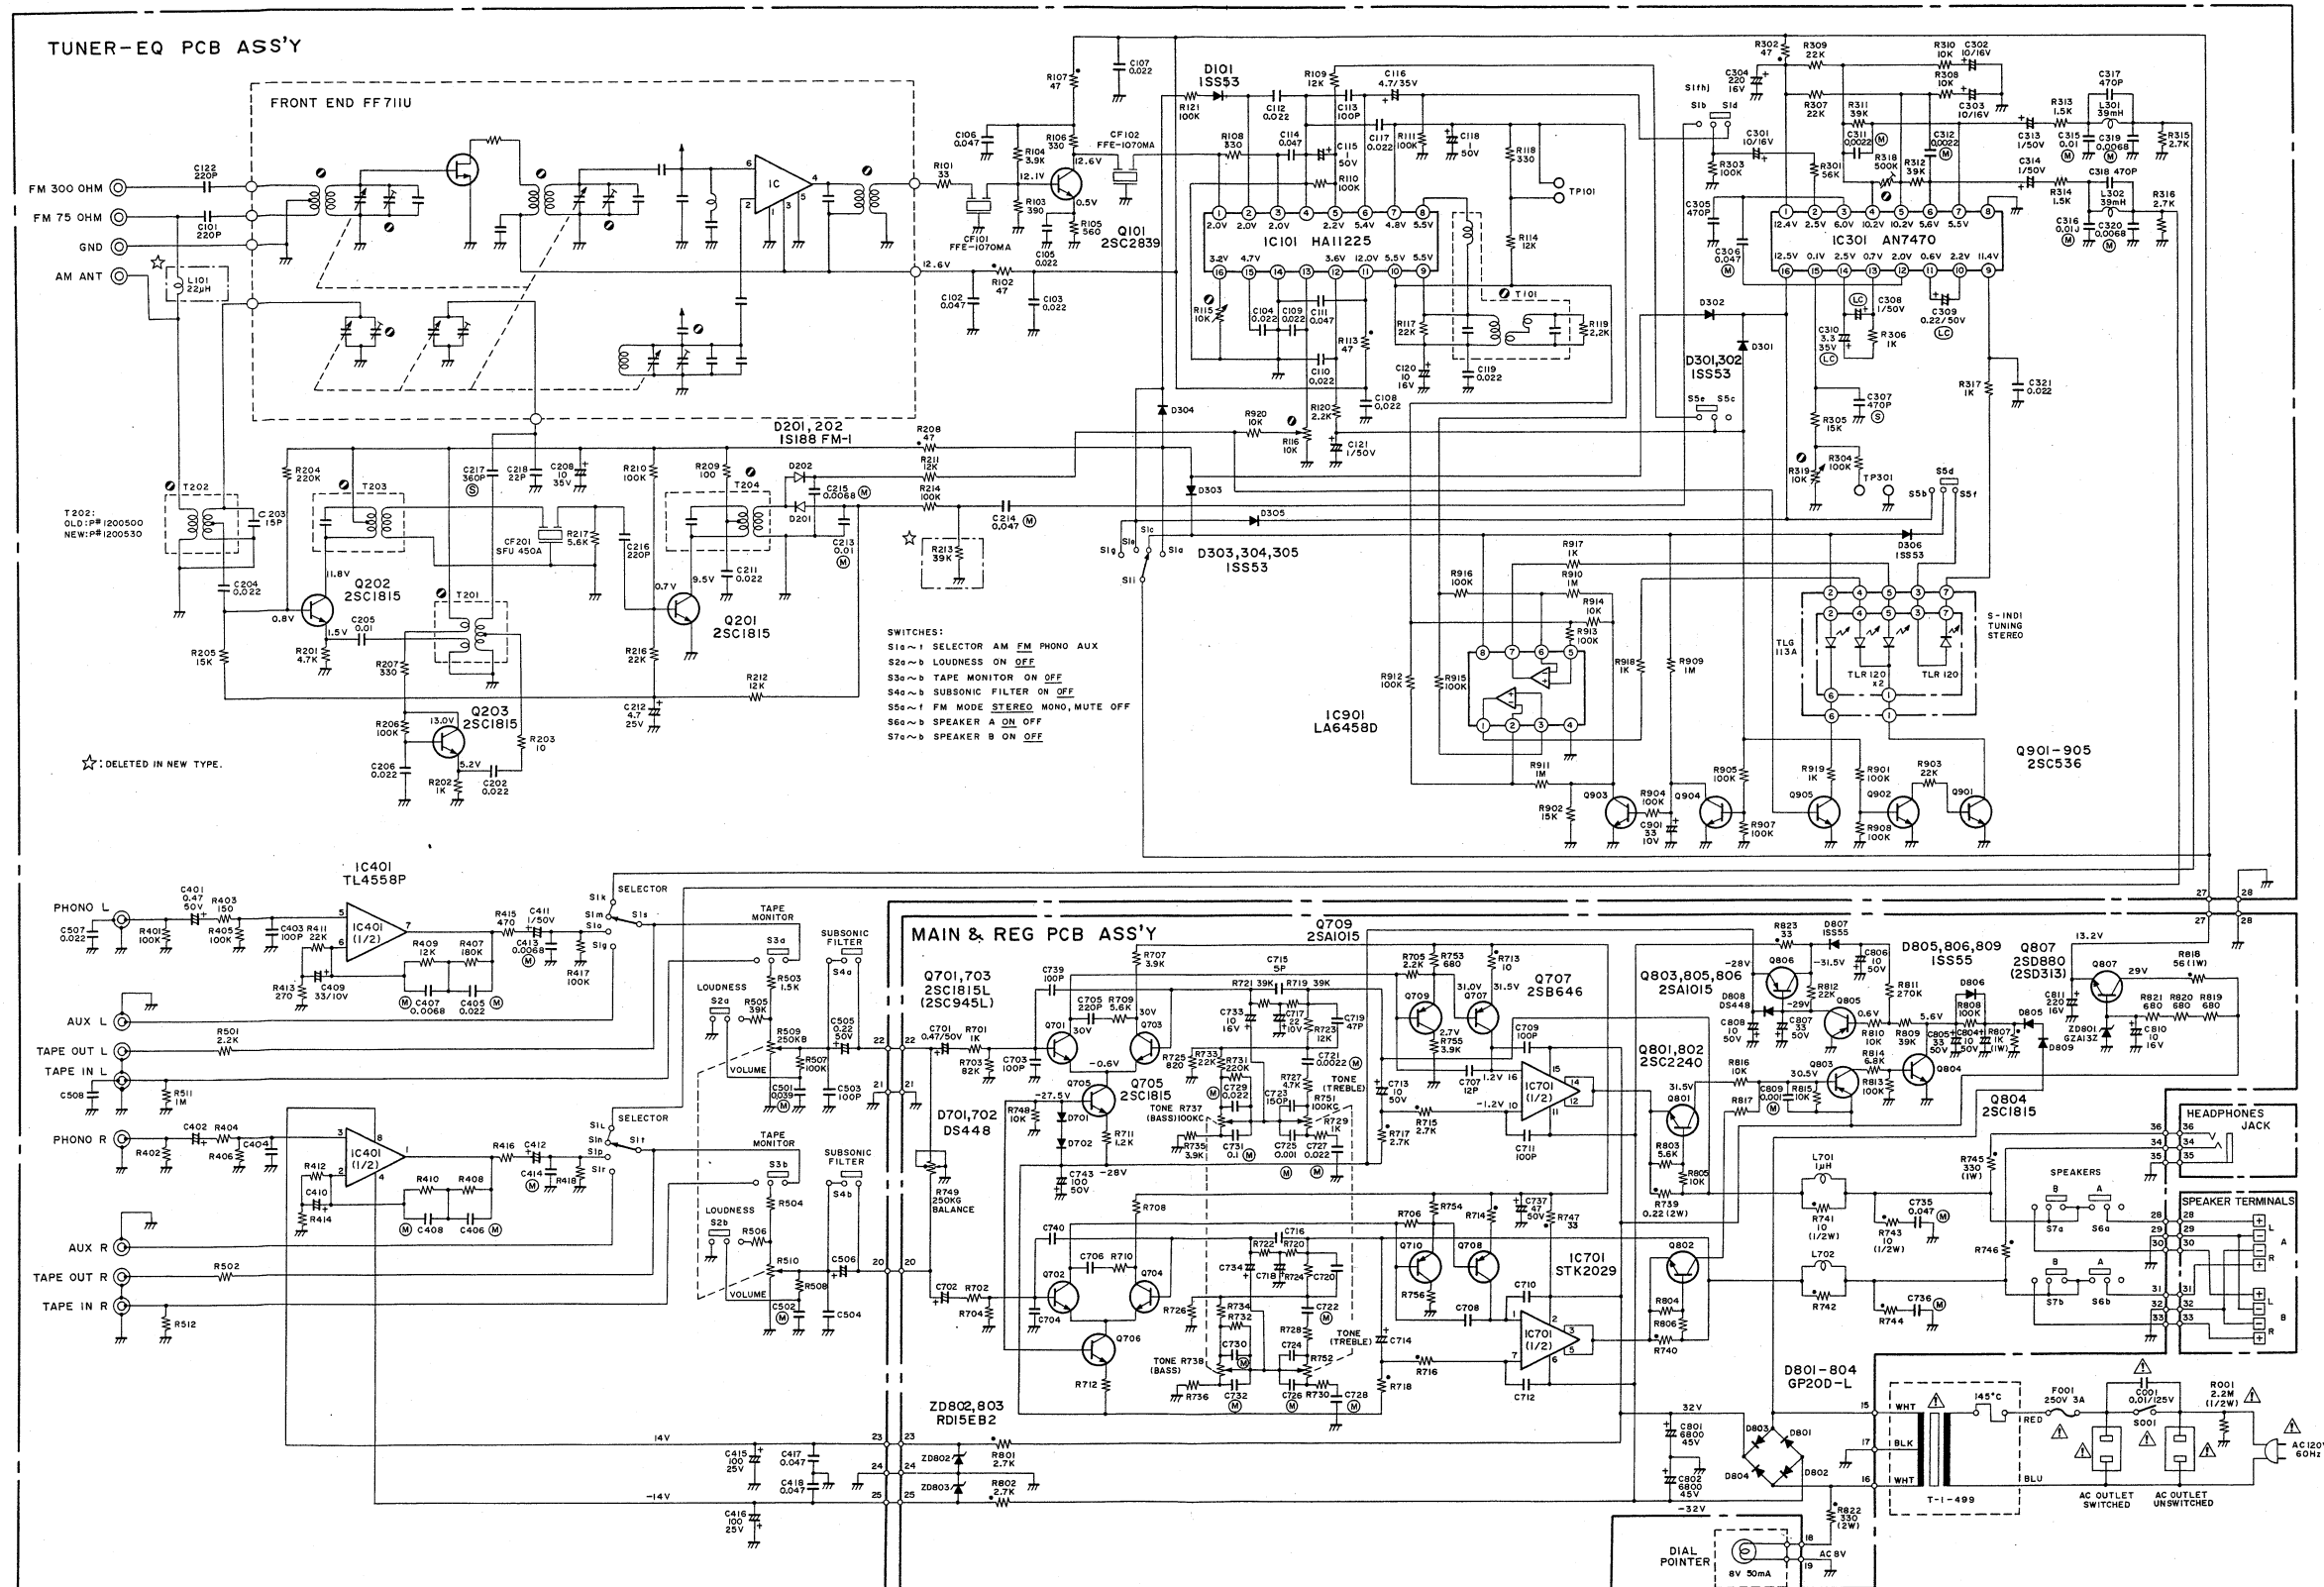**SCHEMATIC DIAGRAM** Figure 8



## SEMICONDUCTORS

 <p>(TOP VIEW)</p>	<p>HA11225 AN7470</p>
 <p>(TOP VIEW)</p>	<p>LA6458D TL4558P</p>
	<p>STK2029</p>
	<p>2SA1015 2SB646 2SC536 (2SC945L) 2SC1815 2SC1815L 2SC2240</p>
	<p>2SC2839</p>
	<p>2SD880 (2SD313)</p>
	<p>1S188FM-1 1SS53 1SS55 DS448 GP20D-L</p>
	<p>RD15EB2 GZA13Z</p>
	<p>TLG113A TLR120</p>

**NOTES:**

1. SCHEMATIC IS SUBJECT TO CHANGE  
WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED:

2. RESISTANCE VALUES ARE IN OHMS.  
K=1,000; M=1,000,000
3. CAPACITANCE VALUES 1.0 AND ABOVE ARE IN pF OR  $\mu$ F (P=pF, M= $\mu$ F), LESS THAN 1.0 ARE IN  $\mu$ F. (ELECTROLYTIC CAPACITANCE VALUES ARE IN  $\mu$ F/WV)
4. VOLTAGES ARE MEASURED TO CHASSIS GROUND WITH A "DC VOLTMETER".

**SCHEMATIC SYMBOLS:**

- (M) POLYESTER FILM CAPACITOR  
 (P) POLYSTYRENE FILM CAPACITOR  
 (LC) LOW CURRENT LEAKAGE ELECTRO-  
 LYTIC CAPACITOR  
 (NO MARK) CERAMIC CAPACITOR  
 • NONFLAMMABLE RESISTOR  
 • INTERNAL ADJUSTMENT POINT

**WARNING:**

- ⚠ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.**





## PARTS LOCATION

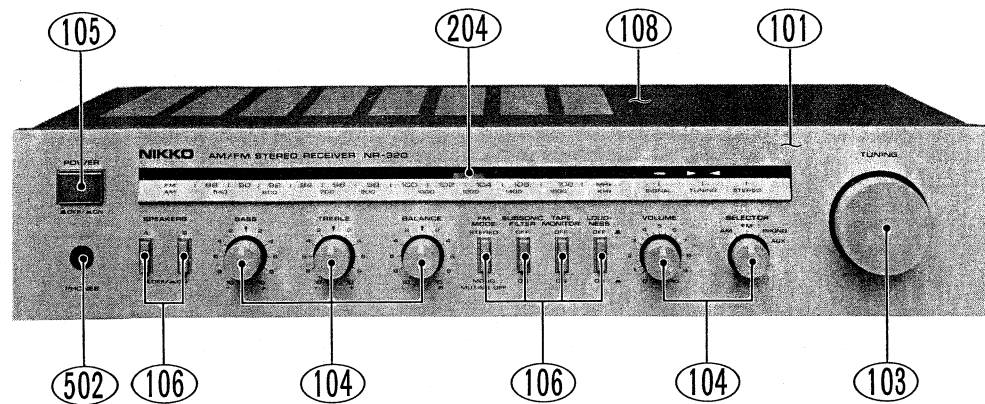


Photo 4

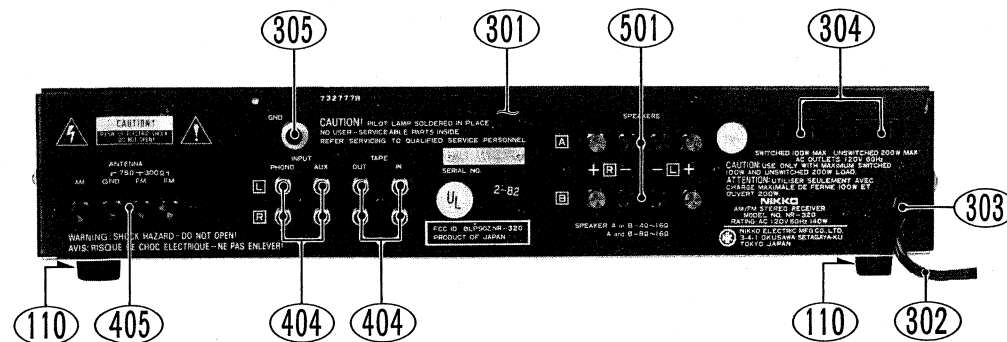


Photo 5

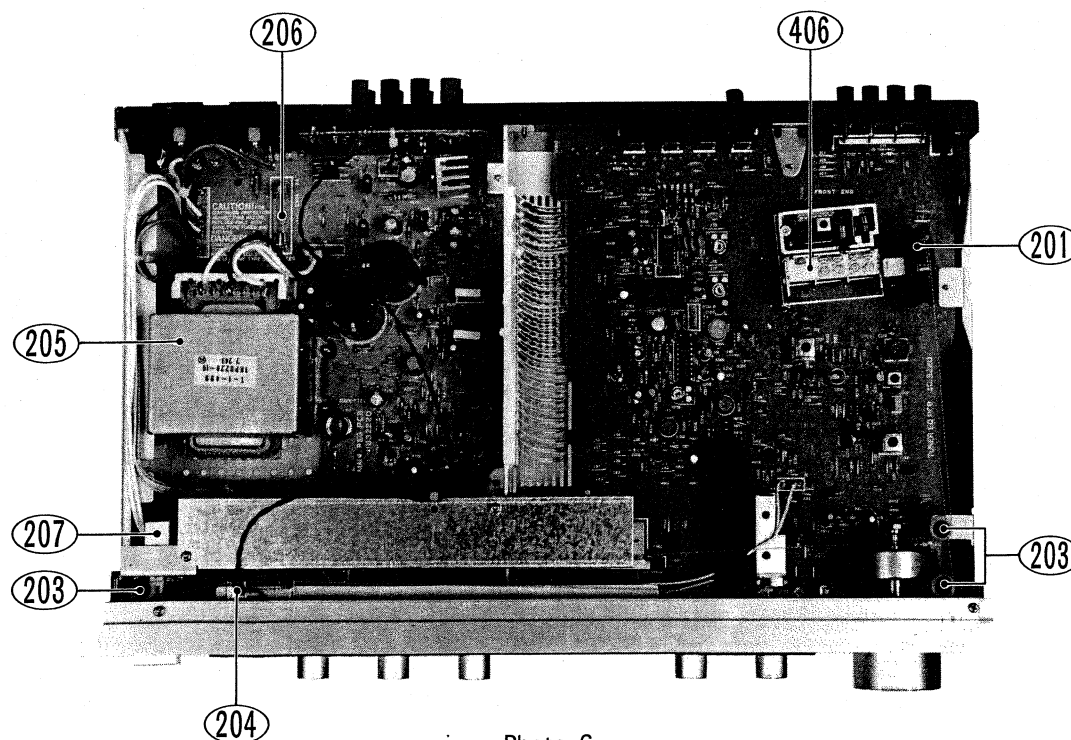


Photo 6

## PARTS LIST

## NOTES:

1. ★ The REF. NUMBER (#) marked with a (★) on parts list related to number of three digits with a ( ). (Photo 4 ~ 6)
2. + Numerals in file indicate the quantity of parts used in one type.  
W<sub>1</sub> : U.S.A. & Canada model without AM loop antenna.  
W<sub>2</sub> : U.S.A. & Canada model with AM loop antenna.
3. ++ TR : Transistor  
FET : Field effect transistor  
VR : Volume control (Variable resistor)  
RES : Carbon film fixed resistor  
MO-RES : Metal oxide film fixed resistor  
CEM-RES : Cemented wirewound fixed resistor  
FP : Flame proof  
C-CAP : Ceramic capacitor  
E-CAP : Aluminum electrolytic capacitor  
M-CAP : Polyester film capacitor  
S-CAP : Polystyrene film capacitor  
T-CAP : Tantalum electrolytic capacitor

- BP-CAP : Bipolar electrolytic capacitor  
LC-CAP : Low current leakage electrolytic capacitor
4. Assemblies and parts are subject to change without notice.
5. Parts ordering procedure :  
A. DO NOT USE THE "REFERENCE" number and "SYMBOL" number. (these are control # for the factory only)  
B. Include in any order  
a. Part number, b. Part description, c. Model number.  
(any of the above lacking from an order may delay shipment of that order.)

## WARNING :

⚠ INDICATES SAFETY CRITICAL COMPONENTS.  
FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

REF. NO.	SYMBOL NO.	TYPE <sup>+</sup> W <sub>1</sub> W <sub>2</sub>	DESCRIPTION <sup>++</sup>	PART NO.
<b>PACKING MATERIALS &amp; ACCESSORIES</b>				
001		1 1	Carton box	9826450
002		2 2	Pad	9841160
003		1 1	Sack, polyethylen cloth	9640720
004		1 1	Sack, polyethylen cloth — #13	9640320
005		1 —	Manual, instructions — in English and French	960387E
006		— 1	Manual, instructions — in English and French	960413E
007		1 1	Card, warranty — U.S.A.	967046A
008		1 1	Card, warranty — Canada	967044A
009		1 1	List, service stations	9690210
010		1 1	Antenna, FM — Q-MATCH	4581360
011		— 1	Loop antenna, AM	1200550
<b>CABINET ASSEMBLY</b>				
★101		1 1	Panel, front	7886070
102		1 1	Window, panel	7803020
★103		1 1	Knob — 320SL-42R — tuning	7841730
★104		5 5	Knob — 320SL-16DR — others	7841740
★105		1 1	Button, push — P1420SL — power	7852860
★106		6 6	Button, push — P414Z — others	7853160
107		1 1	Shaft, extension — 16.5M	7403140
★108		1 1	Cover, top	7821400
109		1 1	Plate, bottom	7327760
★110		4 4	Foot, plastic	7402640
<b>CHASSIS ASSEMBLY</b>				
★201		1 1	Dial drum — 37φ	740086A
202		1 1	Spring, dial drum	7440380
★203		3 3	Pulley — 10φ	7404570
★204		1 1	Dial pointer assembly	7860680
★205		1 1	Transformer, power — T-1-499 — AC 120V	1104990
★206		1 1	Fuse — 3A 250V	4700630
★207		1 1	Switch, push — SDL-1P — power	4041810
208		1 1	C-CAP 0.01uf AC 125V	239103C
209		1 1	Blind, LED	7003210
<b>BACK PLATE ASSEMBLY</b>				
★301		1 1	Plate, back	732777A

REF. NO.	SYMBOL NO.	TYPE <sup>+</sup> W <sub>1</sub> W <sub>2</sub>	DESCRIPTION <sup>++</sup>	PART NO.
★302		1 1	Cord, AC line — DP-70	606007A
★303		1 1	Bush, power cord — SR-3P-4	7400620
★304		2 2	Socket, AC outlet	4500150
★305		1 1	Terminal, GND	4450660
<b>TUNER-EQUALIZER P.C. BOARD ASSEMBLY</b>				
401	S1	1 1	Switch, rotary-slide — SRZV044S — selector	4055250
402	S2~S5	1 1	Switch, tetra push — SUN431A — loudness/tape/subsonic filter/FM mode	4042230
403	R509,510	1 1	VR 250kohm (B) x 2 — volume	4321330
★404		2 2	Terminal, RCA phono pin jack — 2P x 2	4444120
★405		1 1	Terminal, antenna — 4P	4450650
★406		1 1	Front end — FF711U	4910340
<b>(FM IF SECTION)</b>				
T101		1 1	Coil, FM discriminator	1240520
L101		1 —	Coil — 22uH	1210990
CF101,102		2 2	Ceramic filter — FFE-1070-MA	1280890
IC101		1 1	IC HA11225	518070S
Q101		1 1	TR 2SC2839 (E)	512134S
D101		1 1	Diode 1SS53	501023S
C101		1 1	C-CAP 220pf 10% 50V SL	232221K
C102,106		2 2	C-CAP 0.047uf +80, -20% 50V YG	231473Z
C103~C110		7 7	C-CAP 0.022uf +80, -20% 50V YG	231223Z
C111,114		2 2	C-CAP 0.047uf +80, -20% 50V YG	231473Z
C112		1 1	C-CAP 0.022uf +80, -20% 50V YG	231223Z
C113		1 1	C-CAP 100pf 10% 50V SL	232101K
C115,118		2 2	E-CAP 1uf 50V	211510S
C116		1 1	E-CAP 4.7uf 35V	211415S
C117,119		2 2	C-CAP 0.022uf +80, -20% 50V YG	231223Z
C120		1 1	E-CAP 10uf 16V	211220S
C121		1 1	E-CAP 1uf 50V	211510S
C122		1 1	C-CAP 220pf 10% 50V SL	232221K
R115,116		2 2	Potentiometer 10kohm	4301580
R101		1 1	RES 33ohm 5% 1/4W	328330J
R102		1 1	FP-RES 47ohm 5% 1/4W	328470L

PART ORDERING PROCEDURE ----- DO NOT USE THE "REFERENCE" number and "SYMBOL" number. (these are control # for the factory only.) Include in any order: a. Part number b. Part description c. Model number. (any of the above lacking from an order may delay shipment of that order.)

REF. NO.	SYMBOL NO.	TYPE <sup>+</sup> W <sub>1</sub> W <sub>2</sub>	DESCRIPTION <sup>++</sup>	PART NO.
R103	1	1	RES 390ohm 5% ¼W	328391J
R104	1	1	RES 3.9kohm 5% ¼W	328392J
R105	1	1	RES 560ohm 5% ¼W	328561J
R106,108	2	2	RES 330ohm 5% ¼W	328331J
R107	1	1	FP-RES 47ohm 5% ¼W	328470L
R109	1	1	RES 12kohm 5% ¼W	328123J
R110,111	2	2	RES 100kohm 5% ¼W	328104J
R113	1	1	FP-RES 47ohm 5% ¼W	328470L
R114	1	1	RES 12kohm 5% ¼W	328123J
R117	1	1	RES 22kohm 5% ¼W	328223J
R118	1	1	RES 330ohm 5% ¼W	328331J
R119,120	2	2	RES 2.2kohm 5% ¼W	328222J
R121	1	1	RES 100kohm 5% ¼W	328104J
(MPX SECTION)				
L301,302	2	2	Coil - 39mH	1260130
IC301	1	1	IC AN7470	518170S
D301~D306	6	6	Diode 1SS53	501023S
C301~C303	3	3	E-CAP 10uf 16V	211220S
C304	1	1	E-CAP 220uf 16V	211232S
C305	1	1	C-CAP 470pf 5% 50V SL	232471J
C306	1	1	M-CAP 0.047uf 5% 50V	222473J
C307	1	1	S-CAP 470pf 5% 50V	223471V
C308	1	1	LC-CAP 1uf 50V	211510L
C309	1	1	LC-CAP 0.22uf 50V	211502L
C310	1	1	LC-CAP 3.3uf 35V	211413L
C311,312	2	2	M-CAP 0.0022uf 5% 50V	222222J
C313,314	2	2	E-CAP 1uf 50V	211510S
C315,316	2	2	M-CAP 0.01uf 5% 50V	222103J
C317,318	2	2	C-CAP 470pf 5% 50V SL	232471J
C319,320	2	2	M-CAP 0.0068uf 5% 50V	222682J
C321	1	1	C-CAP 0.022uf +80, -20% 50V YG	231223Z
R318	1	1	Potentiometer 500kohm	4301630
R319	1	1	Potentiometer 10kohm	4300510
R301	1	1	RES 56kohm 5% ¼W	328563J
R302	1	1	FP-RES 47ohm 5% ¼W	328470L
R303,304	2	2	RES 100kohm 5% ¼W	328104J
R305	1	1	RES 15kohm 5% ¼W	328153J
R306	1	1	RES 1kohm 5% ¼W	328102J
R307,309	2	2	RES 22kohm 5% ¼W	328223J
R308,310	2	2	RES 10kohm 5% ¼W	328103J
R311,312	2	2	RES 39kohm 5% ¼W	328393J
R313,314	2	2	RES 1.5kohm 5% ¼W	382152J
R315,316	2	2	RES 2.7kohm 5% ¼W	328272J
R317	1	1	RES 1kohm 5% ¼W	328102J
(AM SECTION)				
T201	1	1	Coil, AM oscillator	1220150
T202	1	1	Coil, MW antenna	1200500
T202	1	1	Coil, MW antenna	1200530
T203	1	1	Coil, AM IF	1230160
T204	1	1	Coil, AM discriminator	1230240
CF201	1	1	Ceramic filter, AM - SFU450B	1280910
Q201~Q203	3	3	TR 2SC1815 (Y or GR)	512107S
D201,202	2	2	Diode 1S188FM-1	500019G
C202,204	2	2	C-CAP 0.022uf +80, -20% 50V YG	231223Z
C203	1	1	C-CAP 15pf 10% 50V SL	232150K
C205	1	1	C-CAP 0.01uf +80, -20% 50V YG	231103Z
C206,207	2	2	C-CAP 0.022uf +80, -20% 50V YG	231223Z
C208	1	1	E-CAP 10uf 35V	211420S
C211	1	1	C-CAP 0.022uf +80, -20% 50V YG	231223Z
C212	1	1	E-CAP 4.7uf 35V	211415S
C213	1	1	M-CAP 0.001uf 10% 50V	222102K

REF. NO.	SYMBOL NO.	TYPE <sup>+</sup> W <sub>1</sub> W <sub>2</sub>	DESCRIPTION <sup>++</sup>	PART NO.
C214	1	1	M-CAP 0.047uf 10% 50V	222473K
C215	1	1	M-CAP 0.0068uf 10% 50V	222682K
C216	1	1	C-CAP 220pf 10% 50V SL	232221K
C217	1	1	S-CAP 360pf 5% 50V	223361V
C218	1	1	C-CAP 22pf 10% 50V SL	232220K
R201	1	1	RES 4.7kohm 5% ¼W	328472J
R202	1	1	RES 1kohm 5% ¼W	328102J
R203	1	1	RES 10ohm 5% ¼W	328100J
R204	1	1	RES 220kohm 5% ¼W	328224J
R205	1	1	RES 15kohm 5% ¼W	328153J
R206	1	1	RES 100kohm 5% ¼W	328104J
R207	1	1	RES 330ohm 5% ¼W	328331J
R208	1	1	FP-RES 47ohm 5% ¼W	328470L
R209	1	1	RES 100ohm 5% ¼W	328101J
R210	1	1	RES 100kohm 5% ¼W	328104J
R211,212	2	2	RES 12kohm 5% ¼W	328123J
R213	1	1	RES 39kohm 5% ¼W	328393J
R214	1	1	RES 100kohm 5% ¼W	328104J
R216	1	1	RES 22kohm 5% ¼W	328223J
R217	1	1	RES 5.6kohm 5% ¼W	328562J
(INDICATOR SECTION)				
LD4	1	1	LED TLG113A - signal strength ind., green	5060470
LD1,2,3	3	3	LED TLR120 - others, red	5060480
IC901	1	1	IC LA6458D	518147S
Q901~Q905	5	5	TR 2SC536 (G or H)	512133S
C901	1	1	E-CAP 33uf 10V	211123S
R902	1	1	RES 15kohm 5% ¼W	328153J
R903,906	2	2	RES 22kohm 5% ¼W	328223J
R909~R911	3	3	RES 1meg-ohm 5% ¼W	328105J
R914,920	2	2	RES 10kohm 5% ¼W	328103J
R917~R919	3	3	RES 1kohm 5% ¼W	328102J
others	9	9	RES 100kohm 5% ¼W	328104J
(EQ AMP SECTION)				
IC401	1	1	IC TL4558P	518129S
C401,402	2	2	E-CAP 0.47uf 50V	211505S
C403,404	2	2	C-CAP 100pf 10% 50V YG	232101K
C405,406	2	2	M-CAP 0.022uf 5% 50V	222223J
C407,408	2	2	M-CAP 0.0068uf 5% 50V	222682J
C409,410	2	2	E-CAP 33uf 10V	211123S
C411,412	2	2	E-CAP 1uf 50V	211510S
C413,414	2	2	M-CAP 0.0068uf 5% 50V	222682J
C415,416	2	2	E-CAP 100uf 25V	211330S
C417,418	2	2	C-CAP 0.047uf +80, -20% 50V YG	231473Z
R401,402	2	2	RES 100kohm 5% ¼W	328104J
R403,404	2	2	RES 150ohm 5% ¼W	328151J
R405,406	2	2	RES 100kohm 5% ¼W	328104J
R407,408	2	2	RES 180kohm 5% ¼W	328184J
R409,410	2	2	RES 12kohm 5% ¼W	328123J
R411,412	2	2	RES 22kohm 5% ¼W	328223J
R413,414	2	2	RES 270ohm 5% ¼W	328271J
R415,416	2	2	RES 470ohm 5% ¼W	328471J
R417,418	2	2	RES 100kohm 5% ¼W	328104J
(OTHER SECTION)				
C501,502	2	2	M-CAP 0.039uf 5% 50V	222393J
C503,504	2	2	C-CAP 100pf 10% 50V YG	232101K
C505,506	2	2	E-CAP 0.22uf 50V	211502S
C507,508	2	2	C-CAP 0.022uf 50V YG	231223M
R501,502	2	2	RES 2.2kohm 5% ¼W	328222J
R503,504	2	2	RES 1.5kohm 5% ¼W	328152J
R505,506	2	2	RES 39kohm 5% ¼W	328393J

PART ORDERING PROCEDURE ----- DO NOT USE THE "REFERENCE" number and "SYMBOL" number. (these are control # for the factory only.) Include in any order: a. Part number b. Part description c. Model number. (any of the above lacking from an order may delay shipment of that order.)

REF. NO.	SYMBOL NO.	TYPE <sup>+</sup> W <sub>1</sub> W <sub>2</sub>	DESCRIPTION <sup>++</sup>	PART NO.
	R507,508	2 2 RES	100kohm 5% ¼W	328104J
	R511,512	2 2 RES	1meg-ohm 5% ¼W	328105J
<b>MAIN AMP &amp; REGULATOR P.C. BOARD ASSEMBLY</b>				
<b>(MAIN AMP SECTION)</b>				
	S5, 6	1 1	Switch, twin push — PSC022 — speakers A, B	4042290
	R737,738, R751,752 R749	2 2 1 1	VR 100kohm (C) x 2 — bass/treble VR 250kohm (G) — balance	4321340 4310700
	L701,702	2 2	Coil, choke — 1uH	1210960
	IC701	1 1	IC STK2029	518165S
	Q701~Q704 4 (Q701 ~Q704)	4 4 (4 4)	TR 2SC1815L (GR) TR 2SC945L (P)	512138S 512137S
	Q705,706	2 2	TR 2SC1815 (Y or GR)	512107S
	Q707,708	2 2	TR 2SB646 (C)	511119S
	Q709,710	2 2	TR 2SA1015 (Y)	510102S
	D701,702	2 2	Diode DS448	501026S
	C701,702	2 2	E-CAP 0.47uf 50V	211505S
	C703,704	2 2	C-CAP 100pf 10% 50V SL	232101K
	C705,706	2 2	C-CAP 220pf 10% 50V SL	232221K
	C707,708	2 2	C-CAP 12pf 10% 50V SL	232120K
	C709~C712 4	4 4	C-CAP 100pf 10% 50V SL	232101K
	C713,714	2 2	E-CAP 10uf 50V	211520S
	C715,716	2 2	C-CAP 5pf ±0.5pf 50V SL	232509D
	C717,718	2 2	E-CAP 22uf 10V	211122S
	C719,720	2 2	C-CAP 47pf 10% 50V SL	232470K
	C721,722	2 2	M-CAP 0.0022uf 10% 50V	222222K
	C723,724	2 2	C-CAP 150pf 10% 50V SL	232151K
	C725,726	2 2	M-CAP 0.001uf 10% 50V SL	222102K
	C727~C730 4	4 4	M-CAP 0.022uf 10% 50V	222223K
	C731,732	2 2	M-CAP 0.1uf 10% 50V	222104K
	C733,734	2 2	E-CAP 10uf 16V	211220S
	C735,736	2 2	M-CAP 0.047uf 10% 50V	222473K
	C737	1 1	E-CAP 47uf 50V	211525S
	C739,740	2 2	C-CAP 100pf 10% 50V SL	232101K
	C743	1 1	E-CAP 100uf 50V	211530S
	R701,702	2 2	RES 1kohm 5% ¼W	328102J
	R703,704	2 2	RES 82kohm 5% ¼W	328823J
	R705,706	2 2	RES 2.2kohm 5% ¼W	328222J
	R707,708	2 2	RES 3.9kohm 5% ¼W	328392J
	R709,710	2 2	RES 5.6kohm 5% ¼W	328562J
	R711,712	2 2	RES 1.2kohm 5% ¼W	328122J
	R713,714	2 2	FP-RES 10ohm 5% ¼W	328100L
	R715~R718 4	4 4	FP-RES 2.7kohm 5% ¼W	328272L
	R719~R722 4	4 4	RES 39kohm 5% ¼W	328393J
	R723,724	2 2	RES 12kohm 5% ¼W	328123J
	R725,726	2 2	RES 820ohm 5% ¼W	328821J
	R727,728	2 2	RES 4.7kohm 5% ¼W	328472J
	R729,730	2 2	RES 1kohm 5% ¼W	328102J
	R731,732	2 2	RES 220kohm 5% ¼W	328224J
	R733,734	2 2	RES 22kohm 5% ¼W	328223J

REF. NO.	SYMBOL NO.	TYPE <sup>+</sup> W <sub>1</sub> W <sub>2</sub>	DESCRIPTION <sup>++</sup>	PART NO.
	R735,736	2 2	RES 3.9kohm 5% ¼W	328392J
	R739,740	2 2	CEM-RES 0.22ohm 10% 2W	382229W
	R741~R744 4	4 4	FP-RES 10ohm 5% ¼W	329100L
	R745,746	2 2	FP-MO-RES 330ohm 5% 1W	361331L
	R747	1 1	FP-RES 33ohm 5% ¼W	328330L
	R748	1 1	RES 10kohm 5% ¼W	328103J
	R753,754	2 2	RES 680ohm 5% ¼W	328681J
	R755,756	2 2	RES 3.9kohm 5% ¼W	328392J
<b>(REGULATOR SECTION)</b>				
	Q801,802	2 2	TR 2SC2240 (GR or BL)	512102S
	Q803,805, Q806	3 3	TR 2SA1015 (Y or GR)	510102S
	Q804	1 1	TR 2SC1815 (Y or GR)	512107S
	Q807	1 1	TR 2SD880 (Y or GR)	513106S
	(Q807)	(1 1)	TR 2SD313 (E or F)	513127S
	D801~D804 4	4 4	Diode GP20D-L	560065S
	D808	1 1	Diode DS448	501026S
	others	4 4	Diode 1SS55	501024S
	ZD801	1 1	Zener diode GZA13Z	502095S
	ZD802,803	2 2	Zener diode RD15EB2	502050S
	C801,802	2 2	E-CAP 6800uf 45V	2100240
	C804,806	2 2	E-CAP 10uf 50V	211520S
	C805,807	2 2	E-CAP 33uf 50V	211523S
	C808	1 1	E-CAP 10uf 50V	211520S
	C809	1 1	M-CAP 0.001uf 10% 50V	222102K
	C810	1 1	E-CAP 10uf 16V	211220S
	C811	1 1	E-CAP 220uf 16V	211232S
	R801,802	2 2	FP-RES 2.7kohm 5% ¼W	328272L
	R803,804	2 2	RES 5.6kohm 5% ¼W	328562J
	R805,806	2 2	RES 10kohm 5% ¼W	328103J
	R807	1 1	FP-MO-RES 1kohm 5% 1W	361102L
	R808	1 1	RES 100kohm 5% ¼W	328104J
	R809	1 1	RES 39kohm 5% ¼W	328393J
	R810	1 1	RES 10kohm 5% ¼W	328103J
	R811	1 1	RES 270kohm 5% ¼W	328274J
	R812	1 1	RES 22kohm 5% ¼W	328223J
	R813	1 1	RES 100kohm 5% ¼W	328104J
	R814	1 1	RES 6.8kohm 5% ¼W	328682J
	R815~R817 3	3 3	RES 10kohm 5% ¼W	328103J
	R818	1 1	FP-MO-RES 56ohm 5% 1W	361560L
	R819~R821 3	3 3	RES 680ohm 5% ¼W	328681J
	R822	1 1	FP-MO-RES 330ohm 5% 2W	362331L
	R823	1 1	FP-RES 33ohm 5% ¼W	348330L
<b>(OUTPUT SECTION)</b>				
	*501	1 1	Terminal, speakers — 8P	4450640
	*502	1 1	Jack, headphones	4550390
<b>(PRIMARY SECTION)</b>				
	R001	1 1	RES 2.2meg-ohm 5% ¼W	329225J

## SEMICONDUCTOR DATA

## TRANSISTORS

† NOTES

Ge: Germanium  
Si: Silicon

A: Alloy

B: Base

D: Diffused

Dd: Double-diffused

Df: Drift-field

E: Epitaxial

G: Grown

J: Junction

M: Mesa

P: Planar

Pc: Point-contact

Td: Triple-diffused

DEVICE TYPE	APPLICATIONS	STRUC- TURE†	MAXIMUM RATINGS Absolute-Maximum Values: (T <sub>A</sub> = 25° C unless otherwise specified)					ELECTRICAL CHARACTERISTICS Typical Values: (T <sub>A</sub> = 25° C unless otherwise specified)													MANU- FACTURE
			Collector- to-Base Voltage V <sub>CB0</sub> (V)	Emitter- to-Base Voltage V <sub>EB0</sub> (V)	Collector Current I <sub>C</sub> (mA)	Collector Dissipa- tion P <sub>C</sub> (mW)	Junction Tempera- ture T <sub>J</sub> (°C)	Collector Cutoff Current	Static Forward-Current Transfer Ratio			Collector-Emitter Saturation Voltage			Gain-Bandwidth Product			Output Capacitance C <sub>ob</sub> (pF)	Others		
							I <sub>CBO</sub> (μA)	V <sub>CE</sub> (V)	hFE	V <sub>CE</sub> (V)	I <sub>C</sub> (mA)	V <sub>CE(sat)</sub> (V)	I <sub>C</sub> (mA)	I <sub>B</sub> (mA)	f <sub>T</sub> fob* (MHz)	V <sub>CE</sub> V <sub>CB</sub> * (V)	I <sub>E</sub> I <sub>C</sub> * (mA)				
2SA1015 (Y)	AF, General	PNP Si-E	-50	-5	-150	400	125	-0.1 max.	-50	120 ~ 240	-6	-2	-0.3 max.	-100	-10	80 min.	-10	-1*	7 max.		TOSHIBA
2SB846 (C)	AF, Voltage amp.	PNP Si-E	-120	-5	-50	900	150	-10 max.	-100	100 ~ 200	-5	-10	-2 max.	-30	-3	140	-5	-10*	4		HITACHI
2SC535 (G, H)	AF, General	NPN Si-P	40	5	100	400	125	1 max.	35	280 ~ 950	6	1	0.5 max.	50	5	100	6	1*	3.5		SANYO
2SC945L (P)	AF, General	NPN Si-E	60	5	100	250	125	0.1 max.	60	200 ~ 400	6	1	0.3 max.	100	10	450 max.	6	10	5 max.		N E C
2SC1815 (Y, GR)	AF General	NPN Si-E	60	5	150	400	125	0.1 max.	60	120 ~ 400	6	2	0.25 max.	100	10	80 min.	10	1*	3 max.		TOSHIBA
2SC1815L (GR)	AF, Low noise	NPN Si-E	60	5	150	400	125	0.1 max.	60	200 ~ 400	6	2	0.25 max.	100	10	80 min.	10	1*	3 max.		TOSHIBA
2SC2240 (GR, BL)	AF, Low noise	NPN Si-E	120	5	100	300	125	0.1 max.	120	200 ~ 700	6	2	0.3 max.	10	1	100	6	1*	3		TOSHIBA
2SC2839 (E)	RF amp.	NPN Si-EP	30	5	30	150	125	0.1 max.	10	100 ~ 200	6	1	7 max.	10	1	320	6	1*			TOSHIBA
2SD313 (E, F)	AF, Power amp.	NPN Si-TdP	60	5	3A	30W (T <sub>C</sub> =25° C)	150	100 max.	20	100 ~ 320	2	1A	1 max.	2A	200	8	5	500*	65		SANYO
2SD880 (Y, GR)	AF, Power amp.	NPN Si-Td	60	7	3A	30W (T <sub>C</sub> =25° C)	150	100 max.	60	100 ~ 300	5	0.5A	1 max.	3A	300	3	5	-500	70		TOSHIBA

## DIODES, LEDS

DEVICE TYPE	APPLICATIONS	STRUCTURE†	MAXIMUM RATINGS Absolute-Maximum Values: (T <sub>A</sub> = 25°C unless otherwise specified)									ELECTRICAL CHARACTERISTICS Typical Values: (T <sub>A</sub> = 25°C unless otherwise specified)								MANUFACTURER
			Reverse Surge Voltage	Peak Reverse Voltage	Reverse Voltage	Peak Forward Voltage	Peak Forward Current	Average Rectified Current	Forward Surge Current	Junction Temperature	Total Power Dissipation	Forward Current		Forward Voltage		Reverse Current	Others			
			V <sub>RS</sub> (V)	V <sub>RM</sub> (V)	V <sub>R</sub> (V)	V <sub>FM</sub> (V)	I <sub>FM</sub> (mA)	I <sub>O</sub> (mA)	I <sub>F surge</sub> (A)	T <sub>J</sub> (°C)	P <sub>D</sub> (mW)	I <sub>Fmin</sub> (mA)	Test Condition V <sub>F</sub> (V)	V <sub>Fmax</sub> (V)	Test Condition I <sub>F</sub> (mA)	I <sub>Rmax</sub> (μA)		Test Condition V <sub>R</sub> (V)		
1S188 FM 7	Detector	Ge-Pc		40	35		150	50	0.5	70		4.0	1			13 max.	1		SANYO	
ISS53	Medium speed switching	Si-EP		35	30		300	100	2	200	500			0.8	1.0	0.1	30		N E C	
ISS55	Medium speed switching	Si-EP		100	75		300	100	2	200	500			0.8	1.0	0.1	75		N E C	
DS448	Medium speed switching	Si-P		35	30		360	120	0.5	175	300			1.0	50	1.0	30		SANYO	
GP20D-L	Rectifier	Si-DJ			200	200		2.0A	65	150				1.1	2.0A	5			GENERAL INSTRUMENT	
TLG113A	Lamp (green)	GaP			4			I <sub>F</sub> = 25 mA		75	100			2.8	20	5	4	I <sub>V</sub> = 17.0 mcd (I <sub>F</sub> = 15 mA)	TOSHIBA	
TLR120	Lamp (red)	GaP			4			I <sub>F</sub> = 20 mA		75	90			2.8	20	5	4	I <sub>V</sub> = 4.0 mcd (I <sub>F</sub> = 15 mA)	TOSHIBA	

## ZENER DIODES

DEVICE TYPE	APPLICATIONS	STRUCTURE†	MAXIMUM RATINGS Absolute - Maximum Values: (T <sub>A</sub> = 25°C unless otherwise specified)			ELECTRICAL CHARACTERISTICS Typical Values: (T <sub>A</sub> = 25°C unless otherwise specified)													MANU- FACTURER
			Total Power Dissipation	Zener Current	Junction Temperature	Zener Voltage			Test Conditions		Differential Resistance		Temperature Coefficient		Reverse Current		Others		
						V <sub>Z</sub>	I <sub>Z</sub>	r <sub>Z</sub>	I <sub>Z</sub>	r <sub>Z</sub>	γ <sub>Z</sub>	I <sub>Z</sub>	I <sub>Z</sub>						
														MIN (V)	TYP (V)	MAX (V)		I <sub>Z</sub> (mA)	
P <sub>D</sub> (mW)	I <sub>Z</sub> (A)	T <sub>J</sub> (°C)																	
GZA13Z	Regulator	Si-P	500	34 mA	175	13.4		14.1	5	25	35	5	0.080	0.092	5	0.5	10		SANYO
RD15-EB2	Regulator	Si-J	400		175	13.89		14.62	10		30	10				2	11		NEC

INTEGRATED CIRCUITS STK-2029

FUNCTION/MANUFACTURER

■ Dual Audio Power Amplifier Output Stage/Sanyo


ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

ITEM	SYMBOL	CONDITION	RATING	UNIT
Supply Voltage	Vcc max.		±37	V
Junction Temperature	Tj		150	°C
Storage Temperature	Tstg		-30 ~ +105	°C
Short-Circuit Time Limit	Ts	Vcc=±25.5V, Po=25W, RL=8ohms, f=50Hz	2	sec.


ELECTRICAL CHARACTERISTICS (Ta=25°C, Vcc=±25.5V, RL=8ohms, Rg=600ohms, VG=26.3dB;  
unless otherwise noted)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Idling Current	Icco	Vcc=±31V	20	40	80	mA
Output Power	Po (1)	f=20 ~ 20kHz, THD=0.02%	25			W
Total Harmonic Distortion	THD	f=20 ~ 20kHz, Po=1 ~ 25W			0.02	%

EQUIVALENT CIRCUIT

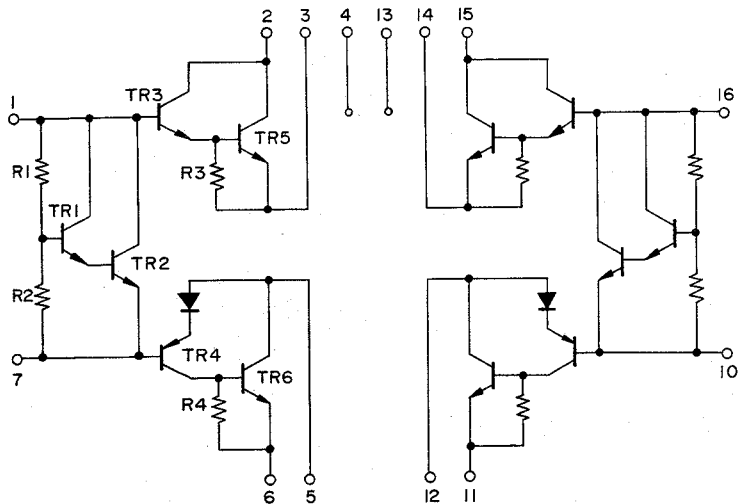

EXTERNAL VIEW

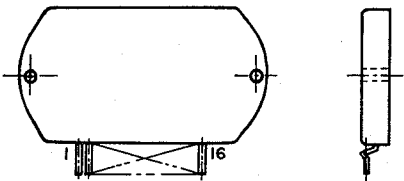





## INTEGRATED CIRCUITS HA11225

DEVICE TYPE	APPLICATION	ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ )				ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ ) Typical Values							MANUFACTURER
		Supply Voltage $V_{CC}$ (V)	Power Dissipation $P_T$ (mW)	Operating Temperature Range $T_{opr}$ ( $^\circ\text{C}$ )	Storage Temperature Range $T_{sig}$ ( $^\circ\text{C}$ )	Supply Current (mA)	Input Limiting Sensitivity $V_{in}$ (lim) ( $\mu\text{V}$ )	AF Voltage (mVrms)	Total Harmonic Distortion (%)	Signal to Noise Ratio (dB)	AM Rejection (dB)	Muting Sensitivity ( $\mu\text{V}$ )	
HA11225	FM IF Amplifier, Quadrature Detector	14	590 ( $T_A=60^\circ\text{C}$ )	$-20 \sim +70$	$-55 \sim +125$	33 max.	35 (-3dB point)	380	0.1 max.	84	54	158	HITACHI

## TERMINAL GUIDE (TOP VIEW)

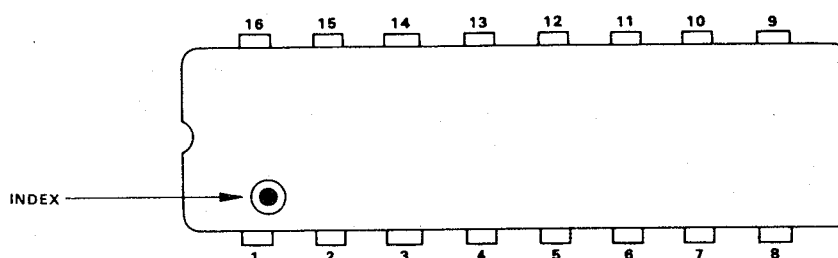


## BLOCK DIAGRAM

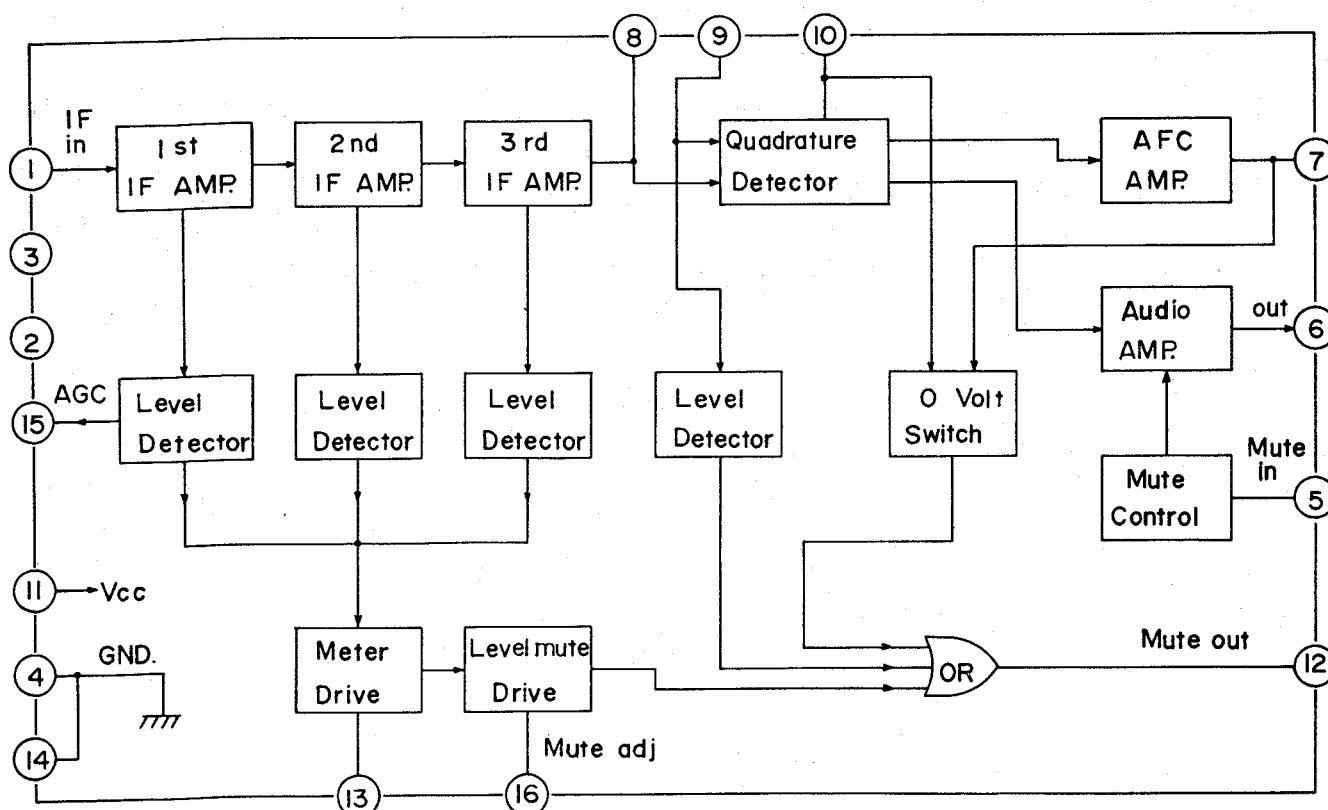


INTEGRATED CIRCUITS AN7470

DEVICE TYPE	APPLICATION	MAXIMUM RATINGS Absolute — Maximum Values: (TA = 25°C)			ELECTRICAL CHARACTERISTICS Typical Values: (TA = 25°C)							MANUFACTURER
		Supply Voltage (V)	Power Dissipation (mW)	Operating Temperature Range (°C)	Supply Current (mA)	Stereo Separation (dB)	Voltage Gain (dB)	Channel Balance (dB)	T. H. D. (mono) (%)	T. H. D. (stereo) (%)	Signal to Noise Ratio (dB)	
AN7470	FM Stereo Demodulator	14.4	430	-20 ~ +75	18	55 (f=1 kHz)	12	0 ± 1.5	0.02	0.04	85	MATSUSHITA

TERMINAL GUIDE (TOP VIEW)

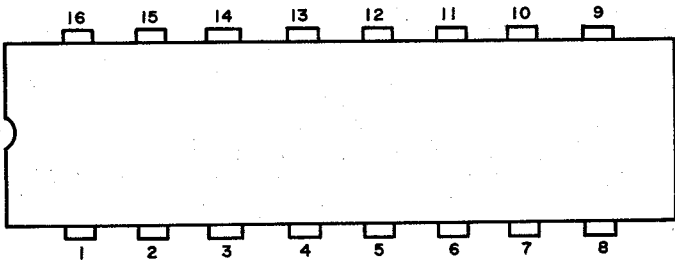

BLOCK DIAGRAM

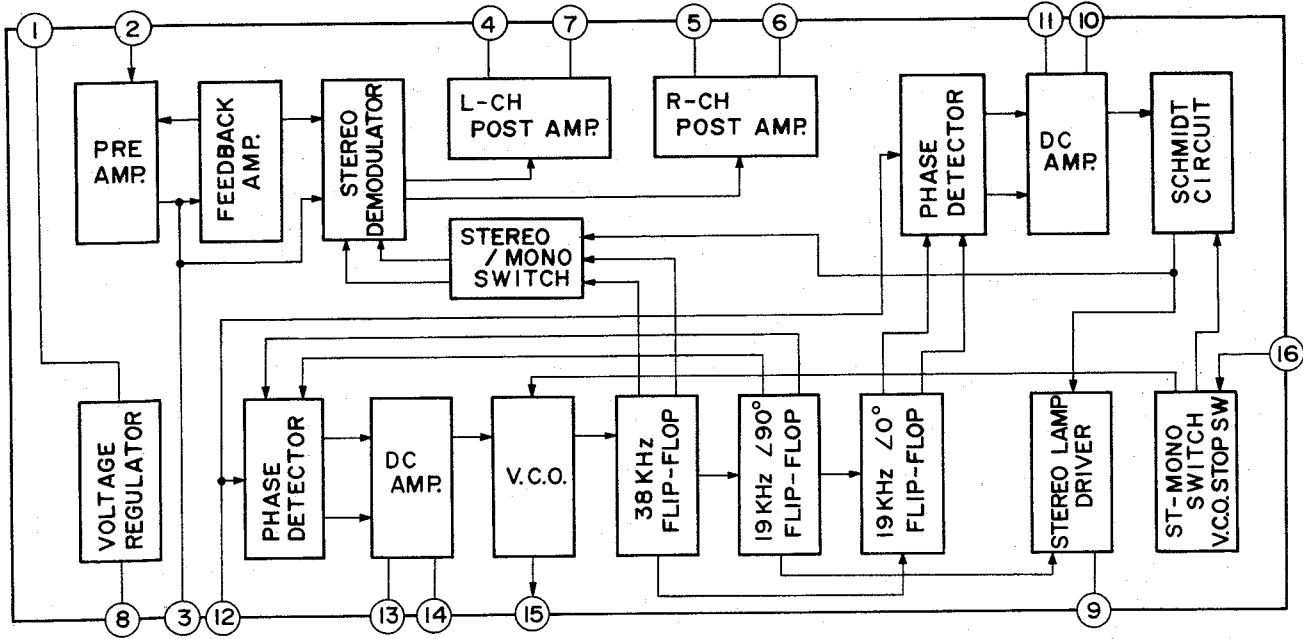

# INTEGRATED CIRCUITS LA6458D/TL4558P

- APPLICATION: DUAL OPERATIONAL AMPLIFIER
- MANUFACTURER: Sanyo (LA6458D)/Texas Instruments (TL4558P)


## ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	LA6458D	TL4558P	UNITS
Supply Voltage	V <sub>S</sub>	±18	±18	V
Total Power Dissipation	P <sub>T</sub>	500	680	mW
Differential Input Voltage	V <sub>ID</sub>	±30	±30	V
Input Voltage	V <sub>ICM</sub>	±15	±15	V
Storage Temperature	T <sub>srg</sub>	-40 ~ +125	-65 ~ +150	°C
Operating Temperature	T <sub>opt</sub>	-20 ~ +75	-20 ~ +70	°C


## ELECTRICAL CHARACTERISTICS (T<sub>a</sub> = 25°C, V<sub>S</sub> = ±15V)

ITEM	SYMBOL	CONDITIONS	LA6458D			TL4558P			UNITS
			MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Input Offset Voltage	V <sub>IO</sub>	R <sub>S</sub> ≤ 10kΩ		0.5	6.0			6.0	mV
Input Offset Current	I <sub>IO</sub>			5	200		5	200	nA
Input Bias Current	I <sub>B</sub>			60	500		40	500	nA
Large-Signal Voltage Gain	A <sub>V</sub>	R <sub>L</sub> ≥ 2kΩ, V <sub>O</sub> = ±10V	86	100		86	110		dB
Output Voltage Swing	V <sub>om</sub>	R <sub>L</sub> ≥ 10kΩ	±12	±14		±12	±14		V
Common Mode Rejection Ratio	CMR	R <sub>S</sub> ≤ 10kΩ	70	90		70	90		dB
Supply Voltage Rejection Ratio	SVR	R <sub>S</sub> ≤ 10kΩ		30	150		30	150	μV/V
Power Consumption	P <sub>d</sub>	both channel		90	180		75	170	mW
Slew Rate	SR	R <sub>L</sub> ≥ 2kΩ, V <sub>G</sub> = 0dB		1.1			1.9		V/μS

## TERMINAL GUIDE (TOP VIEW)

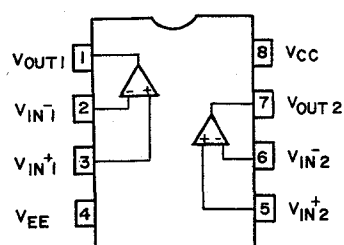

## EQUIVALENT CIRCUIT (1/2 CIRCUIT)

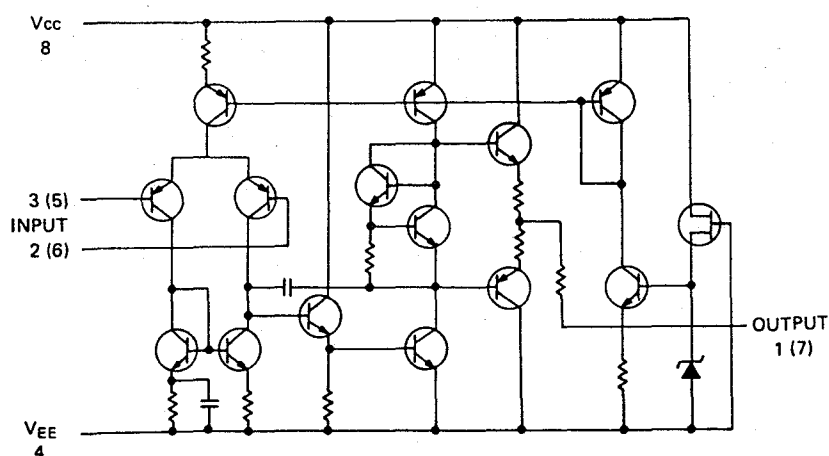

**NIKKO ELECTRIC MFG. CO., LTD.**

HEAD OFFICE

4-1, Okusawa 3-chome, Setagaya-ku, Tokyo 158, Japan

SALES OFFICE

Mitsubishi Bank Bldg., 3-2, Dogenzaka 1-chome  
Shibuya-ku, Tokyo 150, Japan

**NIKKO ELECTRIC CORP. OF AMERICA**

HEAD OFFICE

320 Oser Ave., Hauppauge, N.Y. 11787, U.S.A.

L.A. OFFICE

7801 East Compton Blvd., Paramount, Ca. 90723, U.S.A.