SCHEMATIC DIAGRAM

NOTES:

1. SCHEMATIC IS SUBJECT TO CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED:

2. RESISTANCE VARUES ARE IN OHMS. K = 1,000 ; M = 1,000,000
3. CAPACITANCE VALUES 1.0 AND ABOVE ARE IN pF OR μF (P = pF, M = μF), LESS THAN 1.0 ARE IN μF. (ELECTROLYTIC CAPACITANCE VALUES ARE IN μF/WV.)
4. VOLTAGES ARE MEASURED TO CHASSIS GROUND WITH A "DC VOLTMETER".
   (V) : VOLTAGES MEASURED WITH NO SIGNAL APPLIED.

SCHEMATIC SYMBOLS:

Ⓜ POLYESTER FILM CAPACITOR
ⒷⓅ BIPOLAR CAPACITOR
● NONFLAMMABLE RESISTOR

WARNING:

⚠ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

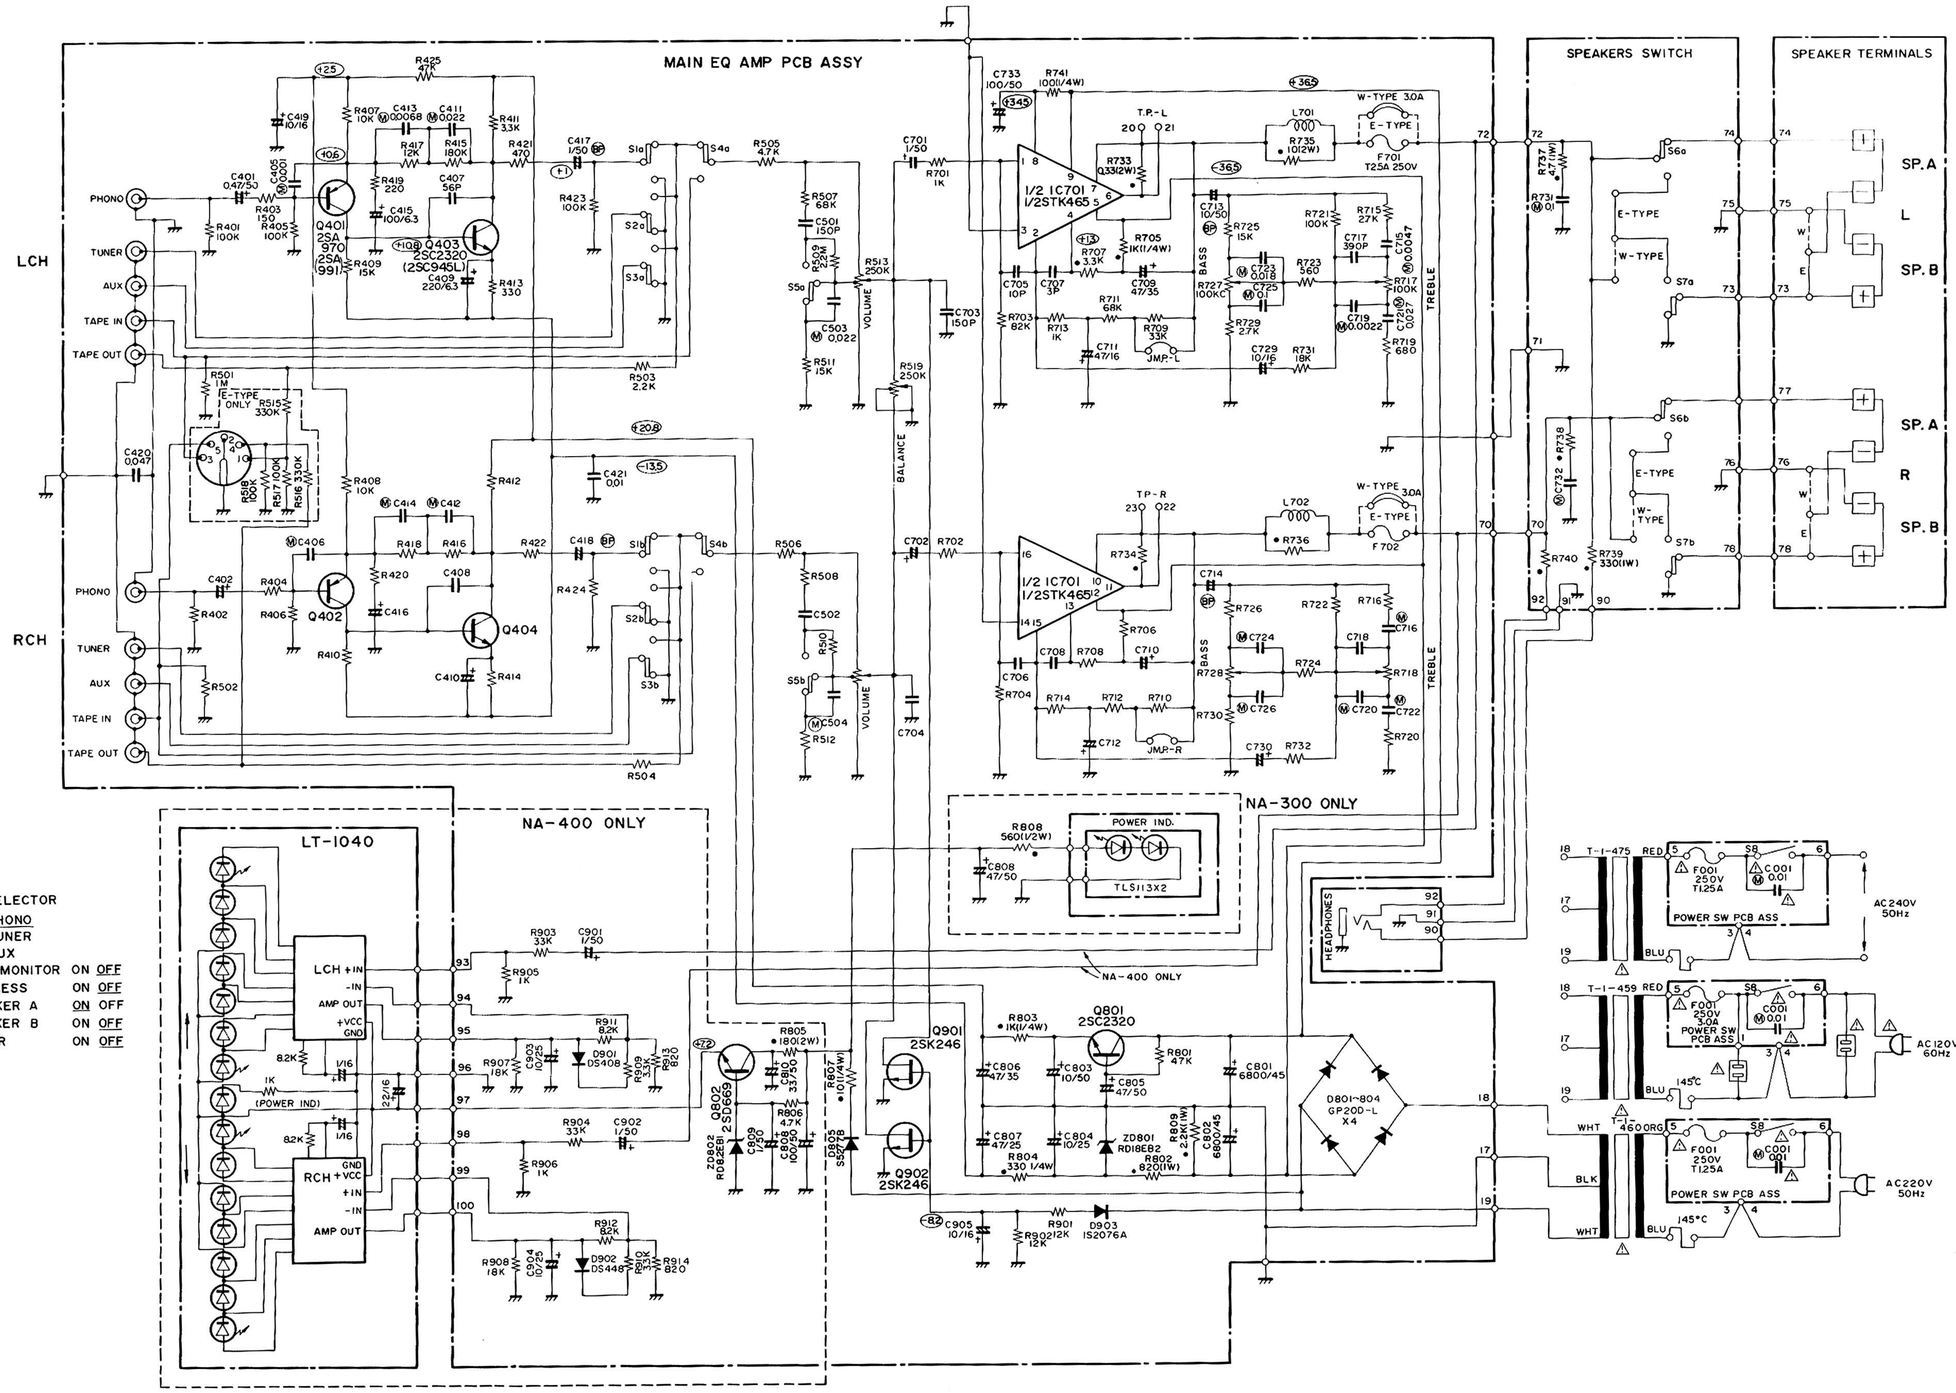

S1~S3 SELECTOR
S1 PHONO
S2 TUNER
S3 AUX

S4	TAPE MONITOR	ON	OFF
S5	LOUDNESS	ON	OFF
S6	SPEAKER A	ON	OFF
S7	SPEAKER B	ON	OFF
S8	POWER	ON	OFF
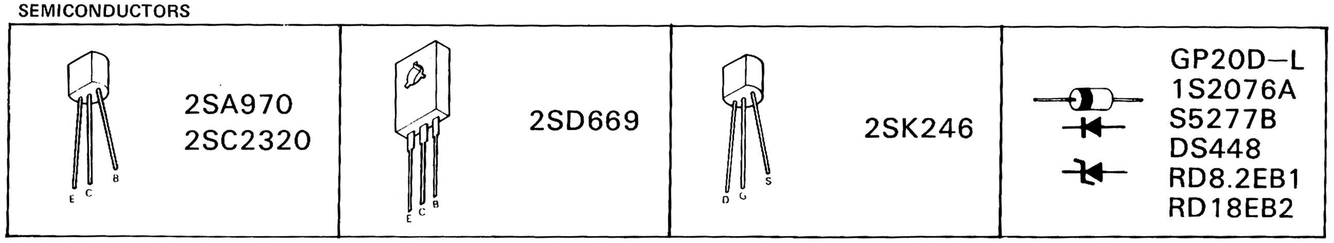
SEMICONDUCTORS