


SERVICIO PHILIPS

BE 362 U


13 - 51 m.
180 - 570 m.

11po 9726 - 5 Ω
110 - 250 V.

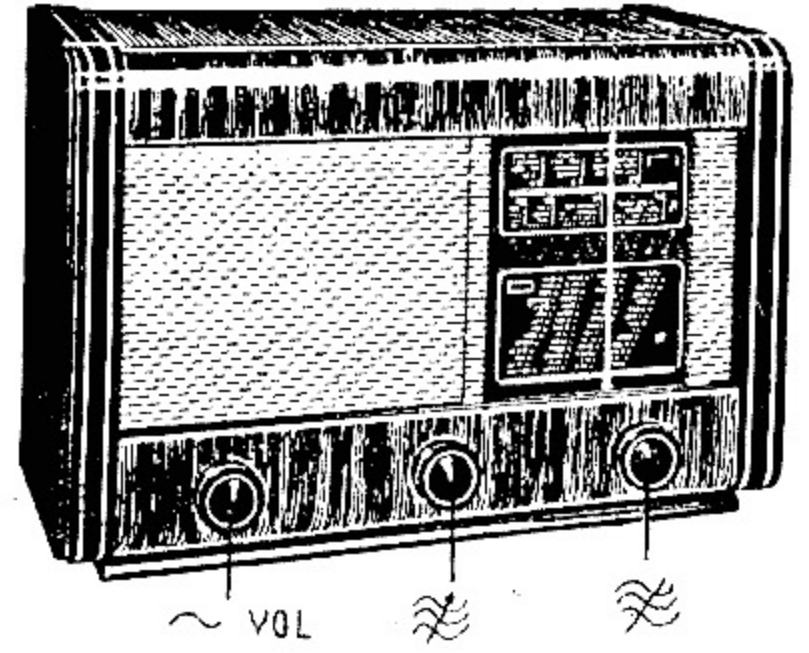

180 - 570 m.	A	13 - 51 m.	B	180 - 570 m.	C
470 Kc/s 25000 pF - g1L1		20 Mc/s - Y		470 Kc/s - Y	
R6		C3, C4 () 20 Mc/s		S27 mín.	
S15, S16, S17, S18 máx.		C6 máx.			
R6		180 - 570 m.			
		1600 Kc/s - Y			
		C3, C4 () 1600 Kc/s			
		C7, C8 máx.			
		600 Kc/s - Y			
		C3, C4 () 600 Kc/s			
		C9 máx.			

C1	40 μF	F10330/40+25	R3	1500 Ω	48 467 10/1K5
C2	25 μF		R5	220 Ω	48 425 10/220
C3	12-490 pF	49 000 69	R6	47000 Ω	48 425 10/47k
C4	12-490 pF		R8	2,7 M Ω	48 427 10/2M7
C5	3,9 pF	48 406 99/3E9	R9	22000 Ω	48 427 10/22K
C6	20 pF	49 005 03	R12	1,8 M Ω	48 427 10/1M8
C7	20 pF	49 005 03	R13	56000 Ω	48 425 10/56K
C8	20 pF	49 005 03	R14	0,35 M Ω	49 500 13
C9	200 pF	28 212 08	R15	0,1 M Ω	48 426 10/100k
C11	4700 pF	48 752 10/4K7	R17	150 Ω	48 427 10/1501
C12	4700 pF	48 752 10/4K7	R19	22000 Ω	48 427 10/22K
C15	0,1 μF	48 750 20/100K	R20	1000 Ω	48 425 10/1K
C16	180 pF	48 406 10/180E	R21	0,47 M Ω	48 425 10/470k
C17	56 pF	48 406 10/56E			
C18	100 pF	48 406 10/100E			
C21	400 pF	48 406 10/400E			
C28	10000 pF	48 750 20/10K			
C29	100 pF	48 406 10/100E			
C31	10000 pF	48 751 10/10K			
C33	4700 pF	48 757 20/4K7			
C34	0,22 μF	48 751 10/220K			
C39	22000 pF	48 756 20/22K			
C42	22000 pF	48 756 20/22K			

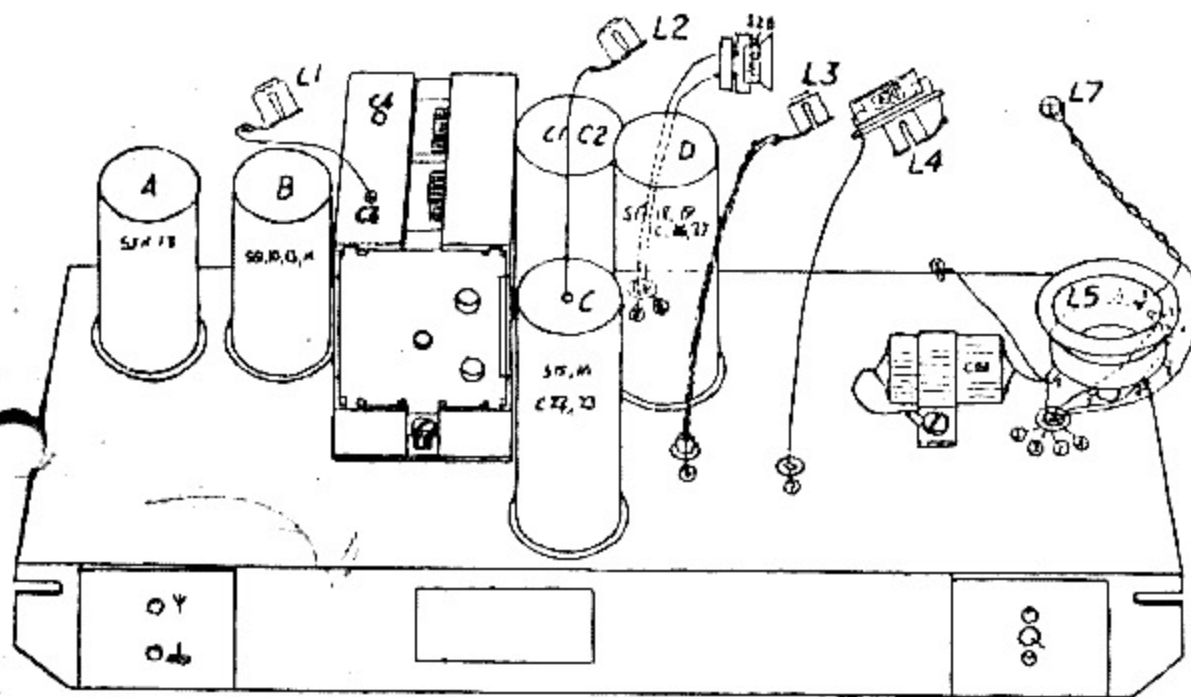

	L1		L2	L3	L4	
	ECH3					
	HEXODO	TRIODO				
Va	88	40	80	40	95	Volts.
Vg'	40		45		90	Volts.
-Vg	2		2,2		6	Volts.
Ia	1,5	2	1,5	1	20	m.A.
Ig'	2		1		17	m.A.
Vf	6,3		6,3	6,3	33	Volts.

S3, S4, S7, S8	F 3238
S9, S10, S13, S14	F 3239
S15, C22, S16, C23	F 3207
S17, C26, S18, S19, C27	F 3208
S20, S21, S22	F 2536
S27	F 3209

S: 27 3-7 4-8 9-13 10-14 15-16 17-18-19 20-21-22-28
 C: 11-16 12-39-67-15-3 5 17 18 21-9-8-4-22-23 1 26-2-42 27-29-28 31-34 33
 R: 3 5-6-9 8-15-19-20-21 17 12-13-14

Commutador en posición E.C.

