KENWOOD

STEREO INTEGRATED AMPLIFIER

KA-3300

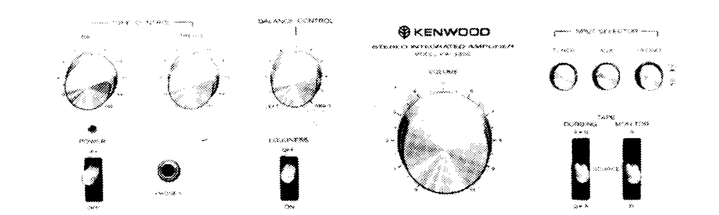

SPECIFICATIONS

POWER AMPLIFIER SECTION

Power Output:	35 watts per channel minimum, RMS at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.8% total harmonic distortion
Both Channel Driven:	38 watts per channel into 8 ohms at 1,000 Hz 40 watts per channel into 4 ohms at 1,000 Hz
Dynamic Power Output:	100 watts into 4 ohms
Total Harmonic Distortion:	0.8% at rated power into 8 ohms 0.08% at 1/2 rated power into 8 ohms at 1,000 Hz
Intermodulation Distortion:	0.5% at rated power into 8 ohms
(60 Hz : 7,000 Hz = 4 : 1)	0.1% at 1/2 rated power into 8 ohms
Power Bandwidth:	10 Hz to 40,000 Hz
Damping Factor:	30 at 8 ohms
Speaker Impedance:	Accept 4 ohms to 16 ohms

PREAMPLIFIER SECTION

Input Sensitivity, Impedance and S/N	
Phono:	2.5mV 50 kohms 70 dB
Tuner:	150mV 50 kohms 90 dB
Aux:	150mV 50 kohms 90 dB
Tape Play:	150mV 50 kohms 90 dB
Output Voltage	
Tape Rec (pin):	150 mV
Frequency Response	
Aux, Tape Play:	20 Hz to 20,000 Hz +2 dB
Tone Controls	
Bass:	±8 dB at 100 Hz
Treble:	±8 dB at 10 kHz
Loudness (30 dB):	+6 dB at 100 Hz +4 dB at 10 kHz

GENERAL

AC Outlet:	Switched 2 Unswitched 1
Power Consumption:	240 watts at full power
Dimensions:	W 14 15/16" (380mm) X H 5 1/2" (140mm) X D 10 1/32" (255mm)
Weight (Net):	16.5 lbs. (7.5 kg)

For the sets sold in England, Australia, and areas except designated.

T, X, M TYPE

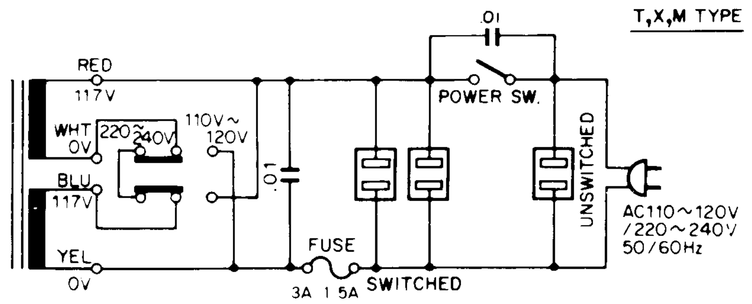

For the sets sold in Europe except England.
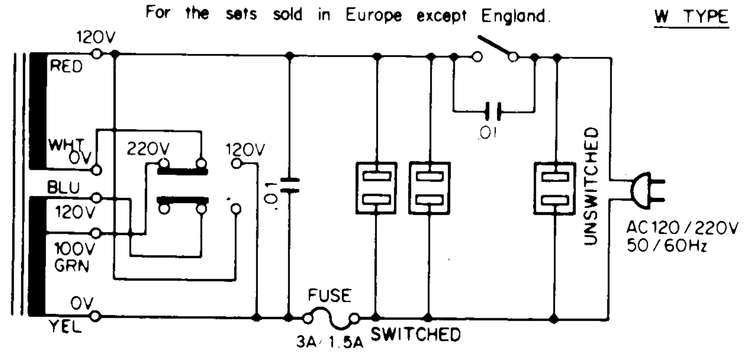
W TYPE