

SANSUI SD-5000 (AMP)

SPECIFICATIONS

INPUT AND OUTPUT LEVEL


INPUT TERMINAL	INPUT	OUTPUT
LINE-HIGH	70mV	1.2V (0VU=0.775V)
LINE-LOW	70mV	0.35V (0VU=0.225V)
DIN	14mV	1.2V (0VU=0.775V)
MIC	0.5mV	

Memo for Replacement Part by Modification or Improvement

Modified Circuit or Section	Date	Reason for Modification	Replaced Part No.	Stock No.	Name of the Original Part

SANSUI SD-5000 SCHEMATIC DIAGRAM OF AMP SECTION

Sansui

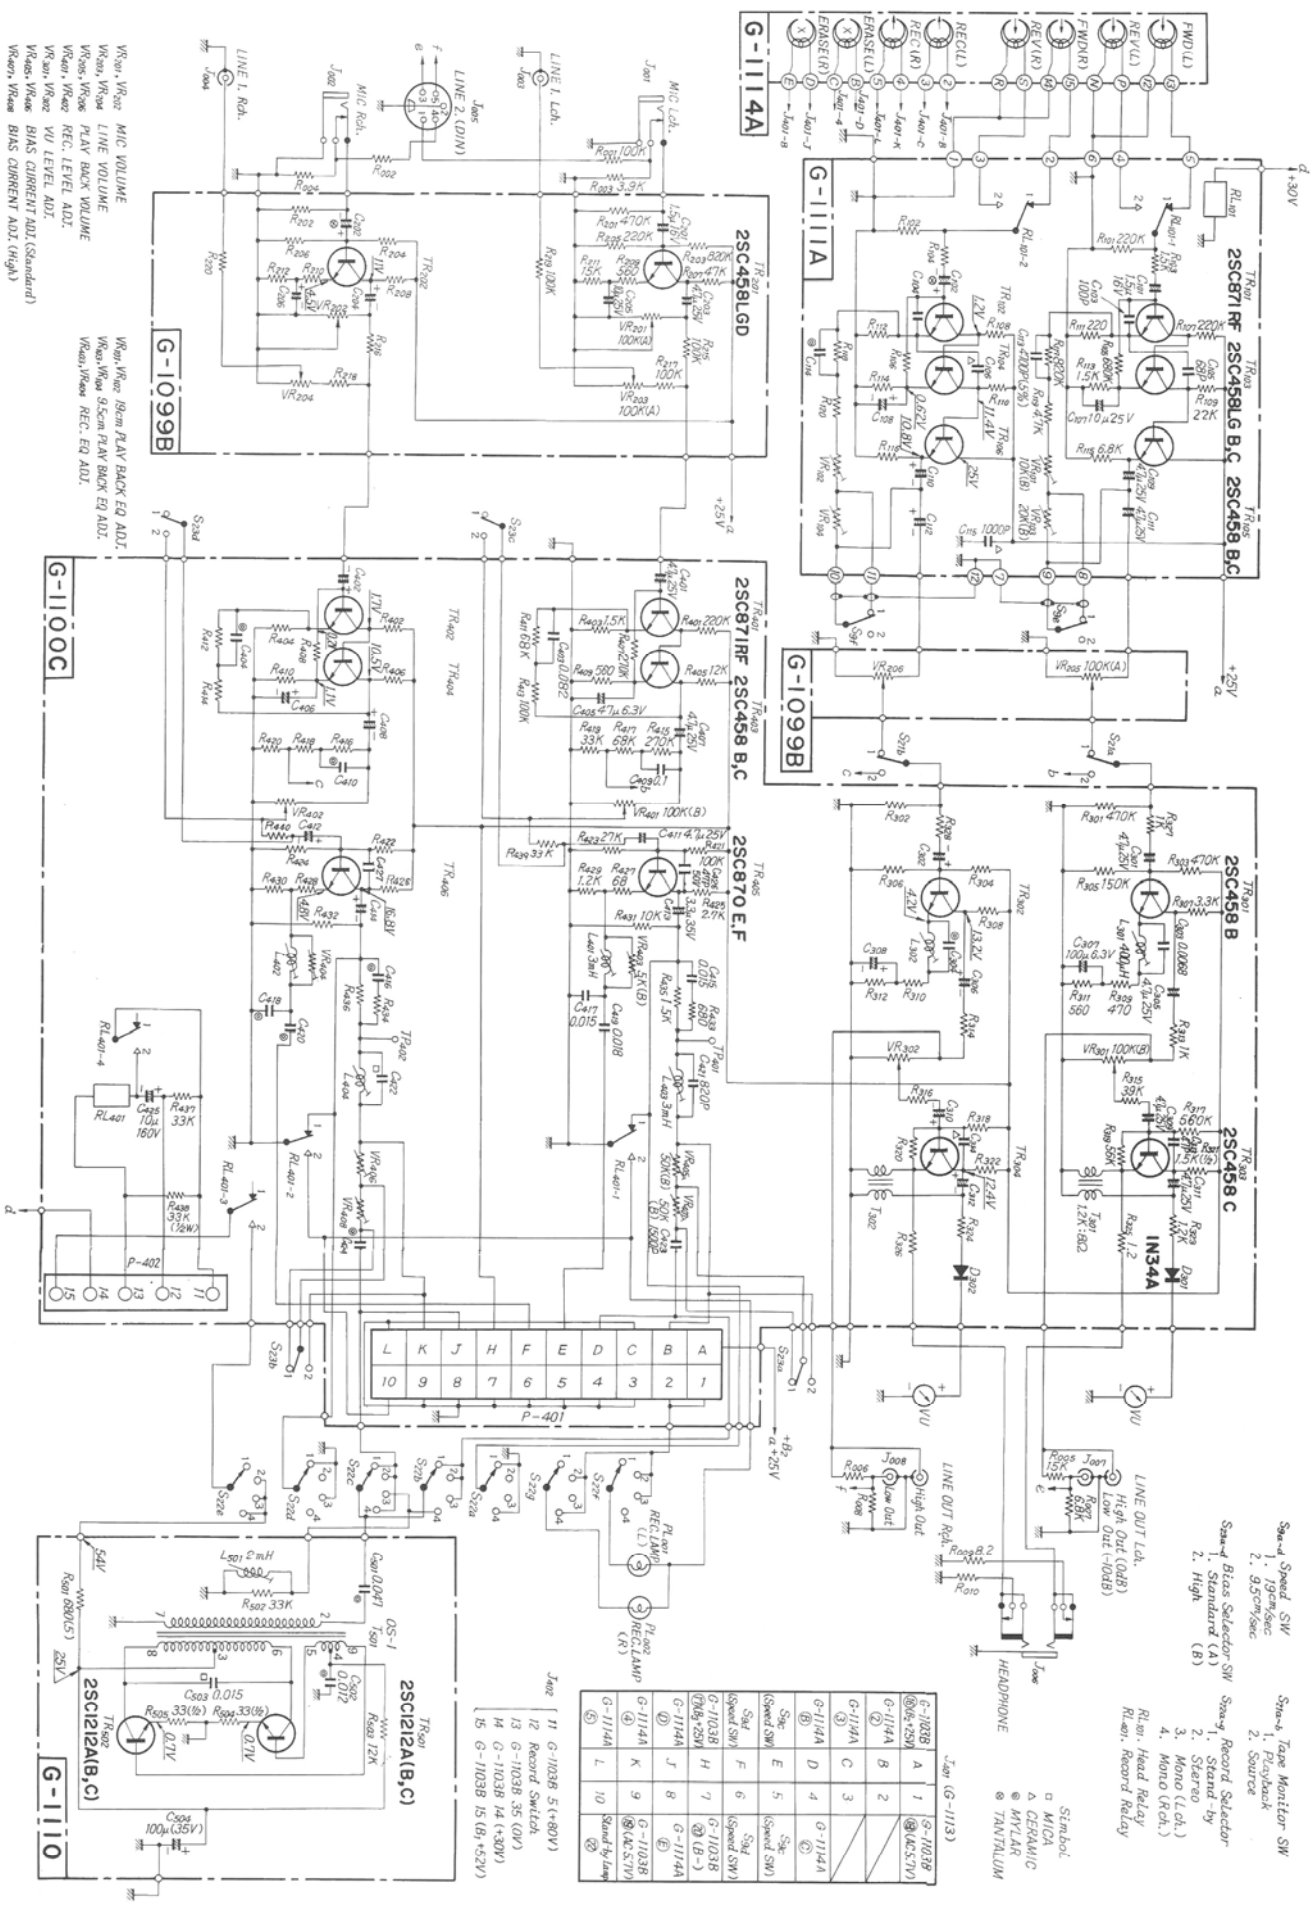

Legend for Component Symbols:

- MIC
- △ CRYSTAL
- ⊗ TANTALUM
- ⊙ TANTALUM

Legend for Switches:

- Speed SW: 1. 10rpm/sec, 2. 15rpm/sec, 3. 20rpm/sec
- Bias Selector SW: 1. Standby (A), 2. High (B)
- Record Selector SW: 1. Standby, 2. Stereo, 3. Mono (Lch.), 4. Mono (Rch.)
- Head Relay: Relay, Record Relay

Legend for Jumper Points:

- J401 (G-1113): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583
- J402 (G-1114): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583

Legend for Jumper Points (continued):

- J403 (G-1114): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583
- J404 (G-1114): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583
- J405 (G-1114): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583
- J406 (G-1114): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583
- J407 (G-1114): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583
- J408 (G-1114): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583
- J409 (G-1114): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583
- J410 (G-1114): 1. 2SC4581, 2. 2SC4582, 3. 2SC4583

Legend for Jumper Points (continued):

- J411 (G-1103B 5(+80V))
- J412 (Record Switch)
- J413 (G-1103B 35 (OV))
- J414 (G-1103B 14 (+30V))
- J415 (G-1103B 15 (B) (+20V))

* Design and specification subject to change without notice for improvements.