


ONKYO® SERVICE MANUAL

STEREO POWER AMPLIFIER MODEL M-5550

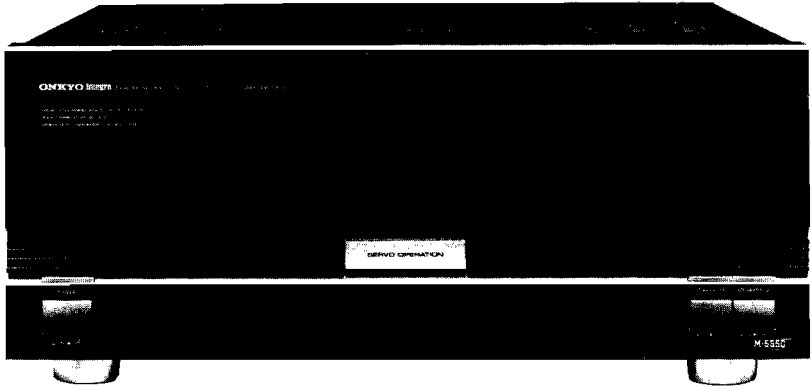

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK Δ ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PARTS NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

TABLE OF CONTENTS

- Specifications 2
- Precautions 2
- Block diagram 3
- Chassis-exploded view 4
- Adjustment procedures 6
- Printed board parts list..... 7
- Packing procedures.....10
- IC Block diagram11
- Printed board view 12
- Schematic diagram 17



SPECIFICATIONS

Continuous Power:	2×220 watts at 4 ohms, 1kHz (DIN)
Output:	2×145 watts at 8 ohms, 1kHz (DIN) 140 watts per channel, min. RMS, at 8 ohms, both channels driven, from 20Hz to 20kHz, with no more than 0.005% Total Harmonic Distortion
Dynamic Power Output:	2×425 watts at 2 ohms, 1kHz 2×290 watts at 4 ohms, 1kHz
Total Harmonic Distortion:	0.005% at rated power 0.005% at 1 watt output
Intermodulation Distortion:	0.004% at rated power 0.004% at 1 watt output
Frequency Response:	+0, -1.5dB at 1Hz to 100kHz
Input Sensitivity:	1.0V
Input Impedance:	20 kohms
Damping Factor:	140 (8 ohms, 1kHz)
S/N ratio:	120dB (IHF-A, Shorted)
Outputs:	SPEAKERS 1 & 2
Inputs:	INPUT

Power Supply:	AC 220V, 50Hz
Dimensions (W×H×D):	435×186×423 mm 17-1/8"×7-5/16"×16-5/8"
Wide side panels (W×H×D):	465×187×423 mm 18-5/16"×7-3/8"×16-5/8"
Weight:	18.5 kg (40.8 lbs.)

Specifications and features are subject to change without notice.

PRECAUTIONS

1. Replacing the fuses

For continued protection against risk fire, replace only with same type and same rating fuse.


CIRCUIT NO.	PART NO.	DESCRIPTION
F801,F802	252075	2.5A-SE-EAK, Primary fuse

2. Replacing the lamp

This unit uses the lamp listed below.

CIRCUIT NO.	PART NO.	DESCRIPTION
PL701, PL702	210160	PL14V150mA

BLOCK DIAGRAM

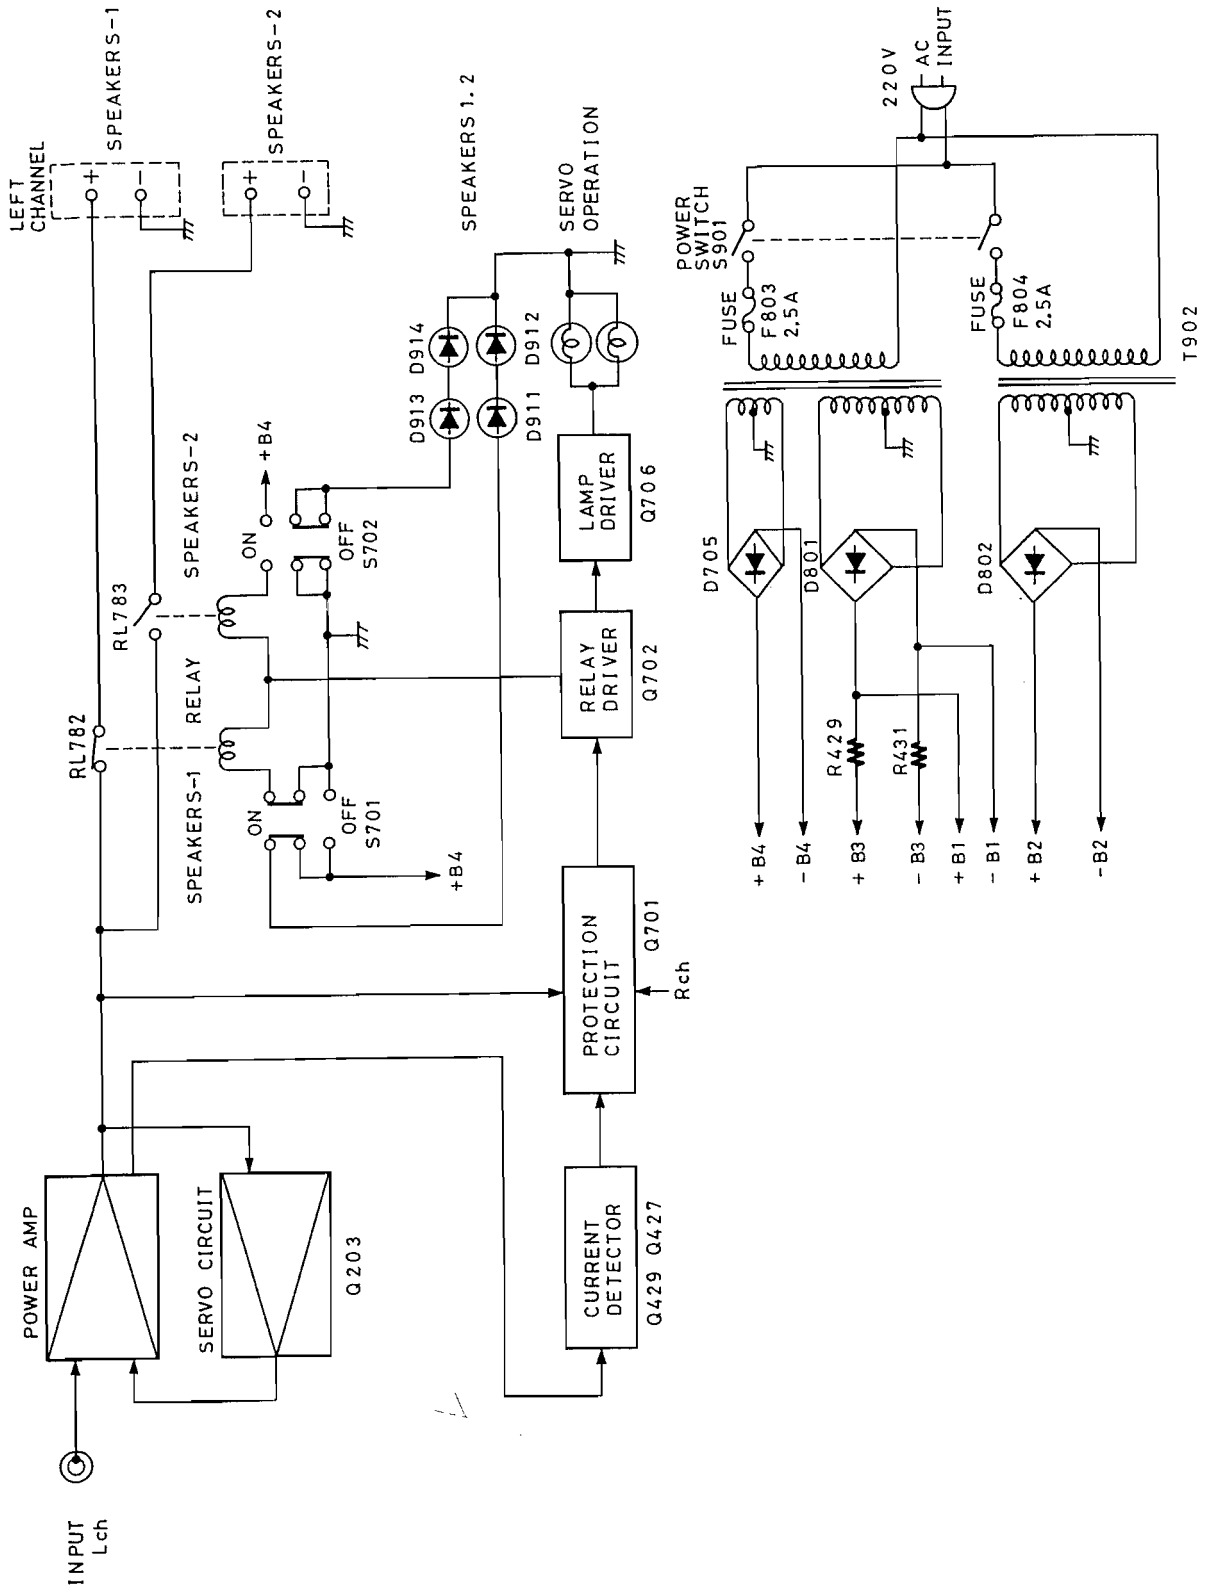

CHASSIS-EXPLODED VIEW – PARTS LIST

REF NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
A001	27110285C	Front bracket	Q449, Q450	2201653 or	2SC3856O or	U010	1A100525-1A	NAETC-3325-1A, Fuse PC board ass'y
A002	271141064	Bracket, FPC	Q457, Q458	2201655 or	2SC3856P or	U011	1A100529-1	NASW-3329-1, Speaker switch PC board ass'y
A004	27115204C	Side bracket	Q451, Q452	2201654	2SC3856Y, Transistors	U012	1A100530-1	NADIS-3330-1, Servo operation PC board ass'y
A005	29360626-1	Label	Q459, Q460	2201663 or	2SA1492O or	U013	1A100531-1	NADIS-3331-1, Speaker display PC board ass'y
A006	27150224	Shield plate	▲ T901	2201664	2SA1492P or	U014	1A100532-1	NADIS-3332-1, Power display PC board ass'y
A007	27130428B	Bracket, PT	▲ T902	2300321	2SA1492Y, Transistor			
A008	27141266	Bracket, PC	▲ T901	2300321	NPT-999G, Power transformer			
A009	27130427	Bracket	▲ T902	2300325	NPT-1000G, Power transformer			
A010	27160195	Radiator	▲ C901, C902	3500065A	0.01μF, AC400V/125V, Capacitor (IS)			
A011	27141068	Bracket, HE	▲ S901	25035381	NPS-121-L345P, Power switch			
A013	27121101	Back panel	▲ P901	253148 or	AS-CEE or			
A014	27150215B	Shield plate	▲ P901	253150	AS-CEE, Power supply cable			
A015	25060041	Ground terminal	▲ C901A, C902A	27300601	SB-1925, Cover (Capacitor)			
A016	87644010	W4×10FBC, Washer	▲ F801, F802	252075	2.5A-SE-EAK, Primary fuse			
A017	27300750	#2271, Bushing (cord)	U001	1A101510-1A	NAAF-3310-1A, Servo and protection circuit PC board ass'y			
A019	27190011	Holder	U002	1A101514-1A	NAETC-3314-1A, Speaker relay circuit PC board ass'y			
A020	27190009	KGLS-4NS, Holder	U003	1A101515-1A	NAETC-3315-1A, Speaker terminal PC board ass'y			
A021	27190480	KGLS-6S, Holder	U004	1A101516-1A	NAETC-3316-1A, Input terminal PC board ass'y			
A022	27300243	WS-2WS, Clamp	U005	1A100520-1	NAAF-3320-1, Power amplifier circuit PC board ass'y			
A025	27300833	WS-2NS, Clamp	U006	1A100521-1	NAETC-3321-1, Transistor(Q443)			
A030	28184319B	Cover	U007	1A100522-1	NAETC-3322-1, Transistor(Q445)			
A032	27170226-2	Bottom board	U008	1A100523-1	NAETC-3323-1, Transistor(Q447)			
A033	27175153	Bottom leg ass'y	U009	1A100524-1	PC board ass'y			
A043	834430088	3TTS+8BBC, Tap-tight screw						
A045	831430088	3TTW+8BBC, Tap-tight screw						
A046	838440089	4TTB+8CBC, Tap-tight screw						
A050	28140869	Cushion, Radiator(right)						
A051	28140870	Cushion, Radiator(left)						
A052	28140020	T4×10×40, Cushion						
A054	28140695	Cushion						
A055	28140761	Cushion						
A057	27270202	Washer						
A060	28175129	Insulating plate						
A350	1A101121	Front panel ass'y						
A367	28323350A	Knob ass'y, POW						
A369	28323351A	Knob ass'y, SP						

NOTE:
THE COMPONENTS IDENTIFIED BY MARK ▲ ARE
CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK.
REPLACE ONLY WITH PARTS NUMBER SPECIFIED.

ADJUSTMENT

1. Preparation

- (1) Set the machine on the work table so that it is parallel to the table in its normal condition, with a space between the bottom of the machine and the table top of 15 mm to permit free passage of air.
- (2) There must be no load, no signal, and the VOLUME must be set to minimum level.
- (3) Before the adjustment, with the power switch OFF, there must be no heat internally.

2. Idling current adjustment

- (1) Turn ON the power switch and leave the unit as is for about 15 minutes.
- (2) Adjust the semi-fixed resistor R423 (R424) so that the voltage between terminals V CT and I ID of the printed circuit board NAAF-3320 is 15mV. (Standard value is $15 \pm 3\text{mV}$.)

Note: Semi-fixed resistor in () indicates RIGHT CHANNEL.

3. Confirmation of protective circuit operation


- (1) Check of speaker relay and muting operation
 - ① About 5 seconds after power is turned ON, relay RL782 or RL783 of PCB NAETC-3314 must go ON.
 - ② At the same time as the above relays go ON, the SERVO OPERATION lamp must light.
 - ③ When the power switch is turned OFF, immediately all relays must go OFF.
- (2) Confirmation of DC detector operation
 - ① In the no-load condition, turn ON the power switch.
 - ② When 1V DC is applied to the input terminal, the speaker relay must operate and the SERVO OPERATION lamp must go out.
 - ③ The same condition must occur for an input of -1V DC applied to the input terminal.

Note: At the time of making this test, there must be absolutely no load connected, and no short at the output terminal. (This is to avoid damage to the speaker relay contacts.)

(3) Confirmation of current detection operation

- ① In the no-load condition with connections made as shown in the diagram below, input a signal to the set.
- ② Adjust the input so that the set output is 40V p-p.
- ③ When a load of 2Ω is connected to the set, Relays RL782 or RL783 must not go OFF.
- ④ Next, when a load of 0.33Ω is connected to the set, after the speaker relay goes ON-OFF several times, it must hold in the OFF condition.

NOTE: When there is a circuit abnormality and the protective circuit operates, the speaker relay goes ON-OFF several times repeatedly, and after several seconds, it is held in the OFF condition. Also, even after the cause of the abnormality has been eliminated, it remains held as it is. To cancel this condition turn OFF the power for several minutes.

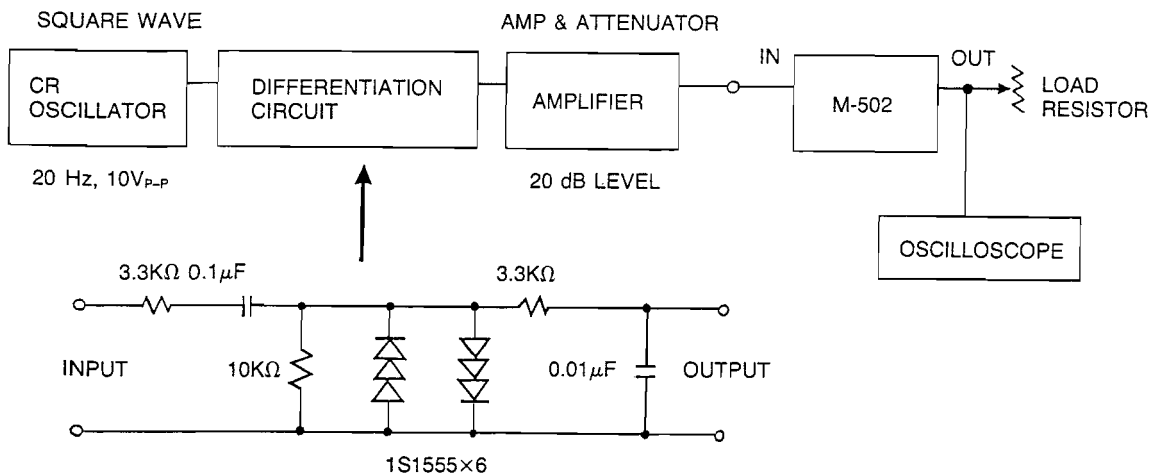

PRINTED CIRCUIT BOARD PARTS LIST

SERVO AND PROTECTION CIRCUIT PC BOARD (NAAF-3310-1A) – PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
Transistors			Capacitors		
Q201, Q202	2212806 or 2212807	2SK389-BL or 2SK389-V	C781, C782 C783~ C786	379131025 379121245	1000 μ F, 100V, Film (DEW) 0.12 μ F, 50V, Film (DEW)
Q702	2211424	2SA817-Y	Resistors		
Q706	2201286 or 2201285	2SD882-P or 2SD882-Q	R781~ R784 R785, R786	441620514 441720514	5.1 Ω , 1W, Metal oxide film 5.1 Ω , 2W, Metal oxide film
ICs			Relays		
Q203, Q204	222652	M5218L	RL782, RL783	25065316	NRL-2P7A-DC12-43
Q701	222584	TA7317P	Jumper sockets		
Diodes			JL407, JL408	25050273	NSCT-9P101
D201~D204	223163	1SS133	JL603	25050268	NSCT-4P96
D205~D208	224651301 or 224451301 or 224151301	HZ13E-B1 or MTZ13-A 05AZ13-X	SPEAKER TERMINAL PC BOARD (NAETC-3315-1A) – PARTS LIST		
D701	223163	1SS133	CIRCUIT NO.	PART NO.	DESCRIPTION
D702	224650623 or 224450623 or 224150623	HZ6.2E-B3 or MTZ6.2-C or 05AZ6.2-Z	Terminals		
D705	223889	RC202	P791, P792	25060120	NTM-4PDMN054
D706	223894	1N4002F	Capacitors		
Capacitors			C791~C794	379131825	1800 μ F, 100V, Film (DEW)
C205, C206	372126814	680pF, 50V, Styrene	INPUT TERMINAL PC BOARD (NAETC-3316-1A) – PARTS LIST		
C207, C208	372122214	220pF, 50V, Styrene	CIRCUIT NO.	PART NO.	DESCRIPTION
C215~C218	391264707	47 μ F, 35V, Elect. (MUSE)	Terminal		
C223~C226	354742219	220 μ F, 16V, Elect.	P101	25045071	NPJ-2PDBL35
C701, C702	354722219	220 μ F, 6.3V, Elect.	Capacitors		
C704	354742209	22 μ F, 16V, Elect.	C103, C104	372123914	390pF, 50V, Styrene
C706	354784799	0.47 μ F, 50V, Elect.	POWER AMPLIFIER CIRCUIT PC BOARD (NAAF-3320-1) – PARTS LIST		
C707	354742219	220 μ F, 16V, Elect.	CIRCUIT NO.	PART NO.	DESCRIPTION
C708, C713	354751029	1000 μ F, 25V, Elect	Transistors		
C709, C710	379121045	0.1 μ F, 50V, Film (DEW)	Q401~ Q404	2211732 or 2211733	2SC1845-F or 2SC1845-E
Resistors			Q405, Q406	2211792 or 2211793	2SA992-F or 2SA992-E
R213, R214	441626814	680 Ω , 1W, Metal oxide film	Q407, Q408	2211414	2SC1627-Y
R215, R216	441722234	22K Ω , 2W, Metal oxide film	Q411~ Q414	2211782 or 2211783	2SA991-F or 2SA991-E
R225, R226	442522724	2.7K Ω , 1/2W, Metal oxide film	Q415~ Q418	2211902 or 2211903	2SC1844-F or 2SC1844-E
R717	442520104	1 Ω , 1/2W, Metal oxide film	Q421~ Q424	2211354 or 2211353	2SA949-Y or 2SA949-O
R722	442525114	510 Ω , 1/2W, Metal oxide film	Q425, Q426	2211634 or 2211633	2SC2229-Y or 2SC2229-O
R725	441721004	10 Ω , 2W, Metal oxide film	Q427, Q428	2211792 or 2211793	2SA992-F, or 2SA992-E
R727	442521824	1.8K Ω , 1/2W, Metal oxide film	Q429, Q430	2212560	2SC3333
R911, R912	442522294	0.22 Ω , 1/2W, Metal oxide film	Q431, Q432	2211255	2SC1815-GR
Socket ass'y			Q433, Q434	2211455	2SA1015-GR
P202	2000553	NSAS-6P509	Q435, Q436	2211634 or 2211633	2SC2229-Y or 2SC2229-O
P207, P208	2000889	NSAS-6P845	Capacitors		
Jumper sockets			Capacitors		
JL401, JL402	25050285	NSCT-8P113	POWER AMPLIFIER CIRCUIT PC BOARD (NAAF-3320-1) – PARTS LIST		
JL409	25050283	NSCT-6P111	CIRCUIT NO.	PART NO.	DESCRIPTION
JL601, JL604	25050280	NSCT-3P108	Transistors		
JL607			Transistors		
JL603	25050281	NSCT-4P109	Transistors		
SPEAKER RELAY CIRCUIT PC BOARD (NAETC-3314-1A) – PARTS LIST			Transistors		
CIRCUIT NO.	PART NO.	DESCRIPTION	Transistors		
D782, D783	223145	1S2076TD	Transistors		
Coils			Transistors		
L781~ L784	231015	S-0.8C	Transistors		

CIRCUIT NO.	PART NO.	DESCRIPTION
Q437,Q438	2211354 or 2211353	2SA949-Y or 2SA949-O
Diodes		
D405~D408	223163	1SS133
D409~D412	225218	LTZ-MR15, LED
D417~D420		
D413~D416	223162	1SS82
D421,D422	223163	1SS133
D423,D424	223168	DA210S
D431,D432	223163	1SS133
D433,D434	223145	1S2076TD
D435~D438	22380003	1N5402F
D439~D442	223162	1SS82
D461, D462	224651002 or 224151002	HZ10E-B2 or 05AZ10-Y
Capacitors		
C405~C408	354743319	330 μ F, 16V, Elect.
C413~C416	391241007	10 μ F, 16V, Elect. (MUSE)
C423, C428		
C417, C418	379121025	1000pF, 50V, Film (DEW)
C435, C436	379131045	0.1 μ F, 100V, Film (DEW)
C437, C438	379122245	0.22 μ F, 50V, Film (DEW)
C443~C446	379124735	0.047 μ F, 50V, Film (DEW)
C455~C462	3504226	6800 μ F, 80V, Elect.
C465, C466	354782299	0.22 μ F, 50V, Elect.
Resistors		
R401~R404	442525614	560 Ω , 1/2W, Metal oxide film
R405, R406	442523314	330 Ω , 1/2W, Metal oxide film
R411, R412	442521614	160 Ω , 1/2W, Metal oxide film
R413, R414	441624734	47K Ω , 1W, Metal oxide film
R415, R416	442521234	12K Ω , 1/2W, Metal oxide film
R423, R424	5225076	N10HR22KBDM, Semi-fixed
R429~R432	441723324	3.3K Ω , 2W, Metal oxide film
R433~R436	442521214	120 Ω , 1/2W, Metal oxide film
R441~R444	442521024	1K Ω , 1/2W, Metal oxide film
R445~R448	442523914	390 Ω , 1/2W, Metal oxide film
R457~R460	442525104	51 Ω , 1/2W, Metal oxide film
R463, R464	442520514	5.1 Ω , 1/2W, Metal oxide film
R465, R466	441720754	7.5 Ω , 2W, Metal oxide film
R467~R470	442520224	2.2 Ω , 1/2W, Metal oxide film
R475~R478		
R479~R482	442521014	100 Ω , 1/2W, Metal oxide film
R487~R490		
R491~R494	4000080	0.47 Ω , 5W, Metal plate
R501~R504		
R505~R508	4000063	0.47 Ω , 2W, Metal plate
R513~R516		
R541, R542	442520474	4.7 Ω , 1/2W, Metal oxide film
Jumper sockets		
JL403,JL404	25050267	NSCT-3P95
JL405,JL406	25050270	NSCT-6P98
Bracket		
	27130430	(KE)
	27300826	Bus (S)
	27300827	Bus (C)

TRANSISTOR PC BOARD (NAETC-3321-1) – PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION
Transistors		
Q443,Q444	2212864 or 2212863	2SC3419-Y or 2SC3419-O
Capacitors		
C463, C464	379122235	0.022 μ F, 50V, Film (DEW)

TRANSISTOR PC BOARD (NAETC-3322-1) – PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION
Transistors		
Q445,Q446	2201644 or 2201643	2SC3298-Y or 2SC3298-O

TRANSISTOR PC BOARD (NAETC-3323-1) – PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION
Transistors		
Q447,Q448	2201634 or 2201633	2SA1306-Y or 2SA1306-O

POWER SUPPLY CIRCUIT PC BOARD (NAPS-3324-1) – PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION
Diodes		
D801,D802	22380014AF	PB102F
Capacitors		
C801~C804	375103345	0.33 μ F, 125V, Film (ME)
C805, C806	375104745	0.47 μ F, 125V, Film (ME)
Resistors		
R801~R804	442522294	0.22 Ω , 1/2W, Metal oxide film
R805, R806	442527504	75 Ω , 1/2W, Metal oxide film

FUSE PC BOARD (NAETC-3325-1A) – PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION
Fuse holders		
F803a,F804a	25050065	YSH403T
Terminal		
	25060092	NTM-1S33

SPEAKER SWITCH PC BOARD (NASW-3329-1) – PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION
Switch		
S701,S702	25035591	NPS-222-L553

**SERVO OPERATION PC BOARD (NADIS-3330-1)
- PARTS LIST**

CIRCUIT NO.	PART NO.	DESCRIPTION
	Lamps	
PL701, PL702	210160	PL14V150mA
	Holder	
	27190640A	Lamp holder


**SPEAKER DISPLAY PC BOARD (NADIS-3331-1)
- PARTS LIST**

CIRCUIT NO.	PART NO.	DESCRIPTION
	Diodes	
D911~D914	225137CG or 225137CY or 225137DG or 225137DY	SEL-2413E-CG or SEL-2413E-CY or SEL-2413E-DG or SEL-2413E-DY, LED
	Holder	
	27190639	LED Holder (SP)

POWER DISPLAY PC BOARD (NADIS-3332-1) - PARTS LIST

CIRCUIT NO.	PART NO.	DESCRIPTION
	Diodes	
D915, D916	225142DX2	SEL2913KDX2, LED
	Jumper socket	
JL601	25050280	NSCT-3P108
	Holder	
	27190638	LED Holder (POW)

PACKING PROCEDURES

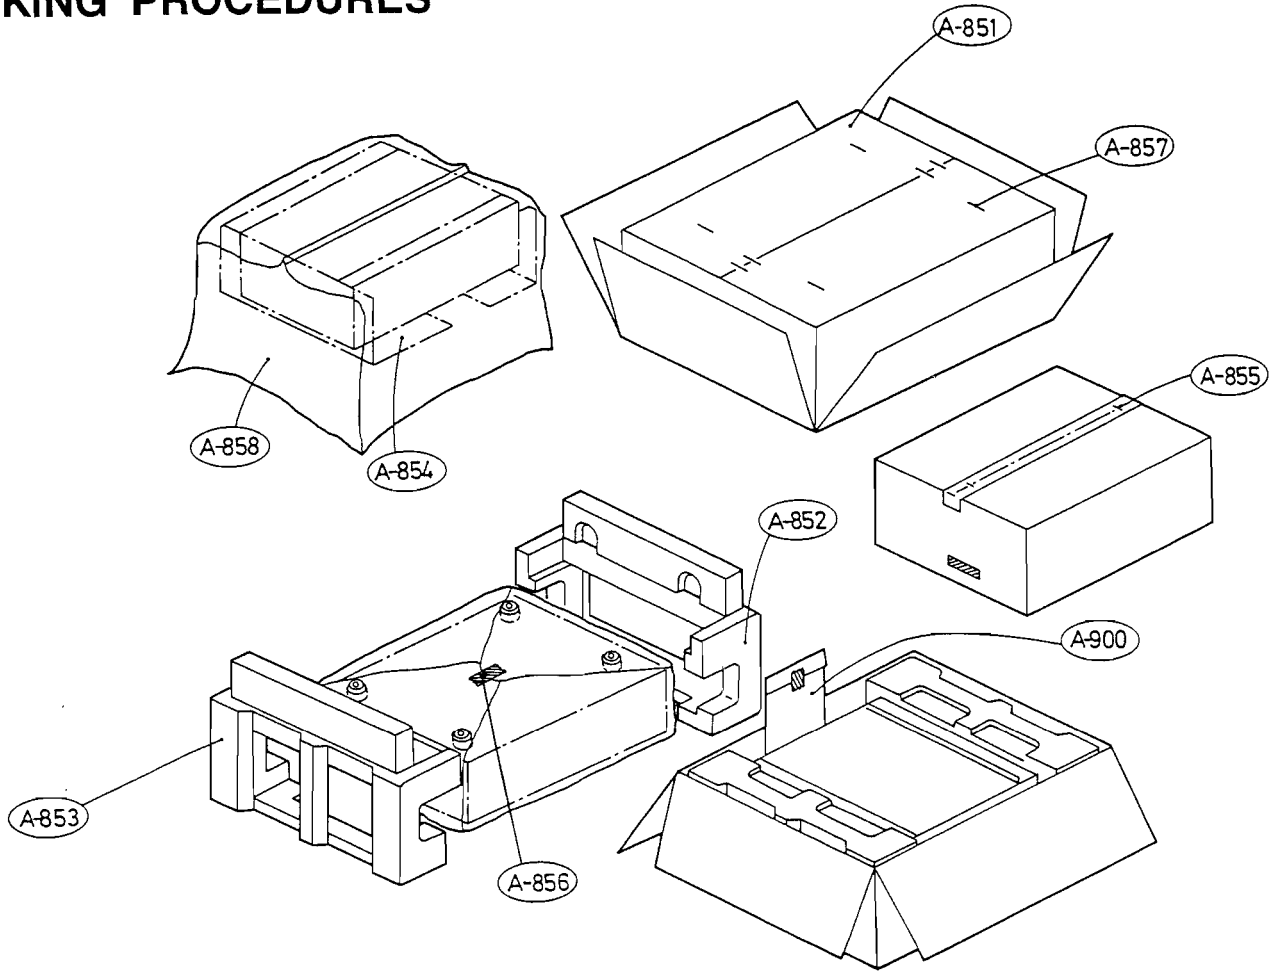


REF. NO.	PART NO.	DESCRIPTION
A851	29051697	Master carton box
A852	29091081C	Pad ass'y, L
A853	29091084B	Pad ass'y, R
A854	290093-1	Sheet
A855	260012	Damp tape
A856	261504	Paper tape
A857	282301	Sealing hook
A858	29100038A	720×950mm, Poly-vinyl bag
A900		Accessory bag ass'y
	29341260	Instruction manual
	29365020	Warranty card
	29100094A	Poly-vinyl bag (Warranty card)
	2010097	Connection cable
	29100006A	350×250mm, Poly-vinyl bag for accessory

SERVICE NOTES


1. When the push switch knob is removed, the switch lock must be in the OFF condition. In particular, because it is desirable for the vertical push switch to be pulled out, care should be taken. (This is to prevent damage to the lock section.)
2. Care should be taken to avoid using excessive force when handling the speaker terminal board NAETC-3315 and the speaker relay board NAETC-3314. (This is to prevent damage to the boards.)
3. When a meter is connected to the NF loop internal circuit, the relationship of the measuring lead wire capacity and the input impedance of the meter can cause oscillation in the amplifier. When such occurs, if a 100Ω resistor is connected to the end of the meter cable, this condition can be alleviated.
4. When making amplifier measurements, if a signal is taken from the load resistor side (dummy load), because of the possibility of an output error with a large distortion measurement, the signal taken should be directly from the amplifier terminal side.

IC BLOCK DIAGRAM

TA7317P (Protective Driver)

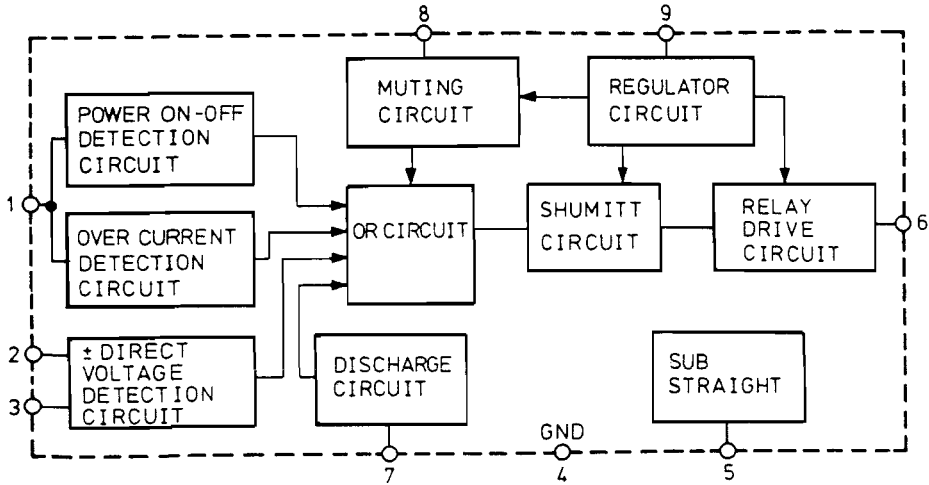


M5218L (OP Amp)

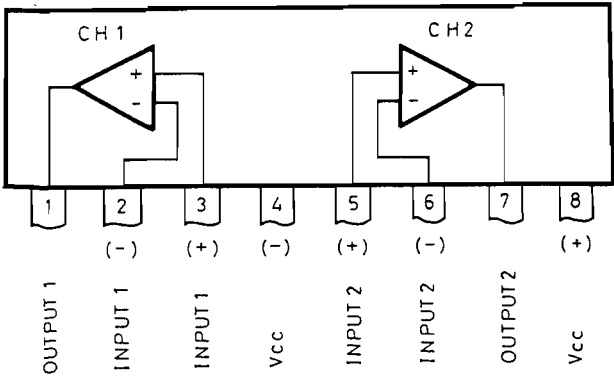


PRINTED CIRCUIT BOARD VIEW FROM BOTTOM SIDE


NAETC-3314-1A

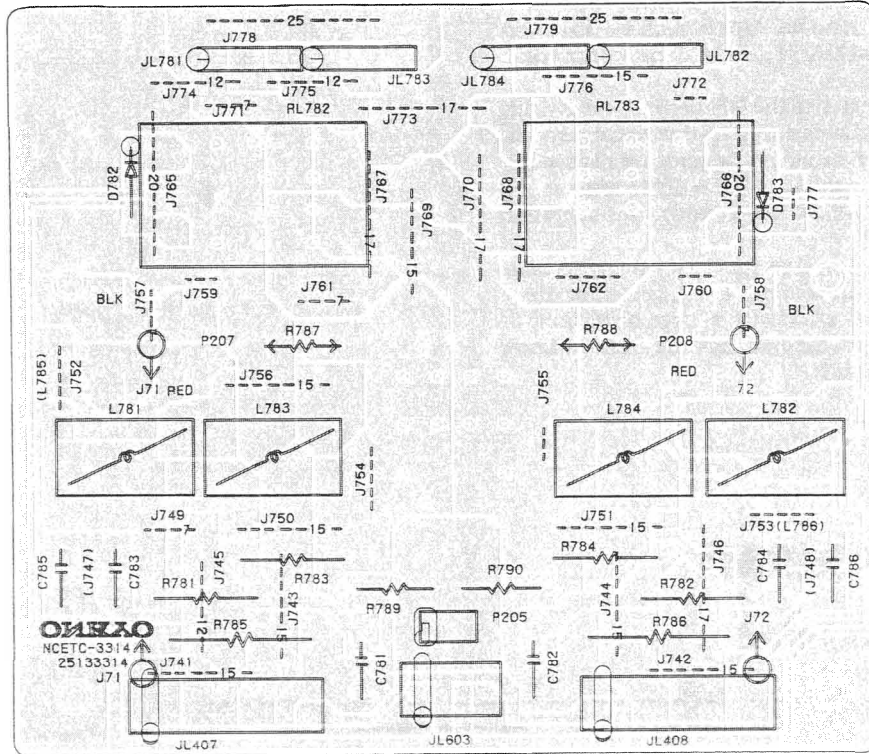


NAETC-3315-1A

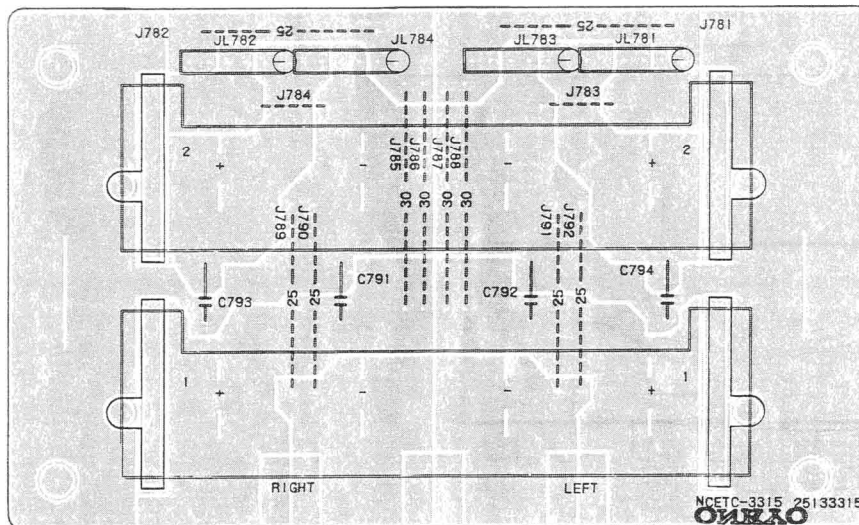


NAAF-3310-1A

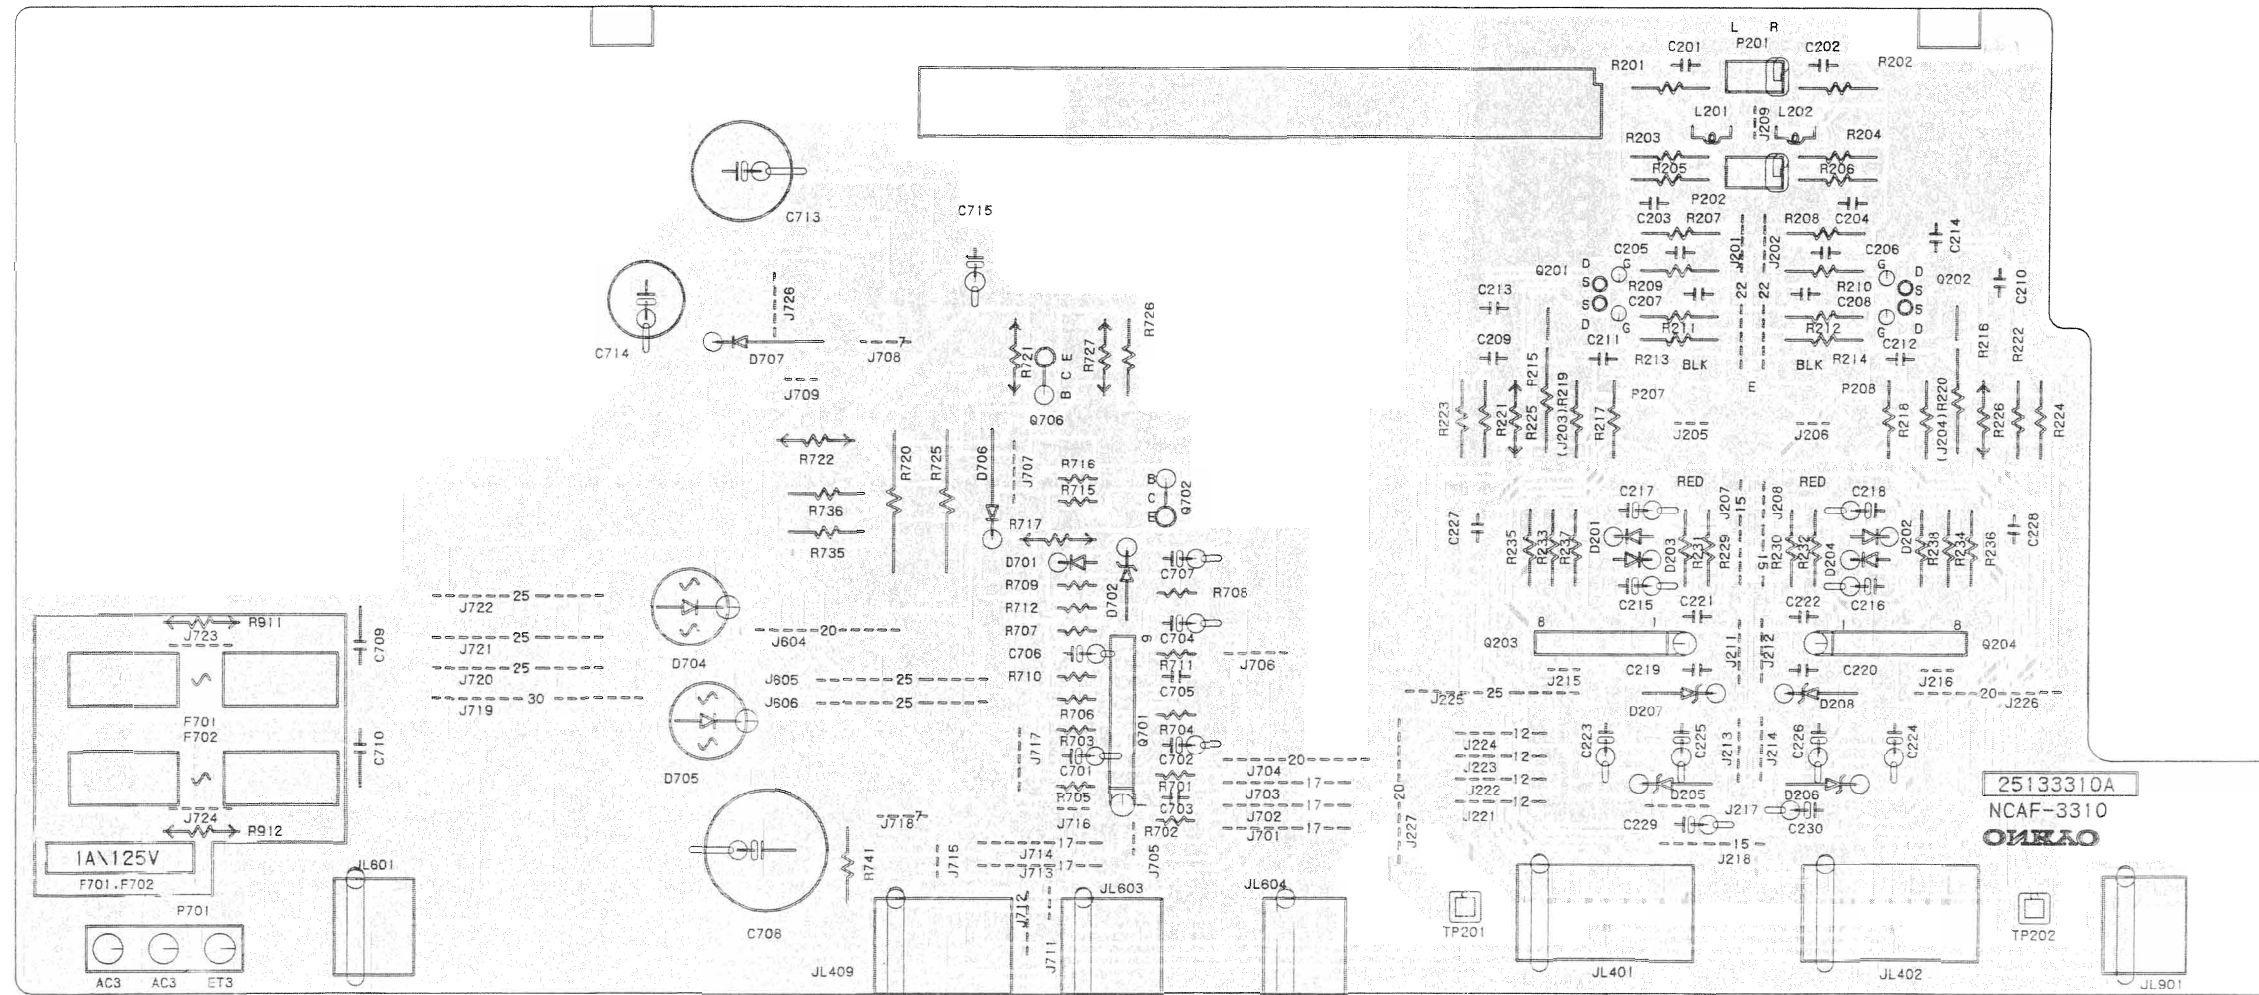


NAETC-3316-1A

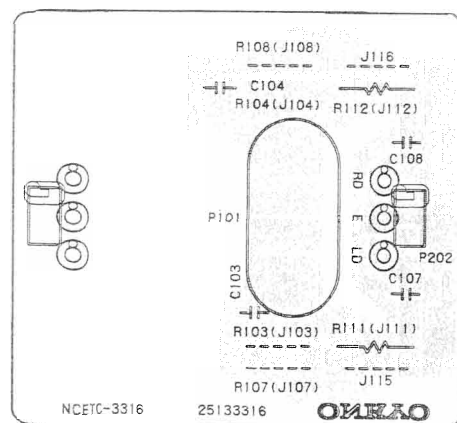


NASW-3329-1

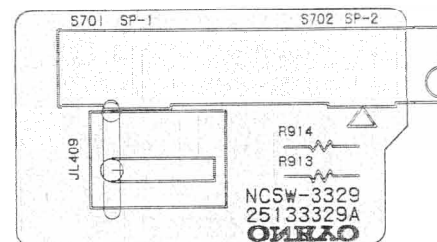


NADIS-3330-1

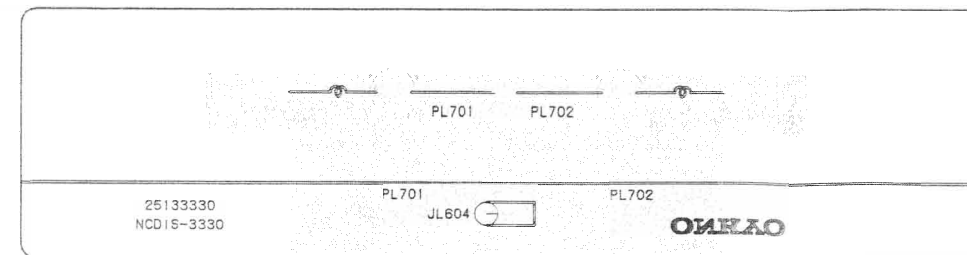

NAAF-3320-1

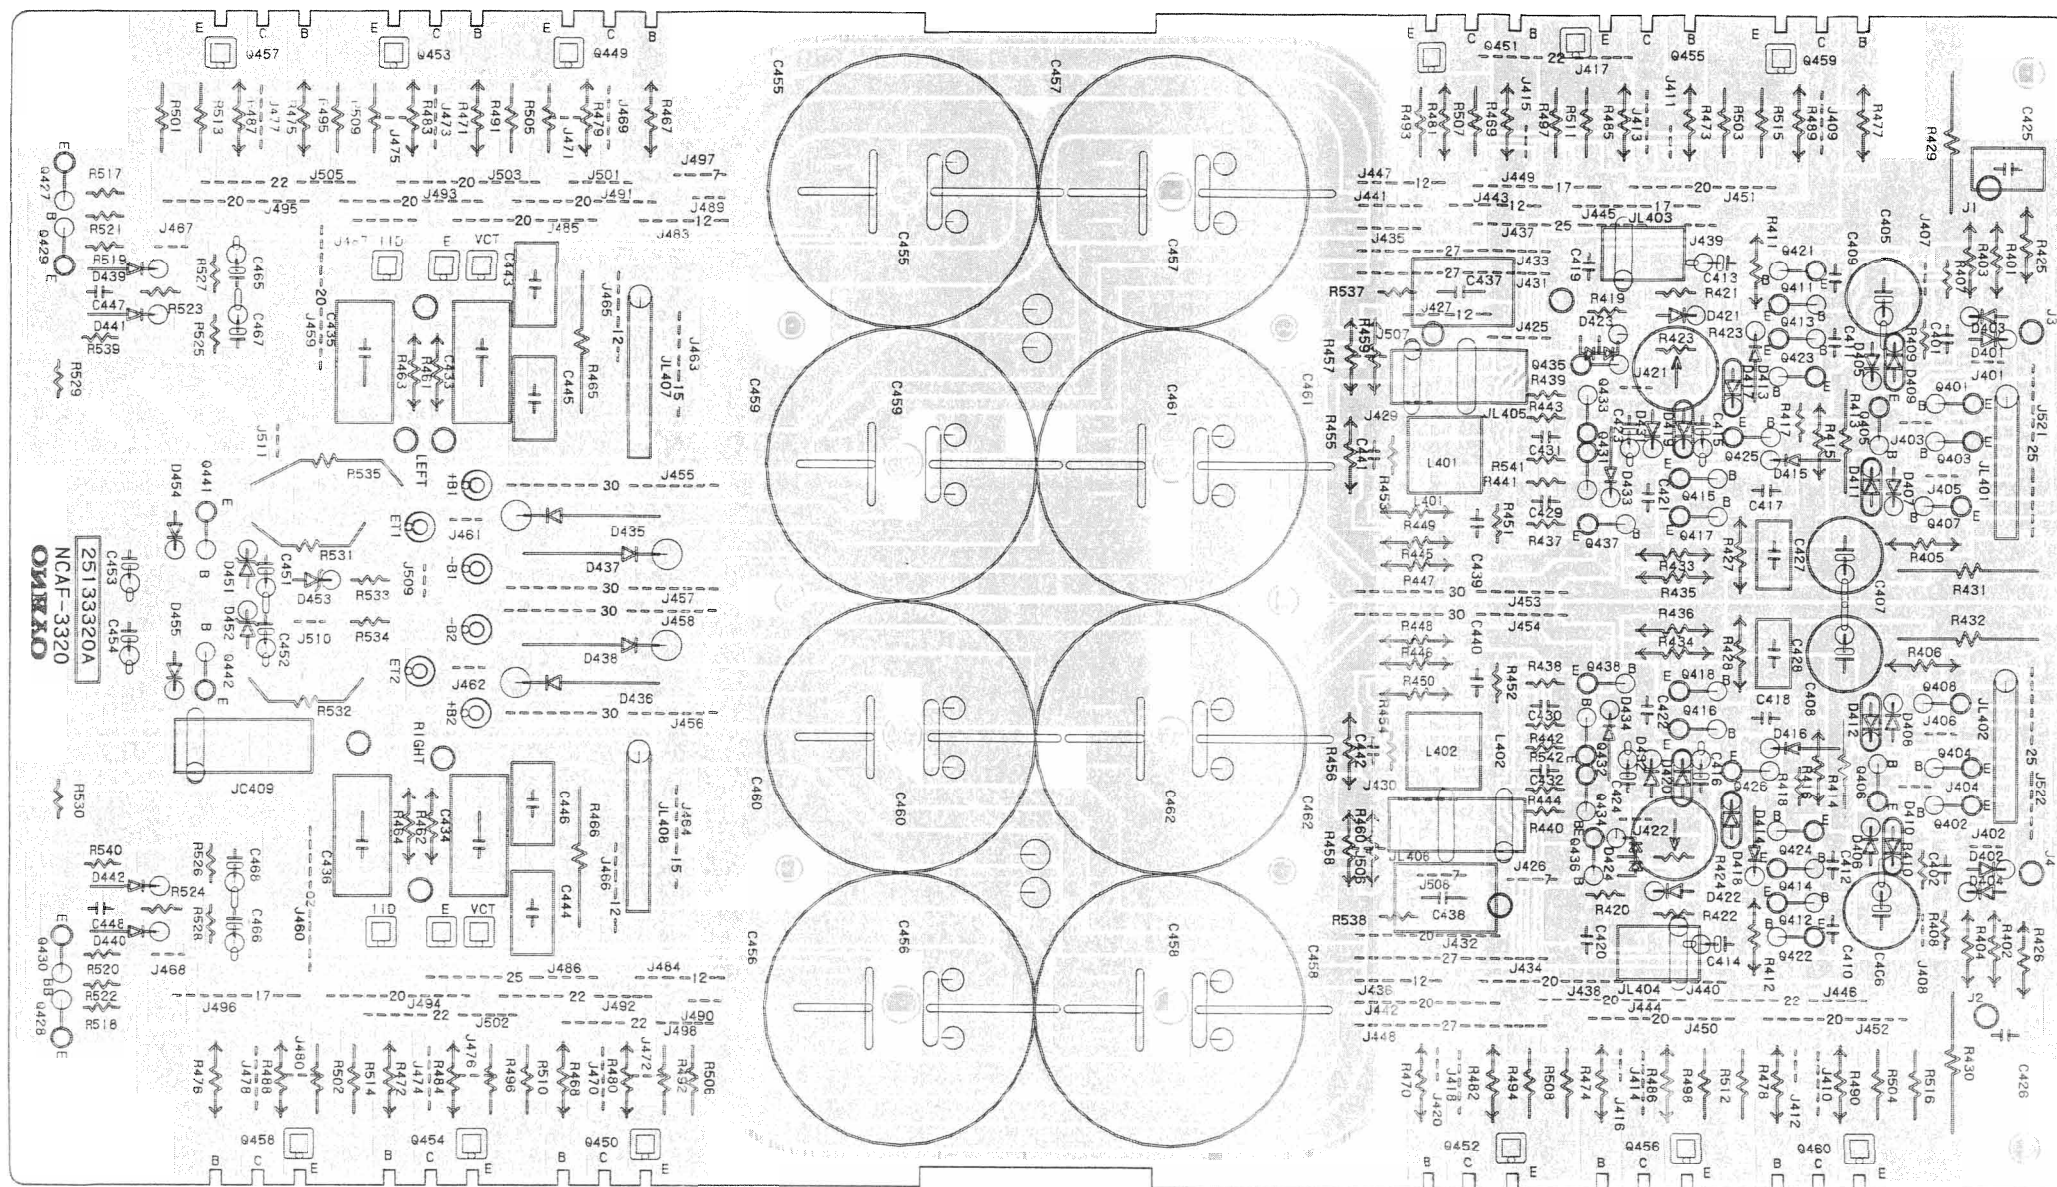

NAETC-3321-1




NAETC-3322-1




NAETC-3323-1



NADIS-3331-1

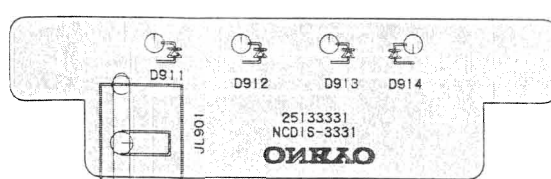


NADIS-3332-1

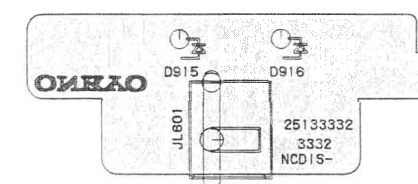


SCHEMATIC DIAGRAM

A B C D E F G H

1
2
3
4
5
6

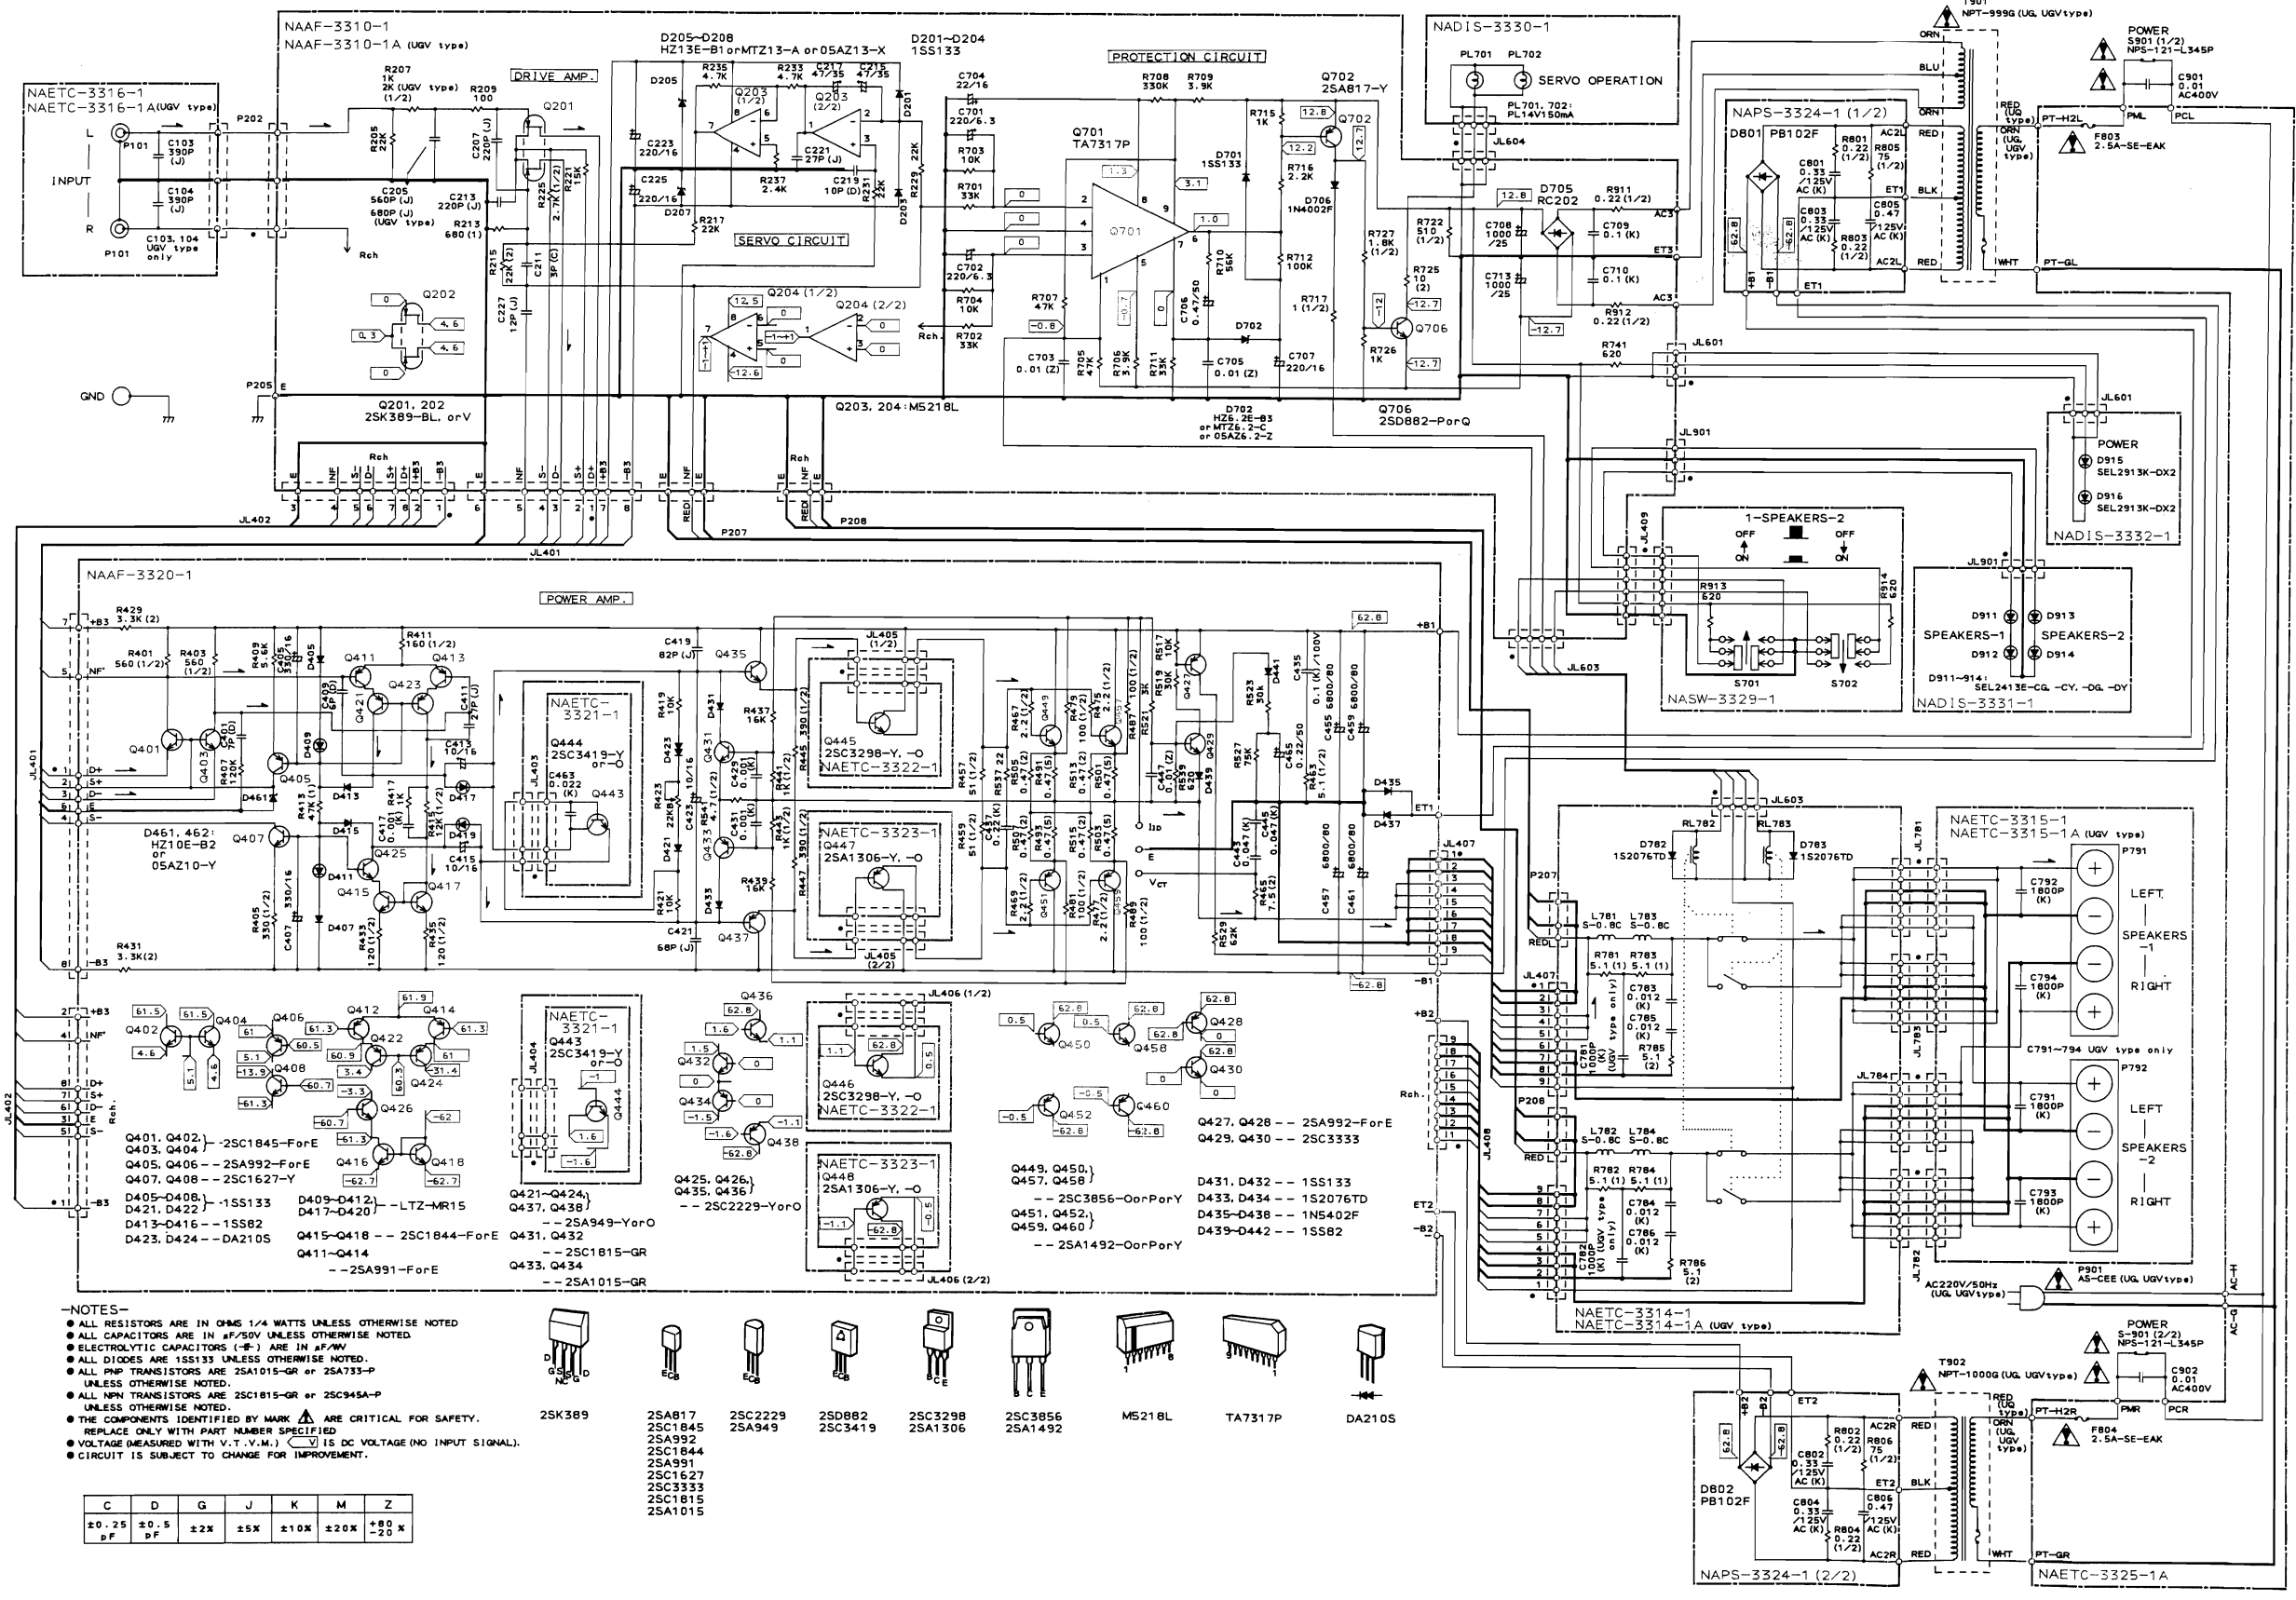


- NOTES**
- ALL RESISTORS ARE IN OHMS 1/4 WATTS UNLESS OTHERWISE NOTED
 - ALL CAPACITORS ARE IN $\mu\text{F}/50\text{V}$ UNLESS OTHERWISE NOTED
 - ELECTROLYTIC CAPACITORS (-E) ARE IN $\mu\text{F}/\text{WV}$
 - ALL DIODES ARE 1SS133 UNLESS OTHERWISE NOTED.
 - ALL PNP TRANSISTORS ARE 2SA1015-GR OR 2SA733-P UNLESS OTHERWISE NOTED.
 - ALL NPN TRANSISTORS ARE 2SC1815-GR OR 2SC945A-P UNLESS OTHERWISE NOTED.
 - THE COMPONENTS IDENTIFIED BY MARK Δ ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
 - VOLTAGE (MEASURED WITH V.T.V.M.) $\langle \Delta \rangle$ IS DC VOLTAGE (NO INPUT SIGNAL).
 - CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

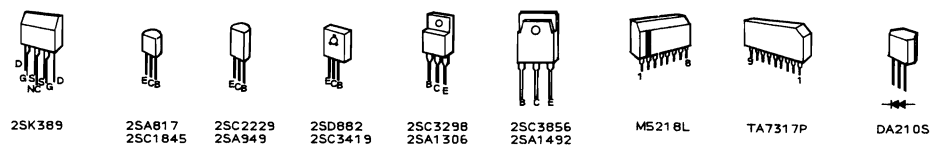

C	D	G	J	K	M	Z
± 0.25	± 0.5	$\pm 2\%$	$\pm 5\%$	$\pm 10\%$	$\pm 20\%$	$\pm 80\%$
pF	pF					

NAPS-3324-1

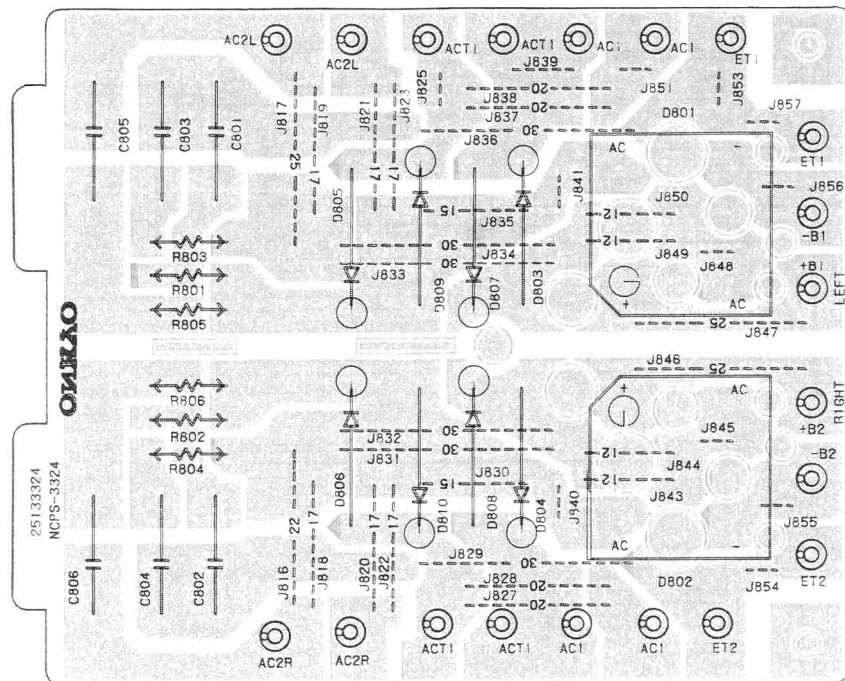

NAETC-3325-1

