

Service

DVP6620/12

Service

Service



# Service Manual

This simple Service Manual is for " Exchange" Scenario

## TABLE OF CONTENTS

	Page
• Instruction.....	1-1
• Software Upgrade.....	2-1
• Accessory list.....	3-1
• Revision List.....	4-1

©Copyright 2008 Philips Consumer Electronics B.V. Eindhoven, The Netherlands  
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise without the prior permission of Philips.



## How to remove the CD manually from the tray

---

1. Please do as below instruction in case the tray can not be open:
  - I. Power off the DVD player.
  - II. Please gently move the CD door follow the below arrowhead (Figure1).

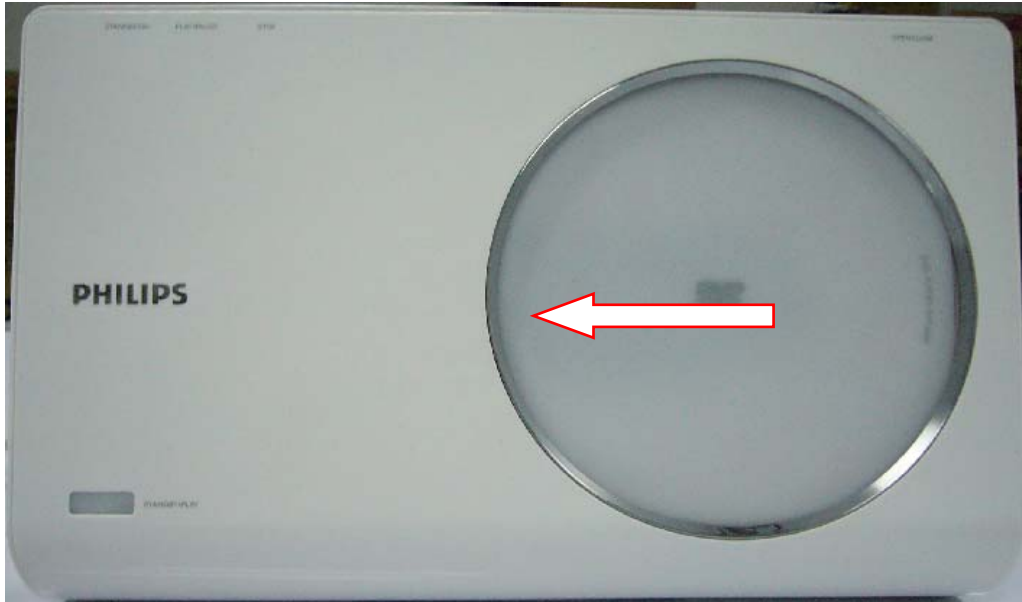


Figure 1

# Software upgrade

## Preparation to upgrade software

- 1) Start the CD Burning software and create a new CD project (Data Disc) with the following setting:  
 Label: DVPXXXX (No need the label name)  
 File Name: DVPXXXX\_XX.BIN  
 Power on the set and open the tray, then press <5><5> to check the File Name.

**Note: It is required capital letter for the File System name**

- 2) Burn the data onto a blank CDR

## A. Procedure for software upgrade:

- 1) Power on the set and insert the prepared Upgrade CDR.
- 2) The set will starts reading disc & response with the following display TV screen:  
 Upgrade File DETECTED  
 Upgrade?  
 Press Play TO START.
- 3) Press <OK> button to confirm, then screen will display :  
 Files coping...  
 UPGRADING...
- 4) The upgraded disc will automatically out when files coping complete, then take out the disc.
- 5) About 1 minute later, the trace will automatically close when upgrading complete.

## B. Read out the software versions to confirm upgrading

- 1) Power on the set and press <Setup> button on the remote control.
- 2) Press<1><3><7><9>button to check the software information.

The software version and other information are display on the TV screen as follows:

Version	XX.XX.XX.XX (Main version)
SUB-VER	XX.XX.XX.XX (software version of application software)
8032	XX.XX.XX.XX
Servo	XX.XX.XX.XX (software version of Servo)
RISC	XX.XX.XX.XX
DSP	XX.XX.XX.XX
Region Code	X

**Caution:** The set must not be power off during upgrading, Otherwise the Main board will be damaged entirely.

## Accessories Spare Parts List

---

Item No.	12NC No.	Description
RC	996510007598	Remote control
AVCable	996510008503	AUDIO CABLE
YUV	996510007599	3RCA/M TO 3RCA/M L=1.5M (YUV Cable)

Revision List  
Version 1.0  
\* Initial Release