

Service **Second Generation**
 Service
 Service



Service Manual




TABLE OF CONTENTS



	Chapter
Location of PCB Boards	1-2
Versions Variation	1-2
Specifications	1-3
Measurement Setup	1-4
Service Aids	1-5
ESD & Safety Instruction	1-6
Lead-free soldering Information	1-7
Setting procedure & Repair Instructions	2
Disassembly Instructions & Service positions	3
Block & Wiring Diagram	4
VFD+JACK+STANDBY Board	5
Main Board	6
Power Board	7
Mechanical Exploded View & Part List	8
Revision List	9

This service manual is for HTS3265/75 Second Generation model, which is different from the previous generation HTS3265/75 models.

For Second Generation model the serial number begin with MF2AXXXXXXXXXX. Refer to the rating label illustration at right.



© Copyright 2008 Philips Consumer Electronics B.V. Eindhoven, The Netherlands
 All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise without the prior permission of Philips.

Published by LM0833 Service Audio Printed in The Netherlands Subject to modification


GB 3139 785 34540

Version 1.0



PHILIPS

LOCATION OF PCB BOARDS

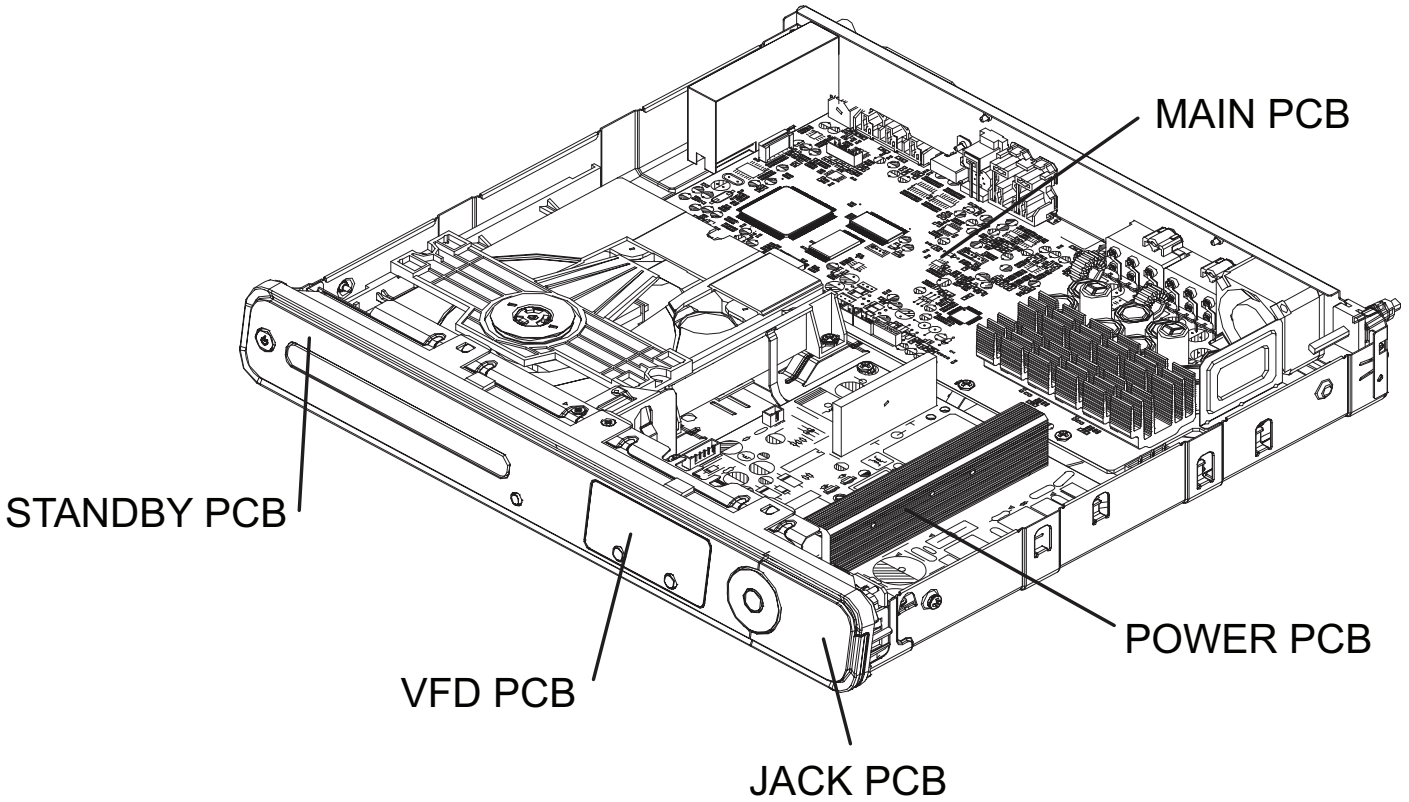

VERSION VARIATION:

Type/Versions	HTS3265
Features	/75
Output Power - 600W	X
Voltage (220V~240V)	X
MP3 Link	X

SERVICE SCENARIO MATRIX:

Type/Versions	HTS3265
Board in used	/75
Main Board	Bd
Power Board	Bd
VFD+JACK+STANDBY Board	Bd

*Bd = Board Level Repair

SPECIFICATIONS

AMPLIFIER

Total output power :	
- Home Theatre mode	600 W
Frequency Response	180 Hz – 18 kHz / ± 3 dB
Signal-to-Noise Ratio.....	> 60 dB (A-weighted)
Input Sensitivity	
- AUX 1	400 mV
- AUX 2	400 mV
- MP3 LINK	400 mV

RADIO

Tuning Range	FM 87.5-108 MHz
.....	(50/100 kHz)
.....	26 dB Quieting
Sensitivity	FM 22 dBf,
IF Rejection Ratio	FM 60 dB
Signal-to-Noise Ratio.....	FM 50 dB
Harmonic Distortion	FM Mono 3%
.....	FM Stereo 3%
Frequency Response	FM 180 Hz–10 kHz / ± 6 dB
Stereo Separation.....	FM 26 dB (1 kHz)
Stereo Threshold.....	FM 29 dB

DISC

Laser Type.....	Semiconductor
Disc Diametre.....	12cm / 8cm
Video Decoding	MPEG-1 / MPEG-2 /
.....	/ DivX 3/4/5/6, Ultra
Video DAC.....	12 Bits
Signal System.....	PAL / NTSC
Video Format	4:3 / 16:9
Video S/N	56 dB
Composite Video	
Output.....	1.0 Vp-p, 75 Ω
Frequency Response	4 Hz–20 kHz (44.1 kHz)
.....	4 Hz–22 kHz (48 kHz)
.....	4 Hz–44 kHz (96 kHz)
PCM.....	IEC 60958
Dolby Digital	IEC 60958, IEC 61937
DTS	IEC 60958, IEC 61937

MAIN UNIT

Power Supply Rating	220 - 240 V~;
.....	50 Hz
Power Consumption	100 W
Dimensions.....	360 x 58 x 332 (mm)
.....	(w x h x d)
Weight	2.9 kg

FRONT AND REAR SPEAKERS

System.....	Full range satellite
Impedance.....	3 Ω
Speaker drivers	3" full range speaker
Frequency response.....	150 Hz – 20 kHz
Dimensions.....	103 x 203 x 71 (mm)
.....	(w x h x d)
Weight	0.54 kg/each

CENTRE SPEAKER

System.....	Full range satellite
Impedance.....	6 Ω
Speaker drivers	3" full range speaker
Frequency response.....	150 Hz – 20 kHz
Dimensions.....	244 x 105 x 74 (mm)
.....	(w x h x d)
Weight	0.84 kg


SUBWOOFER

Impedance.....	6 Ω
Speaker drivers	165mm (6.5") woofer
Frequency response.....	40 Hz – 150 Hz
Dimensions.....	163 x 363 x 369 (mm)
.....	(w x h x d)
Weight	5.08 kg

Specifications subject to change without prior notice.

MEASUREMENT SETUP


Tuner FM

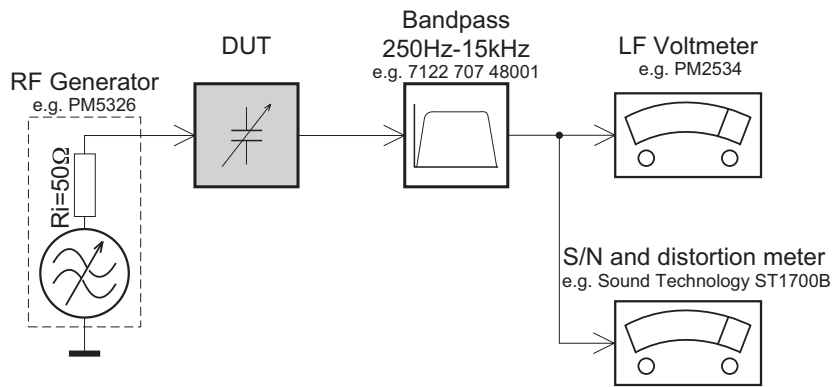

Use a bandpass filter to eliminate hum (50Hz, 100Hz) and disturbance from the pilotone (19kHz, 38kHz).

CD

Use Audio Signal Disc SBC429 4822 397 30184
(replaces test disc 3)

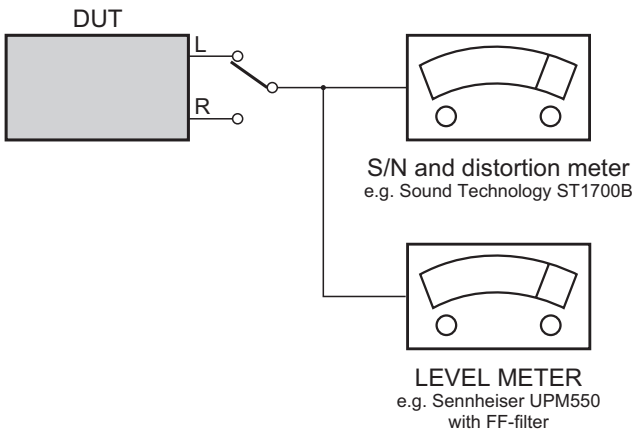

SERVICE AIDS






Service Tools:

Universal Torx driver holder	4822 395 91019
Torx bit T10 150mm	4822 395 50456
Torx driver set T6-T20	4822 395 50145
Torx driver T10 extended	4822 395 50423

Compact Disc:

SBC426/426A Test disc 5 + 5A	4822 397 30096
SBC442 Audio Burn-in test disc 1kHz	4822 397 30155
SBC429 Audio Signals disc	4822 397 30184
Dolby Pro-logic Test Disc	4822 395 10216

HANDLING CHIP COMPONENTS

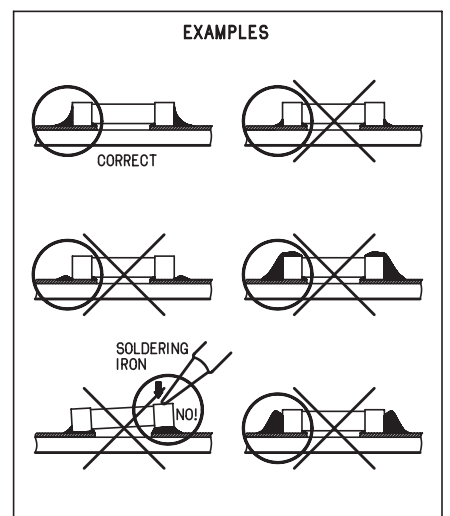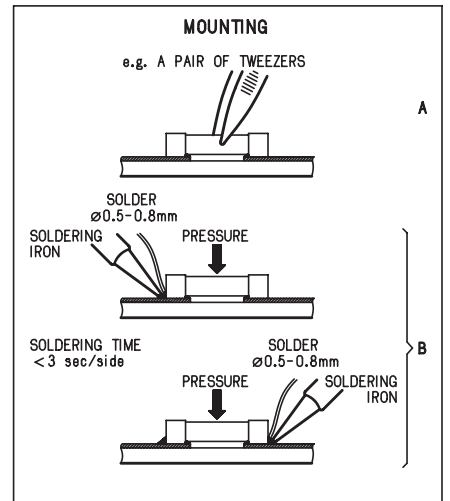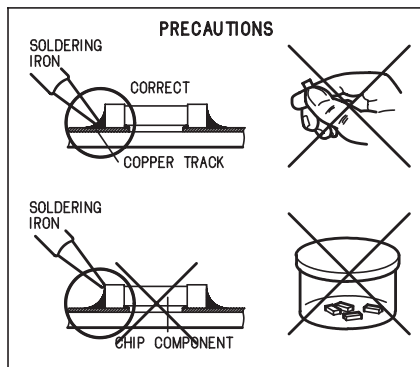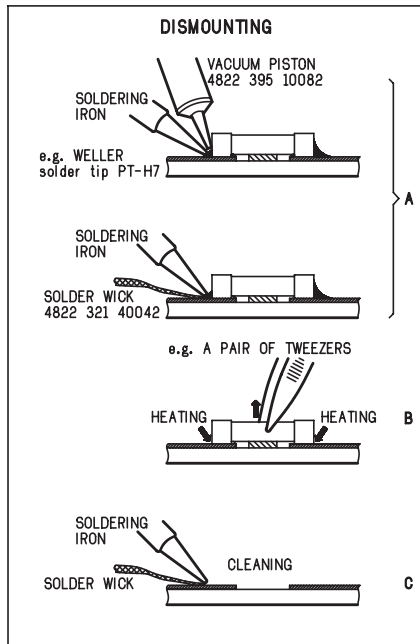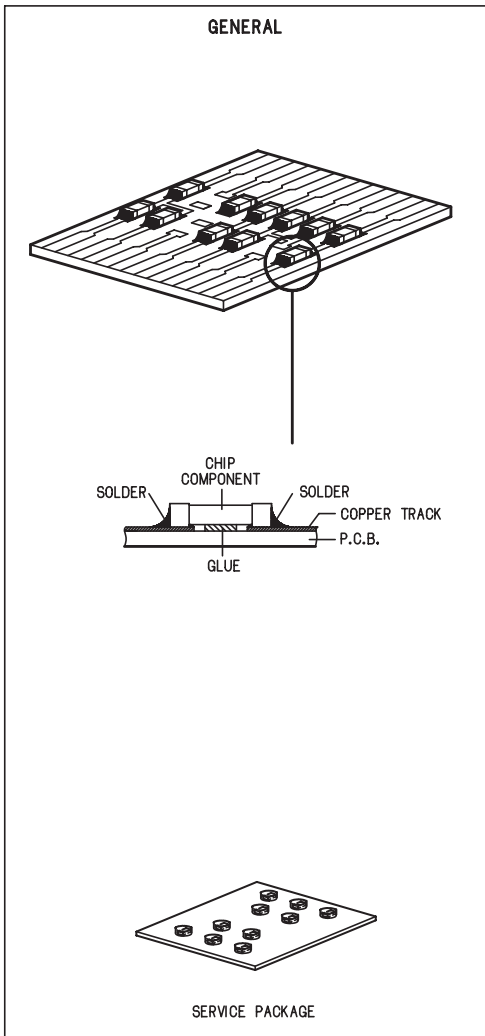

ESD**(GB) WARNING**

All ICs and many other semi-conductors are susceptible to electrostatic discharges (ESD). Careless handling during repair can reduce life drastically.

When repairing, make sure that you are connected with the same potential as the mass of the set via a wrist wrap with resistance. Keep components and tools also at this potential.

(F) ATTENTION

Tous les IC et beaucoup d'autres semi-conducteurs sont sensibles aux décharges statiques (ESD). Leur longévité pourrait être considérablement écourtée par le fait qu'aucune précaution n'est prise à leur manipulation.

Lors de réparations, s'assurer de bien être relié au même potentiel que la masse de l'appareil et enfiler le bracelet serti d'une résistance de sécurité.

Veiller à ce que les composants ainsi que les outils que l'on utilise soient également à ce potentiel.

(D) WARNUNG

Alle ICs und viele andere Halbleiter sind empfindlich gegenüber elektrostatischen Entladungen (ESD).

Unvorsichtige Behandlung im Reparaturfall kann die Lebensdauer drastisch reduzieren. Veranlassen Sie, dass Sie im Reparaturfall über ein Pulsarmband mit Widerstand verbunden sind mit dem gleichen Potential wie die Masse des Gerätes.

Bauteile und Hilfsmittel auch auf dieses gleiche Potential halten.

(NL) WAARSCHUWING

Alle IC's en vele andere halfgeleiders zijn gevoelig voor electrostatische ontladingen (ESD).

Onzorgvuldig behandelen tijdens reparatie kan de levensduur drastisch doen verminderen. Zorg ervoor dat u tijdens reparatie via een polsband met weerstand verbonden bent met hetzelfde potentiaal als de massa van het apparaat.

Houd componenten en hulpmiddelen ook op ditzelfde potentiaal.

(I) AVVERTIMENTO

Tutti IC e parecchi semi-conduttori sono sensibili alle scariche statiche (ESD). La loro longevità potrebbe essere fortemente ridatta in caso di non osservazione della più grande cauzione alla loro manipolazione. Durante le riparazioni occorre quindi essere collegato allo stesso potenziale che quello della massa dell'apparecchio tramite un bracciale a resistenza. Assicurarsi che i componenti e anche gli utensili con quali si lavora siano anche a questo potenziale.

(GB) ESD PROTECTION EQUIPMENT

Complete Kit ESD3 (small tablemat, wristband, connection box, extension cable and earth cable 4822 310 10671
Wristband tester 4822 344 13999

(GB)

Safety regulations require that the set be restored to its original condition and that parts which are identical with those specified, be used.

Safety components are marked by the symbol Δ .

(NL)

Veiligheidsbepalingen vereisen, dat het apparaat bij reparatie in zijn oorspronkelijke toestand wordt teruggebracht en dat onderdelen, identiek aan de gespecificeerde, worden toegepast.

De Veiligheidsonderdelen zijn aangeduid met het symbol Δ .

(F)

Les normes de sécurité exigent que l'appareil soit remis à l'état d'origine et que soient utilisés les pièces de rechange identiques à celles spécifiées.

Les composants de sécurité sont marqués Δ .

(D)

Bei jeder Reparatur sind die geltenden Sicherheitsvorschriften zu beachten. Der Originalzustand des Geräts darf nicht verändert werden; für Reparaturen sind Original-Ersatzteile zu verwenden.

Sicherheitsbauteile sind durch das Symbol Δ markiert.

(I)

Le norme di sicurezza esigono che l'apparecchio venga rimesso nelle condizioni originali e che siano utilizzati i pezzi di ricambio identici a quelli specificati.

Componenti di sicurezza sono marcati con Δ .

(GB)

After servicing and before returning set to customer perform a leakage current measurement test from all exposed metal parts to earth ground to assure no shock hazard exist, The leakage current must not exceed 0.5mA.

**(GB) Warning !**

Invisible laser radiation when open.
Avoid direct exposure to beam.

(S) Varning !

Osynlig laserstrålning när apparaten är öppnad och spärren är urkopplad. Betrakta ej strålen.

(SF) Varoitus !

Avatussa laitteessa ja suojauslaitteiden ohitettaessa olet alltiina näkymättömälle laserisäteilylle. Älä katso säteeseen!

(DK) Advarse !

Usynlig laserstrålning ved åbning når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.


(F)

"Pour votre sécurité, ces documents doivent être utilisés par des spécialistes agréés, seuls habilités à réparer votre appareil en panne".

Pb(Lead) Free Solder

When soldering, be sure to use the pb free solder.

IDENTIFICATION:

Regardless of special logo (not always indicated) 

one must treat all sets from **1 Jan 2005** onwards, according next rules:

Important note: In fact also products of year 2004 must be treated in this way as long as you avoid mixing solder-alloys (lead-free/ lead-free). So best to always use SAC305 and the higher temperatures belong to this.

Due to lead-free technology some rules have to be respected by the workshop during a repair:

- Use only lead-free solder alloy Philips SAC305 with order code 0622 149 00106. If lead-free solder-paste is required, please contact the manufacturer of your solder-equipment. In general use of solder-paste within workshops should be avoided because paste is not easy to store and to handle.
- Use only adequate solder tools applicable for lead-free solder alloy. The solder tool must be able
 - To reach at least a solder-temperature of 400°C,
 - To stabilize the adjusted temperature at the solder-tip
 - To exchange solder-tips for different applications.
- Adjust your solder tool so that a temperature around 360°C – 380°C is reached and stabilized at the solder joint. Heating-time of the solder-joint should not exceed ~ 4 sec. Avoid temperatures above 400°C otherwise wear-out of tips will rise drastically and flux-fluid will be destroyed. To avoid wear-out of tips switch off unused equipment, or reduce heat.
- Mix of lead-free solder alloy / parts with leaded solder alloy / parts is possible but PHILIPS recommends strongly to avoid mixed solder alloy types (leaded and lead-free).

If one cannot avoid or does not know whether product is lead-free, clean carefully the solder-joint from old solder alloy and re-solder with new solder alloy (SAC305).

- Use only original spare-parts listed in the Service-Manuals. Not listed standard-material (commodities) has to be purchased at external companies.
- Special information for BGA-ICs:
 - Always use the 12nc-recognizable soldering temperature profile of the specific BGA (for de-soldering always use the lead-free temperature profile, in case of doubt)
 - Lead free BGA-ICs will be delivered in so-called 'dry-packaging' (sealed pack including a silica gel pack) to protect the IC against moisture. After opening,

dependent of MSL-level seen on indicator-label in the bag, the BGA-IC possibly still has to be baked dry. (MSL=Moisture Sensitivity Level). This will be communicated via AYS-website.

Do not re-use BGAs at all.

- For sets produced before 1.1.2005 (except products of 2004), containing leaded solder-alloy and components, all needed spare-parts will be available till the end of the service-period. For repair of such sets nothing changes.
- On our website www.atyourservice.ce.Philips.com you find more information to:
 - BGA-de-/soldering (+ baking instructions)
 - Heating-profiles of BGAs and other ICs used in Philips-sets

You will find this and more technical information within the "magazine", chapter "workshop news".

For additional questions please contact your local repair-helpdesk.

System , Region Code , etc. Setting Prochure

1)System Reset

- Press "OPTIONS" button on R/C,TV will show setup menu
- Select the menu using the ▼ and ► on R/C
- Go preference page to do system reset


2)Region Code Change

- In open model, press "9" "9" "9" on R/C,then input desired number to change region code :

1	USA
2	EU
3	AP
4	Australia ,NZ , Latam
5	Russia , INDIA
6	CHINA

3)Version Control Change

- In open model, press "1" "5" "9" on R/C
- Press "ok" button to confirm
- TV will show message as below:

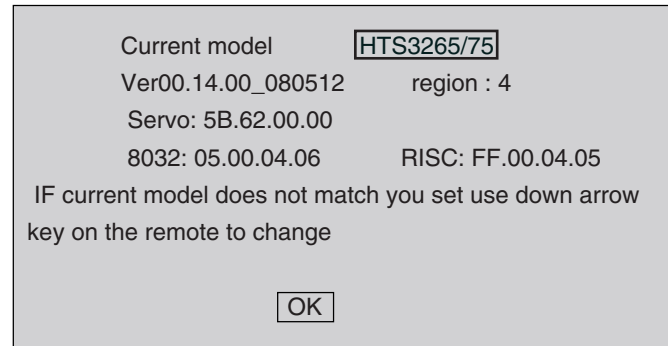

4)Password Change

- Press "OPTIONS " button on R/C,TV will show setup menu
 - Select the menu using the ▼ and ► on R/C
 - Go preference page select "password" to change
- * 000000 is default password supplied.

5)Check on the Sofeware Version

- Open the CD Door
- Press "INFO" button on R/C
- TV will show the version on screen

6)Trade model

- Press "Open/Close " button on R/C
- Press "2" "5" "9" on R/C,VFD will display "TRA ON " or "TRA OFF"


7) Upgrading new software

- Copy "software files" into a CD-R
- Open the CD Door,then insert the CD-R program disc
- Close the CD Door
- VFD will show:


"Loading"
 "Erase" -- erase the flash memory
 "Writing" about 1 minute
 "done "

* the system will switch off and on again automatically.

- OSD will show:

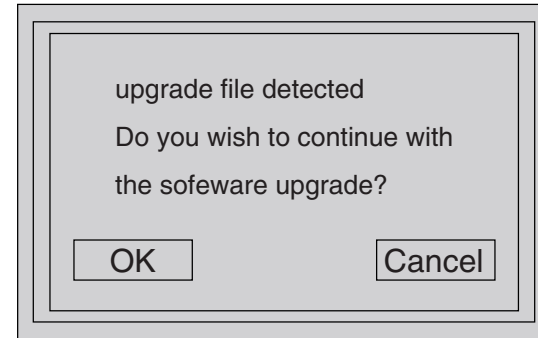

- Select "OK", OSD will show:


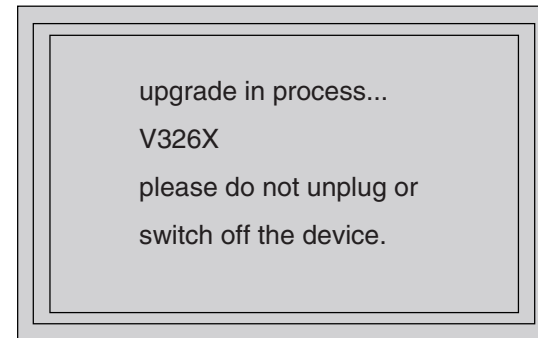


CAUTION!






This information is confidential and may not be distributed.Only a qualified service person should reprogram the Region Code.

REPAIR INSTRUCTIONS (part one)

MAIN UNIT REPAIR CHART

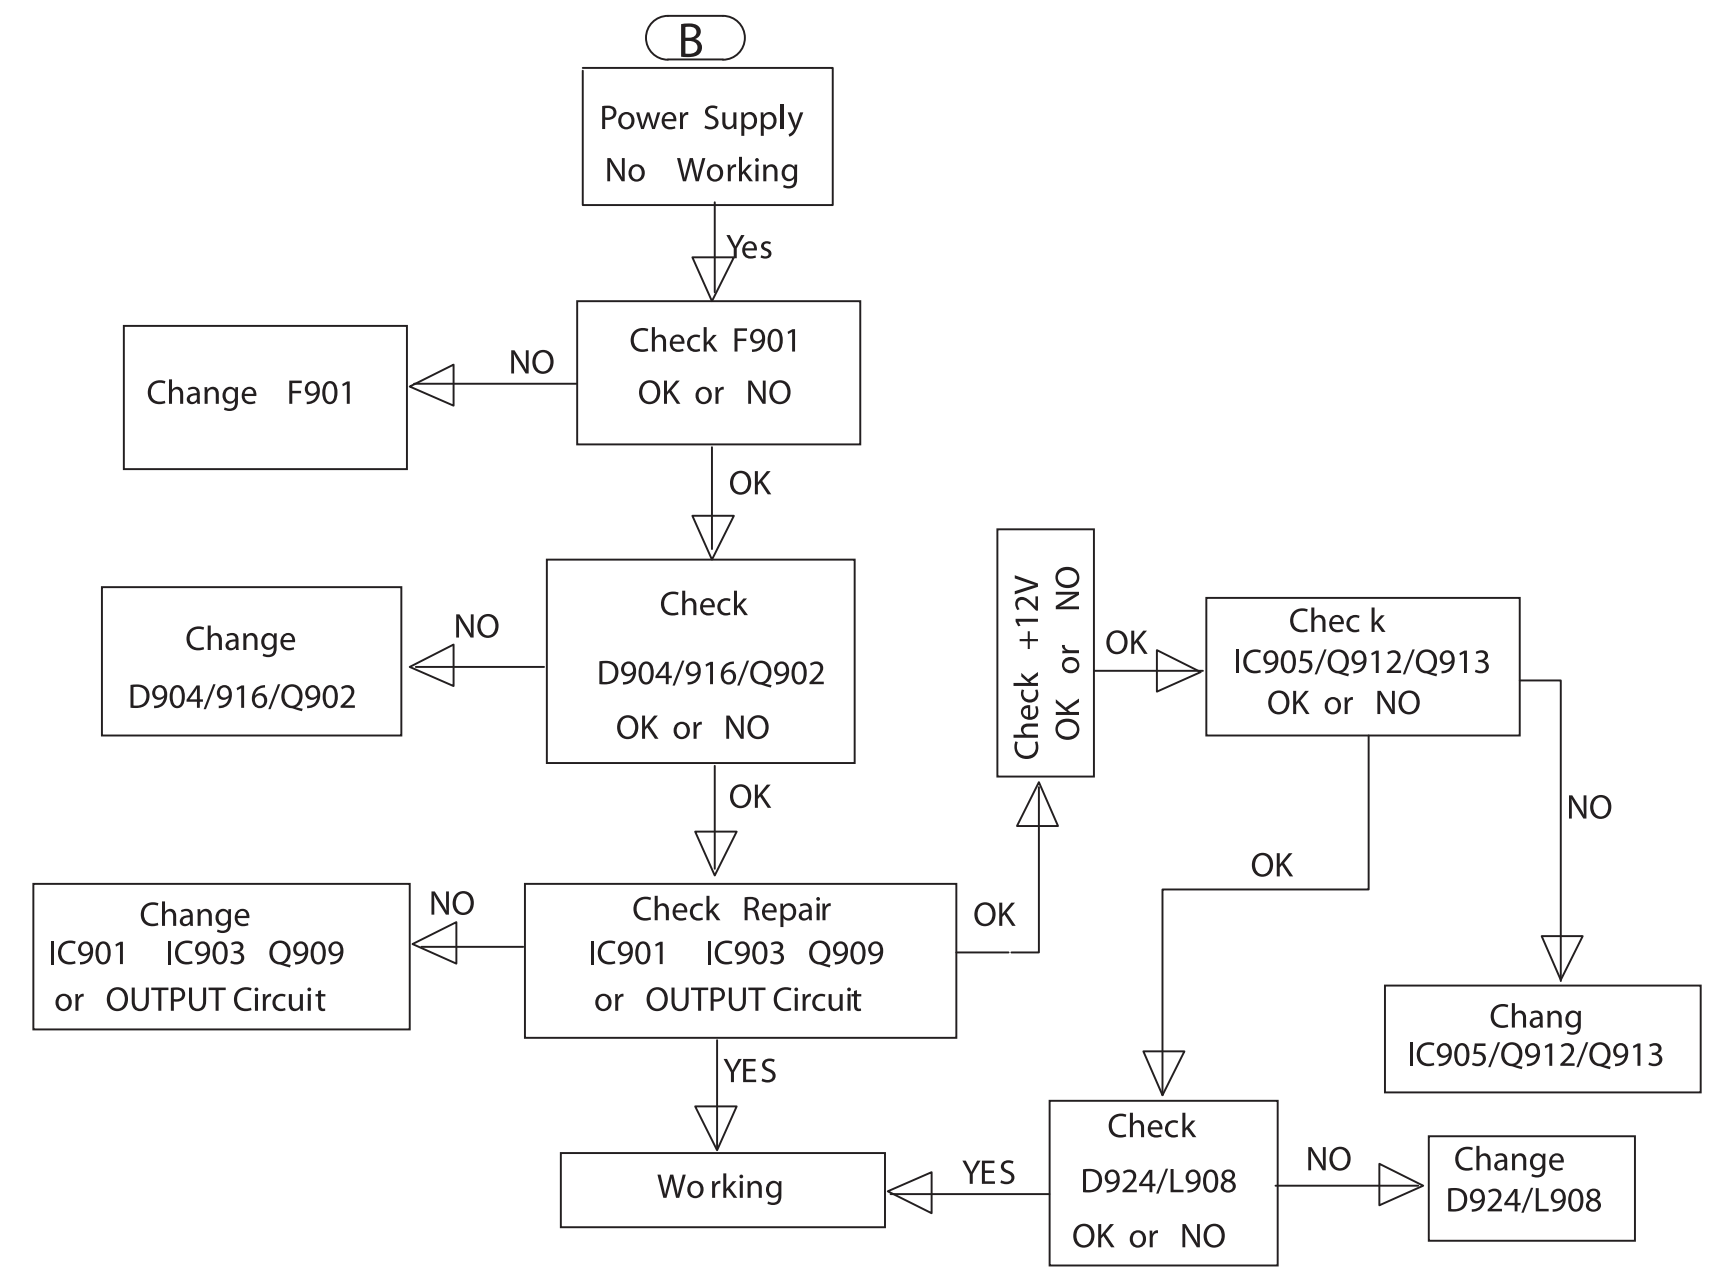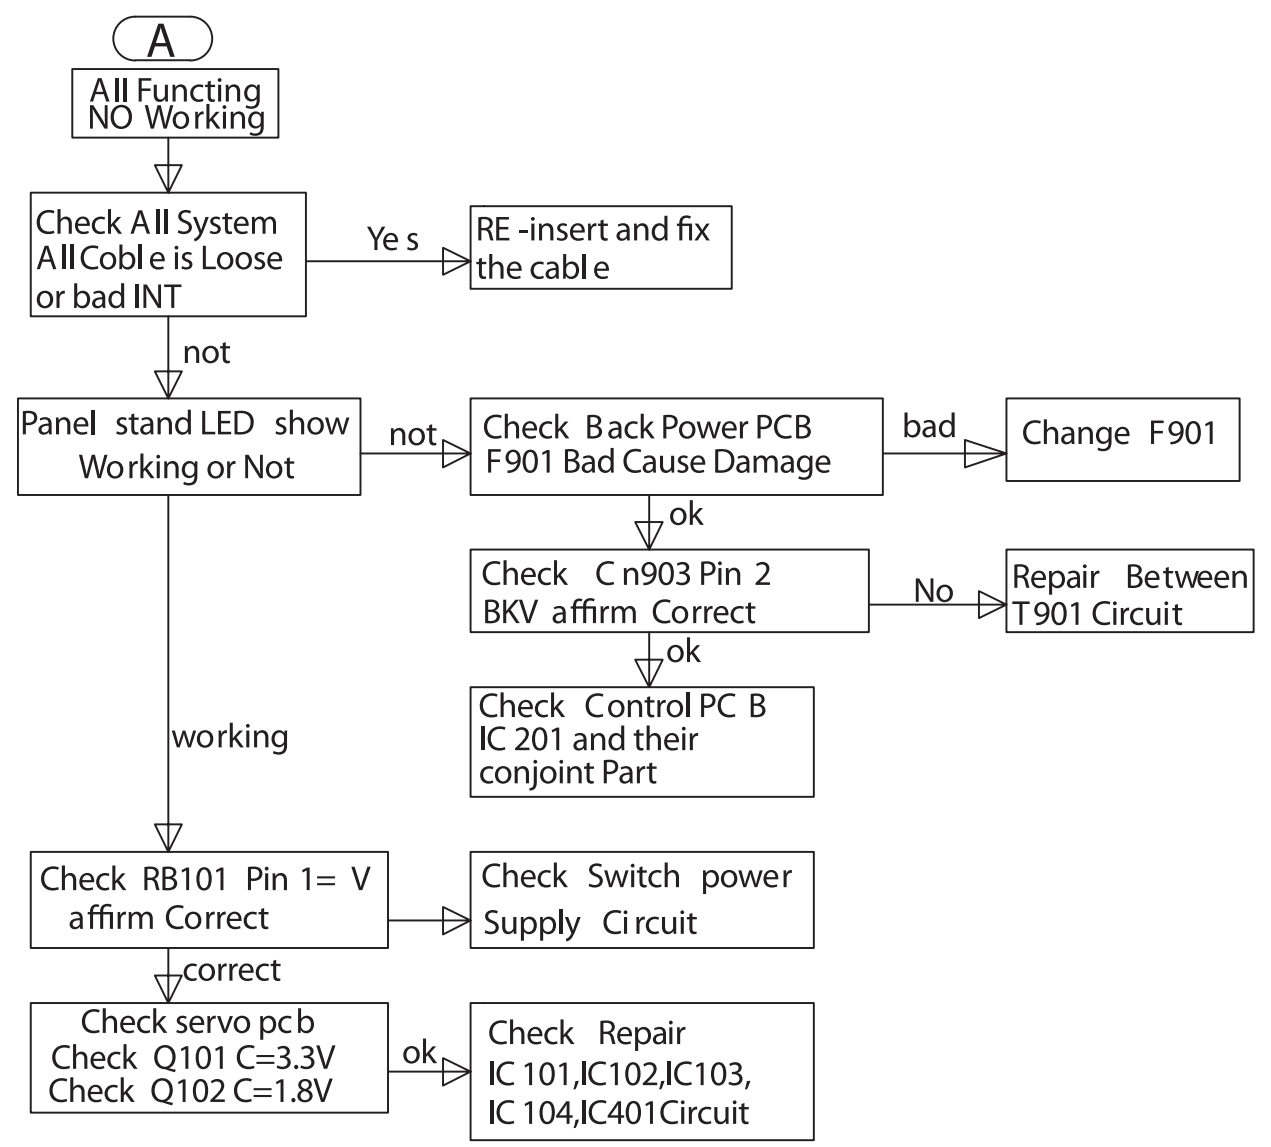

REPAIR INSTRUCTIONS (part two)

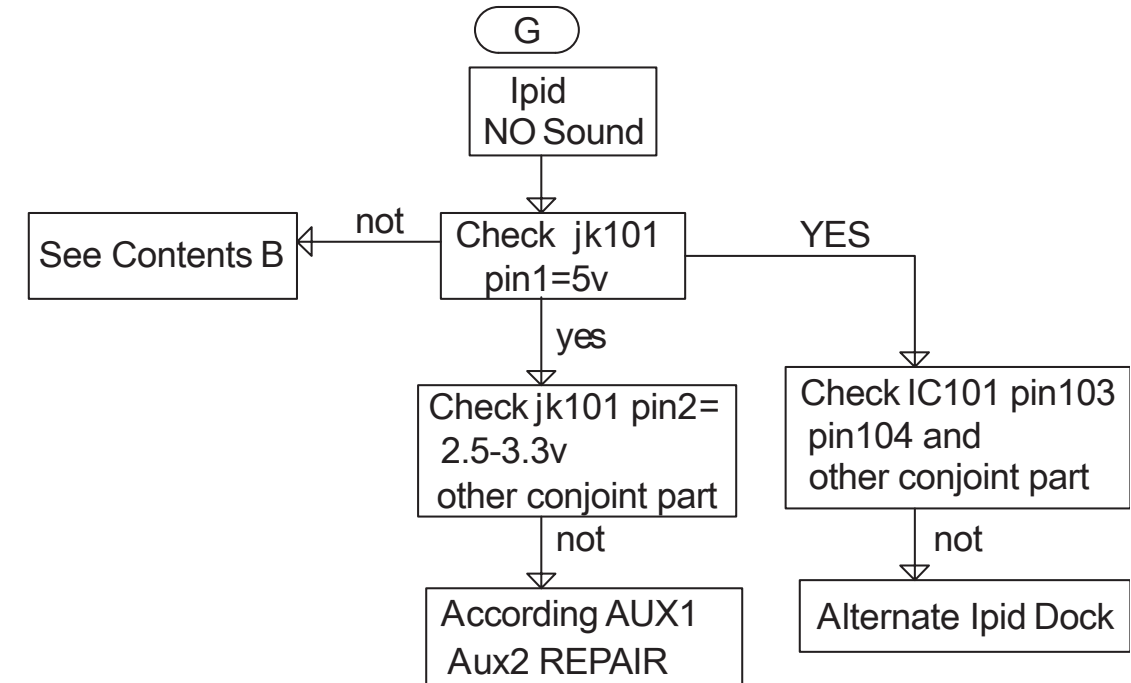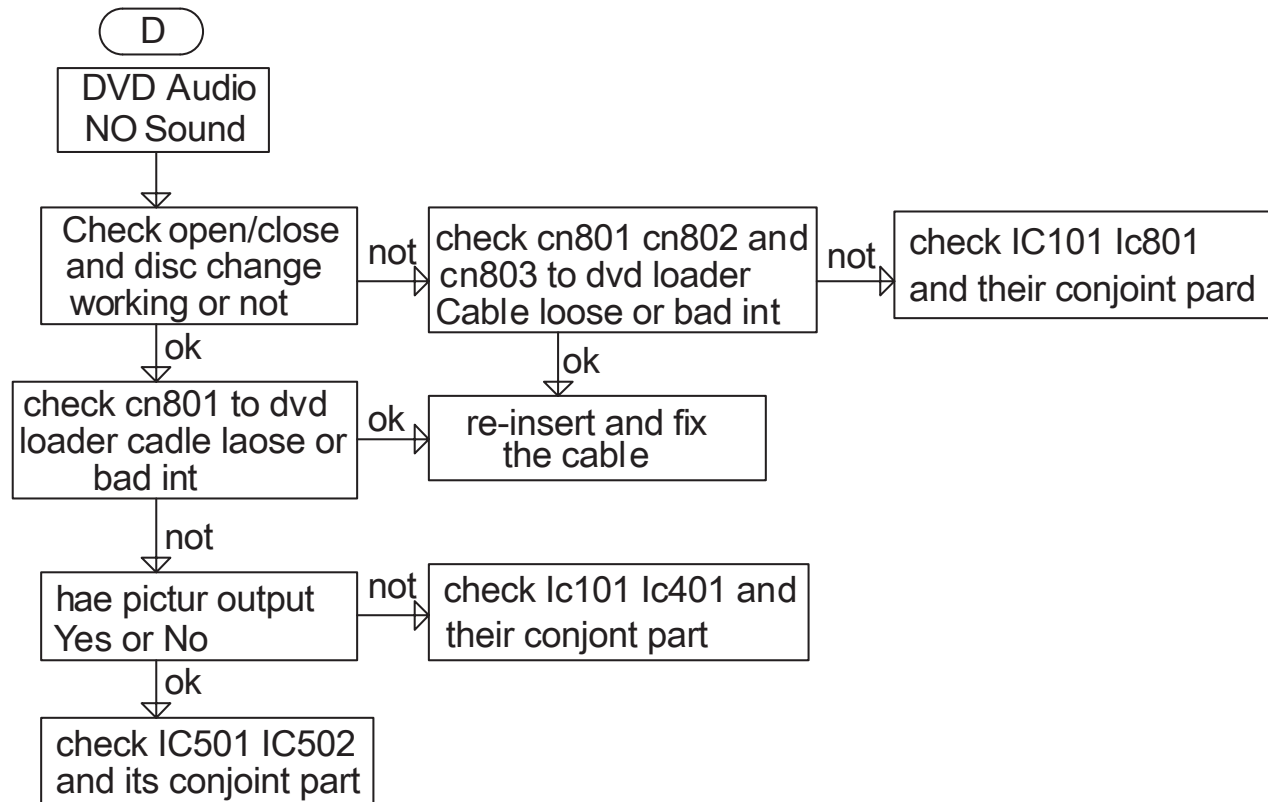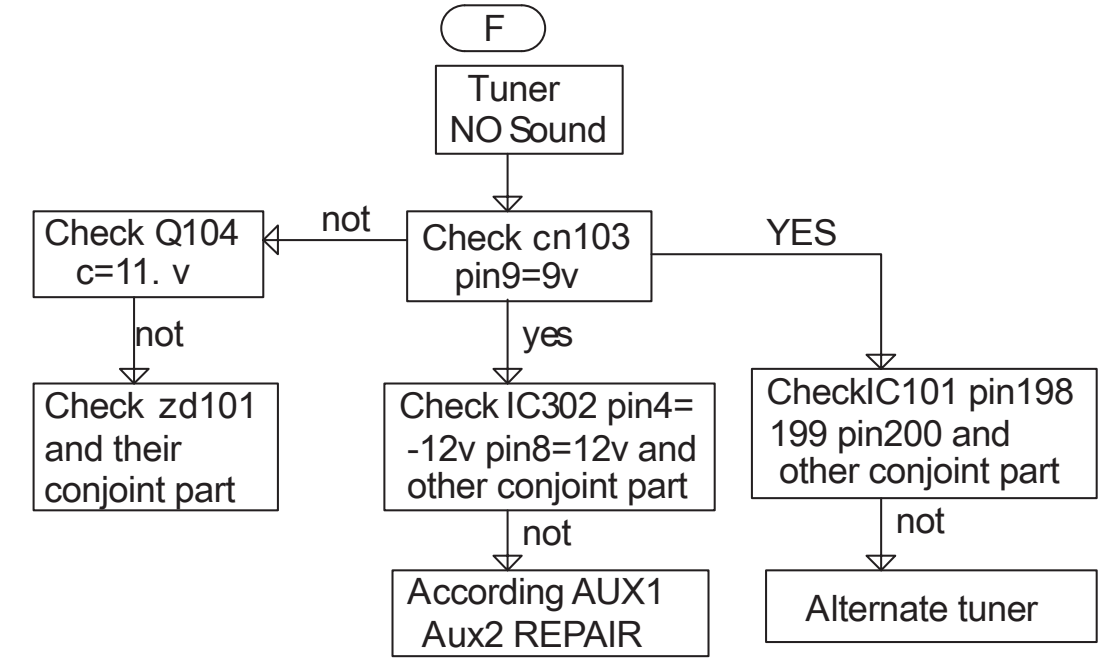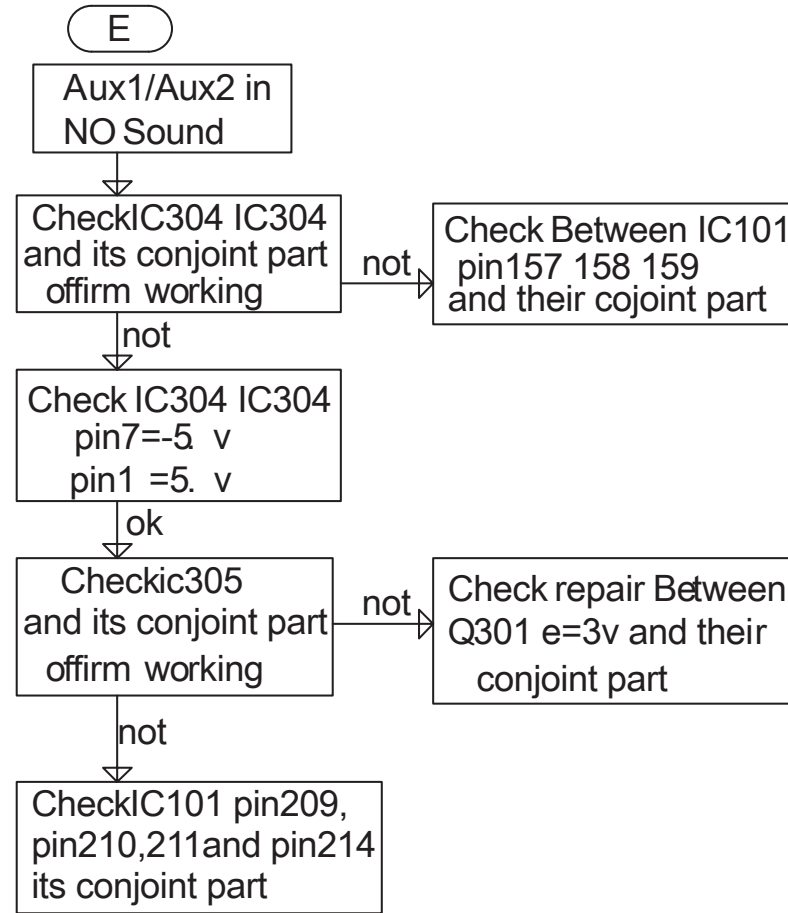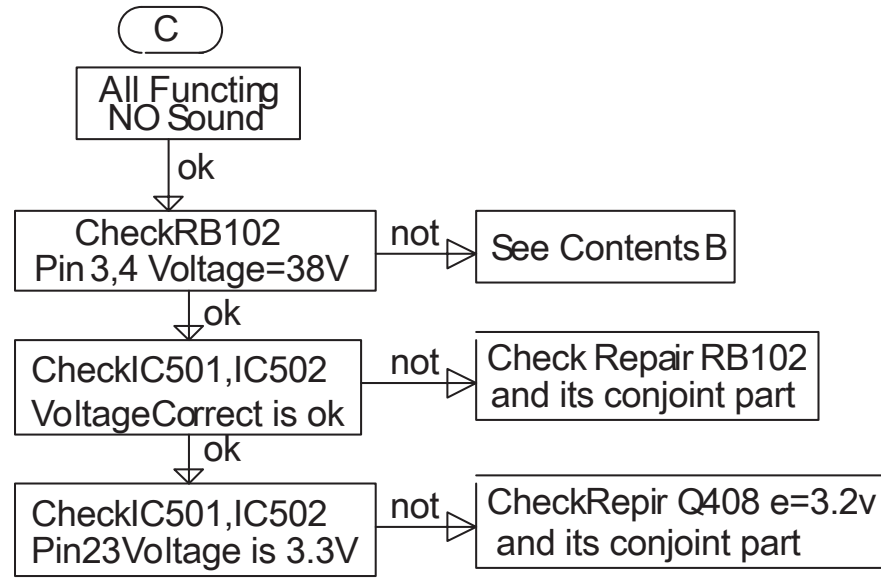

DISASSEMBLY INSTRUCTIONS

Dismantling of the Front Panel Assemble

- 1) Open the DVD Tray by using the Open/Close Button while the Set is ON and disconnect the mains supply after removing the Tray Cover.
Note: If this is not possible, the DVD Tray has to be open manually.
Take a mini screw driver about 2mm diameter and make a marking 24mm from the tip as shown in figure 2 . Place the set on its side, insert the mini screw driver till the marking and slide it towards the left as shown in figure 1 until the Tray moves out of the Front Panel.
- 2) Return the set to its upright position and remove the Tray Cover as shown in Figure 3 and close the tray manually by pushing it back in.

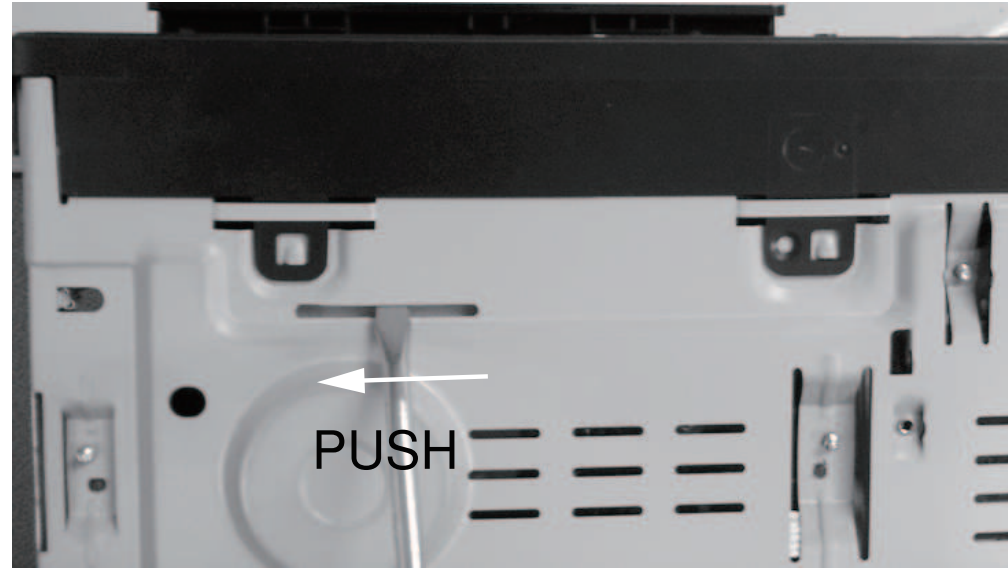


Figure 1

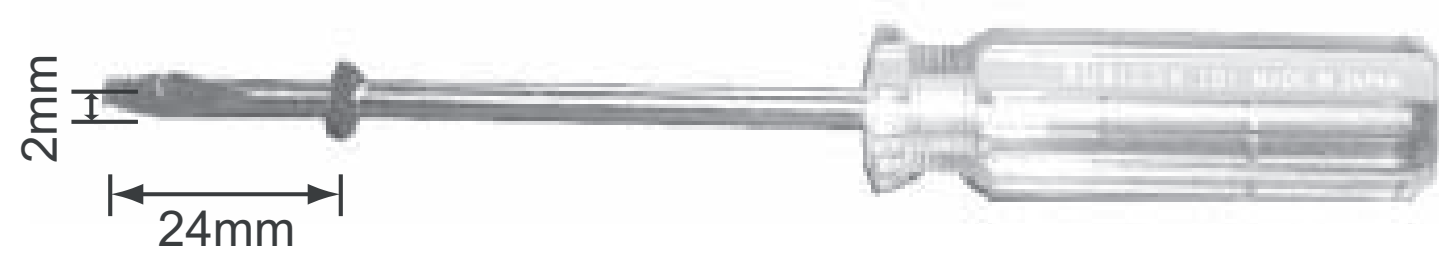


Figure 2

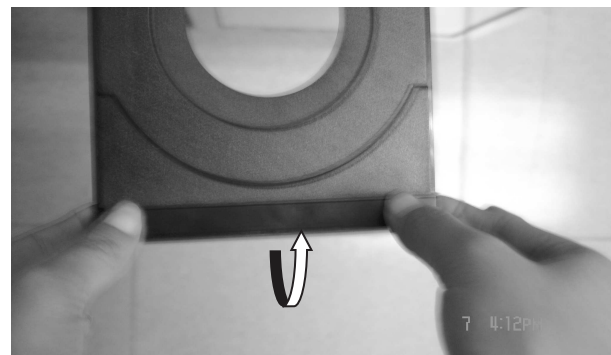


Figure 3

- 3) Loosen 6 screws and remove the Top Cover by lifting the rear portion upwards before sliding it out towards the rear.
 - 1 screw "A" each on the left & right side as shown in figure 4.
 - 4 screws "B" at the back panel as shown in figure 5.
- 4) Loosen 6 screws "C" at the bottom panel as in figure 6 to remove the front panel.

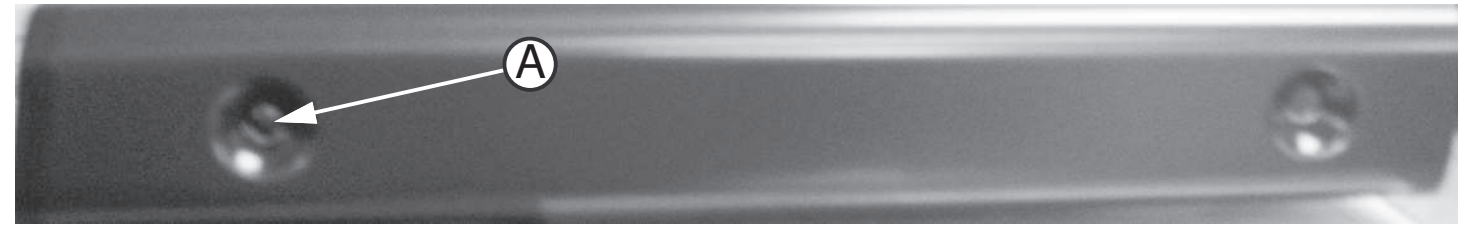


Figure 4

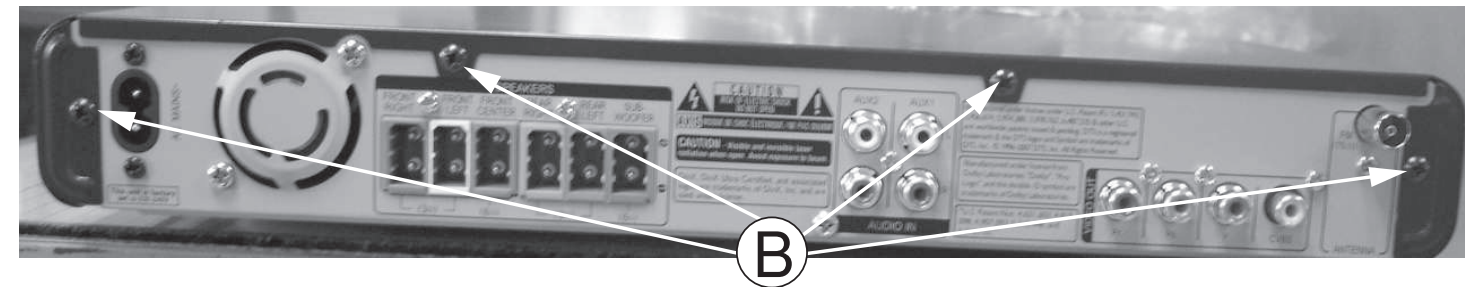


Figure 5

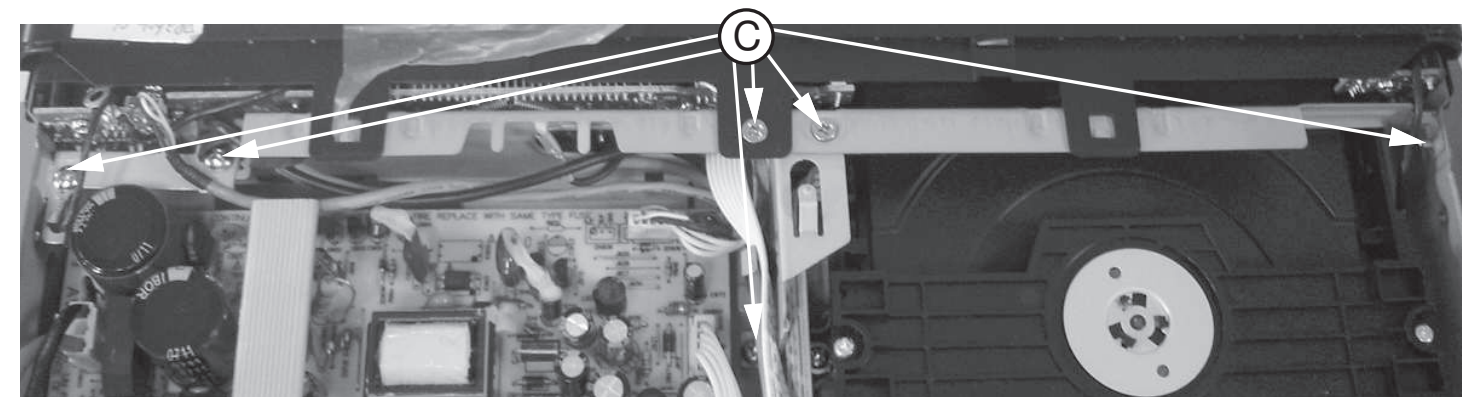


Figure 6

Dismantling of the Power Board

- 1) Loosen 4 screws " D " on the top of power board as shown in figure 7.
- 2) With a pincers to nip this space as shown in figure 8 and to take up the power board.

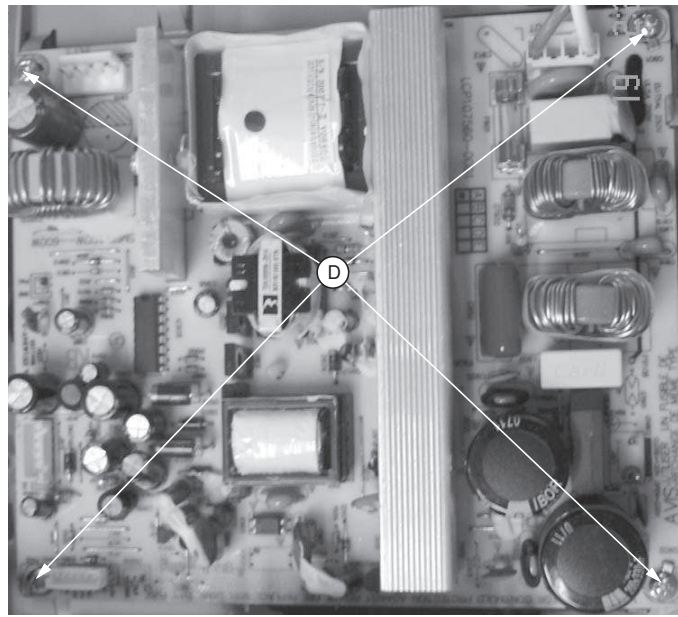


Figure 7

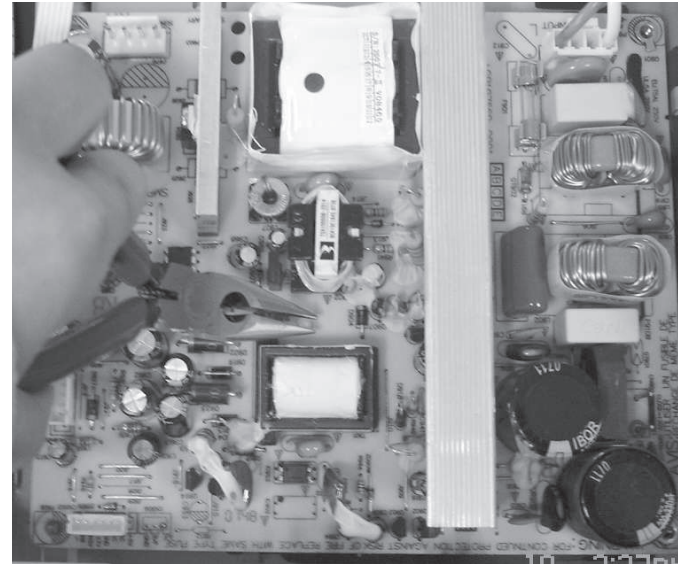


Figure 8

Dismantling of the Main Board

- 1) Loosen 4 screws " E " on the top of main board as shown in figure 9.
- 2) Loosen 6 screws " F " at the back panel as shown in figure 10.

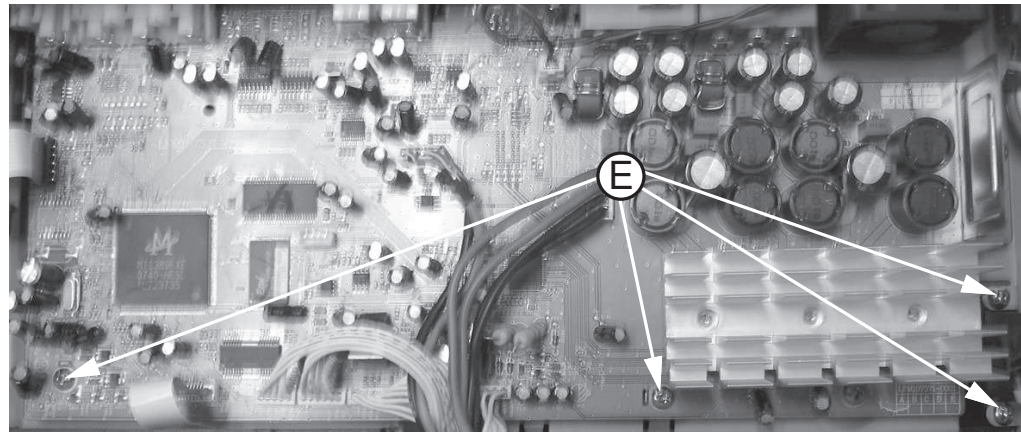


Figure 9



Figure 10

Dismantling of the DVD Module

- 1) Loosen 4 screws " G " at the DVD module as shown in figure 11.

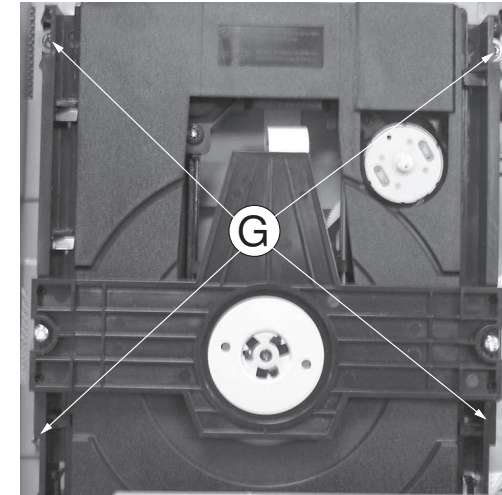


Figure 11

Dismantling of the VFD+JACK+STANDBY Board

- 1) Loosen 10 screws " H " on the top of VFD+JACK+STANDBY board as shown in figure 12.

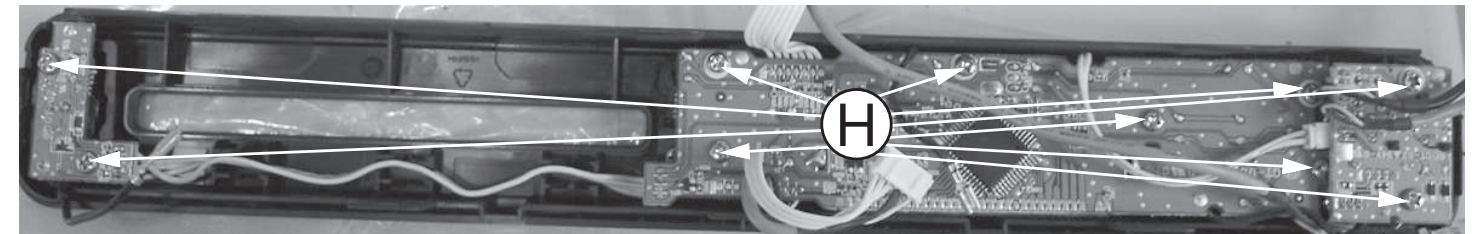



Figure 12

SERVICE POSITIONS

3 - 3


3 - 3

Service position A

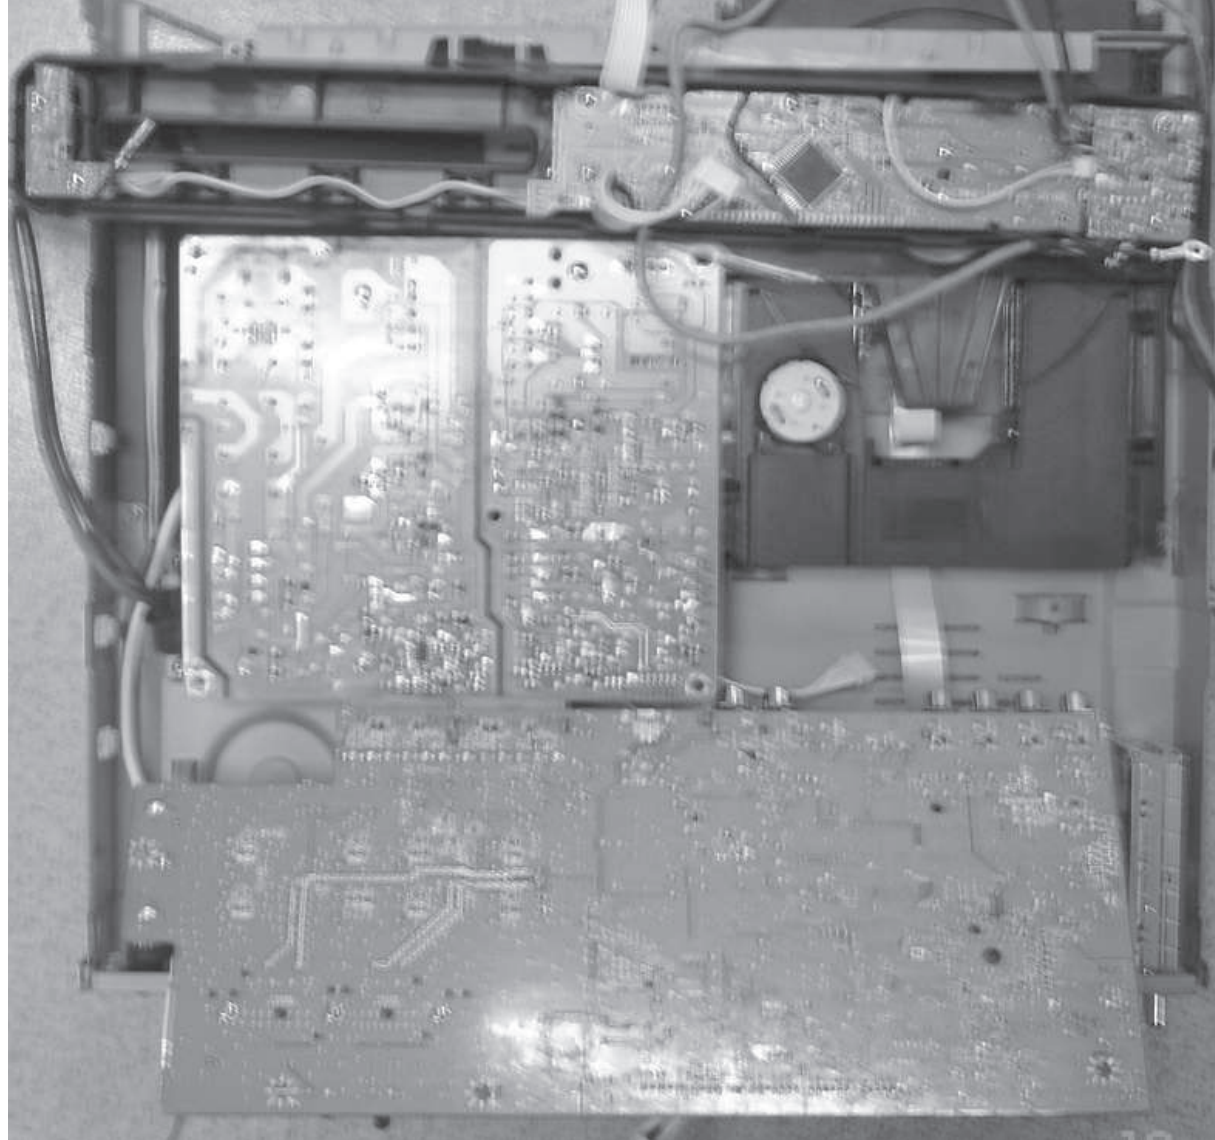


Note: In some service positions the components or copper patterns of one board may risk touching its neighbouring pc boards or metallic parts. To prevent such short-circuit use a piece of hard paper or other insulating material between them.

BLOCK DIAGRAM

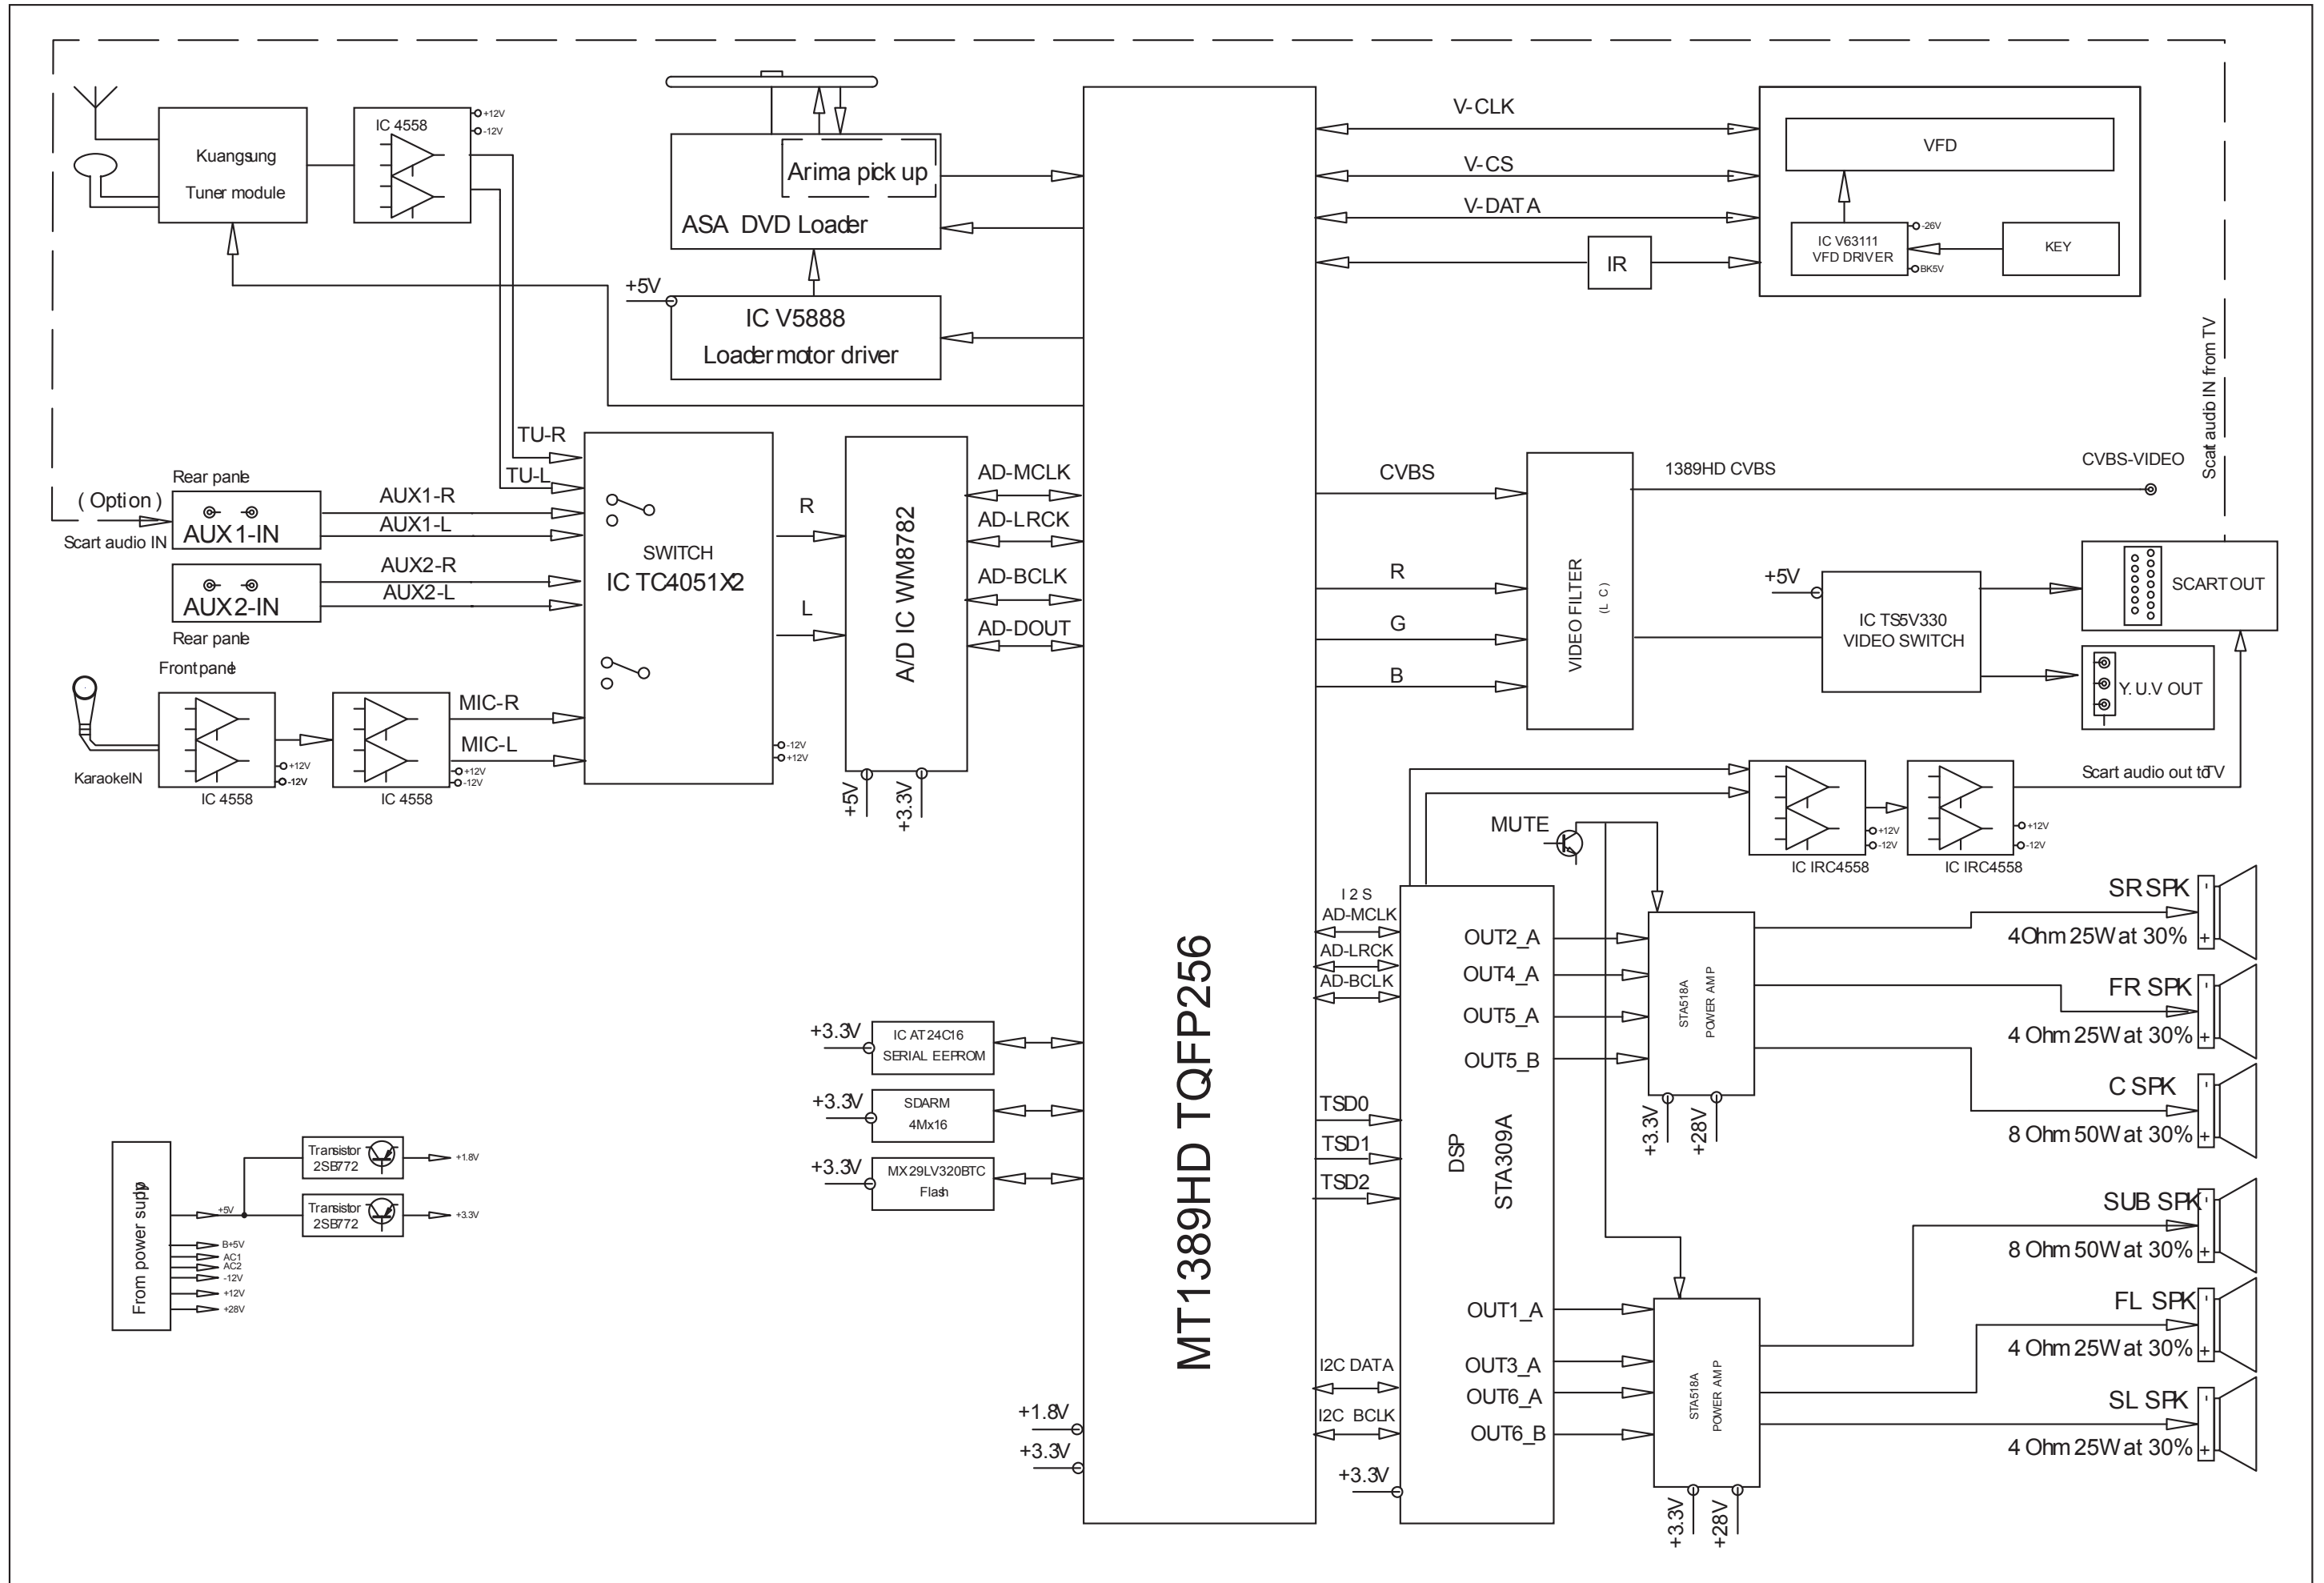


MT1389HD TQFP256

WIRING DIAGRAM

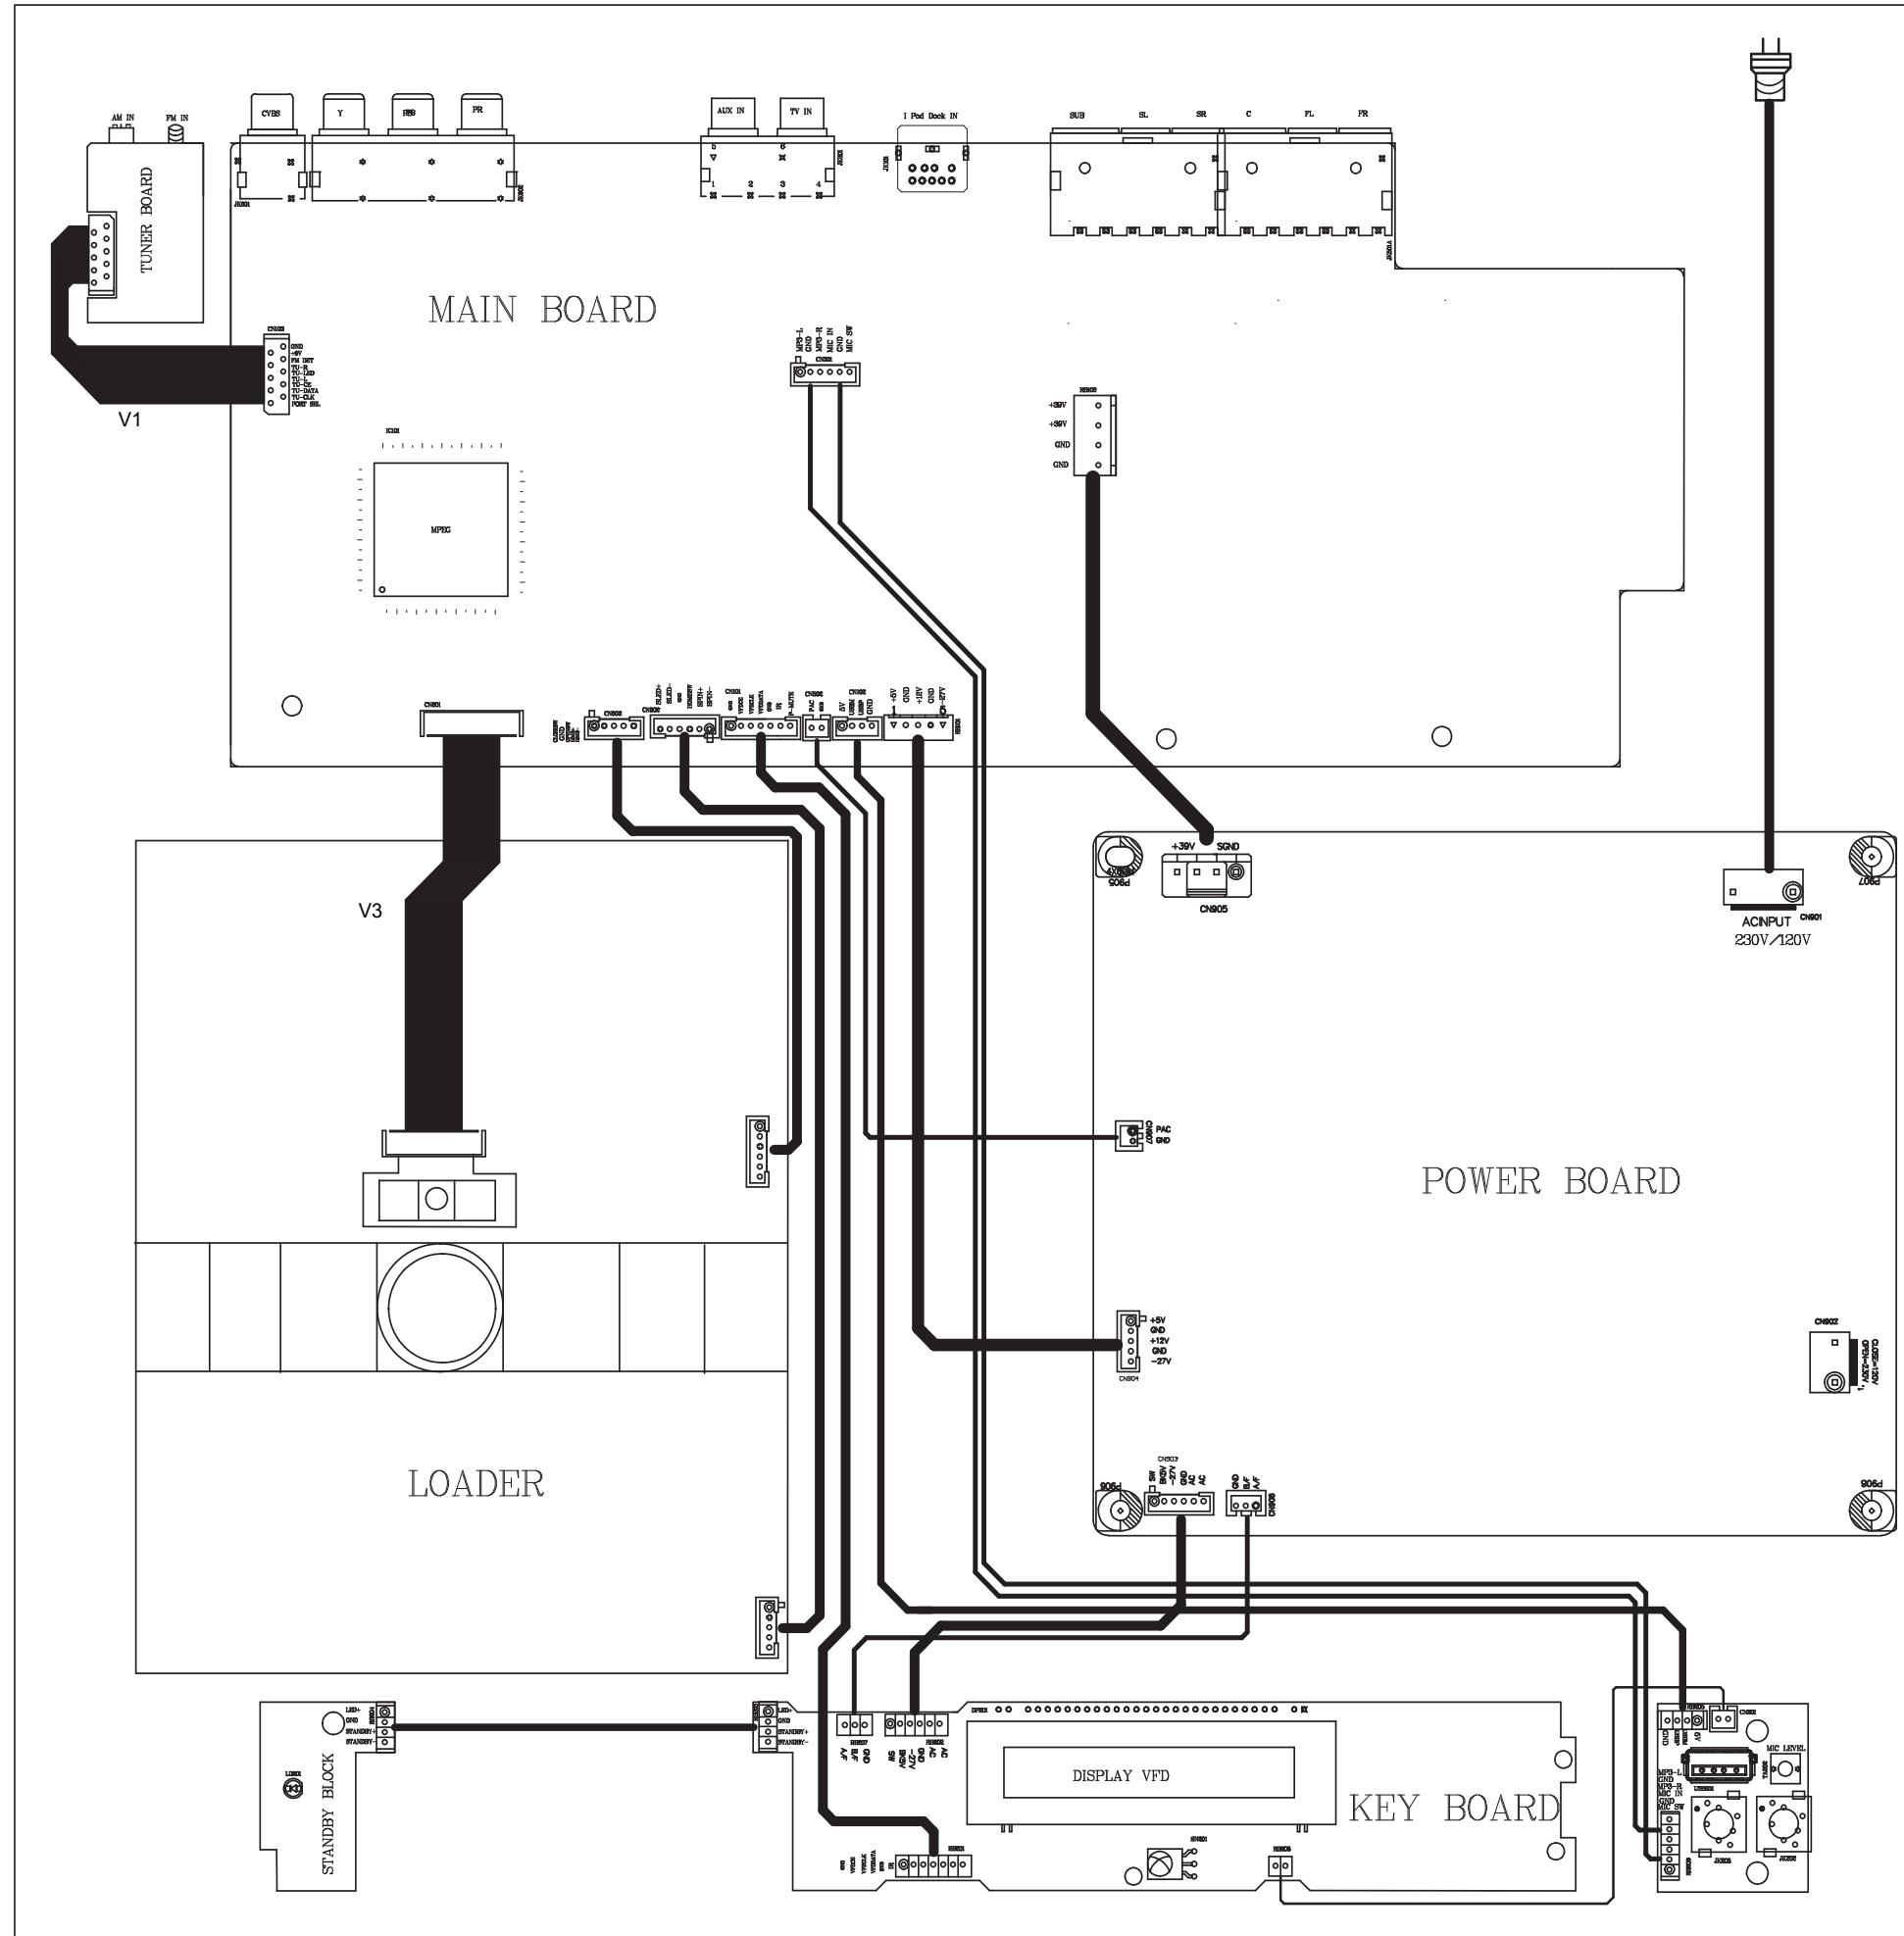

FTD DISPLAY PIN ASSIGNMENT

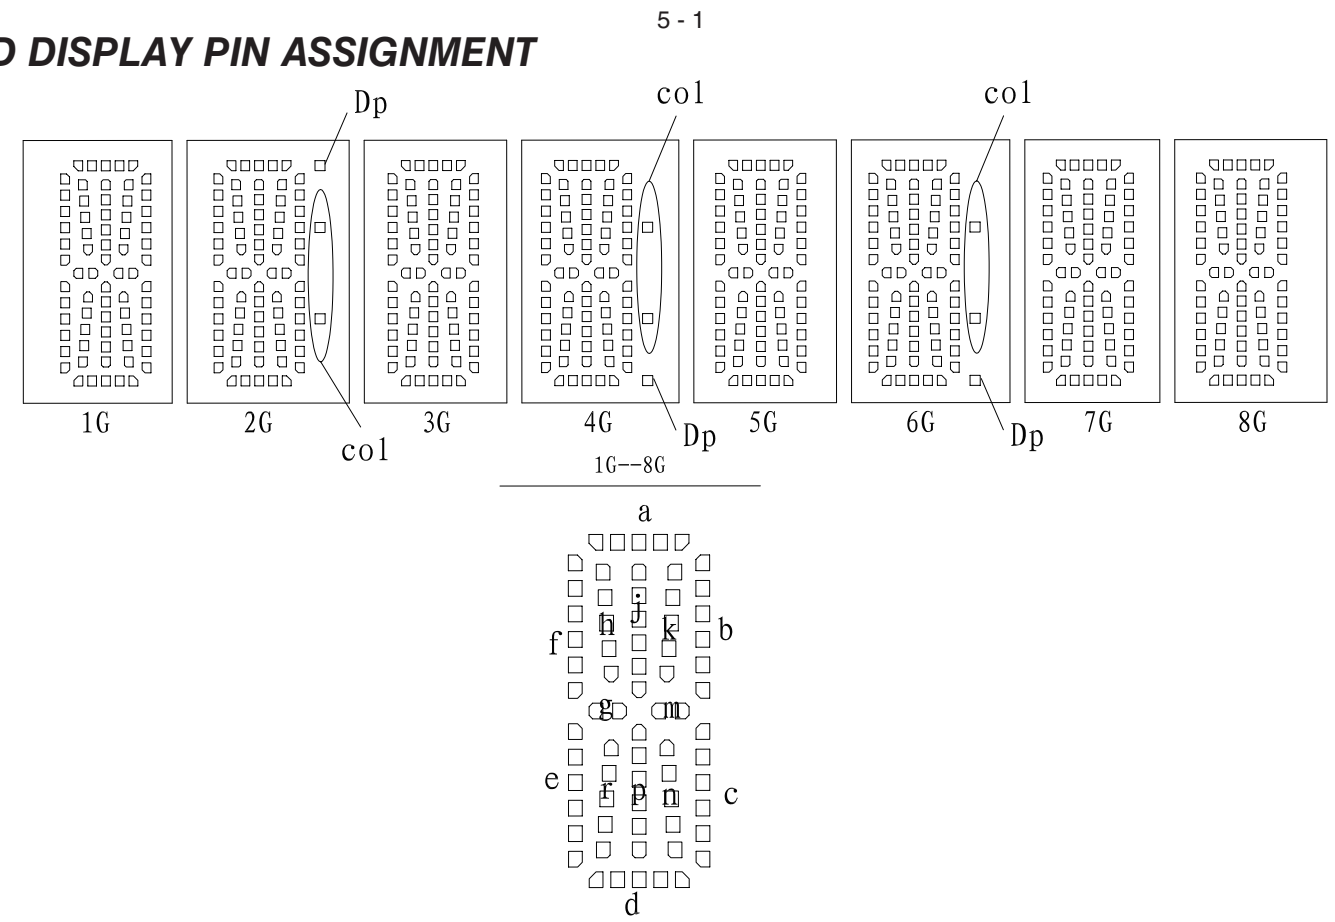

CONTROL BOARD

TABLE OF CONTENTS

FTD Display Pin Assignment.....5-1
 Circuit Diagram5-2
 PCB Layout Top & Bottom View.....5-3

	1G	2G	3G	4G	5G	6G	7G	8G
P1	a	a	a	a	a	a	a	a
P2	j, p	j, p	j, p	j, p	j, p	j, p	j, p	j, p
P3	h	h	h	h	h	h	h	h
P4	k	k	k	k	k	k	k	k
P5	b	b	b	b	b	b	b	b
P6	f	f	f	f	f	f	f	f
P7	m	m	m	m	m	m	m	m
P8	g	g	g	g	g	g	g	g
P9	c	c	c	c	c	c	c	c
P10	e	e	e	e	e	e	e	e
P11	r	r	r	r	r	r	r	r
P12	n	n	n	n	n	n	n	n
P13	d	d	d	d	d	d	d	d
P14	/	col	/	col	/	col	/	/
P15	/	Dp	/	Dp	/	Dp	/	/


PIN CONNECTION

管脚序号 (Pin NO.)	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
连接 (Connection)	F1	F1	NP	NC	P15	P14	NC	P13	P12	P11	P10	P9	P8	P7	P6	P5
管脚序号 (Pin NO.)	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
连接 (Connection)	P4	P3	P2	P1	NC	1G	2G	3G	4G	5G	6G	7G	8G	NP	F2	F2

注 (Notes) : Fn : 灯丝 (Filament Pin) nG : 栅极 (Grid Pin)
 Pn : 阳极 (Anode Pin) NP : 无引出脚 (No Pin)
 NC : 无功能 (No connection Pin)


CIRCUIT DIAGRAM

C1	D4	C14	B2	C18	C1	C22	B4	D12	D2	FB12D3	IC11	B3	Q12	C1	Q16	A2	R14	B1	R18	C1	R22	D1	R26	D1	R30	C2	R34	C2	R40	A3	R44	D1	RB13A1	SN11B1	TA14D1	TA18D2	
C11	B1	C15	D3	C19	B2	C23	B3	D13	D2	FB13D3	JK11	C2	Q13	D1	R11	A1	R15	B1	R19	C1	R23	C1	R27	A2	R31	C2	R35	C2	R41	A4	R45	D1	RB14A1	TA11D1	TA15D2	TA20D2	
C12	B1	C16	C1	C20	B2	C24	B1	DP11A3	FB14D3	LD11A2	Q14	D1	R12	B1	R16	C1	R20	C1	R24	D1	R28	A2	R32	C2	R38	B2	R42	C1	RB11A1	RB15D3	TA12D1	TA16D2	USB11D3				
C13	B1	C17	C1	C21	B3	D11	D2	FB11C3	FB15D3	Q11	B1	Q15	D1	R13	A2	R17	C1	R21	D1	R25	D1	R29	B2	R33	C2	R39	B2	R43	D1	RB12B1	RB16D3	TA13D1	TA17D2	ZD1	A1		

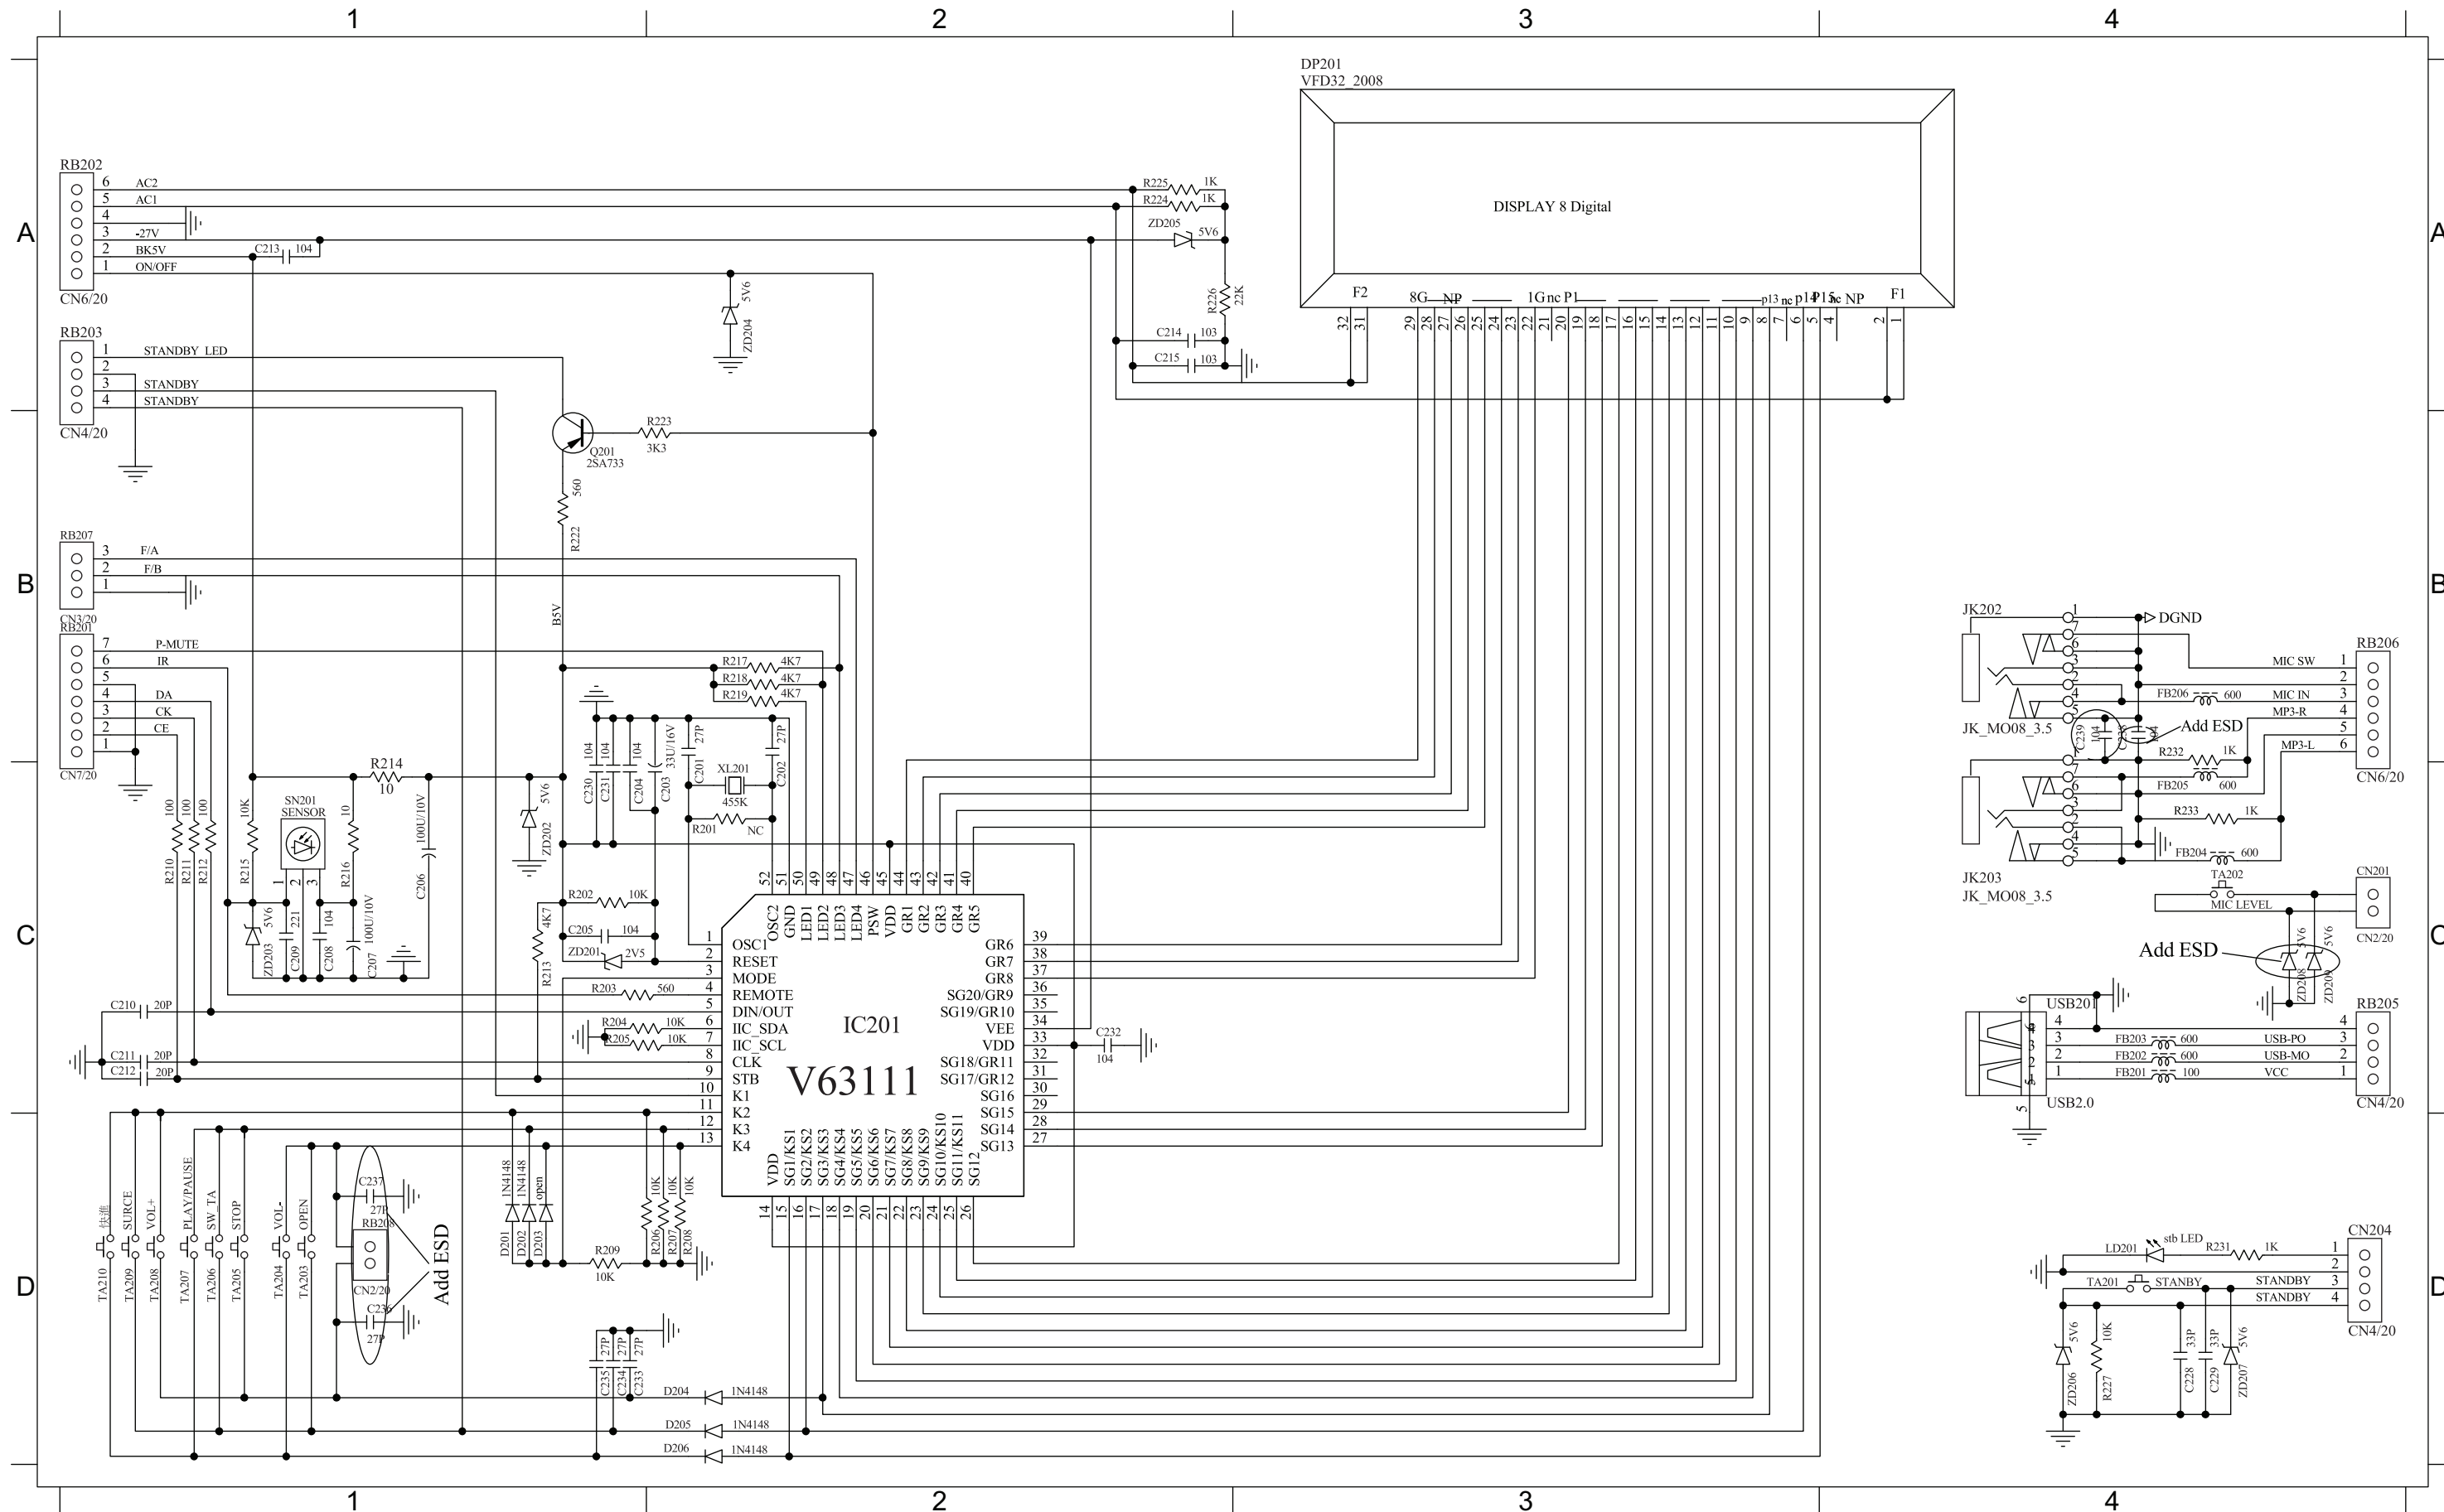


PCB LAYOUT - TOP VIEW

C203 A2 C207 A2 DP201 A2 ESD2 A4 ESD7 A5 JK203 A5 RB201 A2 RB203 A1 RB206 A5 SN201 A3 TA202 A5 TA204 A3 TA206 A4 TA208 A3 TA210 A5 XL201 A3
 C206 A2 CN201 A5 ESD1 A2 ESD6 A1 JK202 A5 LD201 A1 RB202 A2 RB205 A5 RB208 A3 TA201 A1 TA203 A1 TA205 A4 TA207 A4 TA209 A4 USB201 A5

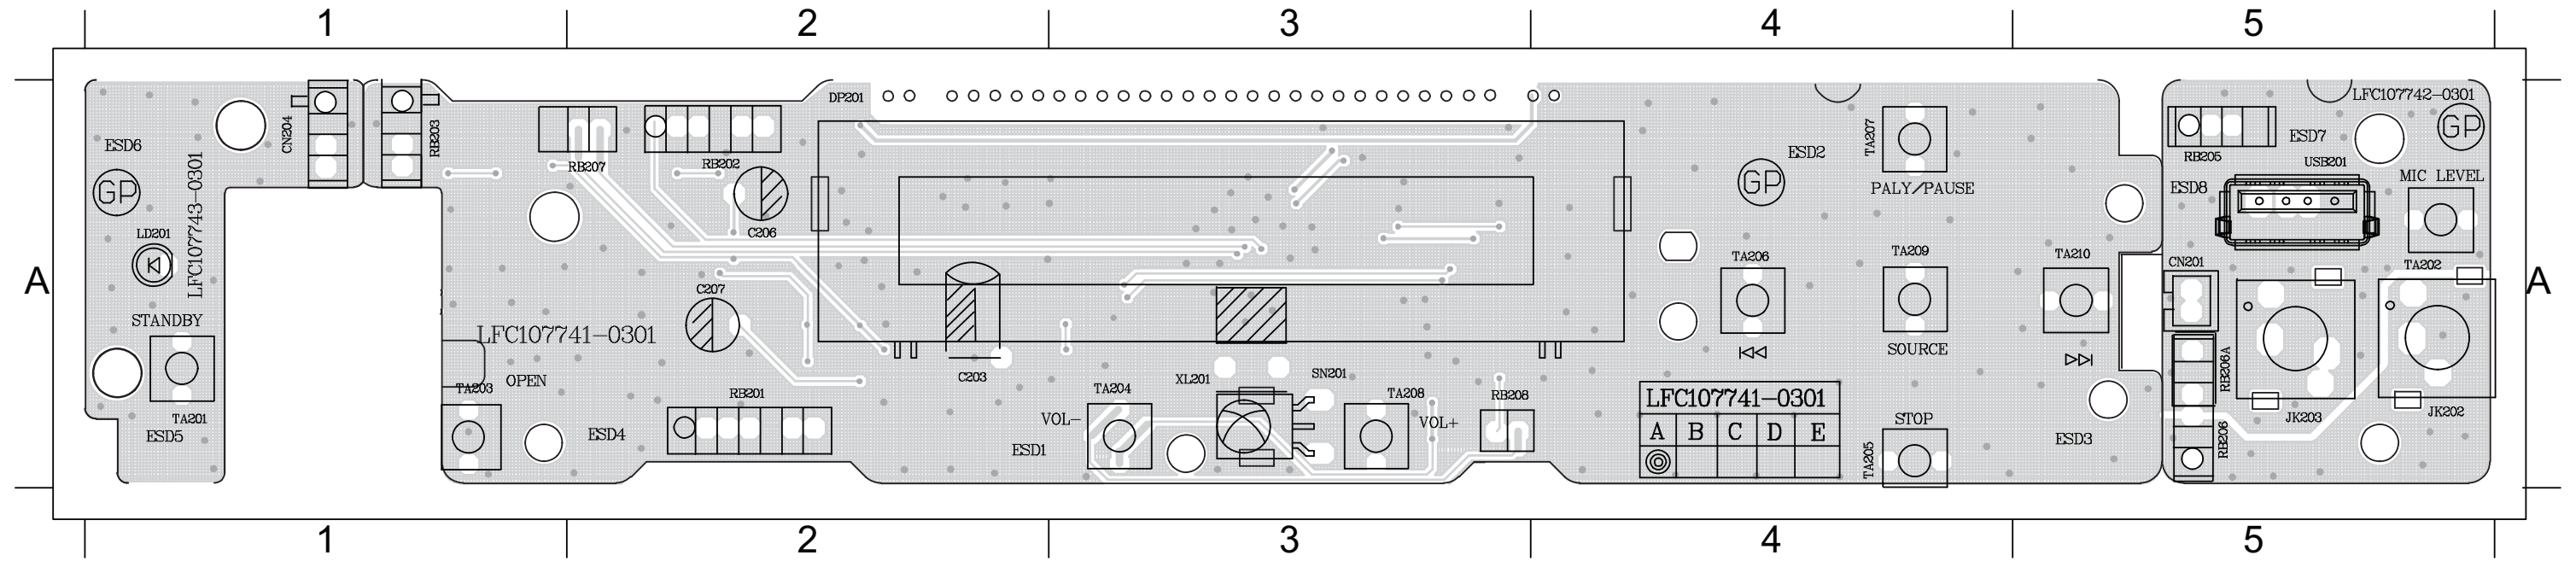

PCB LAYOUT - BOTTOM VIEW

C201 A3 C208 A3 C212 A4 C228 A5 C232 A3 C236 A3 D201 A4 D206 A3 FB204 A1 Q201 A5 R205 A3 R209 A3 R213 A4 R217 A3 R223 A5 R227 A5 ZD201 A4 ZD205 A4 ZD209 A1
 C202 A3 C209 A3 C213 A4 C229 A5 C233 A3 C237 A3 D202 A4 FB201 A1 FB205 A1 R202 A4 R206 A4 R210 A4 R214 A4 R218 A3 R224 A4 R231 A5 ZD202 A4 ZD206 A5
 C204 A3 C210 A4 C214 A4 C230 A3 C234 A4 C238 A1 D204 A3 FB202 A1 FB206 A1 R203 A4 R207 A3 R211 A4 R215 A4 R219 A3 R225 A4 R232 A1 ZD203 A4 ZD207 A5
 C205 A4 C211 A4 C215 A2 C231 A3 C235 A3 C239 A1 D205 A4 FB203 A1 IC201 A3 R204 A3 R208 A4 R212 A4 R216 A4 R222 A5 R226 A4 R233 A1 ZD204 A4 ZD208 A1

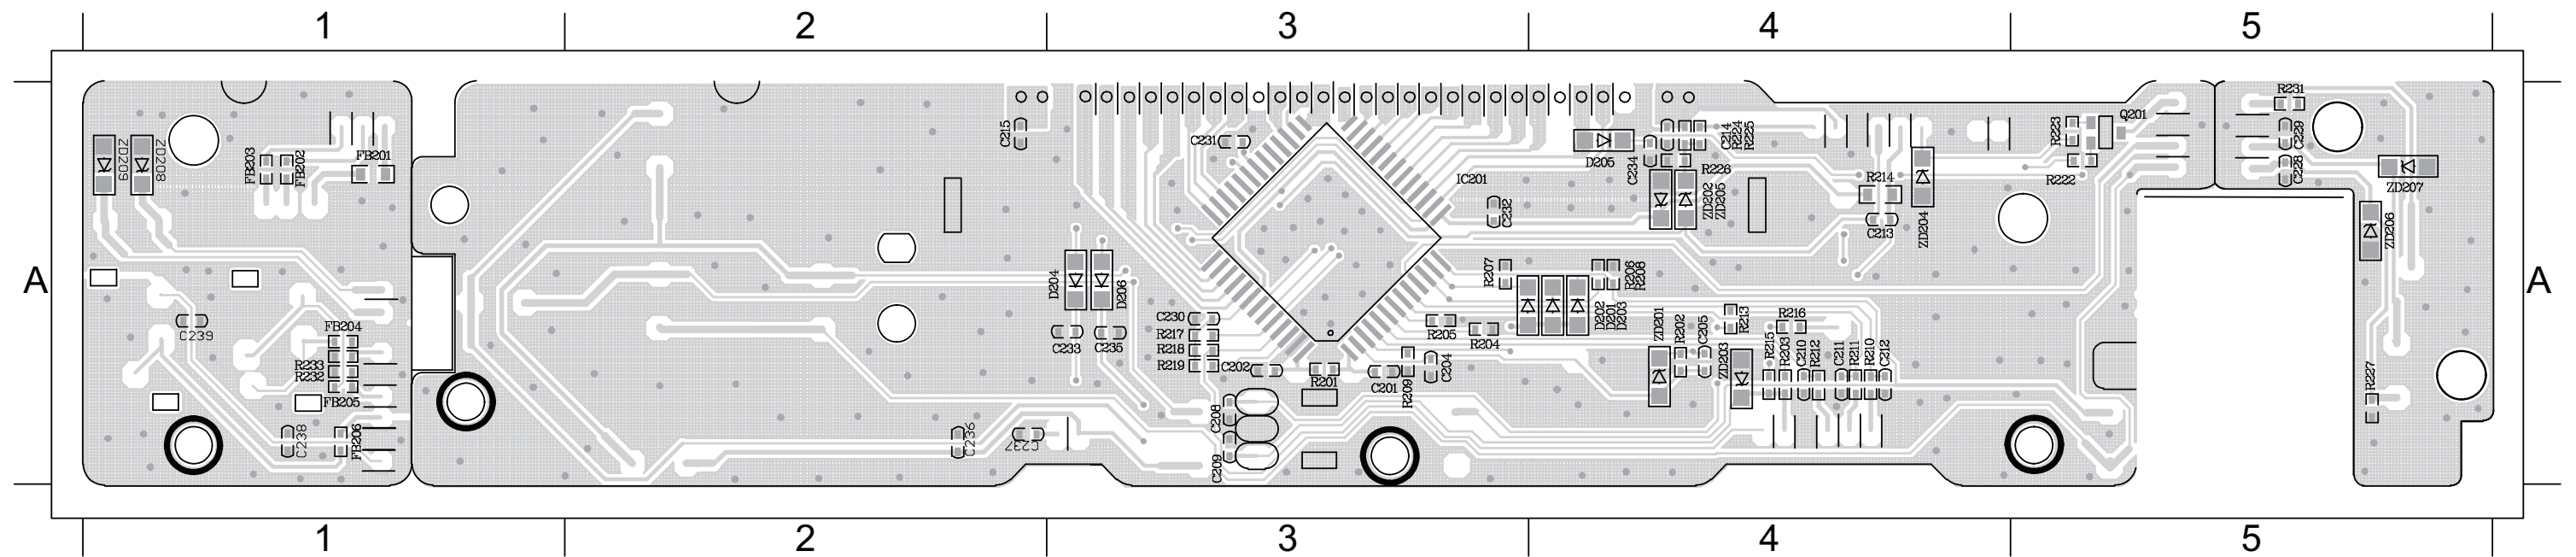


MAIN BOARD


TABLE OF CONTENTS


Internal IC Diagram6-1
 Circuit Diagram (part one)6-2
 Circuit Diagram (part two)6-3
 PCB Layout Top View6-4
 PCB Layout Bottom View6-5

INTERNAL IC DIAGRAM - STA309A

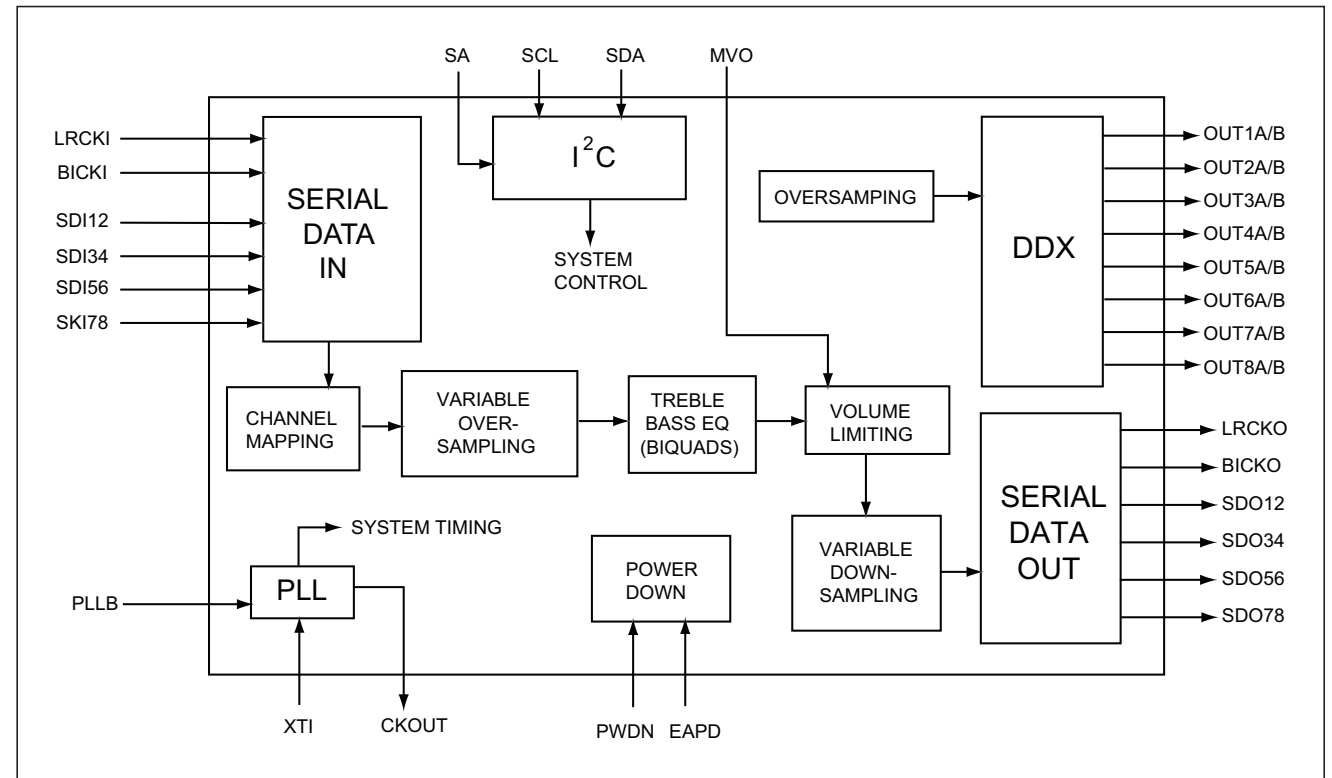


INTERNAL IC DIAGRAM - MT1389HD

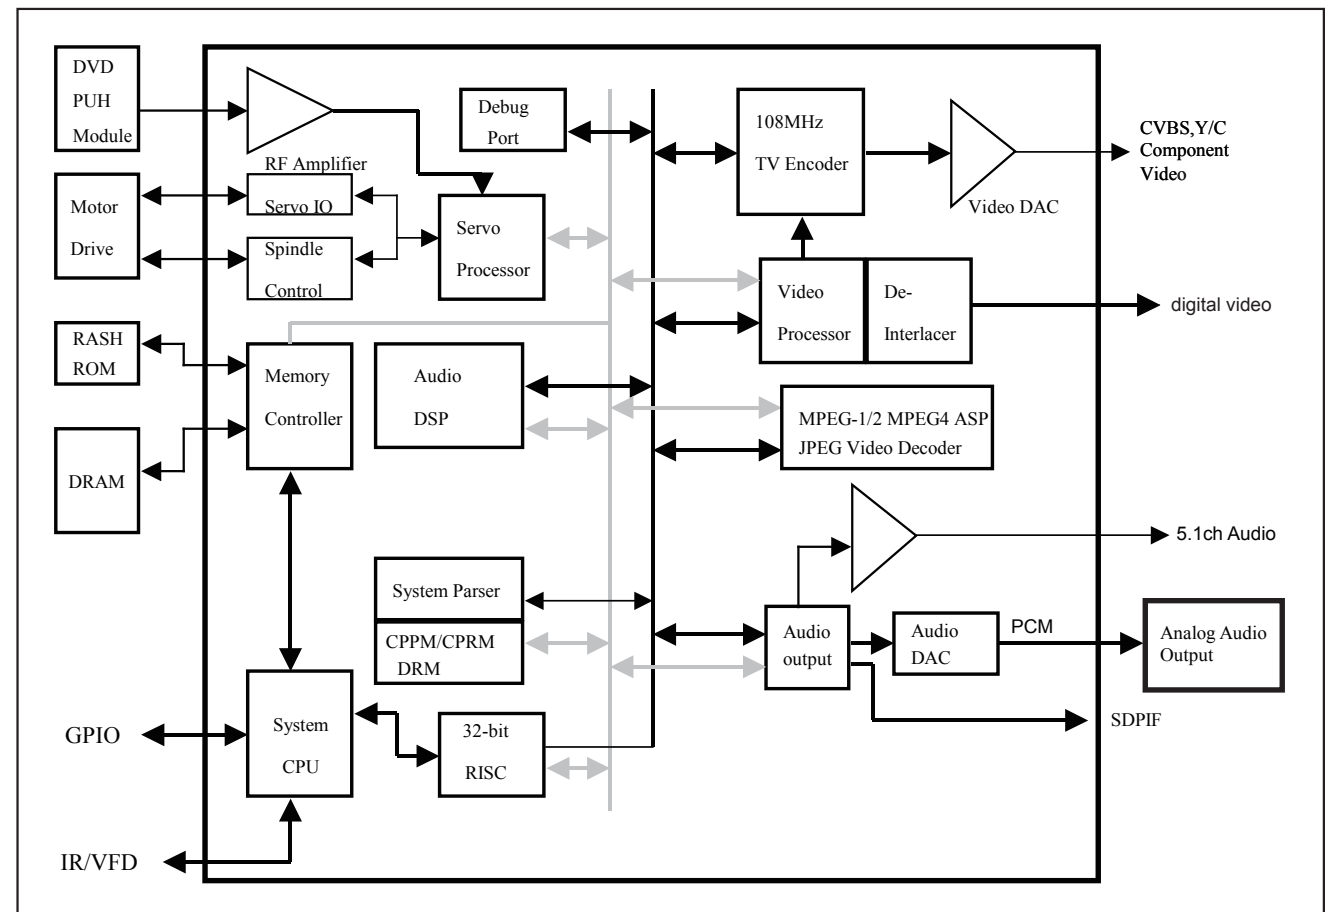

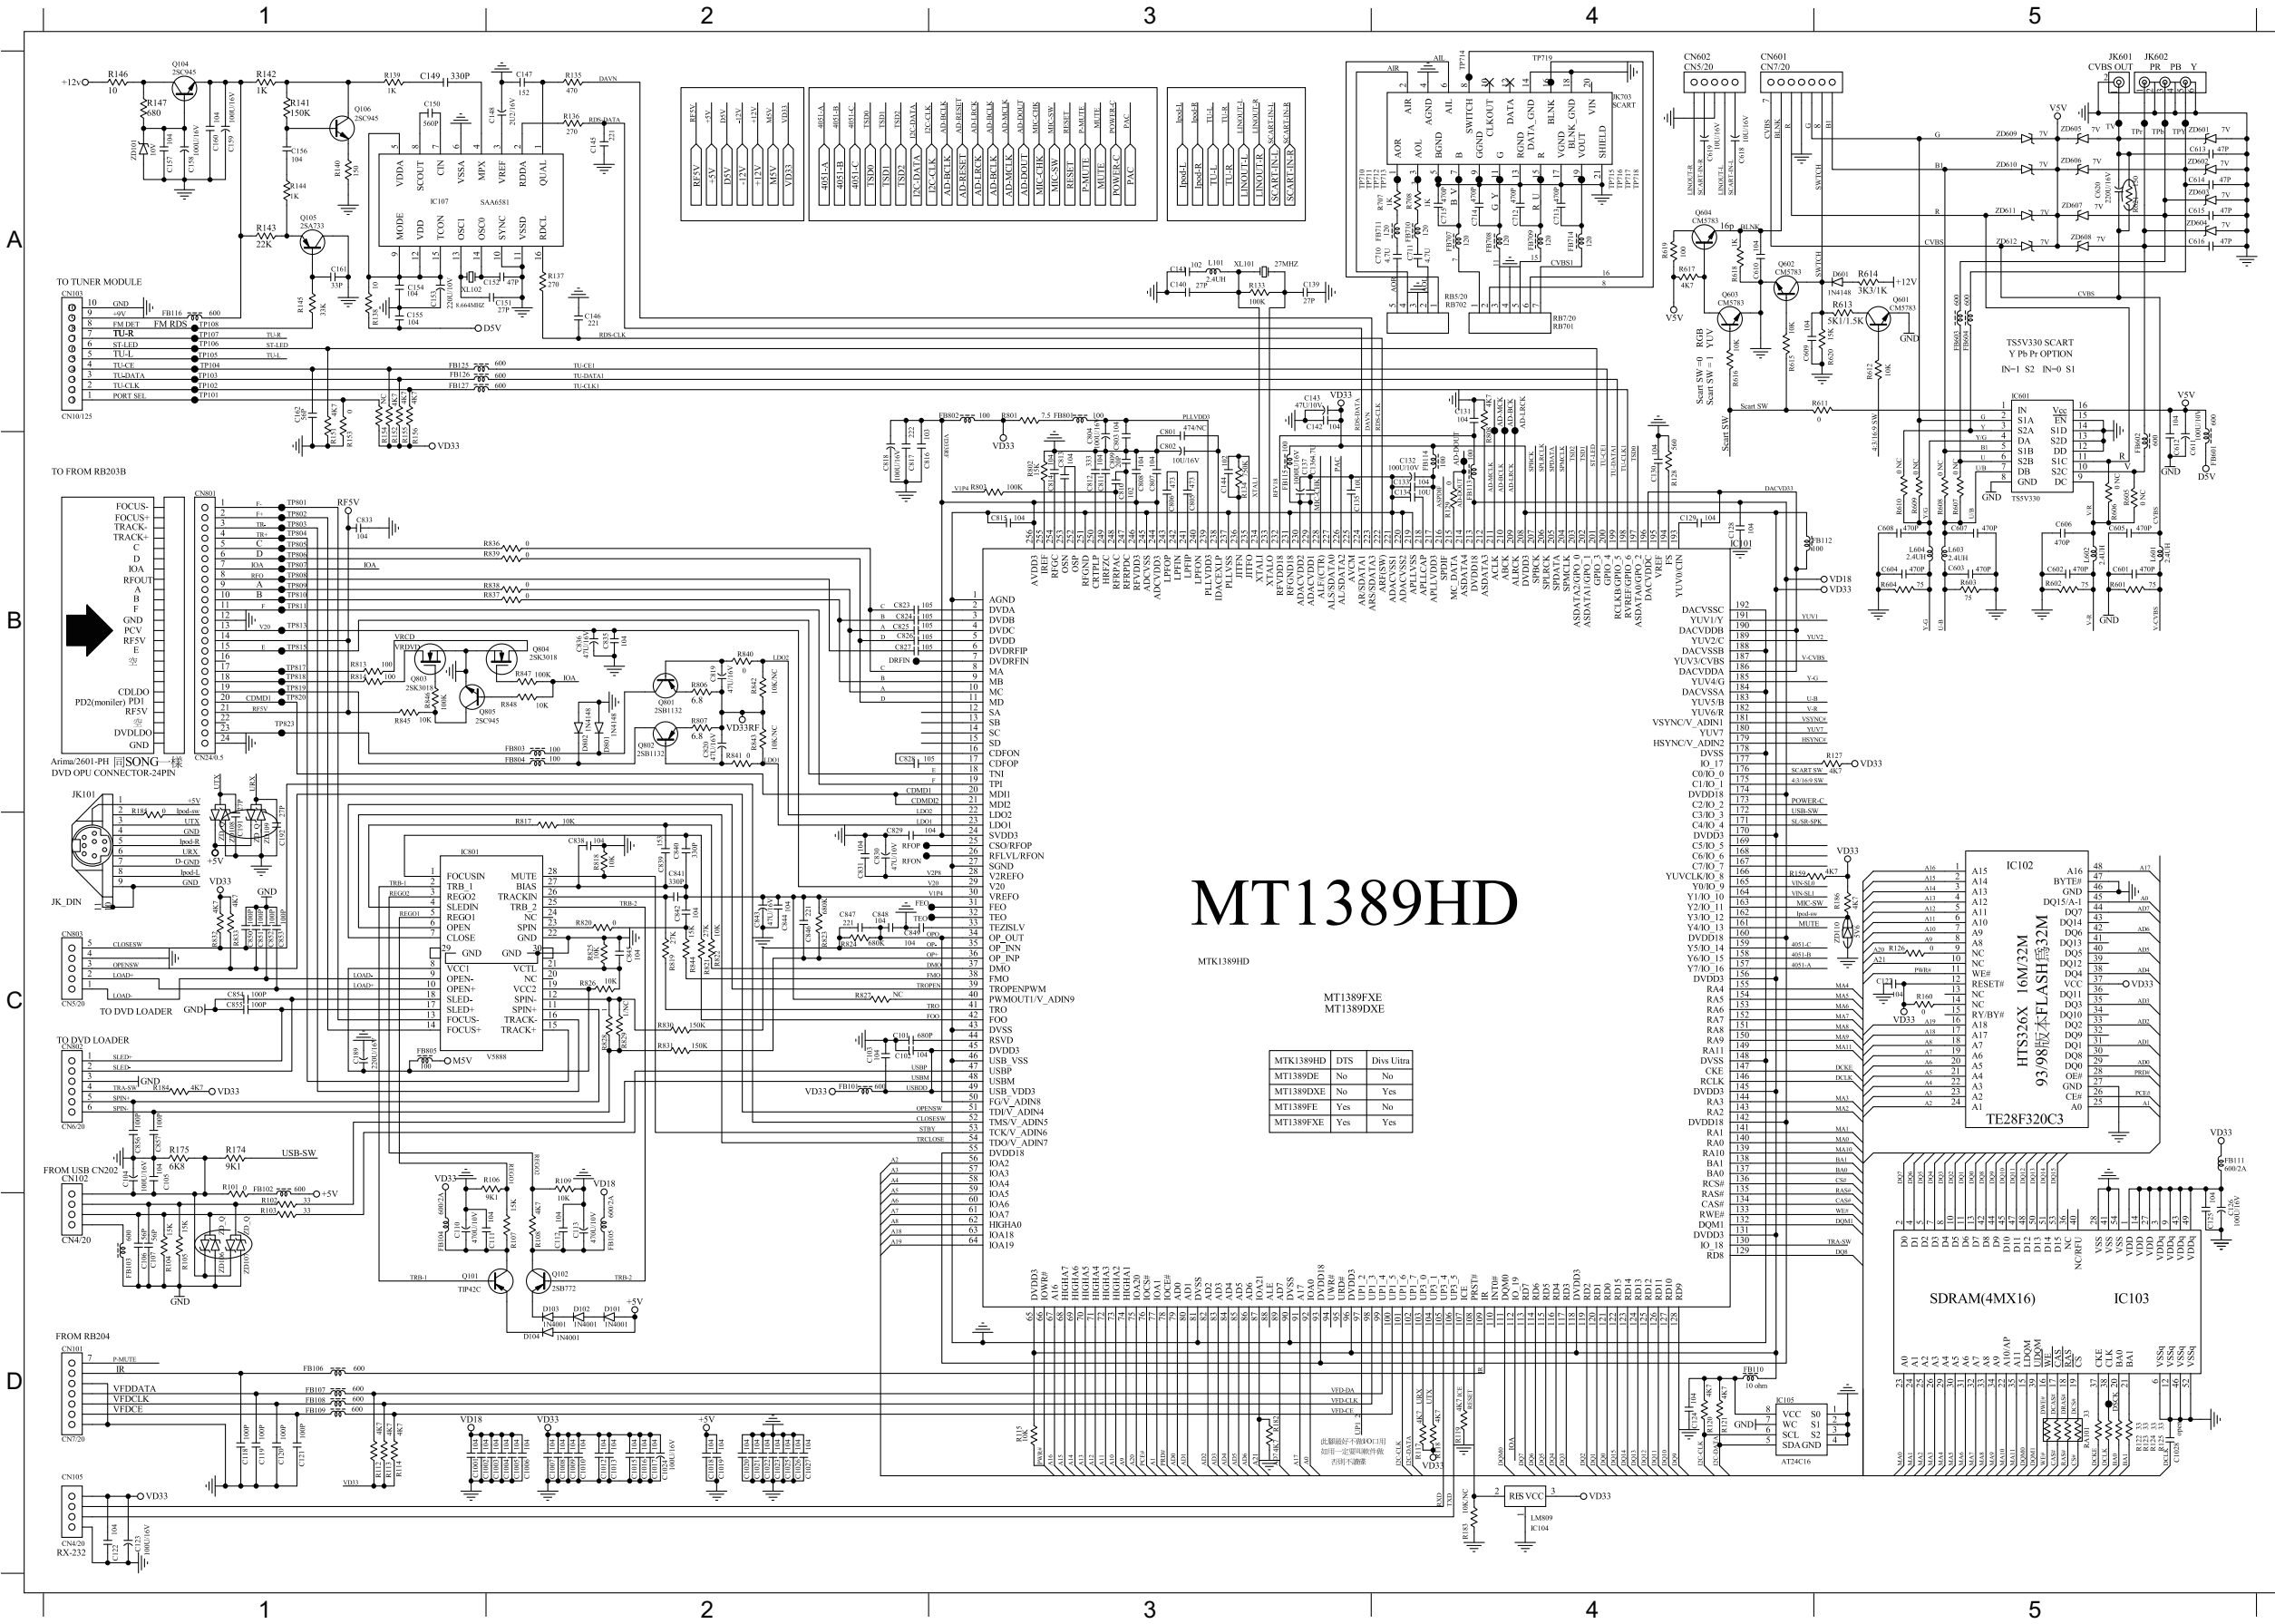


- C1001 D1 C607 B5 D802 B2 R128 B4
- C1002 D1 C608 B5 FB101 C2 R129 B4
- C1003 D2 C609 B5 FB102 C1 R133 A3
- C1004 D2 C611 B5 FB103 C1 R134 B3
- C1005 D2 C612 B5 FB104 D1 R146 A1
- C1006 D2 C613 A5 FB105 D2 R147 A1
- C1007 D2 C614 A5 FB106 D1 R151 A1
- C1008 D2 C615 A5 FB107 D1 R152 A1
- C1009 D2 C616 A5 FB108 D1 R155 A1
- C101 C2 C620 A5 FB109 D1 R155 A1
- C1010 D2 C802 B3 FB110 D4 R156 A1
- C1012 D2 C803 B3 FB111 C5 R159 C4
- C1013 D2 C804 A3 FB112 B4 R160 C5
- C1015 D2 C805 B3 FB113 B4 R174 C1
- C1016 D2 C806 B3 FB114 B4 R175 C1
- C1017 D2 C807 B3 FB115 B3 R182 D3
- C1018 D2 C808 B3 FB116 A1 R184 C1
- C1019 D2 C809 B3 FB125 B1 R601 B5
- C102 C2 C810 B3 FB126 B1 R602 B5
- C1020 D2 C811 B3 FB127 B1 R603 B5
- C1021 D2 C812 B3 FB601 B5 R604 B5
- C1022 D2 C813 B3 FB602 B5 R605 B5
- C1023 D2 C814 B3 FB603 A5 R607 B5
- C1024 D2 C815 B3 FB604 A5 R610 B5
- C1025 D2 C816 B2 FB801 A3 R801 A3
- C1026 D2 C817 B2 FB802 A3 R802 B3
- C1027 D2 C818 B2 FB803 B2 R803 B3
- C103 C2 C819 B2 FB804 B2 R806 B2
- C104 C1 C820 B2 FB805 C1 R807 B2
- C105 C1 C823 B2 IC101 B4 R808 A4
- C106 D1 C824 B2 IC102 C5 R813 B1
- C107 D1 C825 B2 IC103 D5 R814 B1
- C110 D2 C826 B2 IC104 D4 R817 C2
- C111 D2 C827 B2 IC105 D4 R818 C2
- C112 D2 C828 B2 IC801 C1 R819 C2
- C113 D2 C829 C2 JK601 A5 R820 C2
- C118 D1 C830 C2 JK602 A5 R821 C2
- C119 D1 C831 C2 L601 B5 R822 C2
- C120 D1 C833 B1 L602 B5 R823 C2
- C121 D1 C835 B2 L603 B5 R824 C2
- C122 D1 C836 B2 L604 B5 R825 C2
- C123 D1 C838 C2 Q101 D1 R826 C2
- C124 D4 C839 C2 Q102 D2 R828 C2
- C125 D5 C840 C2 Q104 A1 R830 C2
- C126 D5 C841 C2 Q801 B2 R831 C2
- C127 C5 C842 C2 Q802 B2 R832 C1
- C128 B4 C843 C2 Q803 B1 R833 C1
- C129 B4 C844 C2 Q804 B2 R836 B1
- C130 B4 C845 C2 Q805 B1 R837 B1
- C131 A4 C846 C2 R101 C1 R838 B1
- C132 B4 C847 C2 R102 C1 R839 B1
- C133 B4 C848 C2 R103 C1 R840 B2
- C134 B4 C849 C2 R104 D1 R841 B2
- C135 B3 C850 C1 R105 D1 R844 C2
- C136 B3 C851 C1 R106 C1 R845 B1
- C137 B3 C852 C1 R107 D2 R846 B1
- C139 A3 C853 C1 R108 D2 R847 B2
- C140 A3 C854 C1 R109 C2 R848 B2
- C142 A3 C855 C1 R112 D1 RA101D5
- C143 A3 C856 C1 R113 D1 XL101 A3
- C144 B3 C857 C1 R114 D1 ZD101 A1
- C157 A1 CN101D1 R115 D3 ZD106 D1
- C158 A1 CN102C1 R117 D4 ZD107 D1
- C159 A1 CN103A1 R118 D4 ZD601 A5
- C160 A1 CN105D1 R119 D4 ZD602 A5
- C162 A1 CN801B1 R120 D4 ZD603 A5
- C189 C1 CN802C1 R121 D4 ZD604 A5
- C601 B5 CN803C1 R122 D5 ZD605 A5
- C602 B5 D101 D2 R123 D5 ZD606 A5
- C603 B5 D102 D2 R124 D5 ZD607 A5
- C604 B5 D103 D2 R125 D5 ZD608 A5
- C605 B5 D104 D2 R126 C5
- C606 B5 D801 B2 R127 B5

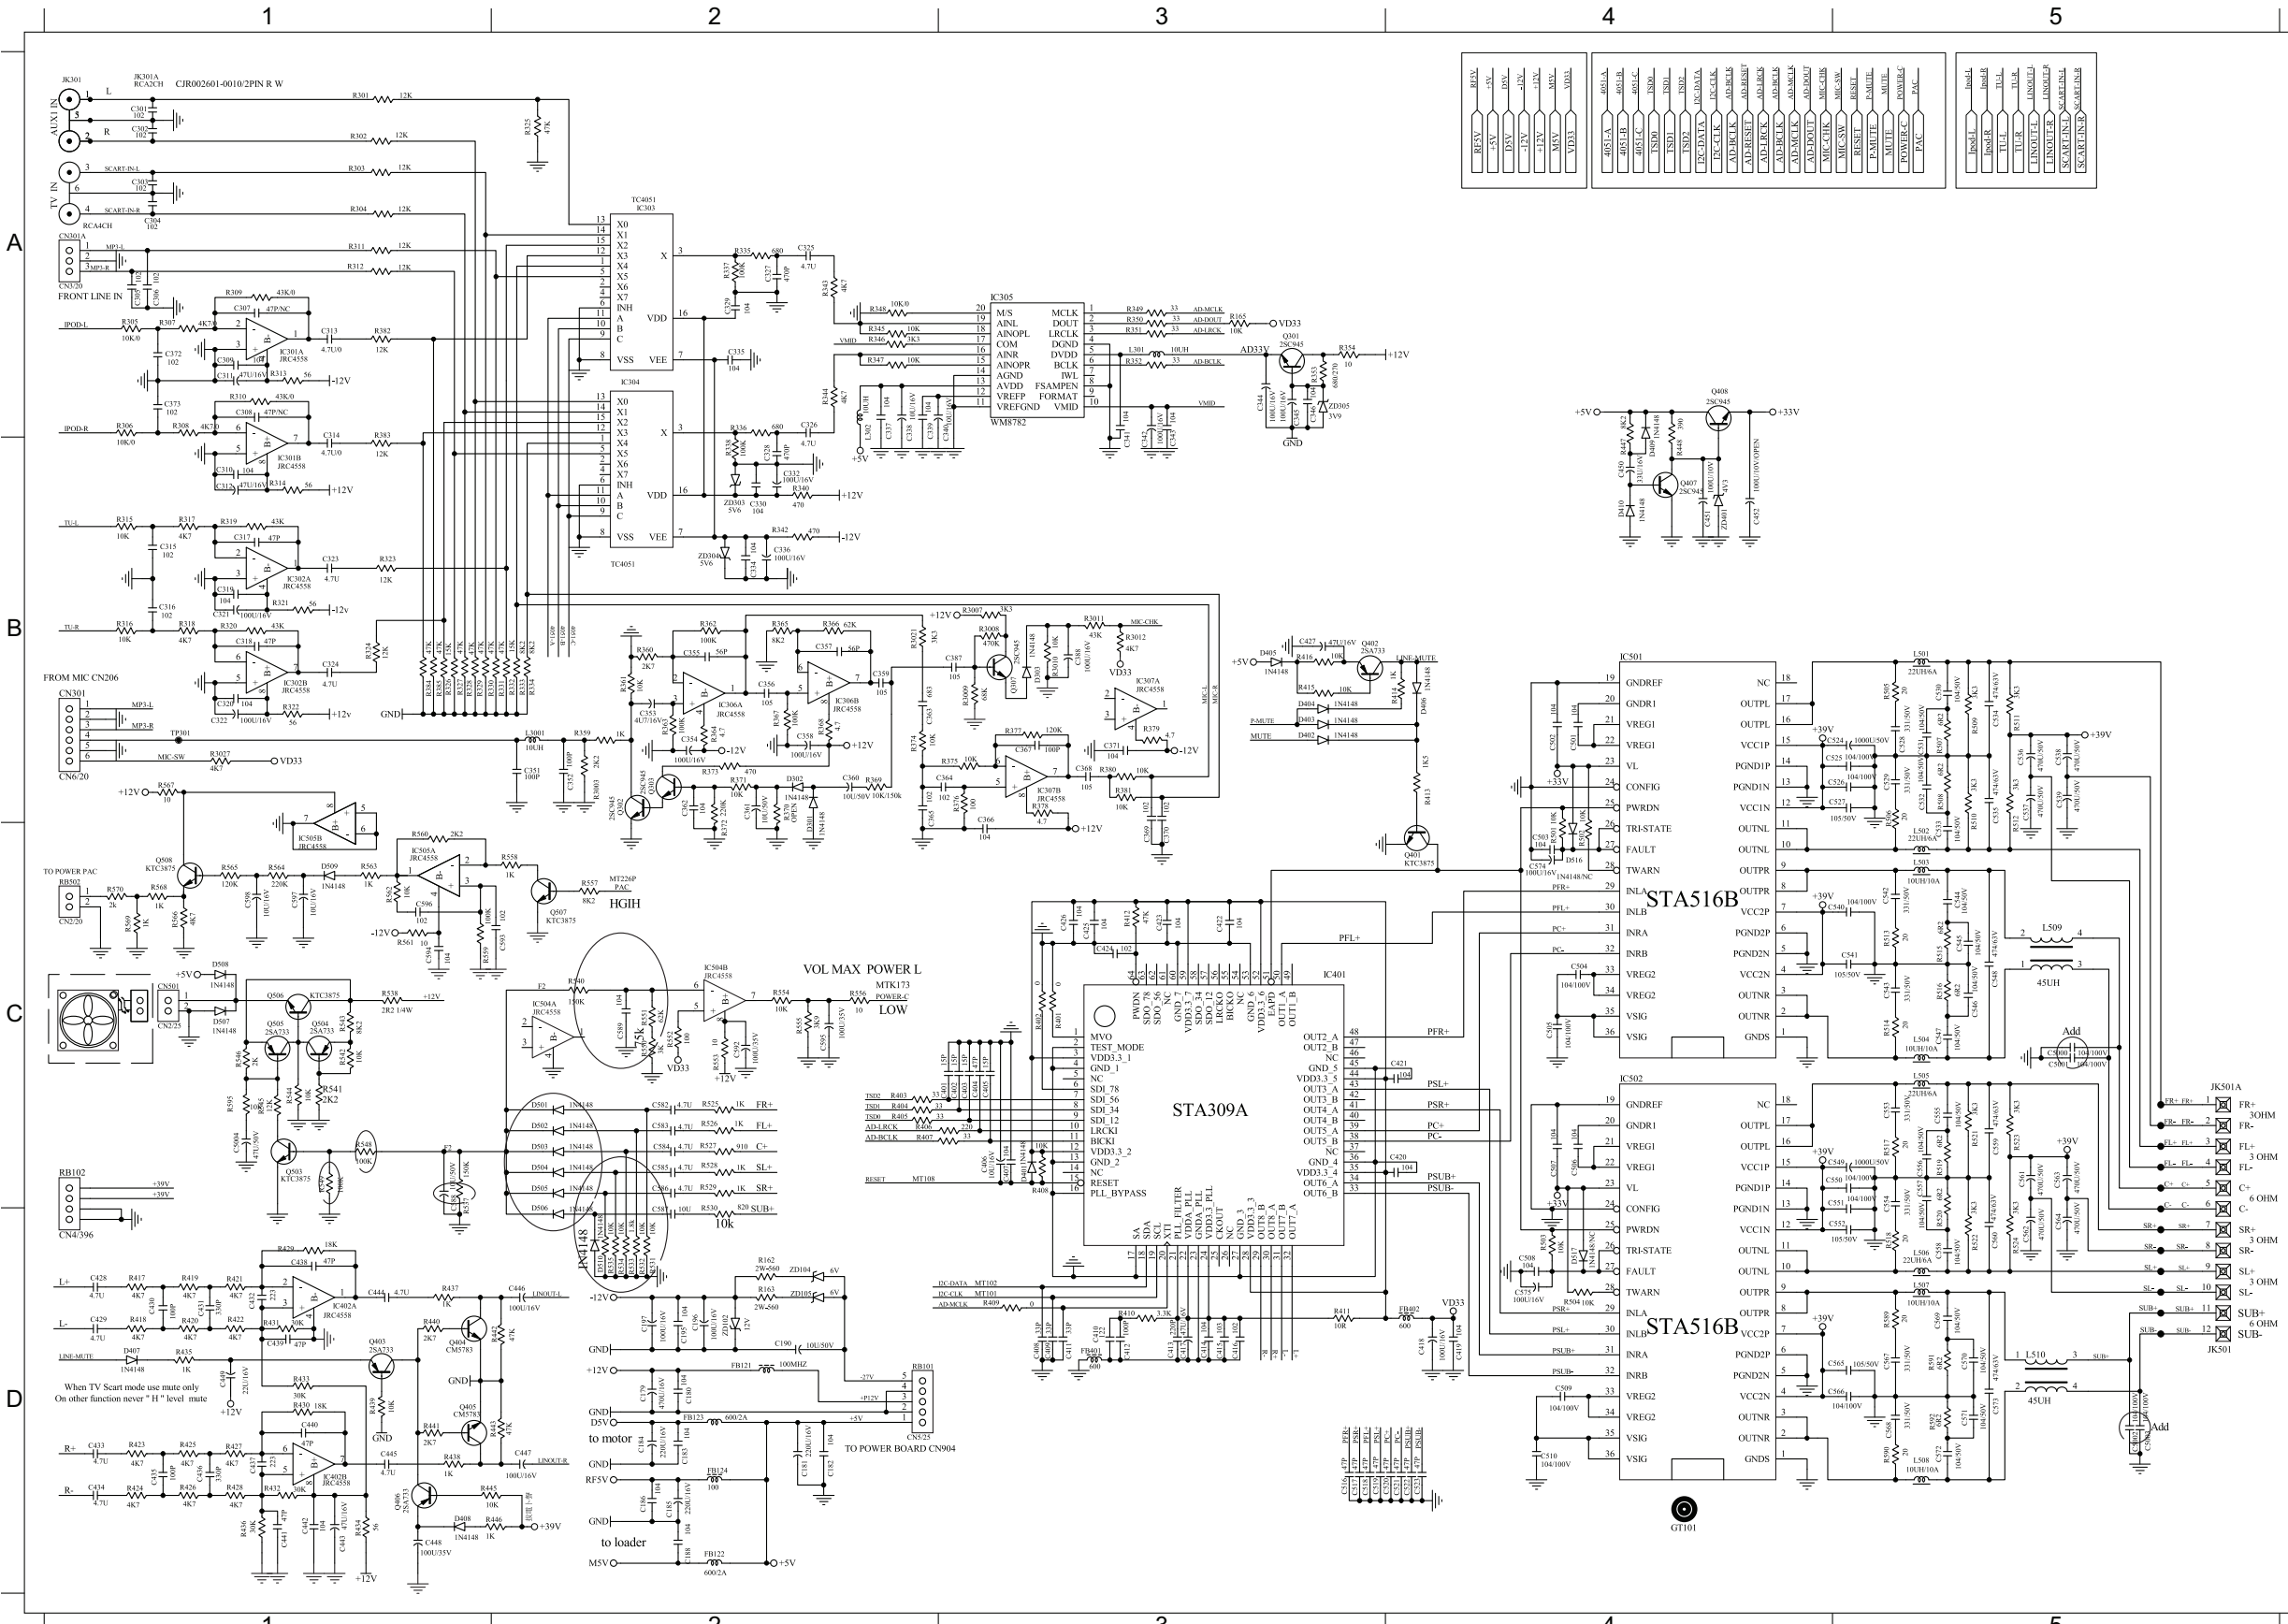

C179	D2	C417	D3	C584	C2	R3011	B3	R416	B3
C180	D2	C418	D4	C585	C2	R3012	B3	R442	D2
C181	D2	C419	D4	C586	C2	R302	A1	R447	B4
C182	D2	C420	C4	C587	D2	R3021	B2	R448	B4
C183	D2	C421	C4	C588	C1	R3027	B1	R501	C4
C184	D2	C422	C3	C589	C2	R303	A1	R502	C4
C185	D2	C423	C3	C592	C2	R304	A1	R503	D4
C186	D2	C424	C3	C593	C2	R311	A1	R504	D4
C188	D2	C425	C3	C594	C1	R312	A1	R505	B5
C190	D2	C426	C3	C595	C2	R313	A1	R506	B5
C195	D2	C427	B3	C596	C1	R314	B1	R507	B5
C196	D2	C450	B4	C597	C1	R315	B1	R508	B5
C197	D2	C451	B4	C598	C1	R316	B1	R509	B5
C301	A1	C5000	C5	CN301	B1	R317	B1	R510	B5
C302	A1	C5001	C5	CN501	C1	R318	B1	R511	B5
C303	A1	C5002	D5	D301	B2	R319	B1	R512	B5
C304	A1	C5003	D5	D302	B2	R320	B1	R513	C5
C305	A1	C5004	C1	D303	B3	R321	B1	R514	C5
C306	A1	C501	B4	D401	C3	R322	B1	R515	C5
C311	A1	C502	B4	D402	B3	R323	B1	R516	C5
C312	B1	C503	C4	D403	B3	R324	B1	R517	C5
C315	B1	C504	C4	D404	B3	R325	A2	R518	D5
C316	B1	C505	C4	D405	B3	R326	B1	R519	C5
C317	B1	C506	C4	D406	B4	R327	B1	R520	D5
C318	B1	C507	C4	D409	B4	R328	B1	R521	D5
C319	B1	C508	D4	D410	B4	R329	B1	R522	D5
C320	B1	C509	D4	D501	C2	R330	B1	R523	D5
C321	B1	C510	D4	D502	C2	R331	B2	R524	D5
C322	B1	C516	D3	D503	C2	R332	B2	R525	C2
C323	B1	C517	D3	D504	C2	R333	B2	R526	C2
C324	B1	C518	D3	D505	C2	R334	B2	R527	C2
C325	A2	C519	D3	D506	C2	R335	A2	R528	C2
C326	A2	C520	D4	D507	C1	R336	A2	R529	C2
C327	A2	C521	D4	D508	C1	R337	A2	R530	D2
C328	B2	C522	D4	D509	C1	R338	B2	R531	D2
C329	A2	C523	D4	F121	D2	R340	B2	R532	D2
C330	B2	C524	B3	F122	D2	R342	B2	R533	D2
C332	B2	C525	B3	F123	D2	R343	A2	R534	D2
C334	B2	C526	B3	F124	D2	R344	A2	R535	D2
C335	A2	C527	B3	F125	D2	R345	A2	R537	C1
C336	B2	C528	B5	F126	D2	R346	A2	R538	C1
C337	A2	C529	B5	F127	D2	R347	A2	R540	C2
C338	A2	C530	B5	F128	D2	R348	A2	R541	C1
C339	A2	C531	B5	F129	D2	R349	A2	R542	C1
C340	A3	C532	B5	F130	D2	R350	A3	R543	C1
C341	A3	C533	B5	F131	D2	R351	A3	R544	C1
C342	A3	C534	B5	F132	D2	R352	A3	R545	C1
C343	A3	C535	B5	F133	D2	R353	A3	R546	C1
C344	A3	C536	B5	F134	D2	R354	A3	R548	C1
C345	A3	C537	B5	F135	D2	R355	B2	R549	C1
C346	A3	C538	B5	F136	D2	R356	B2	R550	C2
C351	B2	C539	B5	F137	D2	R357	B2	R551	C2
C352	B2	C540	C3	F138	D2	R358	B2	R552	C2
C353	B2	C541	C4	F139	D2	R359	B2	R553	C2
C354	B2	C542	C4	F140	D2	R360	B2	R554	C2
C355	B2	C543	C4	F141	D2	R361	B2	R555	C2
C356	B2	C544	C4	F142	D2	R362	B2	R556	C2
C357	B2	C545	C4	F143	D2	R363	B2	R557	C2
C358	B2	C546	C4	F144	D2	R364	B2	R558	C2
C359	B2	C547	C4	F145	D2	R365	B2	R559	C1
C360	B2	C548	C4	F146	D2	R366	B2	R560	C1
C361	B2	C549	C4	F147	D2	R367	B2	R561	C1
C362	B2	C550	C4	F148	D2	R368	B2	R562	C1
C363	B2	C551	C4	F149	D2	R369	B2	R563	C1
C364	B2	C552	D4	F150	D5	R370	B3	R564	C1
C365	B2	C553	C5	F151	D5	R371	B3	R565	C1
C366	B3	C554	C5	F152	D4	R372	B3	R566	C1
C367	B3	C555	C5	F153	D5	R373	B3	R567	B1
C368	B3	C556	C5	F154	D5	R374	B3	R568	C1
C369	C3	C557	C5	F155	D5	R375	B3	R569	C1
C370	C3	C558	D5	F156	D5	R376	B3	R570	C1
C371	B3	C559	C5	F157	D4	R377	A1	R589	D5
C387	B3	C560	C5	F158	D4	R378	A1	R590	D5
C388	B3	C561	C5	F159	D4	R379	B1	R591	D5
C401	C3	C562	C5	F160	D4	R380	B1	R592	D5
C402	C3	C563	C5	F161	D5	R381	C1	R595	C1
C403	C3	C564	C5	F162	D5	R382	C1	RB101	D2
C404	C3	C565	D5	F163	D5	R383	C2	RB102	C1
C405	C3	C566	D5	F164	D5	R384	C2	RB502	C1
C406	C3	C567	D5	F165	D5	R385	C2	ZD102	D2
C407	C3	C568	D5	F166	D5	R386	C2	ZD104	D2
C408	D3	C569	D5	F167	D5	R387	C2	ZD105	D2
C409	D3	C570	D5	F168	D5	R388	C3	ZD303	B2
C410	D3	C571	D5	F169	D5	R389	D3	ZD304	B2
C411	D3	C572	D5	F170	D5	R390	D3	ZD305	A3
C412	D3	C573	D5	F171	D5	R391	D3	ZD401	B4
C413	D3	C574	C5	F172	D5	R392	B3	R412	C3
C414	D3	C575	D5	F173	D5	R393	B3	R413	B4
C415	D3	C576	C2	F174	D5	R394	A1	R414	B4
C416	D3	C577	C2	F175	D5	R395	B3	R415	B3


PCB LAYOUT - TOP VIEW

C1024 D2 C159 B1 C324 A1 C355 A2 C408 C2 C507 D4 C540 C4 C567 C3 C606 B1 C826 D1 CN501B3 D508 A2 IC103 B1 JK602 A1 Q101 D2 Q802 D1 R128 B1 R3011 C2 R324 A2 R344 B2 R367 B2 R402 C2 R501 D4 R542 A3 R561 C2 R607 B1 R836 D1 ZD303 B1
C104 D2 C179 D2 C325 B2 C356 A2 C409 C2 C508 D3 C541 C4 C568 C3 C608 A1 C827 D1 CN801D1 D509 C2 FB124 D1 IC104 C2 L3001 B2 Q102 D2 Q803 D1 R129 C1 R302 A2 R325 B1 R345 B2 R368 A2 R403 C2 R502 D4 R543 A3 R562 C2 R610 A1 R837 D1 ZD304 A1
C106 D2 C181 D2 C326 B2 C357 B2 C410 D2 C509 D3 C542 C4 C573 B3 C611 B1 C828 D1 CN802D2 D801 D1 FB125 B1 IC105 C2 L301 B2 Q104 B1 R804 D1 R133 C1 R3021 B2 R326 A2 R346 B2 R369 B2 R404 C2 R503 D3 R544 A3 R563 C2 R801 D1 R838 D1 ZD305 A2
C107 D2 C184 D2 C327 B1 C358 A2 C411 D2 C510 D3 C543 C4 C574 D4 C620 A1 C830 D1 CN803D2 D802 D1 FB126 B1 IC302 B1 L302 B2 Q301 A2 Q805 D1 R134 C1 R3027 B2 R327 B2 R347 B2 R371 B2 R405 C2 R504 D3 R545 B3 R564 C2 R802 D1 R839 D1 ZD401 D3
C110 D2 C188 D2 C328 B2 C359 B2 C412 D2 C517 D3 C548 B3 C575 D4 C802 C1 C833 D1 D101 D2 FB102 D2 FB127 B1 IC303 B1 L501 B3 Q302 B2 R101 D2 R152 B1 R303 B1 R328 A2 R348 B2 R372 B2 R406 C2 R505 C4 R546 A3 R565 C2 R806 D1 R840 D1 ZD605 A1
C113 C2 C189 D2 C332 B1 C360 B2 C413 D3 C519 D3 C549 C4 C588 A3 C804 C1 C836 D1 D102 D2 FB104 C2 FB401 D2 IC304 B2 L502 C4 Q303 B2 R102 D1 R155 B1 R304 A2 R329 A2 R349 B2 R373 B2 R407 C2 R506 C4 R548 B3 R566 C2 R807 D1 R841 D1 ZD606 A1
C123 C2 C190 D3 C335 A2 C361 B2 C417 D2 C520 D3 C551 C3 C589 C2 C805 C1 C838 D1 D103 D2 FB105 C2 FB402 C2 IC305 B2 L503 B5 Q307 B2 R103 D1 R156 B1 R311 B2 R330 B1 R350 B2 R374 A1 R408 C2 R509 B3 R549 B3 R567 C2 R813 D1 R845 D1 ZD607 A1
C124 C2 C196 D3 C336 B1 C362 B2 C418 D2 C521 D3 C552 C4 C592 B2 C806 C1 C839 D1 D104 D2 FB106 D2 FB601 B1 IC306 A2 L504 C4 Q401 C2 R104 D2 R162 D2 R312 B2 R331 B1 R351 B2 R375 A2 R409 C2 R510 B3 R550 C2 R568 D2 R814 D1 R846 D1 ZD608 A1
C126 B2 C197 B1 C338 B2 C363 A2 C427 C2 C524 C3 C553 C4 C593 C2 C812 D1 C840 D1 D302 B2 FB107 D2 FB602 A1 IC307 B2 L505 B5 Q402 C2 R105 D2 R163 D3 R313 A1 R332 B1 R352 B2 R376 A2 R410 D3 R511 B3 R551 C2 R569 D2 R817 D1 R847 D1
C129 B1 C311 A1 C340 B2 C364 A2 C450 D3 C526 C4 C554 C4 C594 C2 C813 C1 C841 D1 D303 B2 FB108 D2 FB603 A1 IC401 C3 L506 C3 Q407 D3 R107 D2 R165 C2 R314 A1 R333 B1 R353 A2 R377 A2 R411 D3 R512 B3 R552 C2 R570 D2 R818 D1 R848 D1
C130 B1 C312 A1 C341 B2 C365 A2 C451 D3 C527 C4 C559 B3 C595 C2 C814 D1 C842 D1 D402 D2 FB109 D2 FB604 A1 IC501 D4 L507 B3 Q408 D3 R108 D2 R174 C2 R315 A1 R334 B2 R354 A2 R378 A2 R412 D2 R513 C4 R553 C2 R589 C3 R819 D1 RA101 C1
C132 C1 C315 A1 C342 B2 C367 A2 C500 B3 C529 C4 C560 B3 C596 C2 C816 D1 C843 D1 D403 D2 FB110 C2 FB801 D1 IC502 D3 L508 C3 Q503 B3 R109 D2 R175 C2 R316 B1 R335 B1 R355 B2 R380 B1 R413 C2 R514 C4 R554 C2 R590 C3 R820 D1 RB101 D2
C137 C1 C316 B1 C343 C2 C368 B2 C501 D4 C534 B3 C561 B3 C597 C2 C818 D1 C846 D1 D404 C2 FB111 C2 FB802 D1 IC504 C2 L509 A3 Q504 A3 R115 D1 R3003 B2 R317 A1 R336 B2 R360 A2 R381 B2 R414 C2 R517 C4 R555 C2 R595 B3 R821 D1 RB102 C3
C139 C1 C317 A1 C344 B2 C369 B1 C502 D4 C535 B3 C562 A3 C598 C2 C819 D1 CN101D2 D405 C2 FB112 C1 FB803 D1 IC505 C2 L510 B3 Q505 A3 R120 C2 R3007 B2 R318 B1 R337 B1 R361 B2 R382 B1 R415 C2 R518 C3 R556 B2 R601 B1 R823 D1 RB502 C2
C140 C1 C318 B1 C345 C2 C370 B2 C503 D4 C536 B4 C563 B3 C601 B1 C820 D1 CN102D2 D406 C2 FB114 C1 FB804 D1 IC801 D1 L601 B1 Q506 A3 R121 C2 R3008 B2 R319 A1 R338 B2 R362 A2 R383 A2 R416 C2 R537 A3 R557 C2 R602 B1 R826 D1 XL101 D1
C143 D1 C321 A1 C352 B2 C387 B2 C504 D4 C537 B3 C564 B3 C602 B1 C823 D1 CN103B1 D409 D3 FB115 C1 FB805 D2 JK501 A3 L602 B1 Q507 C2 R122 B1 R3009 B2 R320 B1 R340 A1 R363 A2 R384 A2 R442 B2 R538 A3 R558 C2 R603 B1 R828 D2 ZD102 D3
C144 C1 C322 A1 C353 B2 C388 B2 C505 D4 C538 B4 C565 C3 C603 B1 C824 D1 CN105C2 D410 D3 FB121 D2 IC101 C1 JK501AA L603 B1 Q508 C2 R123 B1 R301 B1 R322 A1 R342 A1 R364 A2 R385 B1 R447 D3 R540 C2 R559 C2 R604 B1 R830 D2 ZD104 D2
C158 B1 C323 A1 C354 A2 C406 D2 C506 D4 C539 B4 C566 C3 C604 B1 C825 D1 CN301B2 D507 B3 FB122 D2 IC102 D1 JK601 A1 L604 B1 Q801 D1 R126 C1 R3010 B2 R323 B1 R343 B2 R366 B2 R401 C2 R448 D3 R541 A3 R560 C2 R605 B1 R831 D2 ZD105 D2

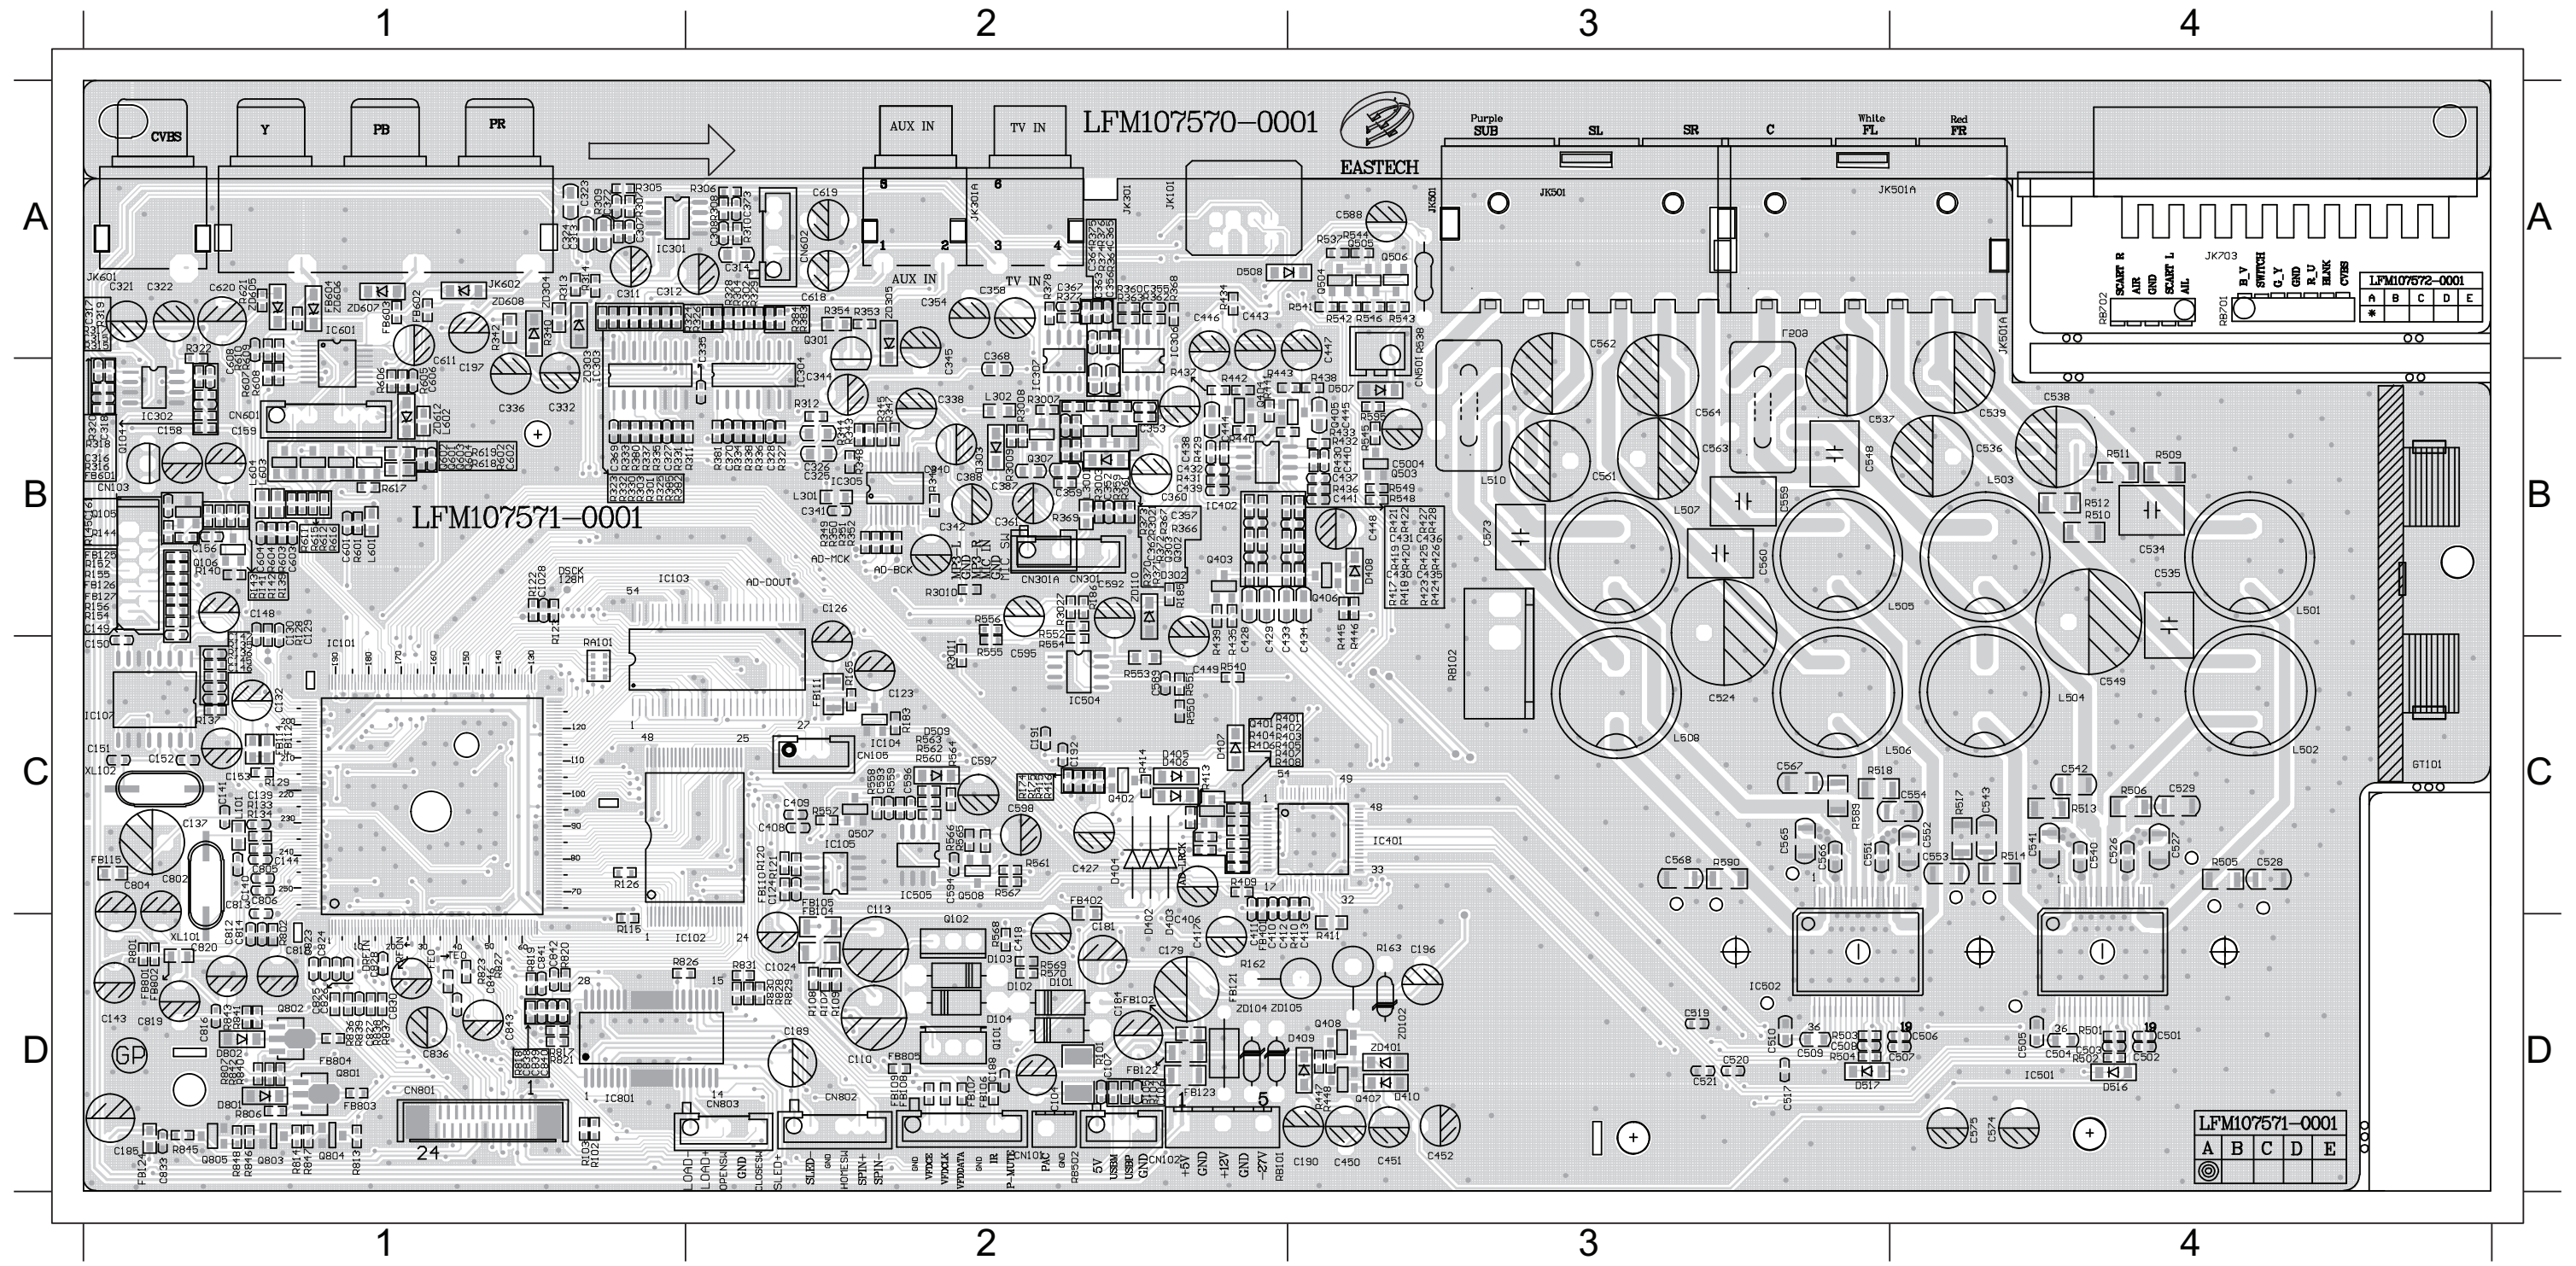

PCB LAYOUT - BOTTOM VIEW

C1001C4	C1010C3	C1021C2	C118 D3	C134 C4	C185 C4	C320 B4	C401 C3	C420 C2	C5003A2	C544 B1	C570 B2	C607 B4	C809 C4	C847 C4	C857 D3	FB103D3	R124 C3	R184 D3	R520 C2	R530 A2	R822 D4	ZD602A4
C1002D4	C1012B4	C1022B4	C119 D3	C135 C4	C186 D4	C329 A4	C402 C3	C421 C2	C516 D2	C545 B1	C571 C2	C609 B4	C810 C4	C848 C4	D301 B3	FB113A4	R125 C3	R3012C3	R521 B2	R531 A1	R824 C4	ZD603A4
C1003D4	C1013B4	C1023B3	C120 D3	C136 C4	C195 D2	C330 A4	C403 C3	C422 C2	C518 D2	C546 C1	C572 C2	C612 B4	C811 C4	C849 C4	D401 C3	FB116B4	R127 C4	R321 A4	R522 B2	R532 A1	R825 C3	ZD604A4
C1004C4	C1015C4	C1025C2	C121 D3	C142 D4	C301 A3	C334 A4	C404 C3	C423 C2	C522 D2	C547 C1	C582 A1	C613 A4	C815 C4	C850 D3	D501 A1	R106 D3	R146 A4	R365 B3	R523 B2	R533 A2	R832 D4	
C1005B4	C1016C4	C1026B4	C122 C3	C157 B4	C302 A3	C337 B3	C405 C3	C424 C3	C523 D2	C550 C2	C583 A2	C614 A4	C817 D4	C851 D3	D502 A2	R112 D3	R147 A4	R379 A3	R524 B2	R534 A2	R833 D4	
C1006C4	C1017C4	C1027D2	C125 C3	C160 B4	C303 A3	C339 B3	C407 C3	C425 C3	C525 C1	C555 B2	C584 A2	C615 A4	C829 D4	C852 D3	D503 A2	R113 D3	R151 B4	R507 B1	R525 A1	R535 A2	R844 D4	
C1007C3	C1018D3	C103 C4	C127 C4	C162 B4	C304 A3	C346 A3	C414 C2	C426 C2	C530 B1	C556 B2	C585 A2	C616 A4	C831 D4	C853 D3	D504 A2	R114 D3	R153 B4	R508 C1	R526 A2	R591 B2	ZD101B4	
C1008C4	C1019D4	C105 D3	C128 C4	C180 D3	C305 B3	C351 B3	C415 C2	C5000A2	C531 B1	C557 C2	C586 A2	C803 C4	C835 D4	C854 D3	D505 A2	R117 C4	R159 C4	R515 B1	R527 A2	R592 C2	ZD106D3	
C1009C4	C102 C4	C111 D3	C131 C4	C182 D3	C306 B3	C366 A3	C416 C2	C5001A2	C532 C1	C558 C2	C587 A2	C807 C4	C844 D4	C855 D3	D506 A2	R118 C4	R160 D3	R516 C1	R528 A2	R803 C4	ZD107D3	
C101 C4	C1020D2	C112 D3	C133 C4	C183 D3	C319 B4	C371 A3	C419 C3	C5002A2	C533 C1	C569 B2	C605 B4	C808 C4	C845 D3	C856 D3	FB101C4	R119 C4	R182 C3	R519 B2	R529 A2	R808 C4	ZD601A4	

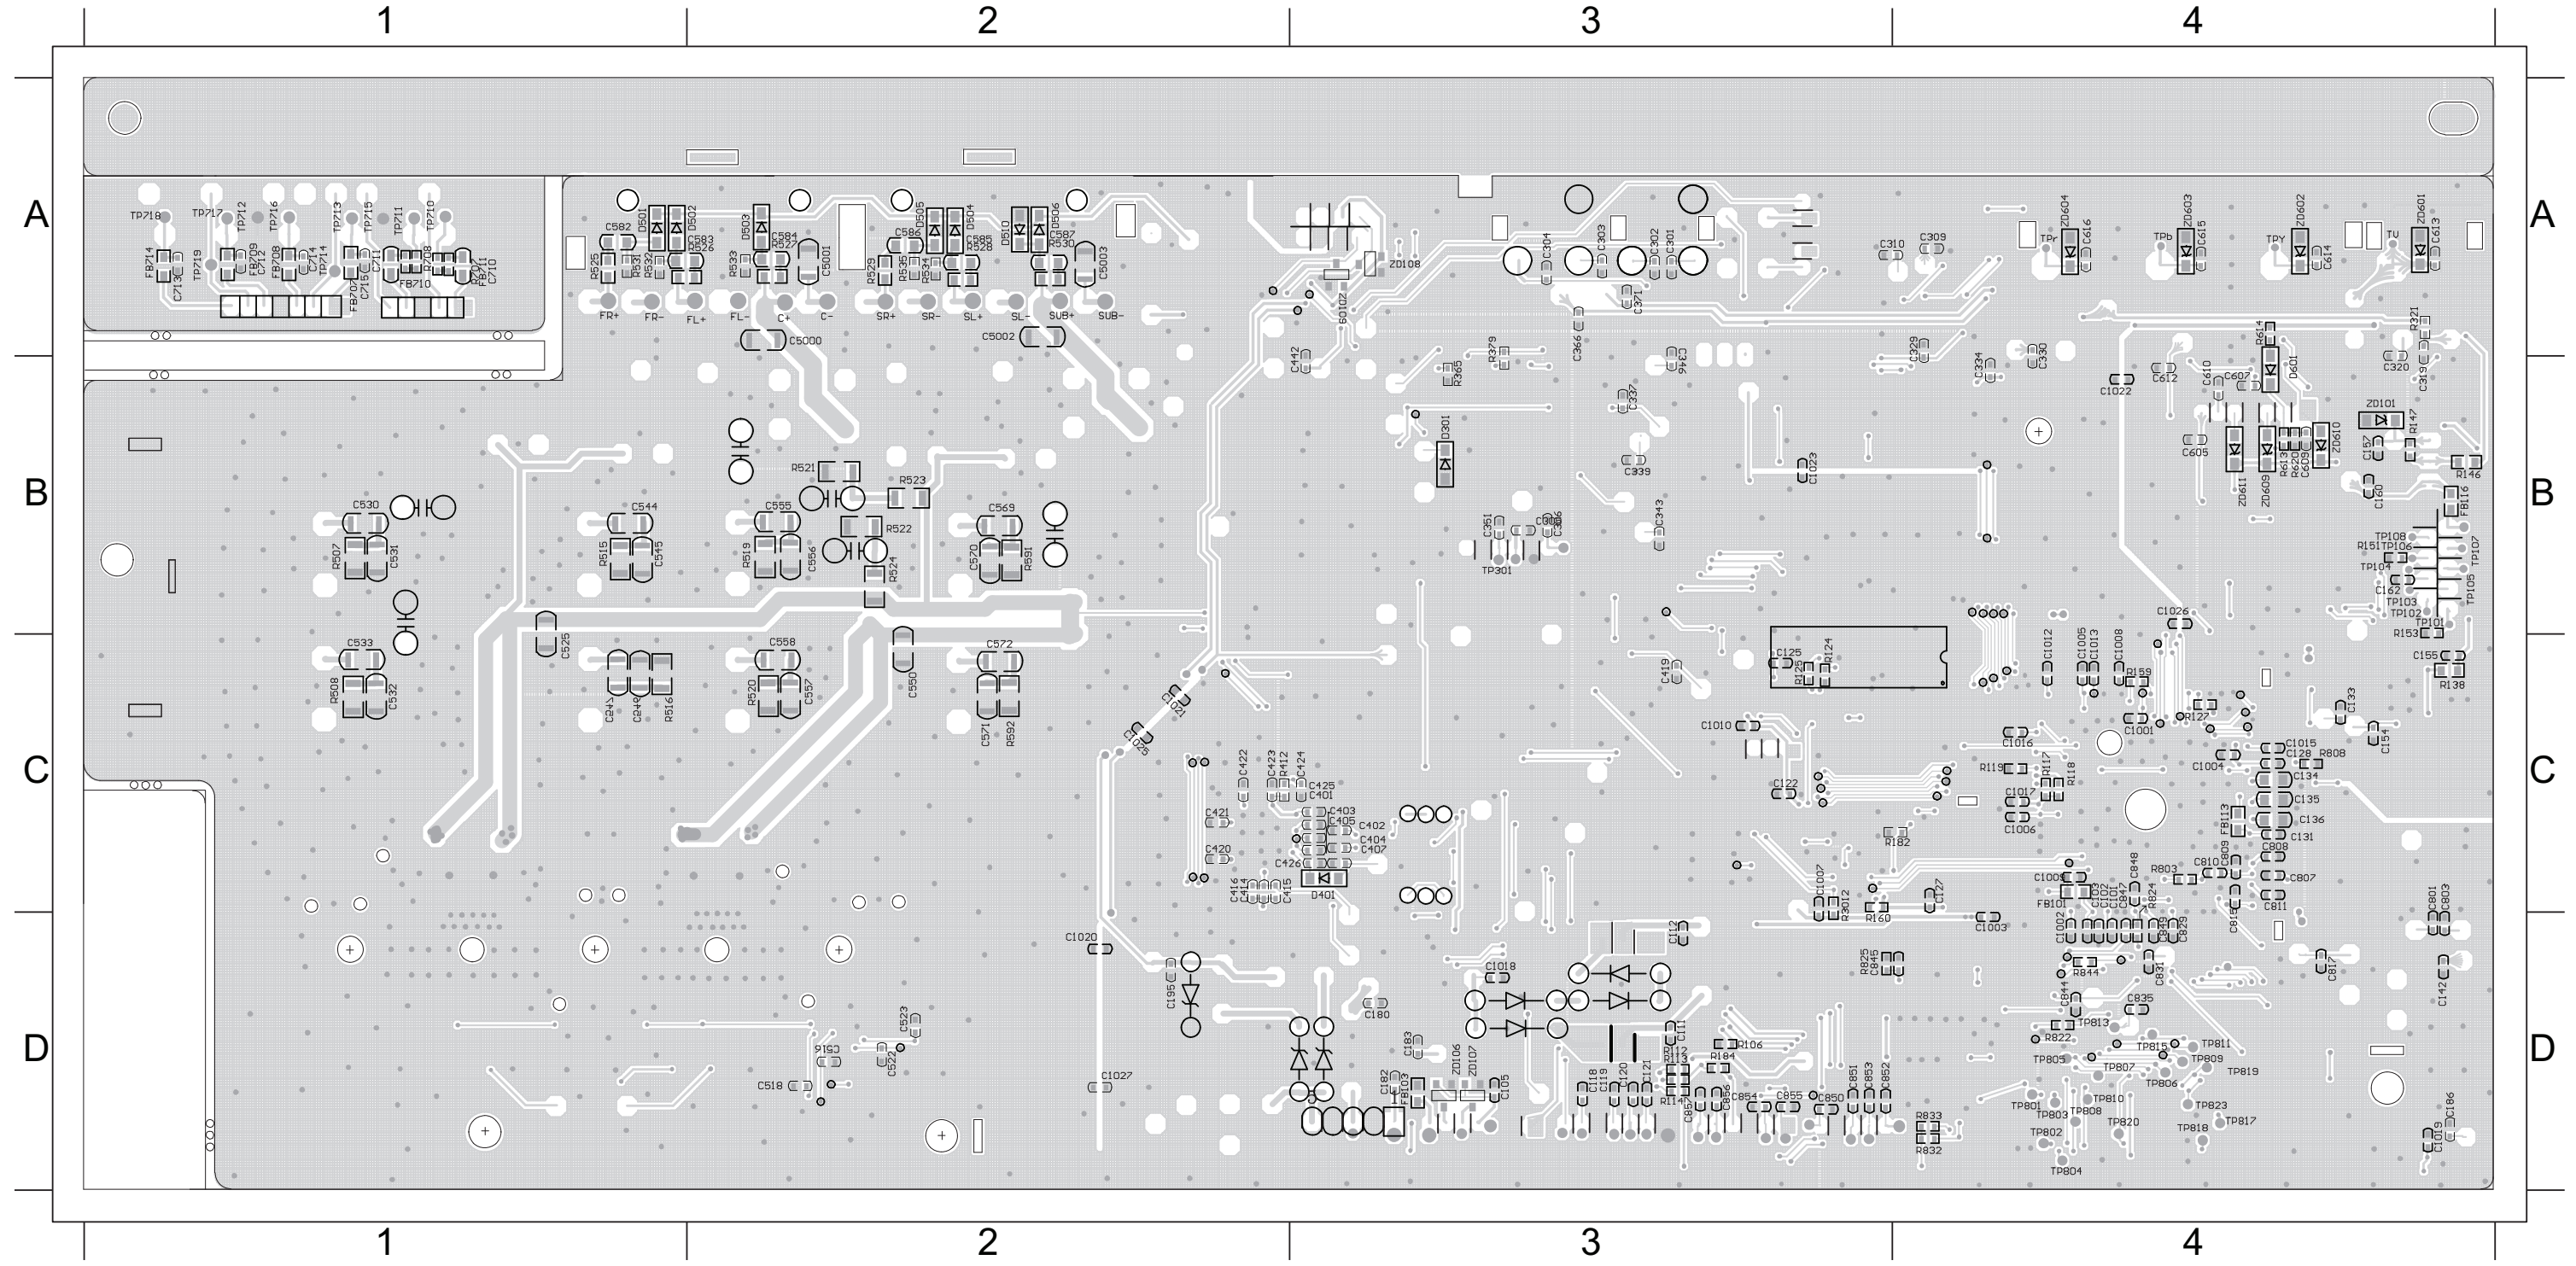


POWER BOARD


TABLE OF CONTENTS

Internal IC Diagram7-1
 Circuit Diagram.....7-2
 PCB Layout - Top View7-3
 PCB Layout - Bottom View7-4

7-1
INTERNAL IC DIAGRAM - AP3843GMTR

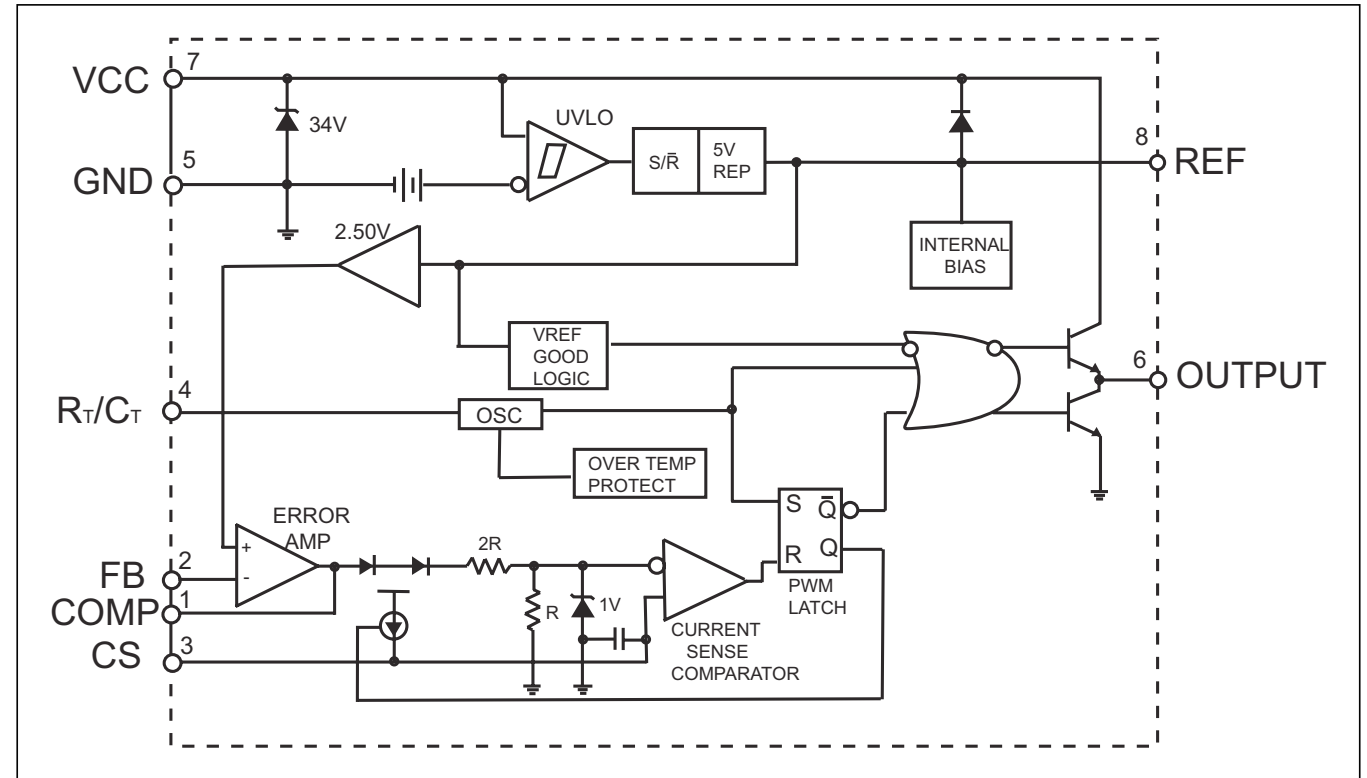



INTERNAL IC DIAGRAM - KA7500C

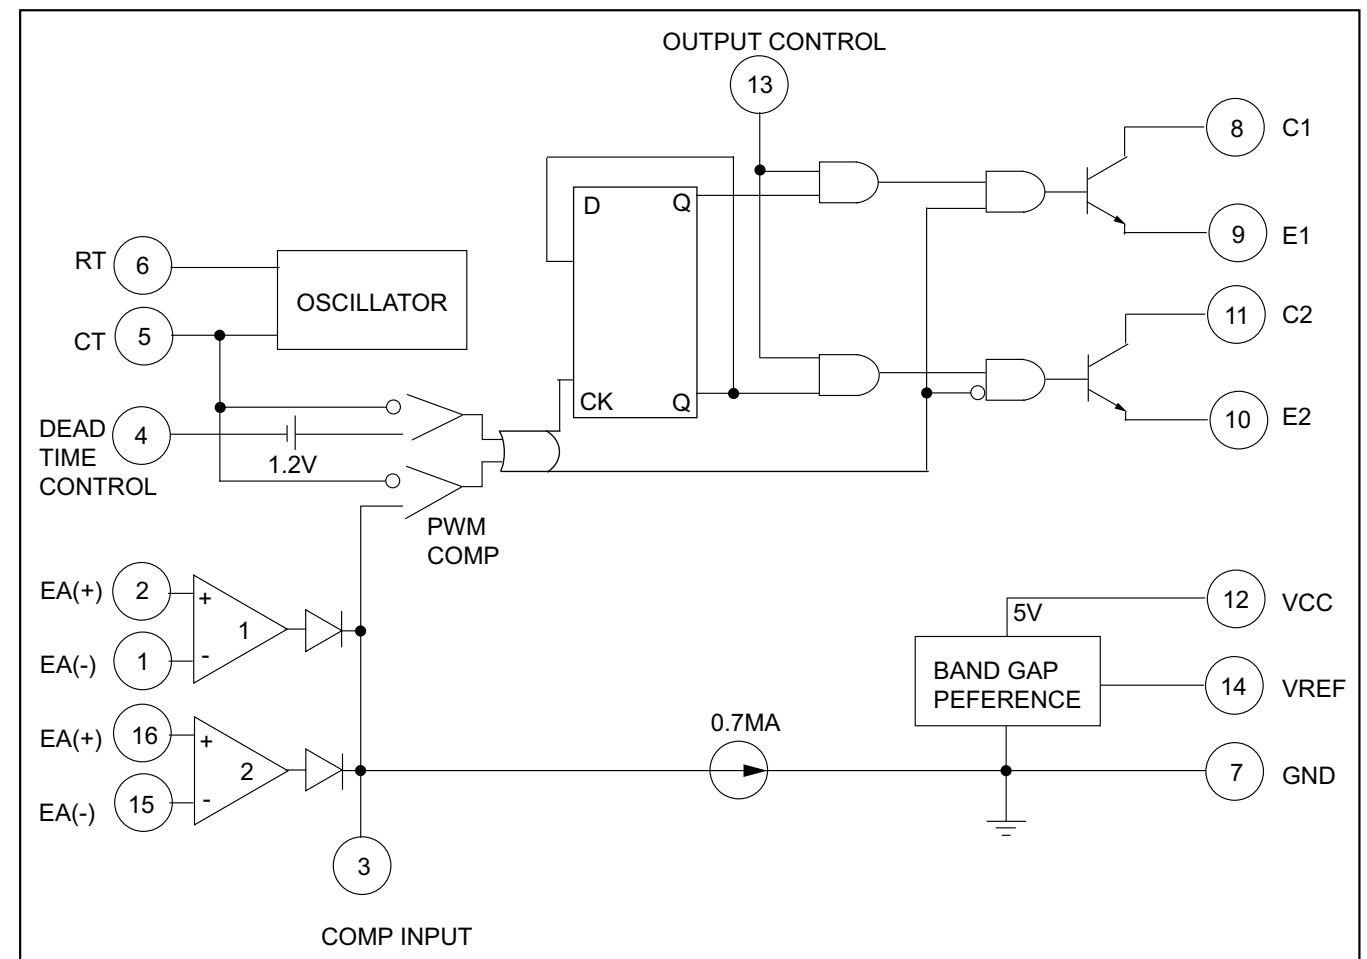

CIRCUIT DIAGRAM

BD901	A1	C915	C1	C926	D3	C937	C3	C948	C3	C960	C3	C972	A3	C985	D1	D905	B2	D917	C3	GT902	B2	L907	A3	Q912	B2	R907	C2	R922	D3	R935	C2	R946	C2	R959	C3	R970	A4	R982	A4	ZD903	B2
C901	D1	C916	C1	C927	C3	C938	B3	C949	A3	C961	C3	C973	D4	C992	B3	D906	A2	D918	C2	IC901	C1	L908	A3	Q913	A2	R908	C1	R925	D3	R936	C2	R947	D4	R960	A4	R971	A3	R983	D1	ZD904	A2
C902	D1	C917	B1	C928	C3	C939	C2	C950	A2	C962	C3	C974	B4	C993	B3	D907	B3	D919	C3	IC903	D2	NTC901C1	Q914	C3	R909	A3	R926	B3	R937	C2	R948	C4	R961	C4	R972	A3	R984	D2	ZD905	A3	
C903	D1	C918	B1	C929	C3	C940	D3	C951	A3	C963	C3	C975	C4	C994	D1	D908	B3	D922	C3	IC904	D3	Q902	C1	Q915	D4	R911	C4	R927	D2	R938	C3	R949	A2	R962	C3	R973	A3	R985	C3	ZD906	C4
C904	A1	C919	B1	C930	B4	C941	C2	C952	A2	C964	C4	C977	D1	CN901	D1	D909	B3	D923	C3	IC905	C4	Q903	D1	Q916	D2	R912	B1	R928	D2	R939	C3	R950	A2	R963	B3	R974	A3	R987	D1	ZD907	B4
C905	A1	C920	A1	C931	C3	C942	C2	C954	D3	C965	C3	C978	B1	CN903	D4	D910	A3	D924	A3	L901	C1	Q905	D3	R901	C1	R914	B1	R929	D2	R940	C2	R951	A2	R964	B3	R975	A3	T901	C2	ZD908	A4
C906	D1	C921	A1	C932	C3	C943	B2	C955	C3	C966	B3	C980	C4	CN904	C4	D911	A3	D927	C4	L902	B1	Q907	D2	R902	C1	R915	A1	R930	C2	R941	B2	R954	D3	R965	B3	R976	A3	T902	B2	ZD909	A4
C909	D1	C922	D2	C933	C2	C944	A2	C956	C3	C967	B3	C981	C4	CN905	A4	D912	A4	D929	D1	L903	D4	Q908	D2	R903	C1	R916	A1	R931	C2	R942	B2	R955	D3	R966	B3	R977	D4	T903	A2	ZD910	A4
C910	C1	C923	D2	C934	C2	C945	C1	C957	A3	C968	A3	C982	D1	D902	D2	D914	A4	F901	C1	L904	C3	Q909	D2	R904	C1	R917	A1	R932	C2	R943	B2	R956	C3	R967	B3	R978	D4	TVR901C1	ZD911	D2	
C913	C1	C924	D3	C935	C3	C946	A2	C958	A4	C969	A3	C983	D1	D903	B2	D915	C3	G901	A4	L905	C3	Q910	B3	R905	C1	R918	A1	R933	C2	R944	A2	R957	C3	R968	B3	R979	C4	ZD901	D2	ZD913	A3
C914	C2	C925	D3	C936	B2	C947	C3	C959	C3	C971	A3	C984	D1	D904	B2	D916	B2	G902	A4	L906	B3	Q911	B3	R906	C2	R920	C2	R934	C2	R945	A3	R958	C3	R969	B4	R980	C4	ZD902	C2		

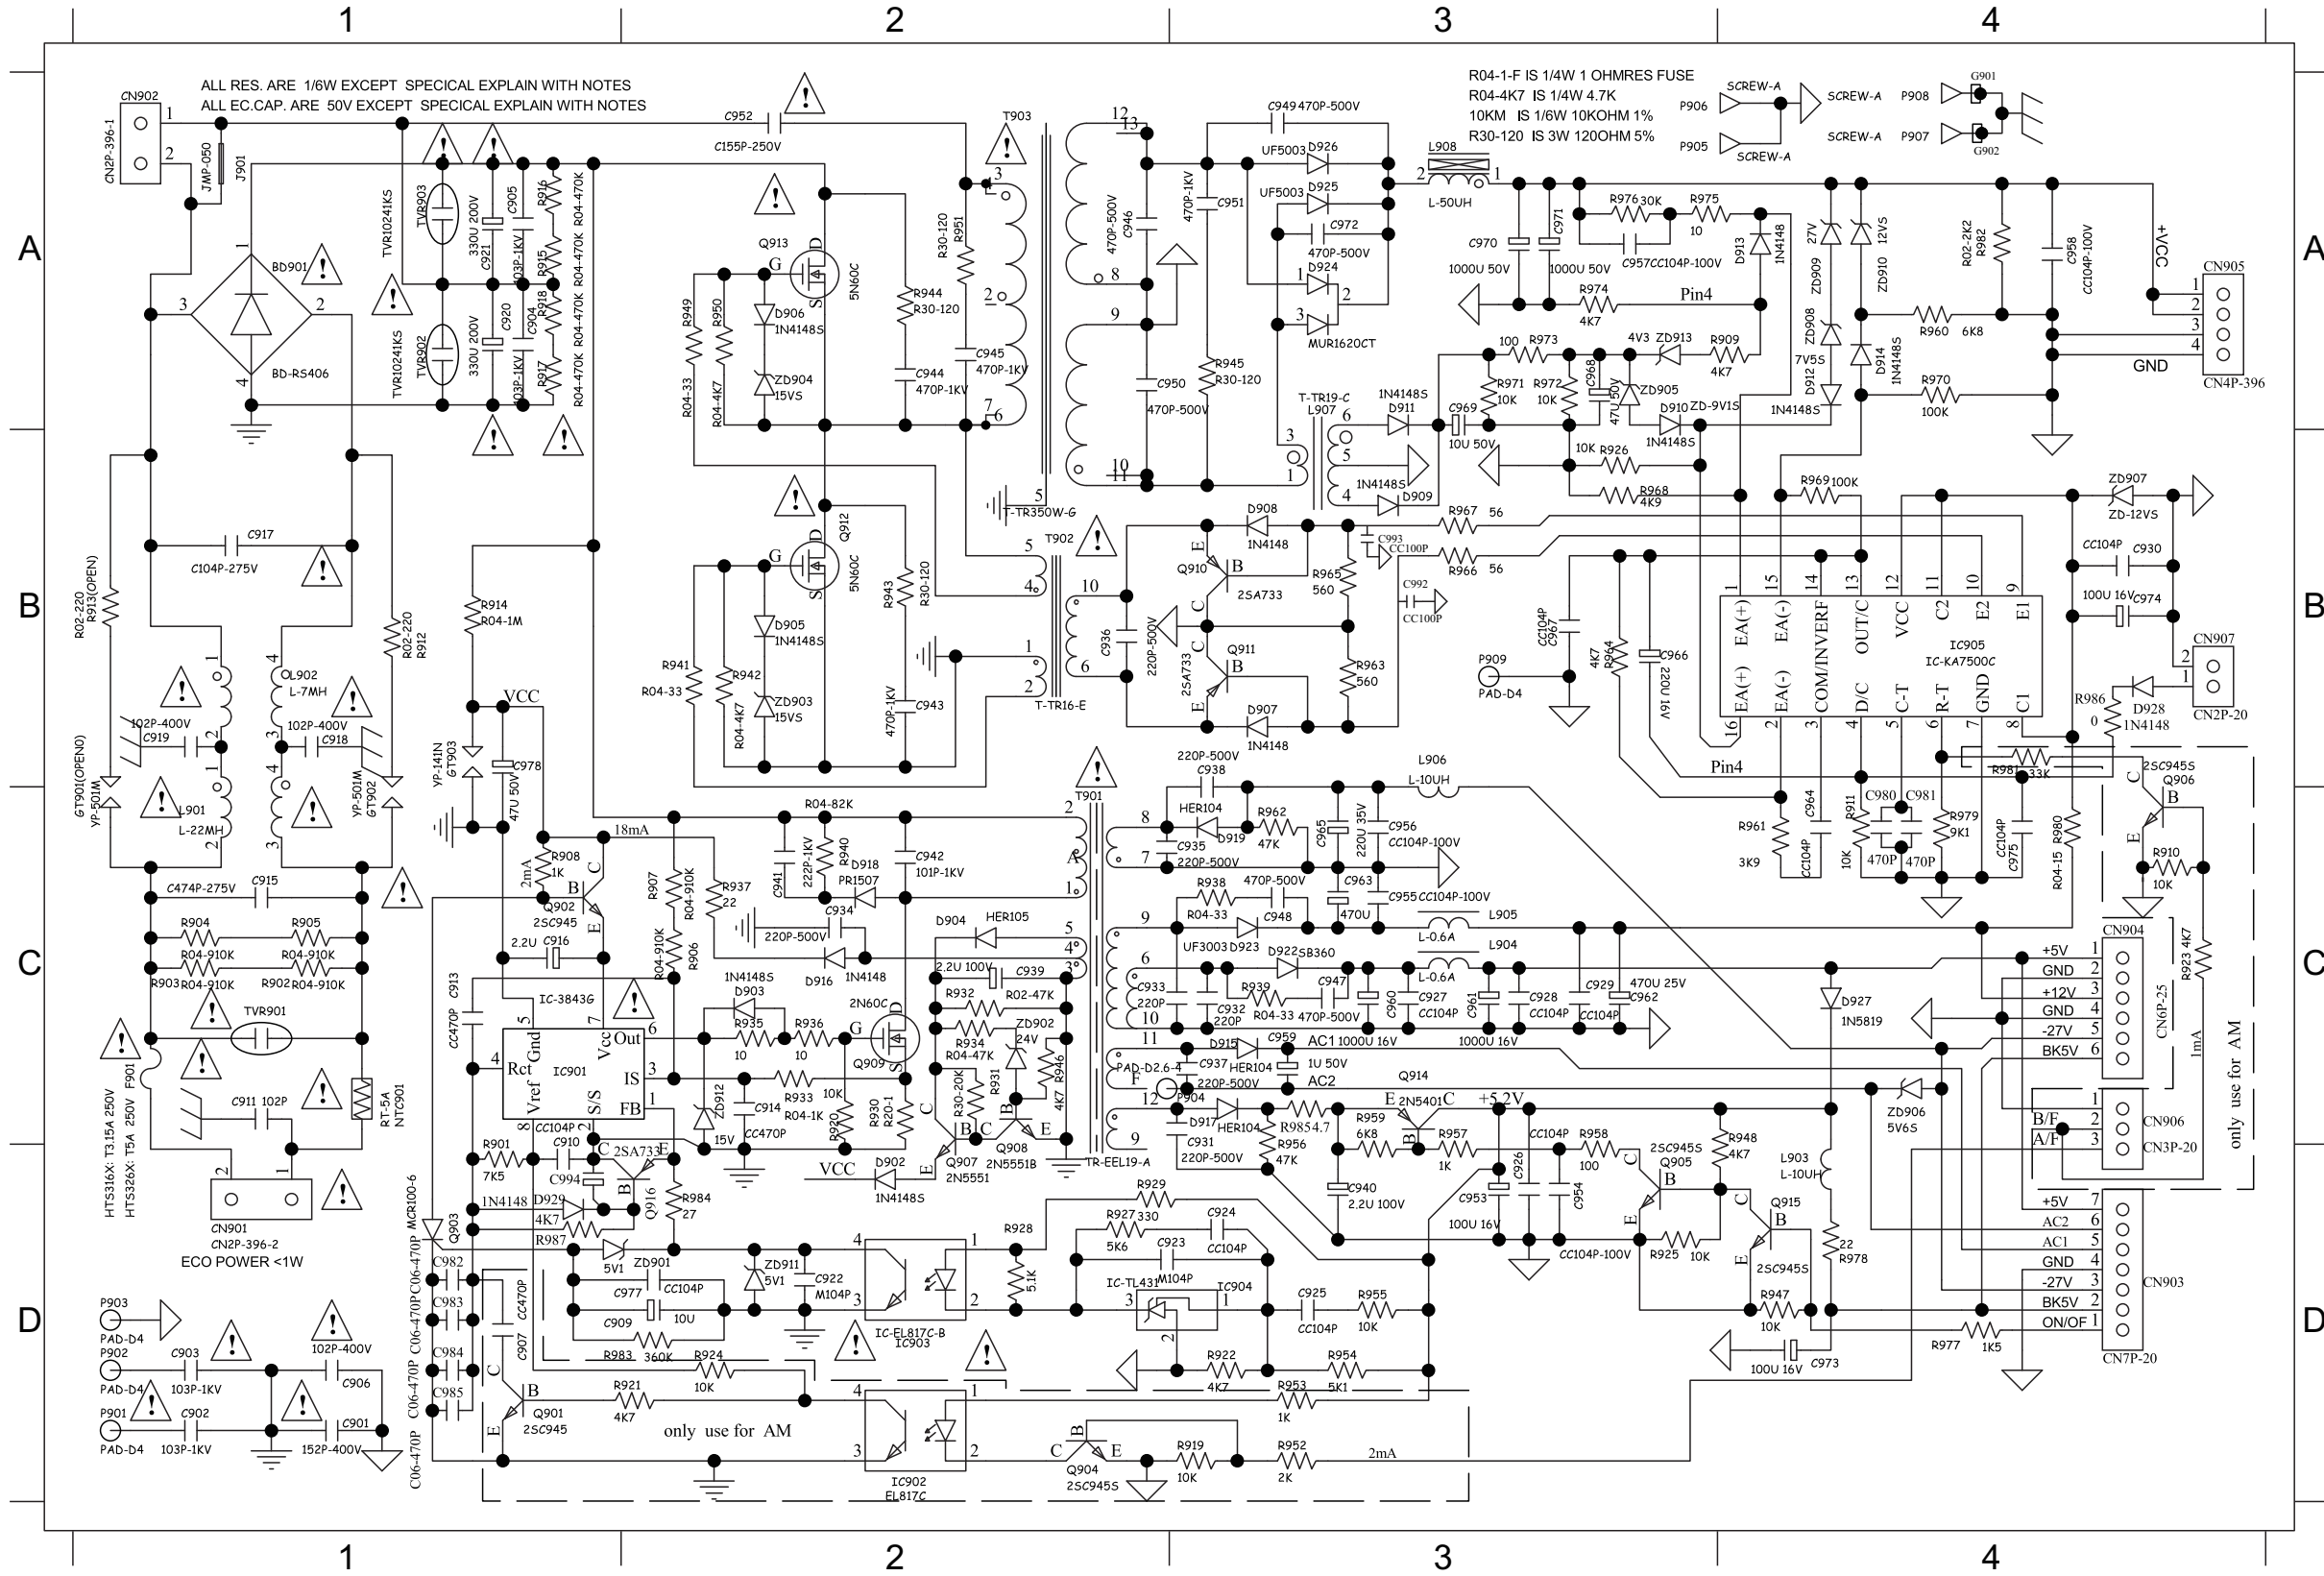

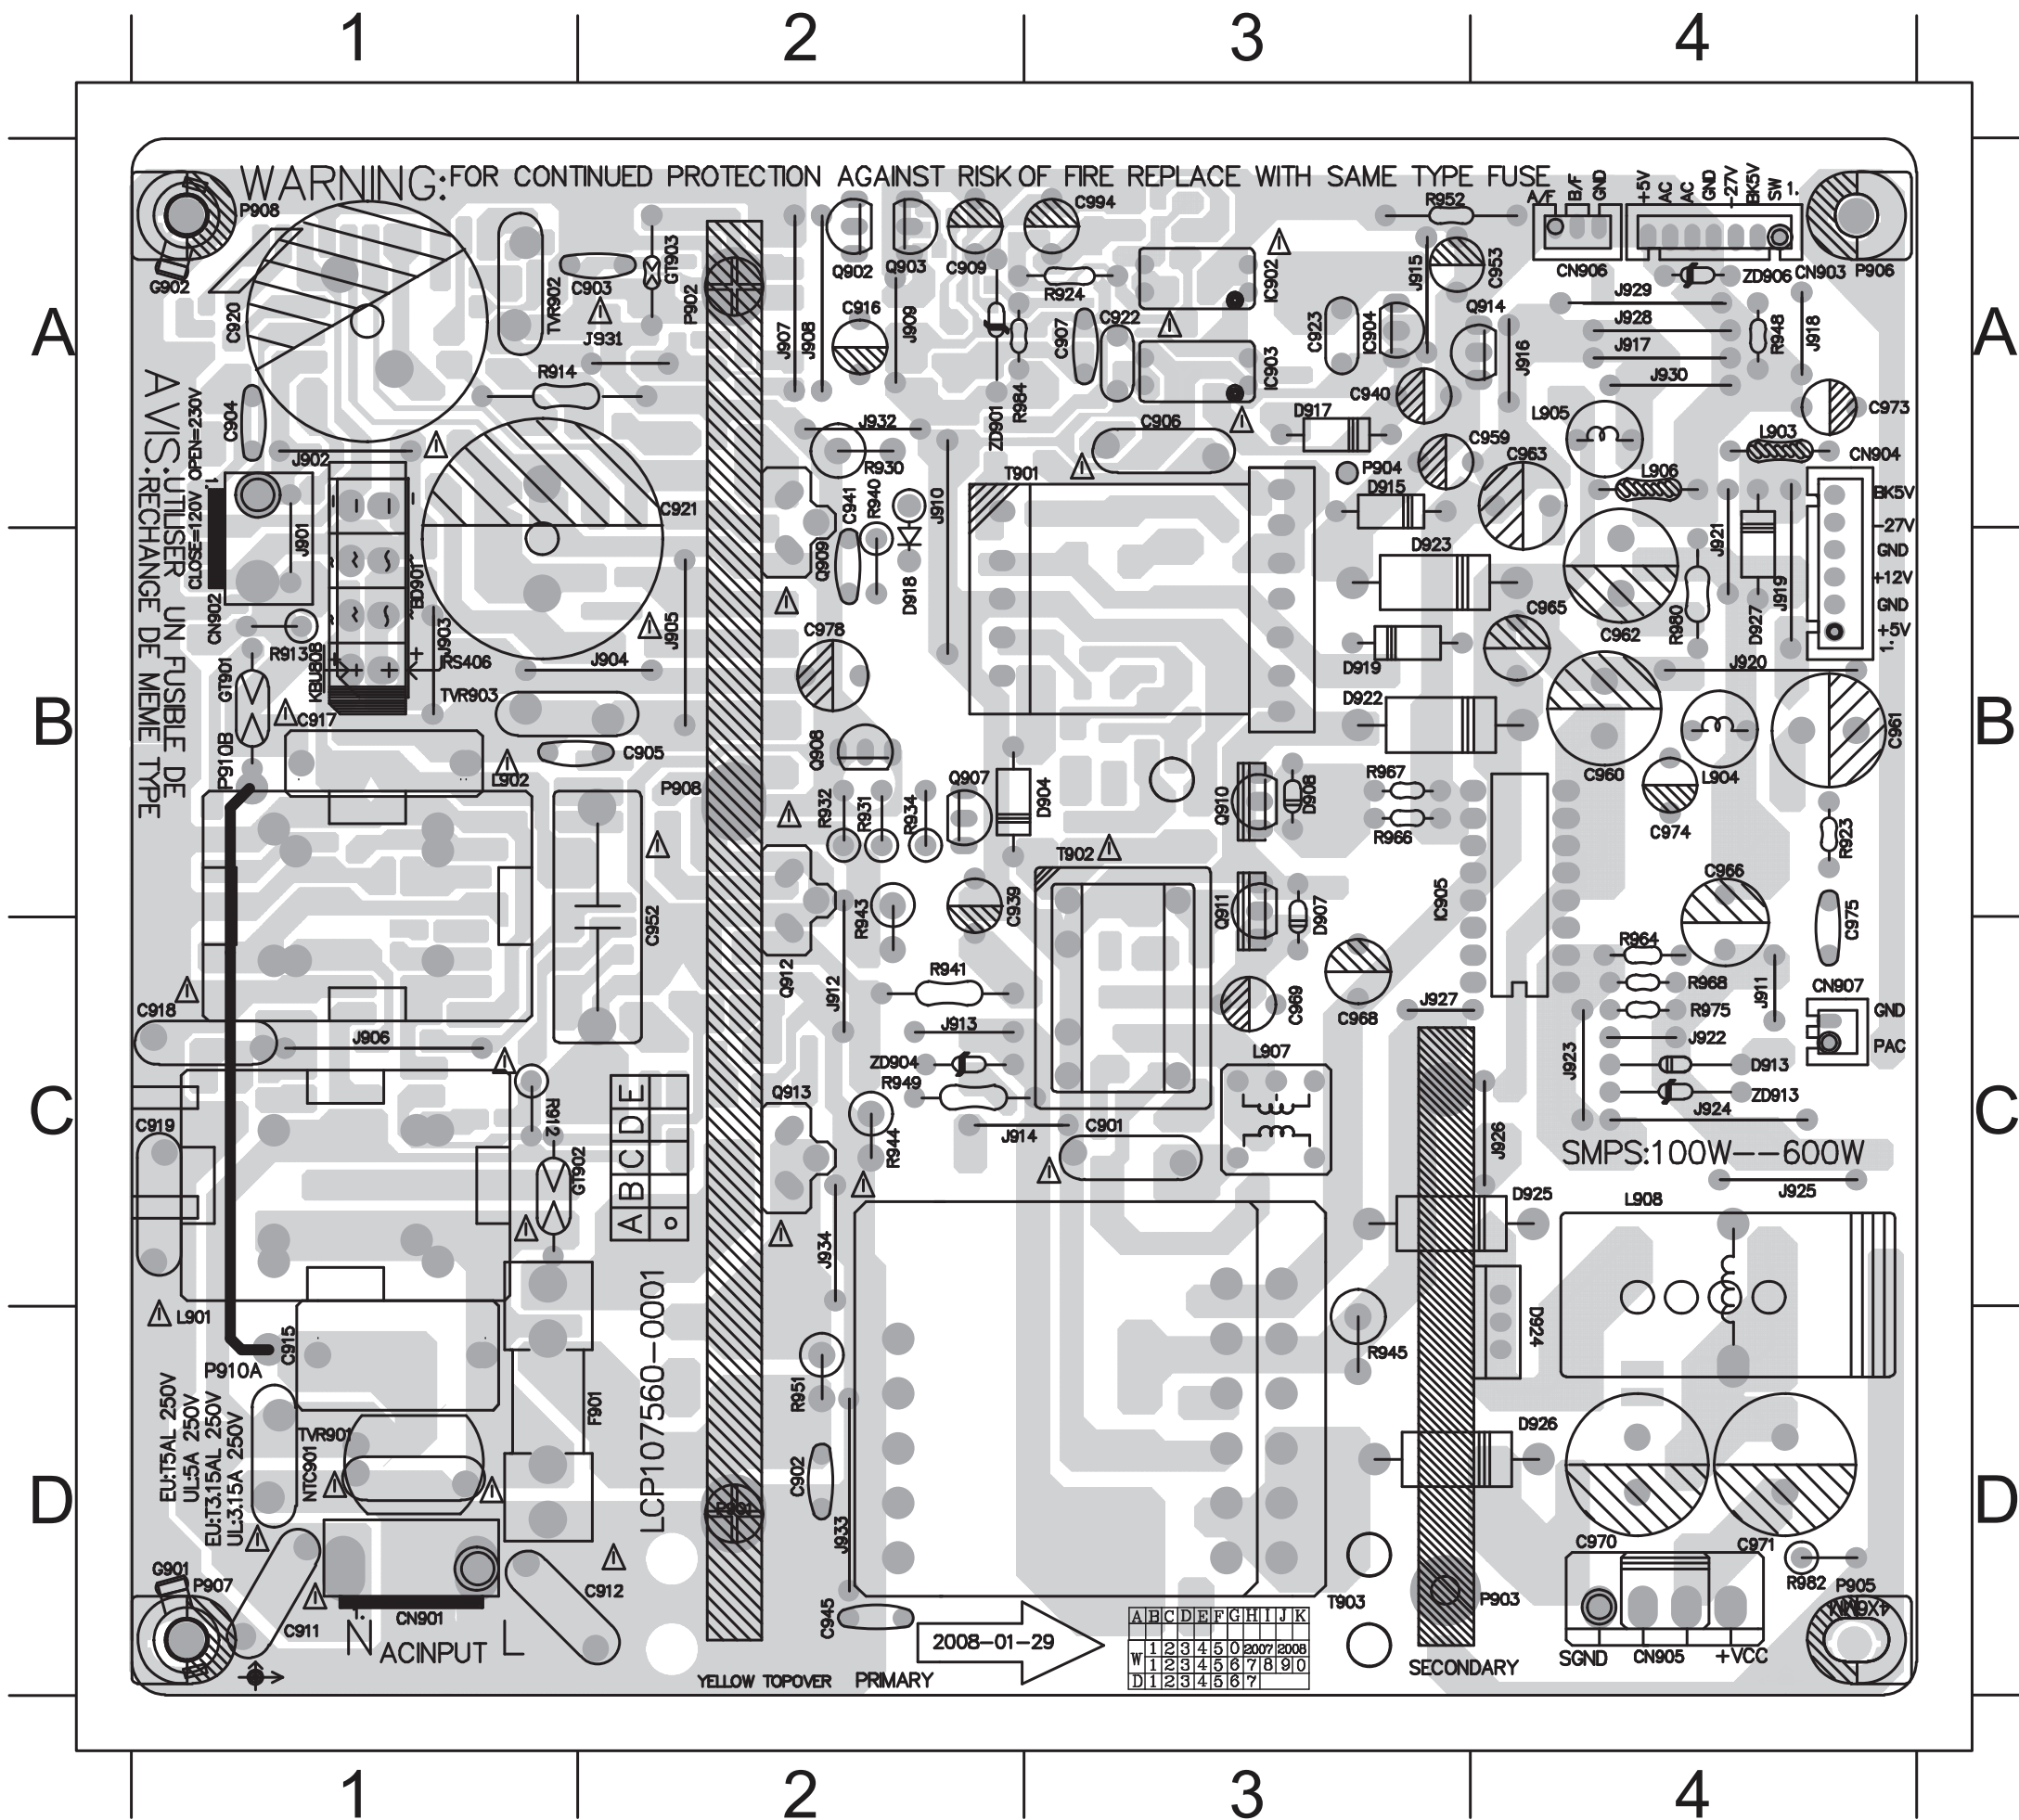


- BD901B1
- C901 C3
- C902 D2
- C903 A2
- C904 A1
- C905 B2
- C906 A3
- C909 A2
- C915 D1
- C916 A2
- C917 B1
- C918 C1
- C919 C1
- C920 A1
- C921 A2
- C922 A3
- C923 A3
- C939 B2
- C940 A3
- C941 A2
- C945 D2
- C952 C2
- C959 A4
- C960 B4
- C961 B4
- C962 B4
- C963 B4
- C965 B4
- C966 B4
- C968 C3
- C969 C3
- C971 D4
- C973 A4
- C974 B4
- C975 B2
- C978 B2
- C994 A3
- CN901D1
- CN903A4
- CN904A4
- CN905D4
- CN907C4
- D904 B3
- D907 B3
- D908 B3
- D915 A3
- D917 A3
- D918 B2
- D919 B3
- D922 B3
- D923 B3
- D924 D4
- D927 B4
- F901 D2
- GT902C2
- IC903 A3
- IC904 A3
- IC905 B3
- J902 A1
- J903 B1
- J904 B2
- J905 B2
- J906 C2
- J907 A2
- J908 A2
- J909 A2
- J910 A2
- J911 C4
- J912 C2
- J913 C2
- J914 C2
- J915 A3
- J916 A4
- J917 A4
- J918 A4
- J920 B4
- J921 B4
- J922 C4
- J923 C4
- J924 C4
- J925 C4
- J926 C4
- J927 C3
- J929 A4
- J930 A4
- J931 A2
- J932 A2
- J933 D2
- J934 D2
- L901 D1
- L902 B1
- L903 A4
- L904 B4
- L905 A4
- L906 A4
- L907 C3
- L908 C4
- NTC901D1
- Q902 A2
- Q903 A2
- Q907 B2
- Q908 B2
- Q909 B2
- Q910 B3
- Q911 B3
- Q912 C2
- Q913 C2
- Q914 A4
- R912 C1
- R914 A1
- R930 A2
- R931 B2
- R932 B2
- R934 B2
- R940 A2
- R941 C2
- R943 C2
- R944 C2
- R945 D3
- R948 A4
- R949 C2
- R951 D2
- R964 C4
- R966 B3
- R967 B3
- R968 C4
- R975 C4
- R980 B4
- R982 D4
- R984 A2
- T901 A2
- T902 B3
- T903 D3
- TVR901D1
- TVR902A1
- TVR903B1
- ZD901 A2
- ZD904 C2
- ZD906 A4
- ZD911 A2
- ZD913 C4

PCB LAYOUT - BOTTOM VIEW

7-4

7-4

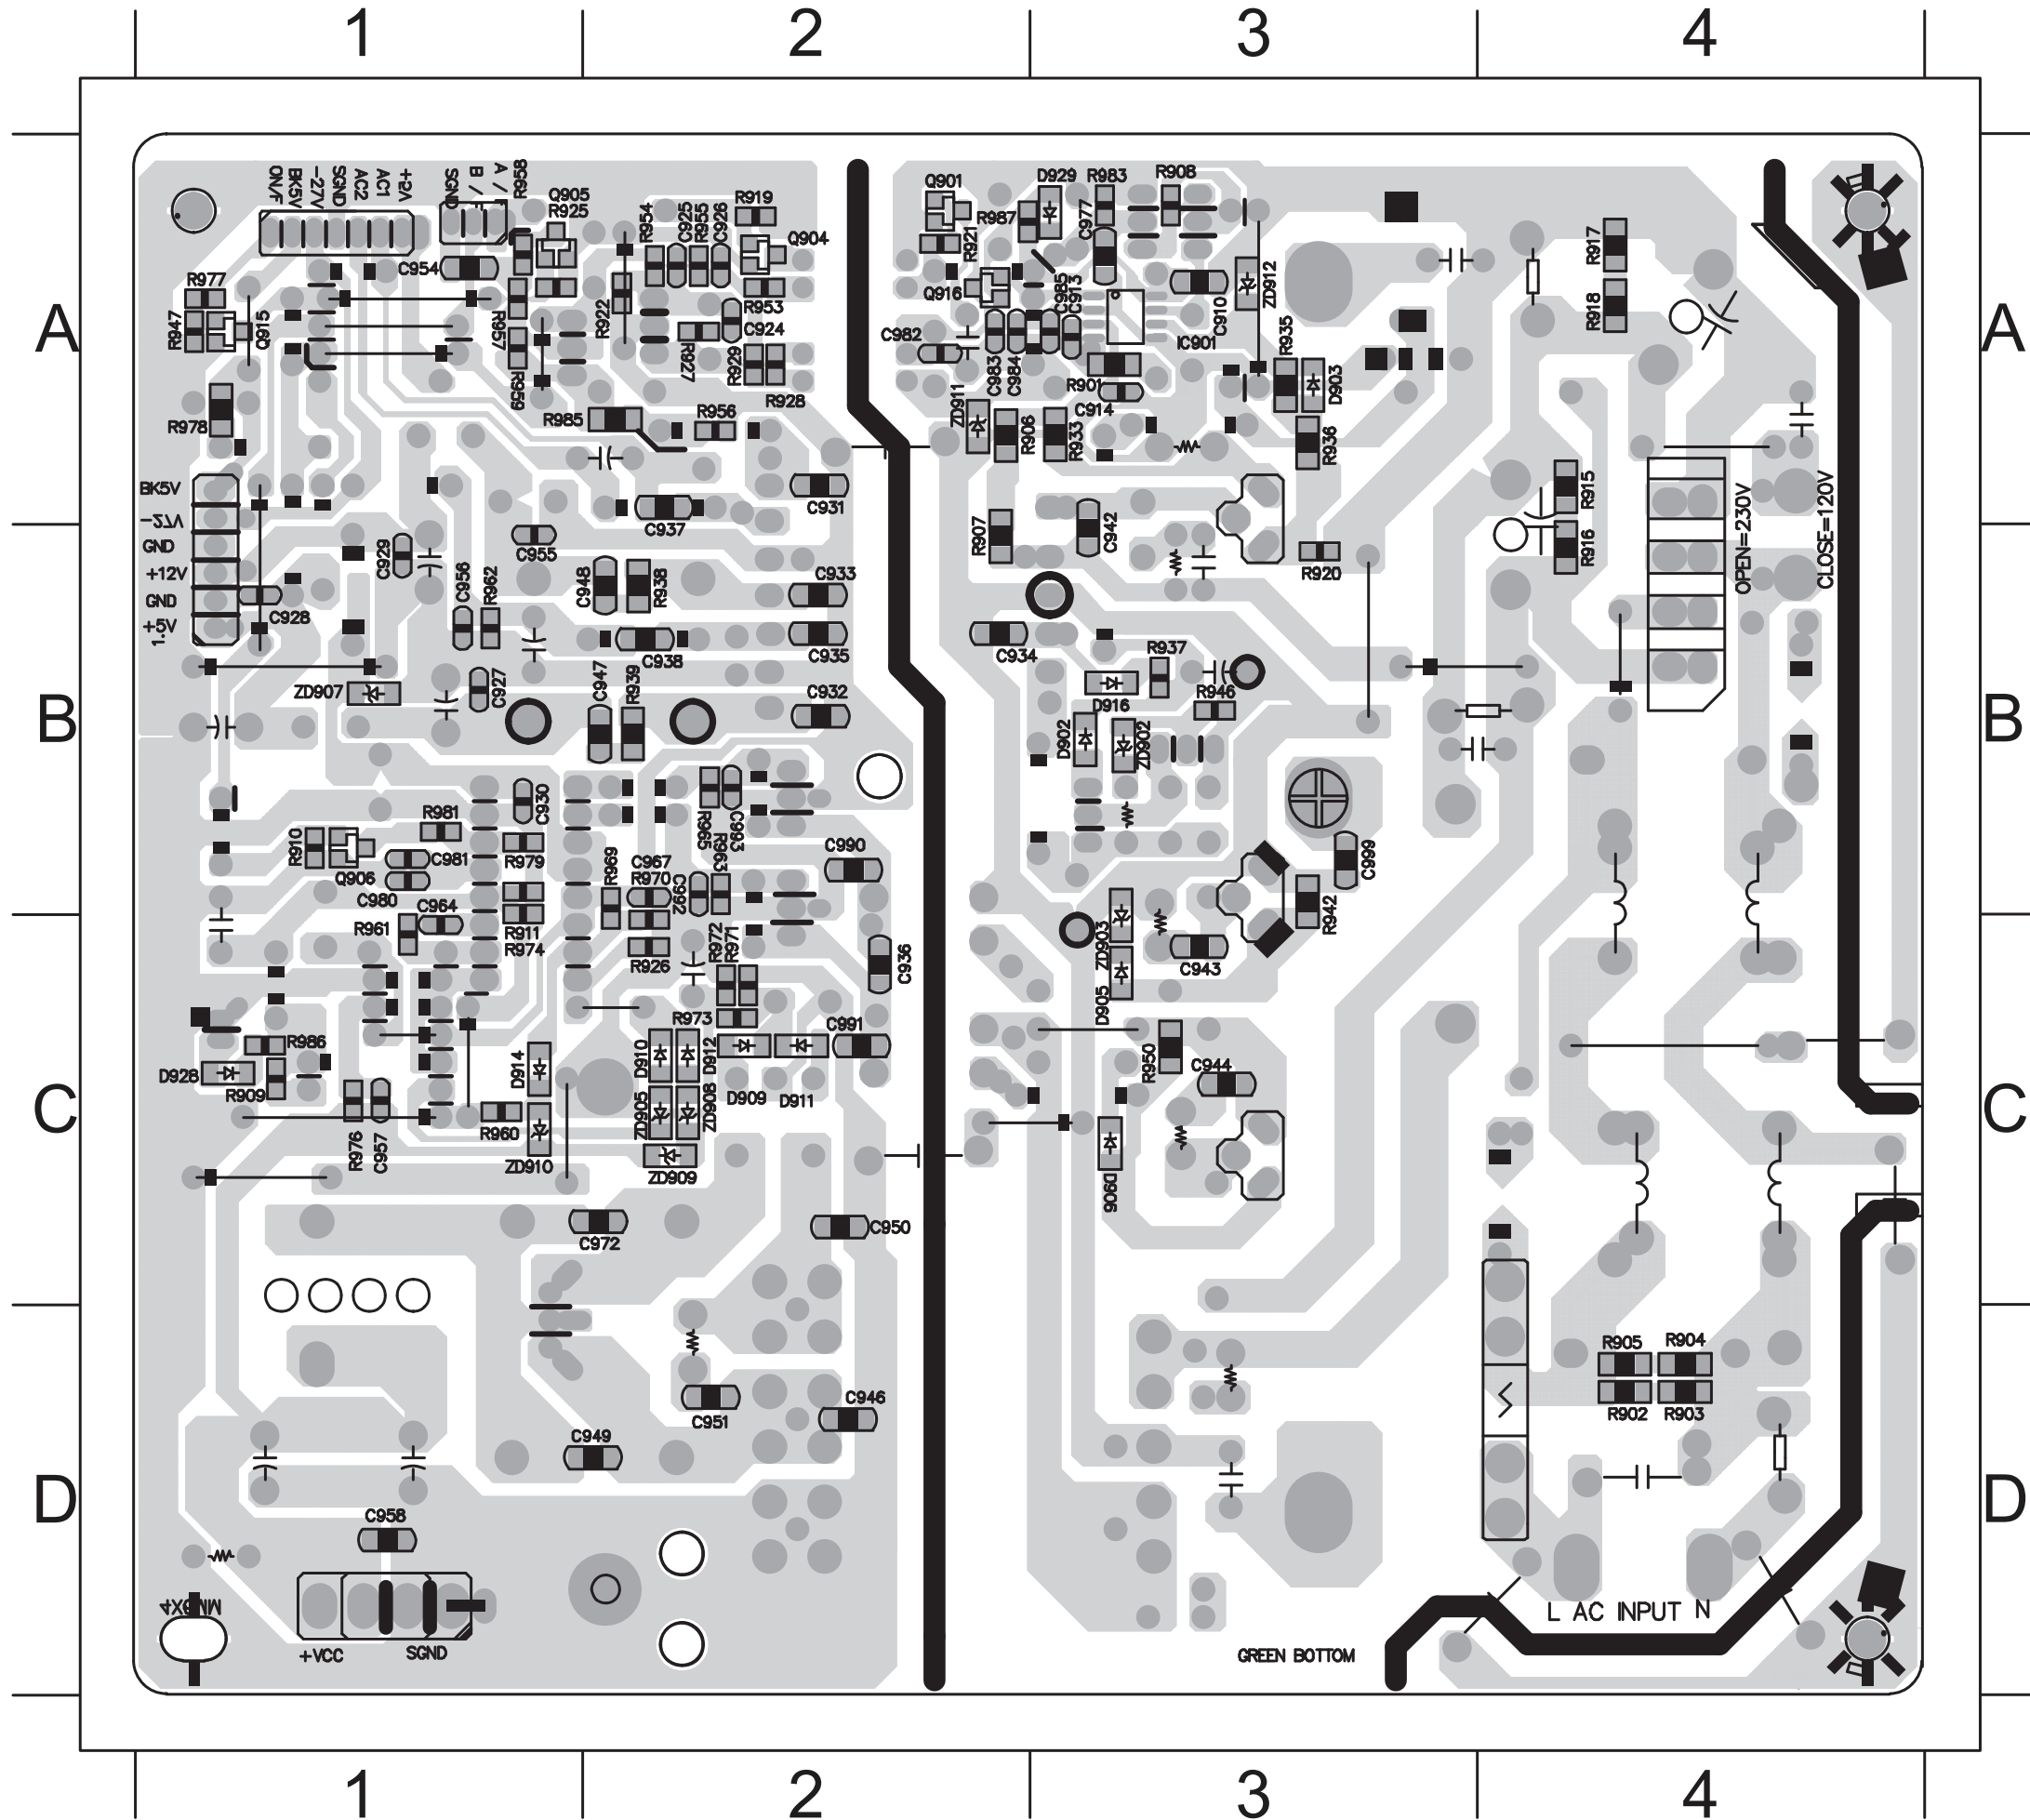


C910	A3	C992	B2	R937	B3
C913	A3	C993	B2	R938	B2
C914	A3	D902	B3	R939	B2
C924	A2	D903	A3	R942	B3
C925	A2	D905	C3	R946	B3
C926	A2	D906	C3	R947	A1
C927	B1	D909	C2	R950	C3
C928	B1	D910	C2	R954	A2
C929	B1	D911	C2	R955	A2
C930	B1	D912	C2	R956	A2
C931	A2	D914	C1	R957	A1
C932	B2	D916	B3	R958	A1
C933	B2	D928	C1	R959	A1
C934	B2	D929	A3	R960	C1
C935	B2	IC901	A3	R961	C1
C936	C2	Q905	A1	R962	B1
C937	A2	Q915	A1	R963	B2
C938	B2	Q916	A2	R965	B2
C942	A3	R901	A3	R969	B2
C943	C3	R902	D4	R970	B2
C944	C3	R903	D4	R971	C2
C946	D2	R904	D4	R972	C2
C947	B2	R905	D4	R973	C2
C948	B1	R906	A2	R974	C1
C949	D1	R907	A2	R976	C1
C950	C2	R908	A3	R977	A1
C951	D3	R909	C1	R978	A1
C954	A1	R911	C1	R979	B1
C955	B1	R915	A4	R983	A3
C956	B1	R916	B4	R985	A1
C957	C1	R917	A4	R986	C1
C958	D1	R918	A4	R987	A2
C964	B1	R920	B3	ZD902	B3
C967	B2	R922	A2	ZD903	C3
C972	C1	R925	A1	ZD905	C2
C977	A3	R926	C2	ZD907	B1
C980	B1	R927	A2	ZD908	C2
C981	B1	R928	A2	ZD909	C2
C982	A2	R929	A2	ZD910	C1
C983	A2	R933	A3		
C984	A2	R935	A3		
C985	A3	R936	A3		

MECHANICAL EXPLODED VIEW

8 - 1

8 - 1

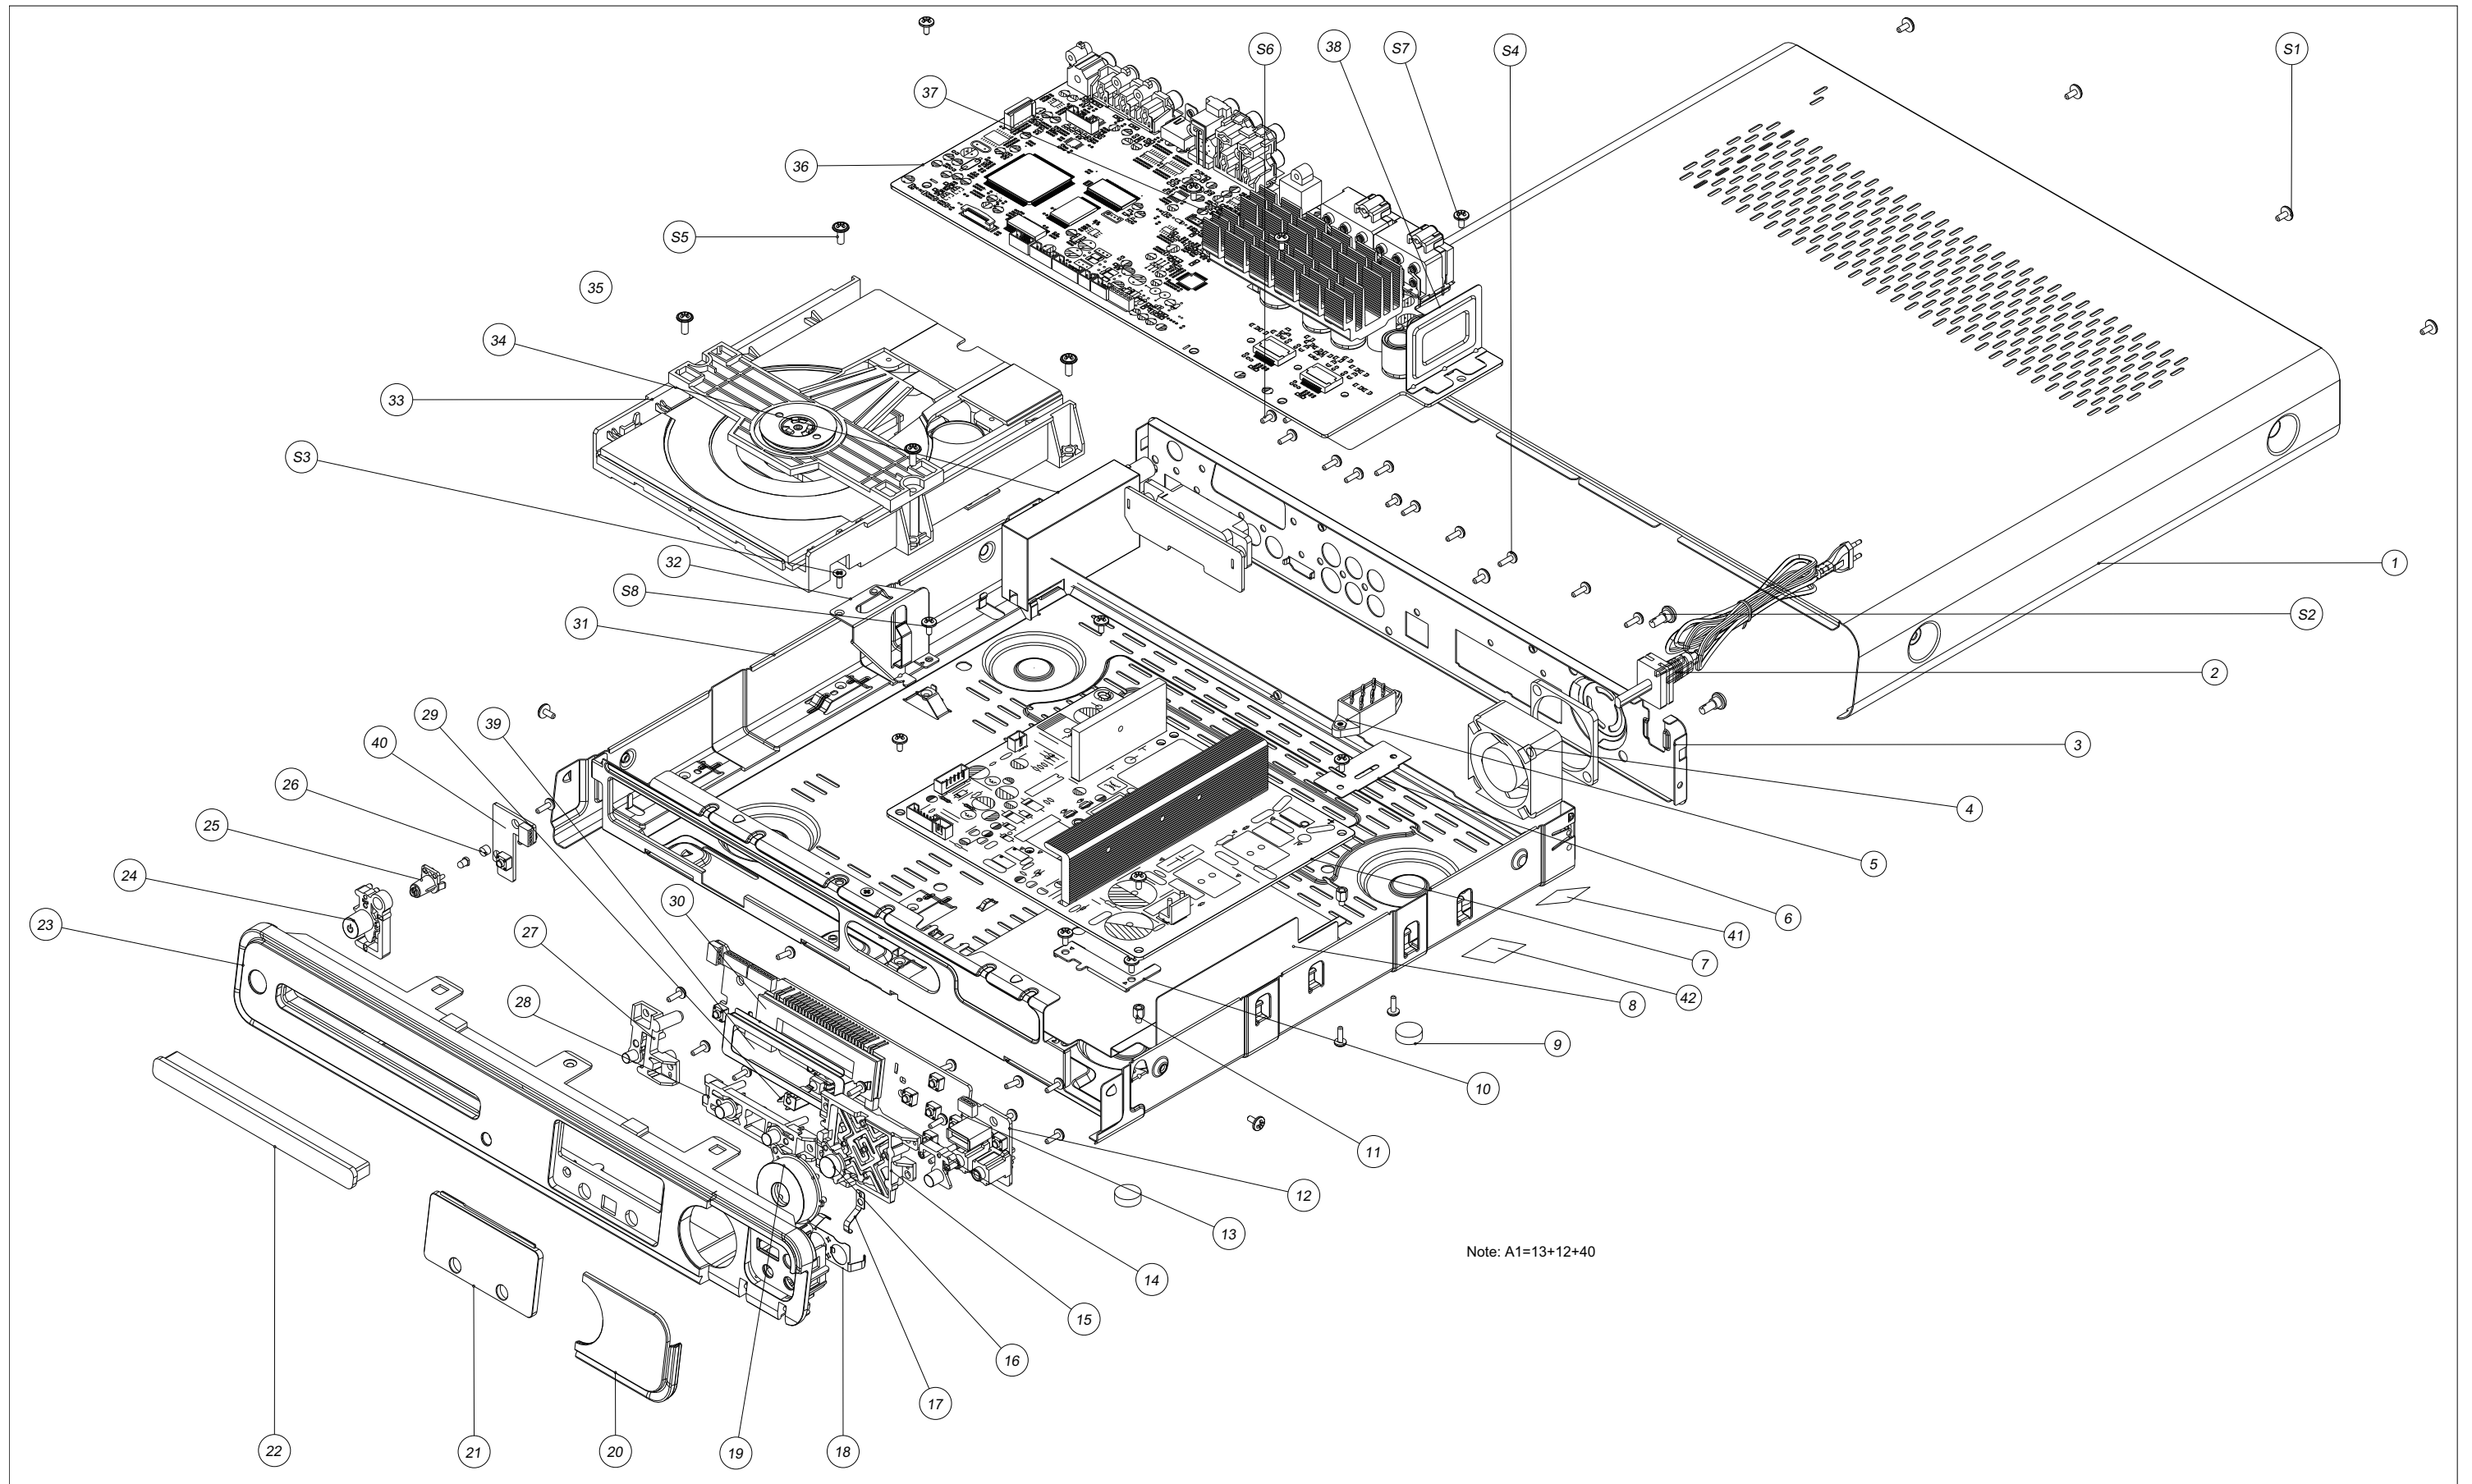

Note: A1=13+12+40

MECHANICAL PART LIST

Loc.	12 No.	Description
MAIN		
1	996510012462	TOP COVER SECC
2	996510010082	LINE CORD 2P 1800mm SAA /79
3	996510015698	REAR COVER SECC
4	996510012461	FAN DC
7	996510015699	POWER PCB ASSY
8	996510011276	POWER PCB PLATE PVC
9	996510011288	RUBBER FOOT
14	996510012460	MIC-LEVEL BUTTON
15	996510011285	FUNCTION BUTTON BASE ABS
16	996510011284	SOURCE BUTTON ABS
19	996510011282	FUNCTION BUTTON ABS
20	996510011287	CONNECTORS COVER
21	996510011286	VFD LENS PMMA
22	996510012458	DVD DOOR ABS
23	996510012459	FRONT PANEL
24	996510011280	POWER BUTTON ABS
25	996510010840	STANDBY LENS
27	996510011281	EJECT BUTTON ABS
28	996510011283	VOLUME BUTTON ABS
31	996510013766	BOTTOM COVER SECC
33	996510017573	DVD LOADER
34	996510010825	TUNER
36	996510019106	MAIN+SCART PCB ASSY
39	996510012457	VFD FILTER PC
A1	996510015262	VFD+JACK+STANDBY PCB ASSY
FM	996510008251	FM ANT
RC	996510012491	REMOTE CONTROL
V1	996510007429	FFCCBLE 10P
VIDEO	996500013058	RCA CABLE 2P 1.2M

SPEAKER

RFC	996510001599	RUBBER FOOT -CENTER SPK
RFRF	996510001601	RUBBER FOOT - REAR SPK
RFS	996510010854	RUBBER FOOT -SUB
SPKC	996510017404	SPEAKER BOX -CENTER
SPKFL	996510017405	SPEAKER BOX - FRONT LEFT
SPKFR	996510017406	SPEAKER BOX - FRONT RIGHT
SPKRL	996510017407	SPEAKER BOX - REAR LEFT
SPKRR	996510017408	SPEAKER BOX - REAR RIGHT
SUBW	996510017409	SUBWOOFER

REVISION LIST

9 - 1

9 - 1

Version 1.0
*Initial release