


AEG-TELEFUNKEN

Flexible accessories and
all auxiliary units:
professional tape recorder
system M15A

magnetophon 15A



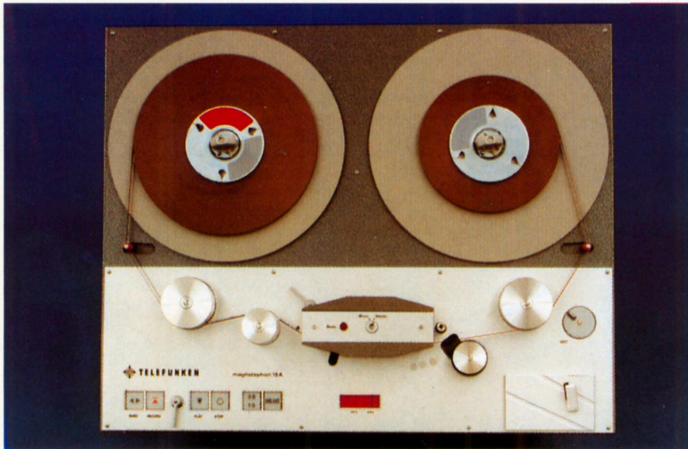

The M15A, A-wind configuration shown

The professional tape recorder M15A (short for »magnetophon 15A«) is a compact unit. It incorporates the amplifiers for monaural, stereophonic or two-track configuration, as well as for synchronous operation with pilot-tone or time code.

See separate brochure no. K271V62.5.3/0281 E magnetophon 15A with SYNC and TIMECODE 2 tape speed combinations optional for all models 15 and 7.5 ips or 30 and 15 ips.


Special versions are e.g. M15A Preview for pitch/depth control or M15A-Q for quadraphonic recording (1/2"-tape)

The M15A – the master recorder for today and for tomorrow – has been designed for easy and versatile application, taking advantage of the most modern technologies. The amplifiers are equipped with clickfree modulation switches, which are controlled from the tape transport function.

The M15A is designed for top quality master recording and reproduction at radio and tv studios, at motion picture and record industries, at professional studios in general.



M15A in string of consoles

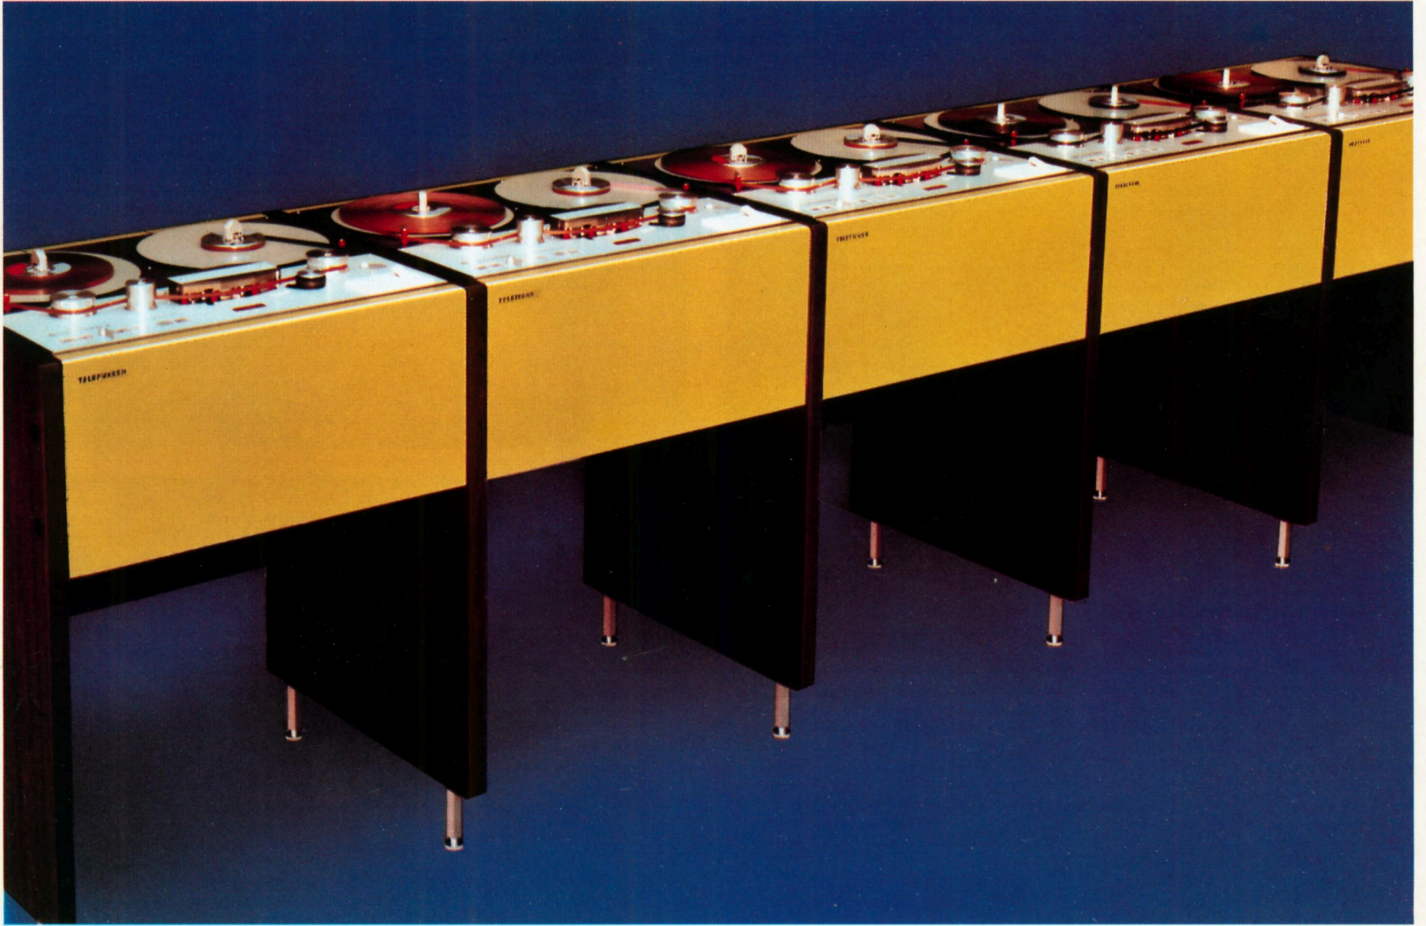

Carrying case (option)
Console 700 (option), right



M15A-Q for quadraphonic recording on 1/2"-tape.
The tape transport is a modification of the M15A-1/4"-tape transport



Console 700 with shelf (option)

M15A in Console 700 with vu-meter bridge
(deliverable with and without monitor loudspeaker), right



Wide Console 800 with Autolocator AL15A



Capstan with flywheel and tacho-generator
 Amplifier magazine, shown with cover removed
 (here shown with XLR-connectors), in the middle
 Control logic magazine, shown with cover removed, bottom

Capstan drive




- Capstan speed stabilized with reference to a quartz oscillator, remains unaffected by mains frequency variations
- Brushless dc motor for minimum wear and disturbance
- Heat minimized with special regard to the capstan
- Loading a tape will start the capstan motor, at tape end the capstan stops. No pressure roller action until capstan is up to nominal speed
- Remote control provided for capstan start/stop
- Mains or externally synchronized operation by pilot tone or time code, with auxiliary units
- Continuously variable speed control, acting through $\pm 50\%$ of nominal speed, with auxiliary unit

Tape path


- High precision tape guidance to minimize phase fluctuation in stereo mode
- Constant tape tension assured by tension controls right and left. No tension peaks, no tape strain.
- Tight, self-supporting tape packs (pancakes)
- Hubs and spools of all standards accommodated by exchangeable mounts
- Easy-to-handle lock mount for European hubs

Function controls


- Illuminated push-buttons smoothly acting on solid-state switches
- Push-buttons guarded against inadvertent actuation
- Fully electronic control of all functions
- CMOS logic for high-grade noise immunity
- Reel motor circuits switched by means of triacs
- Fail-safe operation of controls
- Continuously variable spooling speed in both directions, with especially sensitive control at low searching speeds
- Instant stop at tape run-out
- Tape speed indicated by lamps, remotable
- Remote control connections provided on a special plug-in unit (option), adaptable for different remote control systems. Control modes selectable: parallel, remote only, local only.
- Remote control unit for all functions as option
- Automatic unit with tape sensor as option
- The Autolocator (option) will automatically locate any desired tape position. The Autolocator searches the position accurately by the required read-out, without overshooting. Any selected tape portion can be repeated in shuttle mode. Without interfering with the continuous time measurement, the Autolocator is able to display separately the read-out of an individual take duration. The read-outs of up to 9 positions of interest may be stored in the Autolocator memory, retrievable simply by pressing one of the buttons 1 to 9 on the programmable keyboard. All transport remote controls are also incorporated in the Autolocator (see page 7).

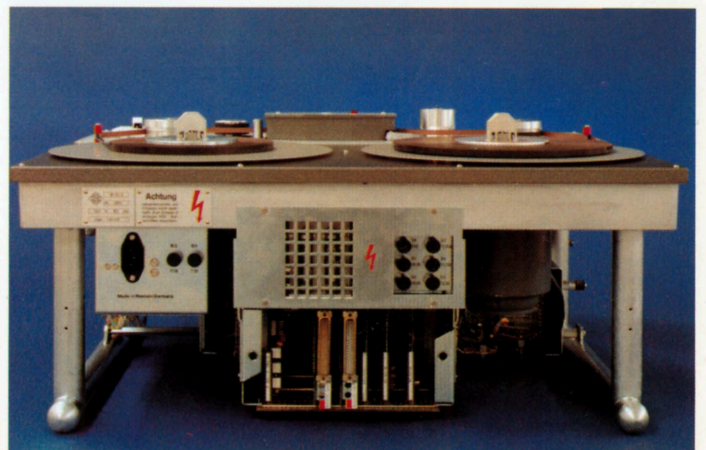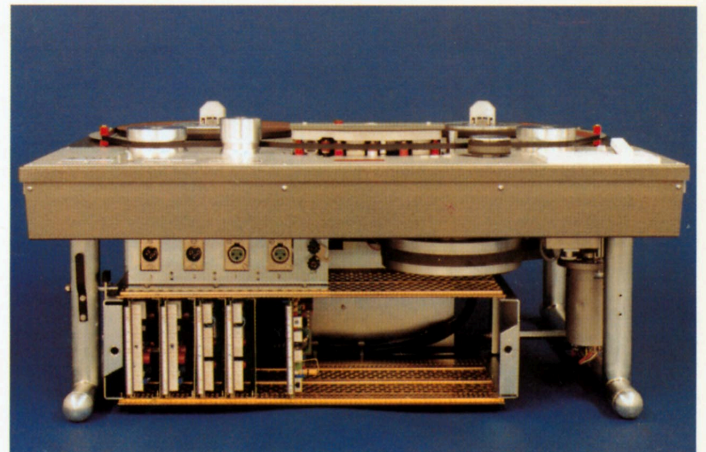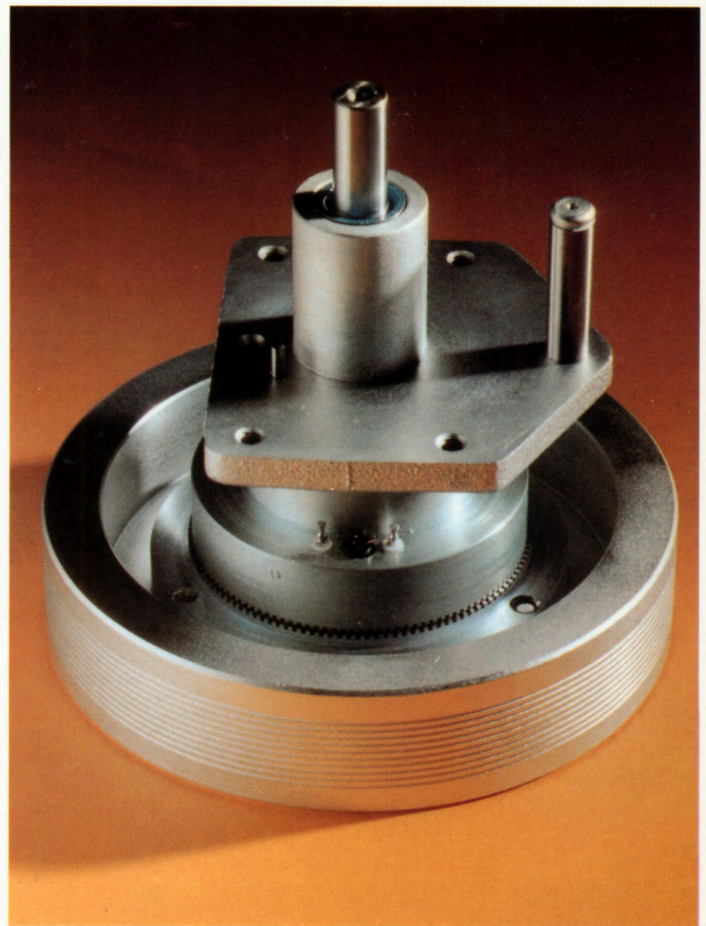

Vacodur head for long life
V-shaped cores for best crosstalk rejection

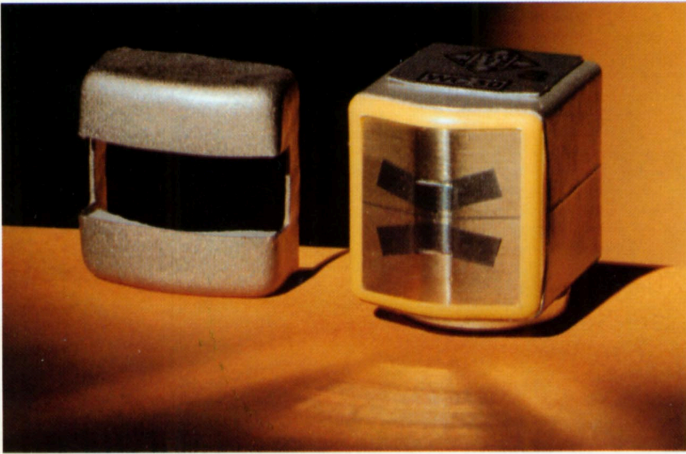


- Optional plug-in units for recording and reproducing pilotone for full-track models
- The amplifier magazine is generally wired for 2 channels. It provides space for up to 4 channels

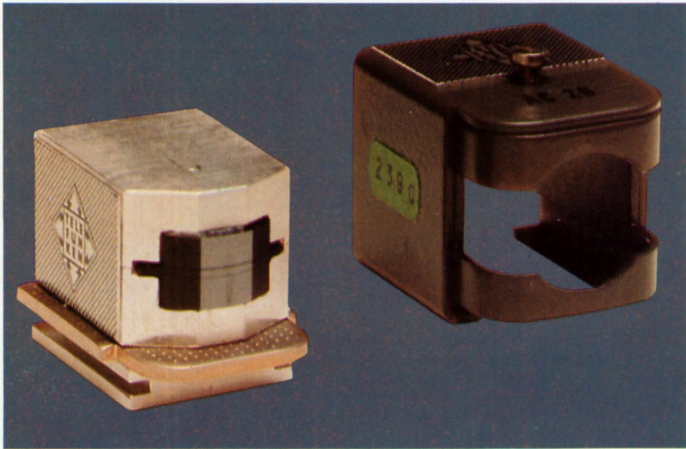

Magnetic head of high-density ferrite for long life.
Optimal gap geometry. Improved treble recording

Electronic tape timer with LED display 10 mm high
(here with negative reading)

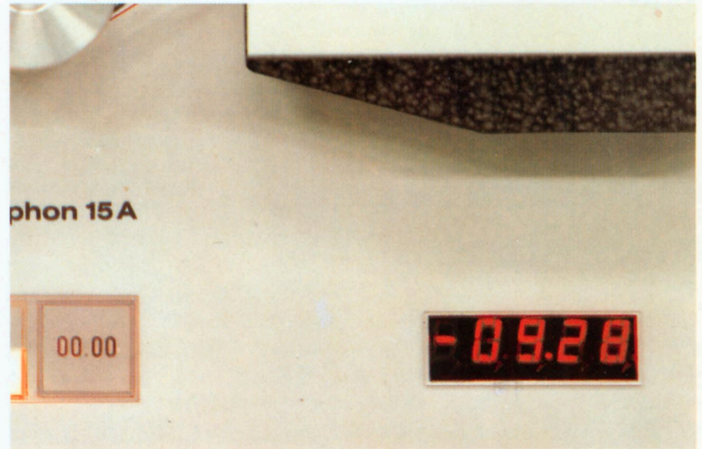


Head assembly

- Head assemblies are interchangeable without need of mechanical realignment
- Optional Vacodur or high-density ferrite record and playback heads. Long life heads with a precision finish obviating realignment, azimuth adjustable
- High-precision tape guides
- Flutter idler mounted between record and playback heads to eliminate longitudinal tape vibration

Amplifiers

- Printed-circuit plug-in units fitted with ICs
- Electronic switching of equalization for 15 and 7.5 ips, optional for 30 and 15 ips, automatically controlled from speed selected at the tape deck
- Ramp-shaped signal voltages, controlled from transport function, switch the erase, record and replay amplifiers on and off, suitably timed (see diagram page 11). This feature enables clickfree and gapless overdubbing
- Electronic mono-stereo switching (optional) by means of a switch in the head assembly
- Record and playback equalizations adjustable for NAB or CCIR equalization
- Switchable equalization (optional) permitting to select, as required, NAB or CCIR equalization

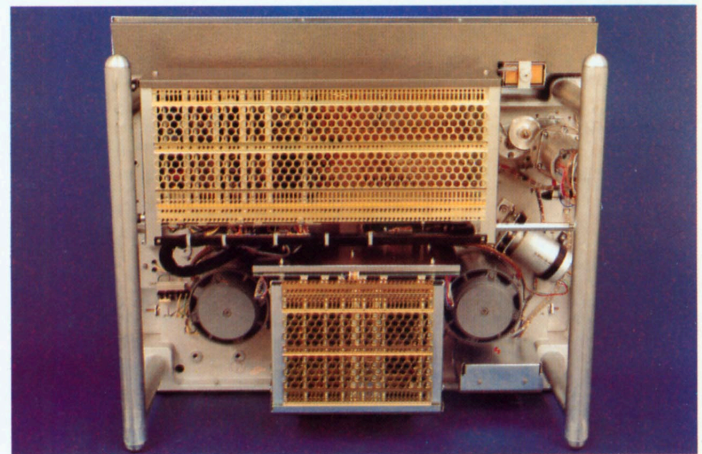

A view from below. The amplifier magazine is hinge-mounted to facilitate maintenance

Minimum maintenance

- High structural stability through rigid die-cast frame
- Highly constant brakes
- Long head life
- Easy access to all sections and components
- Amplifier magazine hinge-mounted
- Running hour counter for due maintenance, indicating capstan motor running time

Remote control unit FS15A, Autolocator AL15A – a most versatile control unit –, Automatic unit AZ15A

Adapter cards (option) with the connectors for auxiliary units, bottom left: Synchronization adapter, right: Remote control adapter

Vari-speed unit SZ15A, Pilotone synchronization unit NS15A




Auxiliary Units/Adapter plug-in units

Remote control adapter (with female connector)
 FA 1
 FA 2
 FA 3
 FA 15*

Synchronization adapter (with male connector)
 NA 1
 NA 2

Accessory	FA 1	FA 2	FA 3	FA 15*	NA 1	NA 2
FS 15 A	•					
AL 15 A	•					
AZ 15 A		•				
Attenuator start-stop	•	•				
FS 15				•		
E 315				•		
Attenuator start-stop			•			
NS 15 A					•	
SZ 15 A						•

* for remote control compatibility with M15 equipment

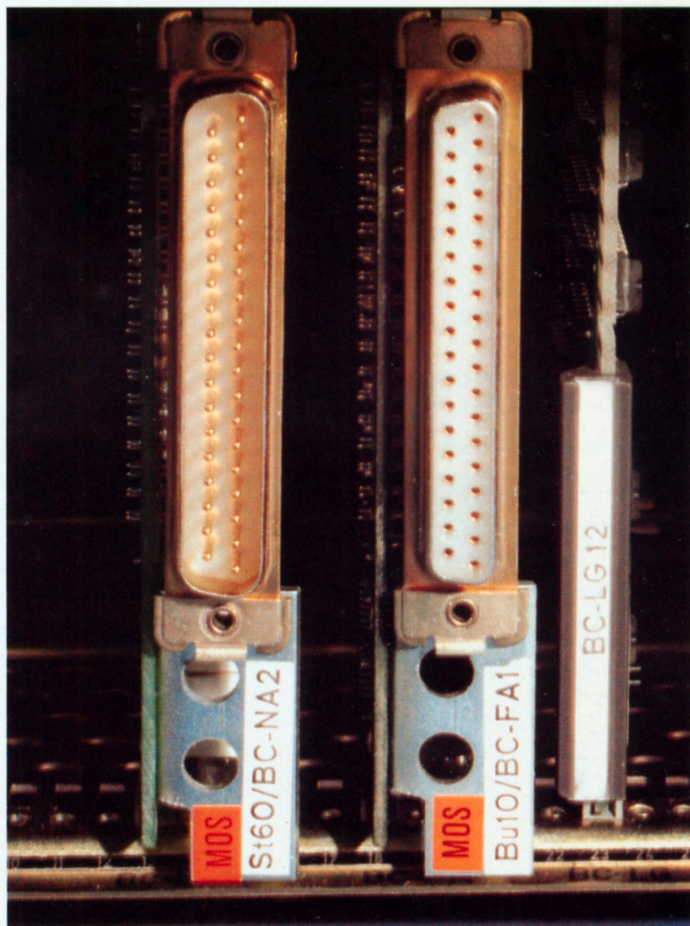

Remote control facilities with auxiliary units

with Remote Control Unit FS15A (40 mm x 190 mm)
 remote control of all transport modes,
 remote only or parallel control,
 switch for mono-stereo or NAB-CCIR
 with Autolocator AL15A (80 mm x 190 mm)
 automatic location of a tape position,
 repeated replay of a tape portion,
 remote control of all transport modes
 with Automatic Unit AZ15A (40 mm x 190 mm)
 for automation of broadcasting by means of ready spliced
 tapes controlled by transmitted-light tape sensor
 with Synchronization Unit NS15A (80 mm x 190 mm)
 synchronized tape speed, referred to mains frequency or to
 external pilottone frequency (50 or 60 Hz)
 with Vari-Speed Unit SZ15A (40 mm x 190 mm)
 stepless variation of tape speed within $\pm 50\%$ of nominal
 speed, highly accurate repeatability
 These auxiliary units are designed as standard control
 console cassettes

Amplifiers

Equalization

at 30 ips: 17.5 μ s
 to NAB: 30+3180 μ s at 15 and 7.5 ips
 or
 to CCIR: 35 μ s at 15 ips
 70 μ s at 7.5 ips
 (optional: equalizations with NAB-CCIR selector)

Input

balanced, floating

Input level

+ 6 dBm (max. + 15 dBm)
 or by changing connections
 + 15 dBm (max. + 24 dBm)

Input impedance

min. 5 k Ω between 30 Hz and 16 kHz

Output

balanced, floating

Output level

+ 6 dBm (nominal)
 adjustable to + 12 dBm (at 2000 pWb tape flux)
 max. output level + 24 dBm
 or by changing connections
 + 15 dBm (nominal)
 adjustable to + 21 dBm (at 2000 pWb tape flux)
 max. output level + 24 dBm

Output impedance (+ 6 dBm and +15 dBm versions)

max. 40 Ω between 30 Hz and 16 kHz
 min. load impedance 150 Ω up to + 18 dBm
 200 Ω up to + 24 dBm

Erase/bias frequency

131 kHz with quartz reference

Overall characteristics

These data refer to NAB equalization and to modern tapes,
 e.g. 3 M 206 or equivalent

Frequency response

30 ips	60 Hz – 20 kHz:	± 1.5 dB
	80 Hz – 18 kHz:	± 1 dB
15 ips:	30 Hz – 16 kHz:	± 1.5 dB
	60 Hz – 16 kHz:	± 1 dB
7.5 ips:	30 Hz – 15 kHz:	± 1.5 dB
	60 Hz – 10 kHz:	± 1 dB

Signal to noise ratio

"A"-weighted, rms, referring to 400 nWb/m
 (i.e. 6dB above operating level)

	30 ips and 15 ips	7.5 ips
full-track	69 dB	69 dB
stereo	65 dB	65 dB
two-track	64 dB	64 dB

Total harmonic distortion

referring to 400 nWb/m (i.e. 6 dB above operating level)

full-track, two-track	1.0%
stereo	1.0%
pilottone model	1.0%

Crosstalk rejection measured with 1 kHz according to DIN 45521

stereo version:	min. 48 dB (with Vacodur heads) min. 38 dB (with ferrite heads)
two-track version:	min. 54 dB (with Vacodur heads)

Erase

min. 80 dB at 1 kHz

Mains

100, 110, 120, 200, 220 or 240 V (+5/-10%), 50 or 60 Hz

Power consumption

max. 190 VA

Ambient temperature

+5°C to + 45°C

Dimensions

Dimensions	Height mm	Width mm	Depth mm	Weight kg
Chassis	308	645	525	53
Carrying case	420	760	615	28
Console 700	920	730	600	42
Console 800	920	815	600	46

Model options

1/4 inch design for tape coated inside (A-wind) or outside (B-wind). Head assemblies and amplifiers have been adjusted together. Thus, by interchanging both head assemblies and amplifiers, the versions are convertible without requiring readjustment

Model Technical features	M15A-1 Mono	M15A-1U Mono, NAB-CCIR	M15A-1U-76 Mono, NAB-CCIR, 30/15 ips	M15A-GPW Mono-Pilotone	M15A-S Stereo, track sep. 0.75 mm	M15A-MS Mono-Stereo, track sep. 0.75 mm	M15A-SU Stereo, track sep. 0.75 mm NAB-CCIR	M15A-SU-76 Stereo, track sep. 0.75 mm NAB-CCIR, 30/15 ips	M15A-SU2 Stereo, track sep. 2 mm, NAB-CCIR A-wind only	M15A-SU2-76 Stereo, track sep. 2 mm, NAB-CCIR 30/15 ips, A-wind only	M15A-2 Two-track, track sep. 2mm
Amplifiers											
Record amplifier plug-in unit BC-AV1	1	1	1	1	2	2	2	2	2	2	2
Rec amp sub-unit BC-ANC1		1					2		2	2	
Rec amp sub-unit BC-ANC2			1					2		2	
Rec amp sub-unit BC-AMS1						1					
Rec amp sub-unit BC-AMS2						1					
Stabilizer/oscillator plug-in unit BC-SL11	1	1	1	1	1	1	1	1	1	1	1
Erase output stage module BC-SL14											1
Playback amplifier plug-in unit BC-WV1	1	1	1	1	2	2	2	2	2	2	2
Play amp sub-unit BC-WNC1		1					2		2	2	
Play amp sub-unit BC-WNC2			1					2		2	
Play amp sub-unit BC-WMS1						1*					
Play amp sub-unit BC-WMK1						*					
Pilotone record amplifier plug-in unit BC-PA1				1							
Pilotone playback amplifier plug-in unit BC-PW1				1							
Head assembly											
Full-erase head	•	•	•	•	•	•	•	•	•	•	•
Two-track erase head with overlapping erasure											•
Stereo record and playback heads with 2 mm track sep.									•	•	
Push-pull pilot head and audio/pilot rec selector				•							
Track selector											•
NAB-CCIR selector		•	•				•	•	•	•	
Mono/stereo selector						•					
NAB indicator lamp		•	•				•	•	•	•	
Mono indicator lamp						•					
Pilotone level indic. lamp				•							

*) Play amp sub-units in the M15A-MS

Sub-unit plugged

Output signal at Mono

Standard version
channel 1: BC-WMS1
channel 2: —

output 1: mono signal
output 2: right stereo signal

Optional version:

channel 1: BC-WMS1
channel 2: BC-WMK1


or

channel 1: BC-WMS1
channel 2: BC-WMS1

output 1: mono signal
output 2: no signal


output 1: mono signal
output 2: mono signal

Suitably timed control of the amplifiers

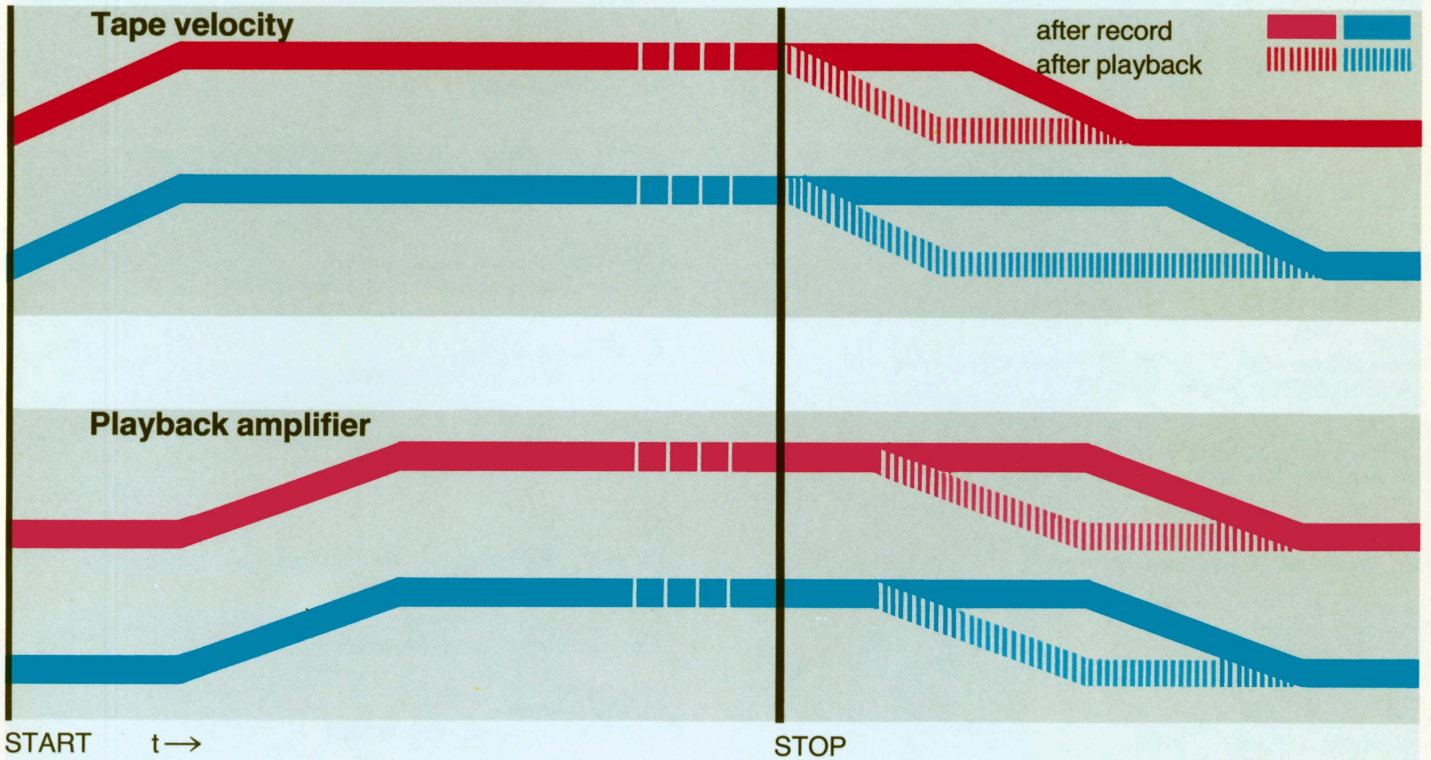

Electronic Editing
 Suitably timed control of the amplifiers –
 for clickfree and gapless overdubbing

higher tape speed
 lower tape speed

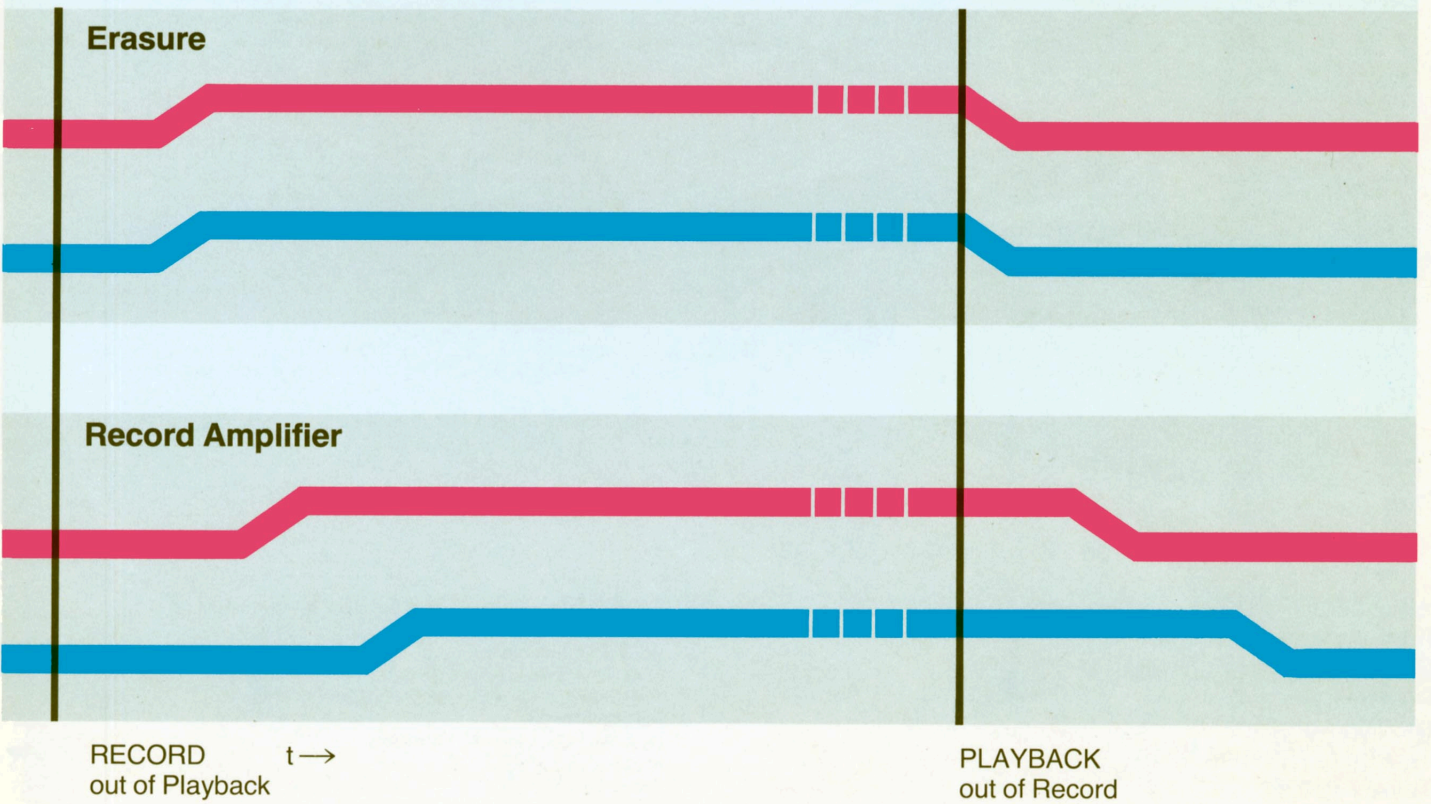

We are easy to reach.

One of our representatives is certainly in your vicinity, too. Please contact the representatives abroad or our central address below. One of them will respond at once.

Our representatives abroad

Austria

Österreichische AEG-TELEFUNKEN Ges.m.b.H.
1210 Wien, Brünner Straße 52, 380 10

Belgium

Société Anonyme belge AEG-TELEFUNKEN
1180 Bruxelles, Rue de Stalle 65, 37006 11

Denmark

AEG-TELEFUNKEN Dansk Elektricitets Aktieselskab
2620 Albertslund, Roskildevej 8-10, 64 85 22

Finland

Sähköliikkeiden Oy
01301 Vantaa 30, Sähkömetsä, 83 81

France

AEG-TELEFUNKEN France S.A.
6, boulevard du Général Leclerc
92115 Clichy, (01) 739-33-10

Greece

John D. Nicolopoulos
101 Thessalonikis Street
Athens-Moschaton 58, 4 8193 46

Iceland

Braedurnir Ormsson H/F
Reykjavik, Lágmúla 9, 3 88 20

Italy

AEG-TELEFUNKEN S.l.p.A.
RNV 221 (ELA)
Via Clerici, 2/4
20099 Sesto S. Giovanni (Milano), (02) 2 42 78 12

Japan

Electori Co., Ltd.
Mondo Bldg. 1-19-3 Kamiochiai,
Shinjuku-Ku
Tokyo (03) 950-6266

Luxemburg

AEG-TELEFUNKEN LUXEMBOURG S.A.
2, rue Albert-Borschette
Luxembourg-Kirchberg, 43 30 51

Netherlands

AEG-TELEFUNKEN Nederland N.V.
1066 BP Amsterdam, Aletta Jacobslaan 7, 5 11 63 33

Norway

TELAEG Aksjeselskap
1346 Gjøttum (Oslo), Baerumsveien 357 E, 54 11 90

Portugal

AEG-TELEFUNKEN Portuguesa S.A.R.L.
Lisboa 5, rua João Saraiva 4/6, 89 11 71

Spain

TELEFUNKEN Ibérica, S.A.
Madrid 26, Antonio López, 109, 4 75 31 12

Sweden

SATT Elektronik Aktiebolag
12611 Stockholm, Tellusborgsvägen 90-94, 81 01 00

Switzerland

Tonstudio »r« AG
3005 Bern, Thunstrasse 20, 43 14 44

U.K.

Hayden Laboratories Ltd.
Chiltern Hill
Chalfont St. Peter, Gerards Cross
Bucks, SL9 9EW (028 13) 884 47

AEG-TELEFUNKEN
Kommunikationstechnik
Studio-Magnetbandgeräte
Bücklestraße 1-5
D-7750 Konstanz
Telefon (07531) 86-2370
Telex 733233

For inquiries from other countries please write or call:

AEG-TELEFUNKEN
Communication Systems
Professional Tape Recorder Division
Postfach 21 54
D-7750 Konstanz, W. Germany
Phone (7531) 86-23 70
Telex 733233