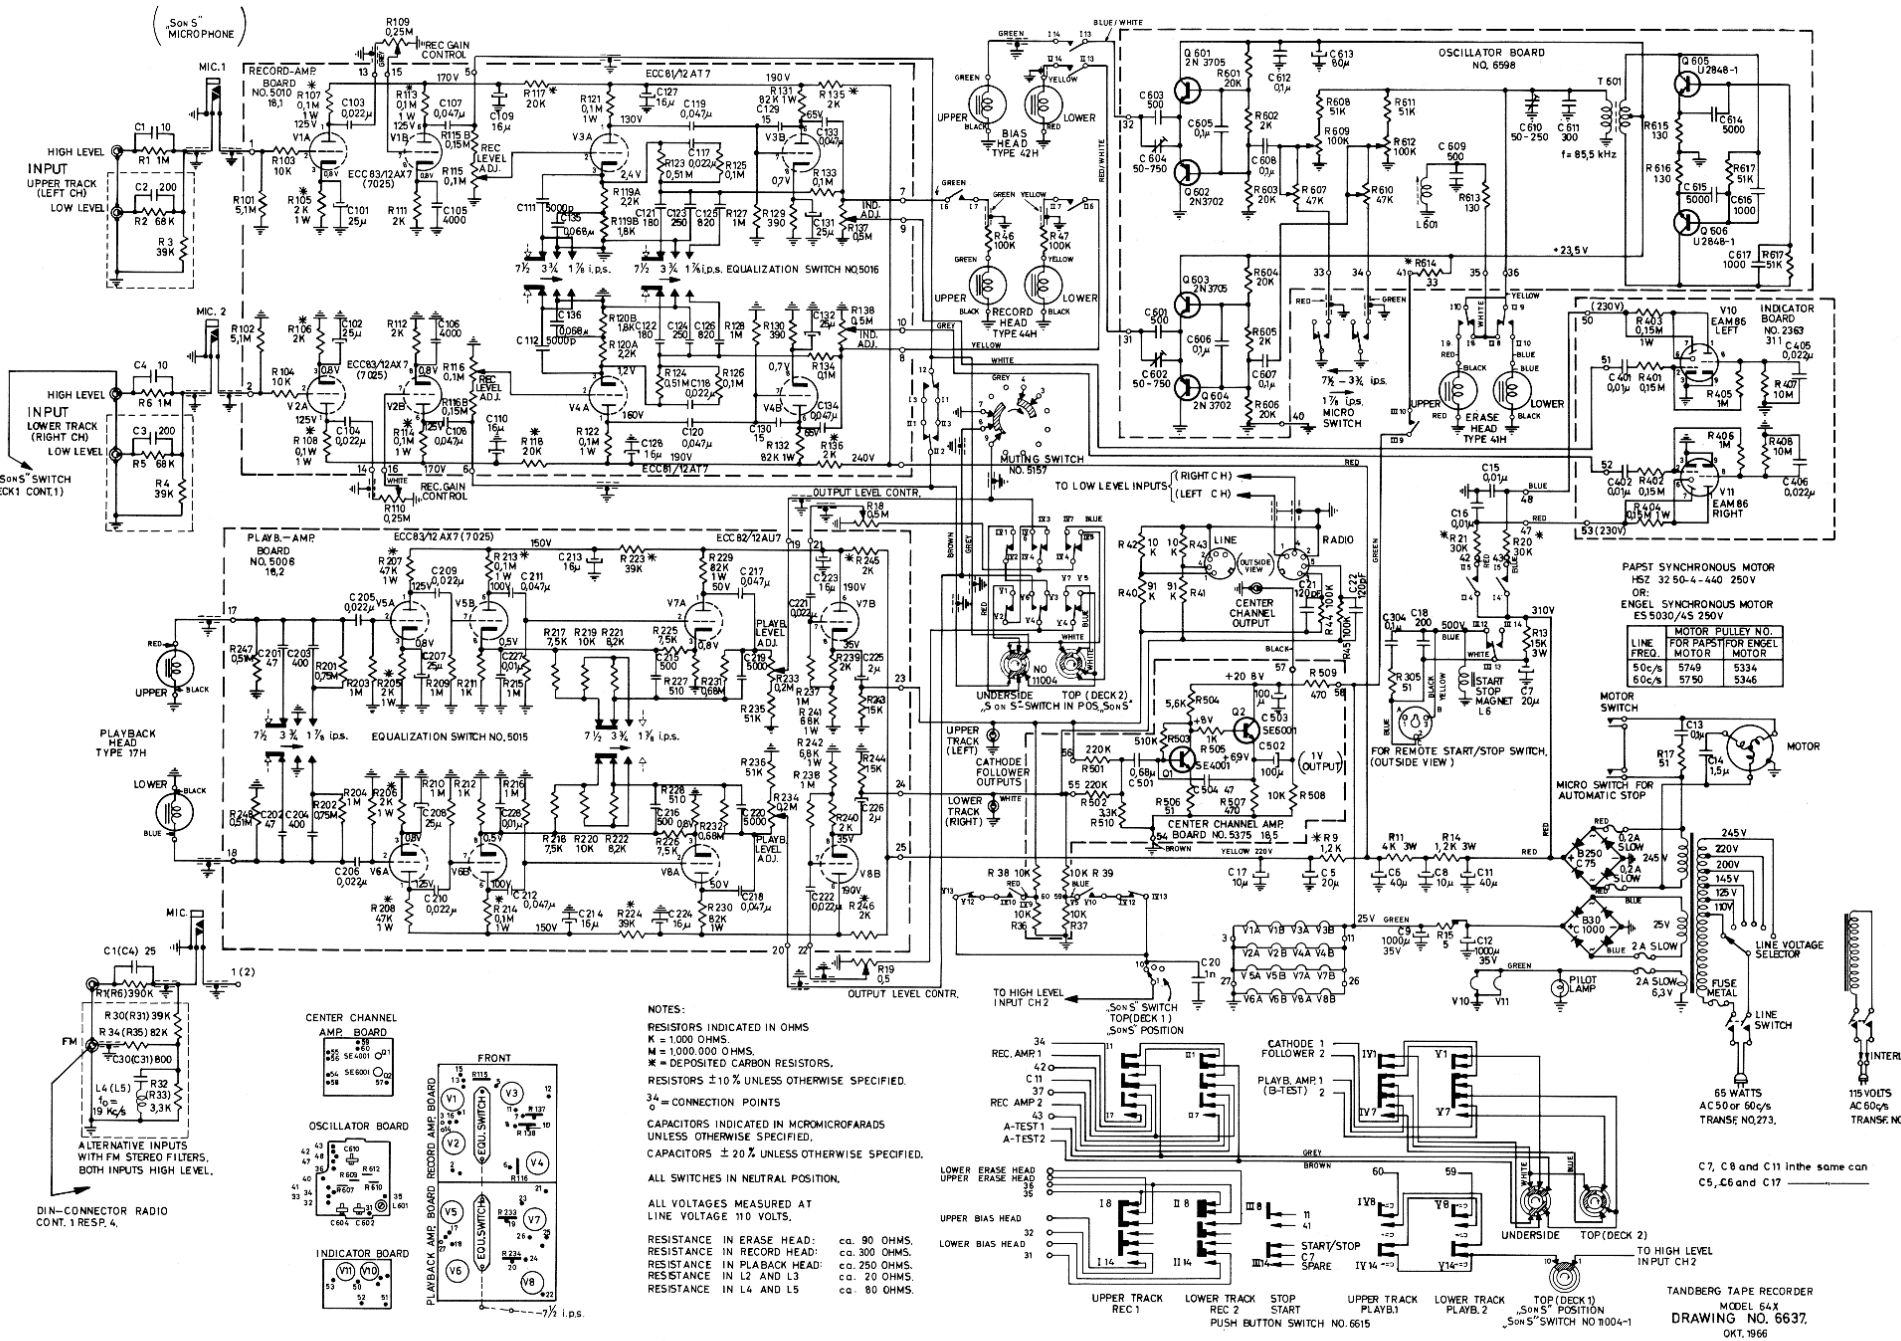

NOTES:

RESISTORS INDICATED IN OHMS
K = 1,000 OHMS.
M = 1,000,000 OHMS,
* = DEPOSITED CARBON RESISTORS.

RESISTORS ±10 % UNLESS OTHERWISE SPECIFIED.

34 = CONNECTION POINTS

CAPACITORS INDICATED IN MICROMICROFARADS UNLESS SPECIFIED.

CAPACITORS ± 20 % UNLESS OTHERWISE SPECIFIED.

ALL SWITCHES IN NEUTRAL POSITION.

ALL VOLTAGES MEASURED AT LINE VOLTAGE 110 VOLTS.

RESISTANCE IN ERASE HEAD:	ca. 90 OHMS.
RESISTANCE IN RECORD HEAD:	ca. 300 OHMS.
RESISTANCE IN PLABACK HEAD:	ca. 250 OHMS.
RESISTANCE IN L2 AND L3	ca. 20 OHMS.
RESISTANCE IN L4 AND L5	ca. 80 OHMS.

Fig. 2. Tandberg Tape Recorder Model 64x – 62x, Schematic.