

SERVICE MANUAL



FISHER

STEREO DOUBLE CASSETTE DECK

CR-W9025

(EUROPE)



142 500 19

SPECIFICATIONS

Motor	(2) DC Governor
Cassette Loading	(2) Front
Drive System	(2) Capstan
Number of Heads	3
Head Material	Permalloy/Ferrite
Operation	(2) Full Logic Mechanism
Dubbing	Normal/High Speed
Wow & Flutter	0.06% WRMS
Signal-to-Noise Ratio (CCIR Weighted)	
Dolby NR OFF	52dB
Dolby NR ON	62dB
(Dolby is registered trademark of Dolby Laboratories.)	
Erase Ratio	70dB
Channel Separation	40dB
Signal Crosstalk	70dB
Frequency Response 1-7/8 Ips.	
Normal Tape (± 3 dB)	40Hz ~ 13kHz
CrO ₂ Equivalent Tape (± 3 dB)	40Hz ~ 14kHz
Metal Tape (± 3 dB)	40Hz ~ 15kHz

Total Harmonic Distortion	
at 0 VU	1.5%
Fast Forward/Rewind Time	
(C-60)	110sec.
Level Indicators	(2) L.E.D. Meter
Inputs (Sensitivity/Impedance)	(2) Line
	100mV/50k Ω
Outputs (Level at 0 VU/Impedance)	(2) Line
	500mV/2.2k Ω
Auto Tape Select	Normal, CrO ₂ , Metal
Tape Counter	3-Digit


GENERAL

Power Requirements (50Hz)	AC 220V
Power Consumption	26Watts
Dimensions (WxHxD)	440x132x278mm
Weight (approx)	5.2kg

— Specifications and design are subject to change without notice. —

REFERENCE No. WM-570560


SCHEMATIC DIAGRAM (Amplifier)

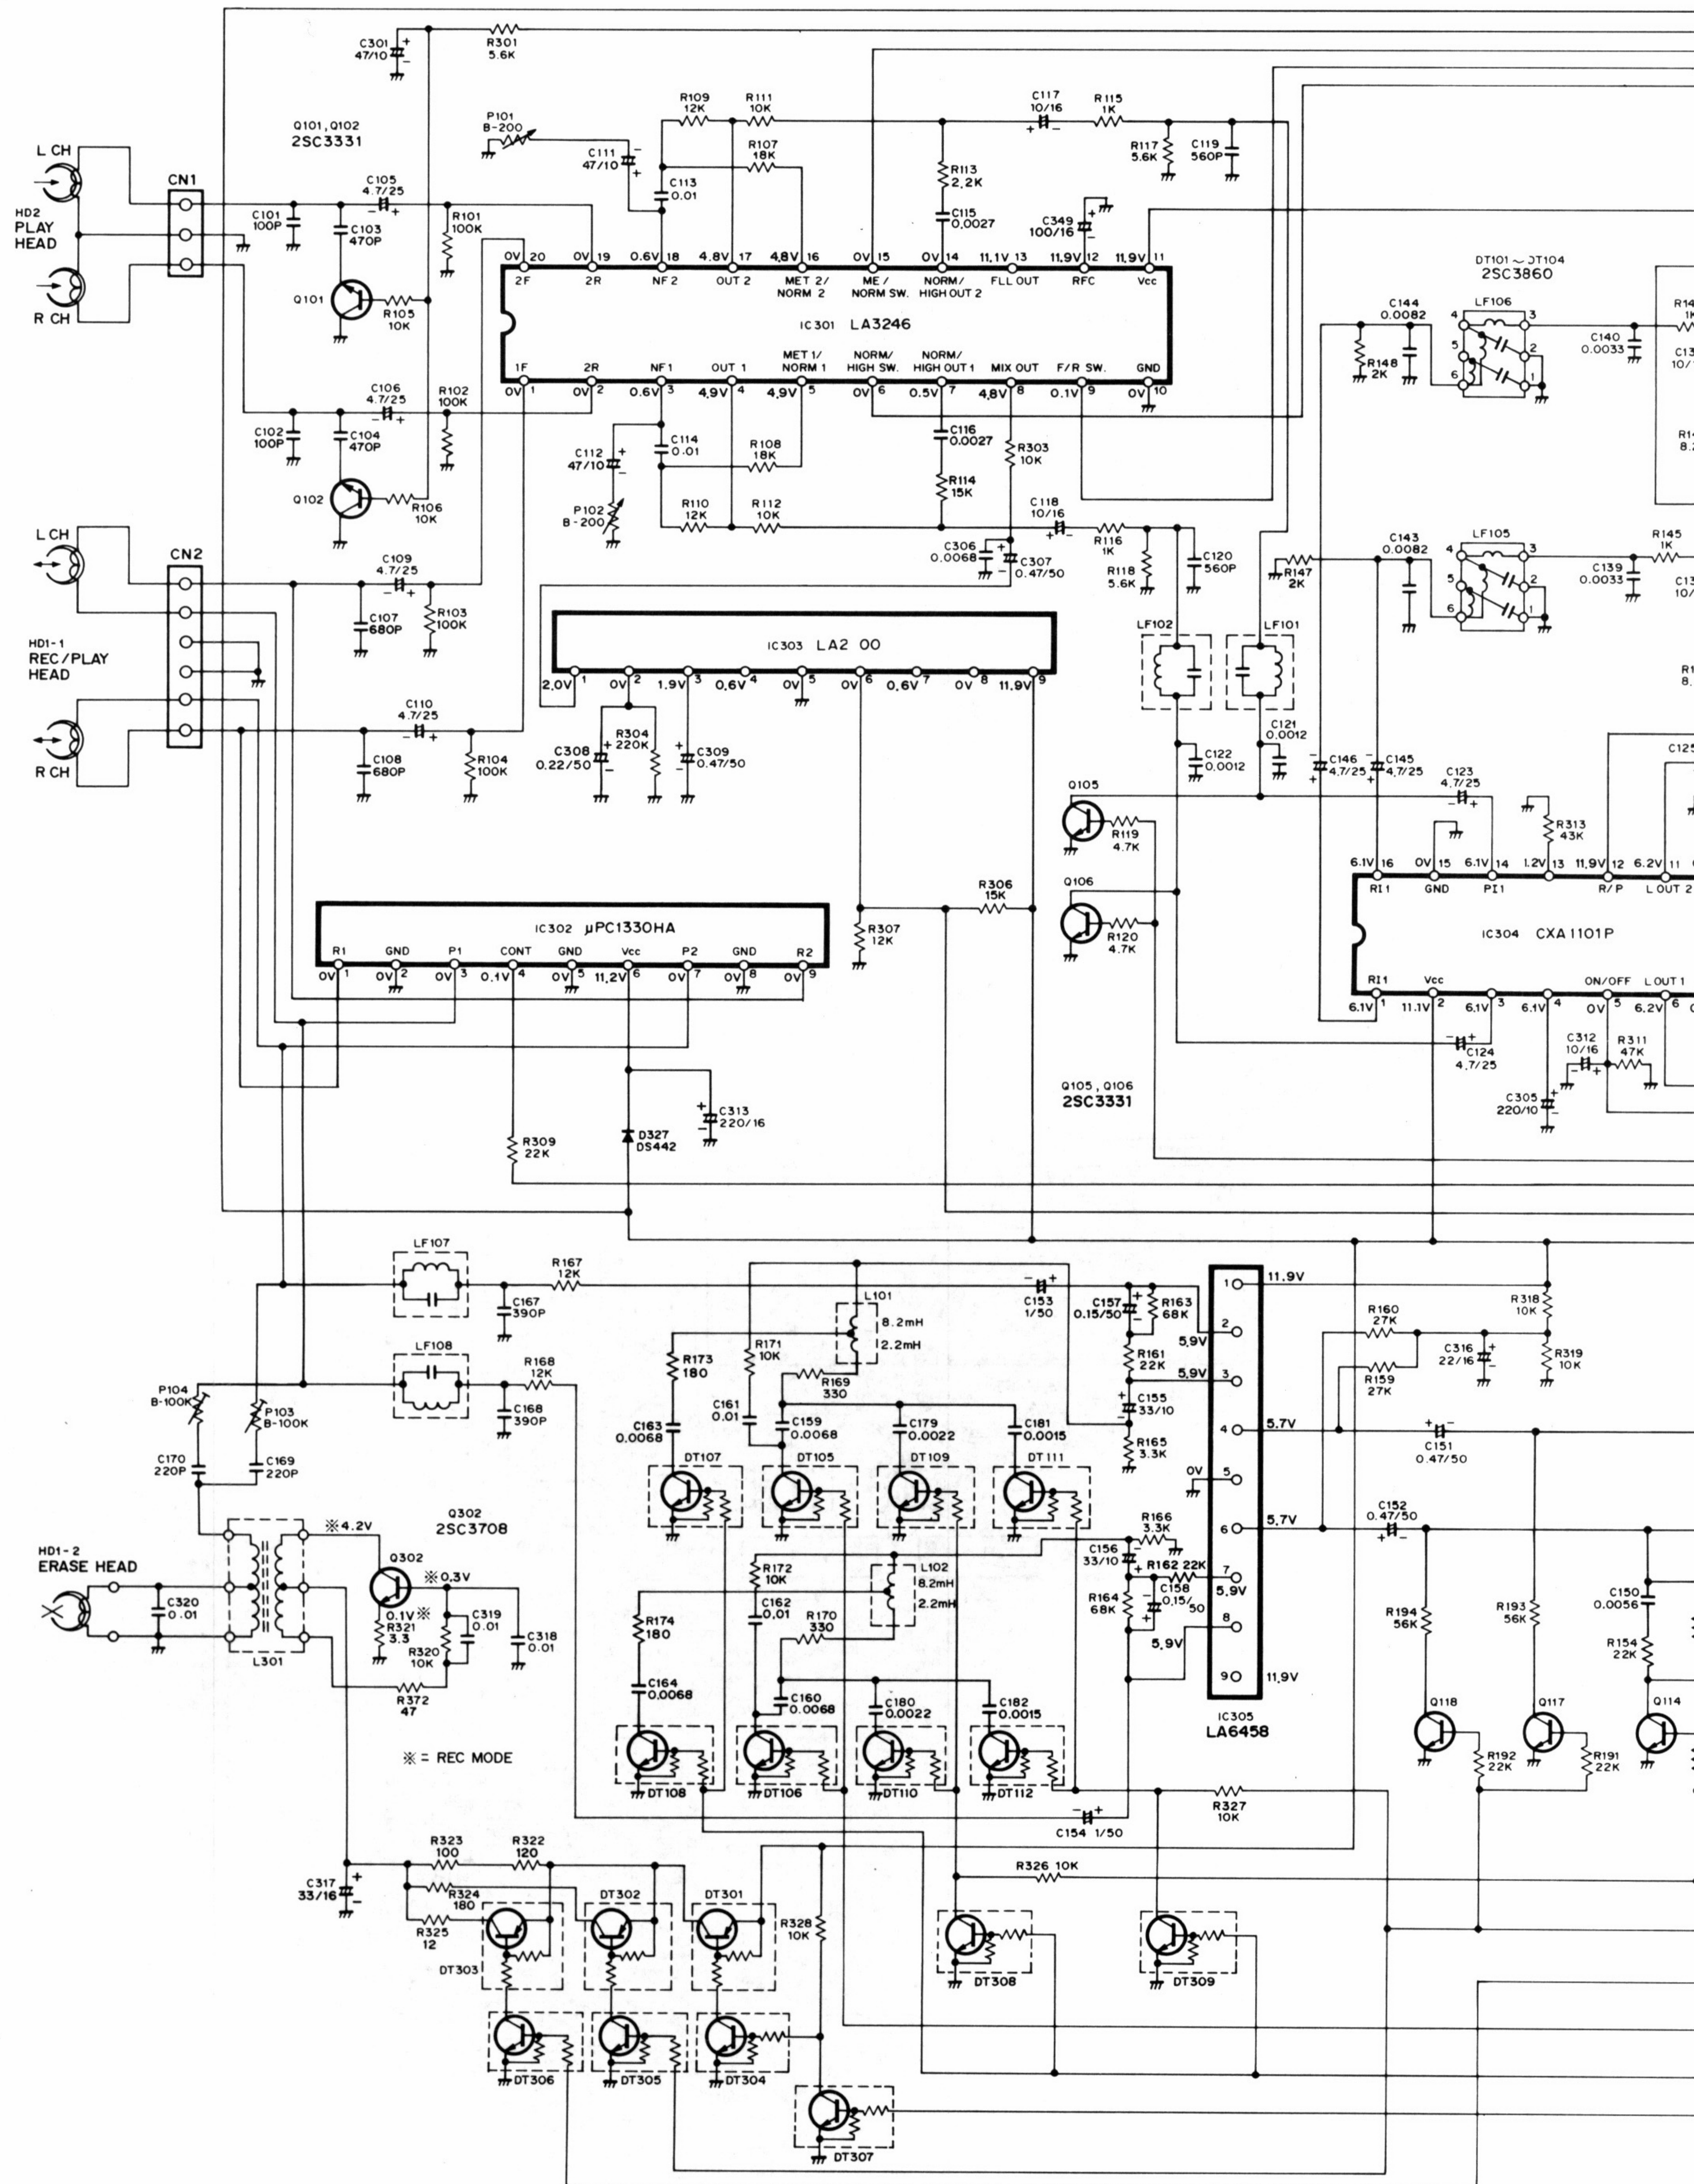

DT301, DT303 2SA1524
DT302 2SA1503

DT105 ~ DT112 2SC3402
DT304 ~ DT309

M (Amplifier Section)

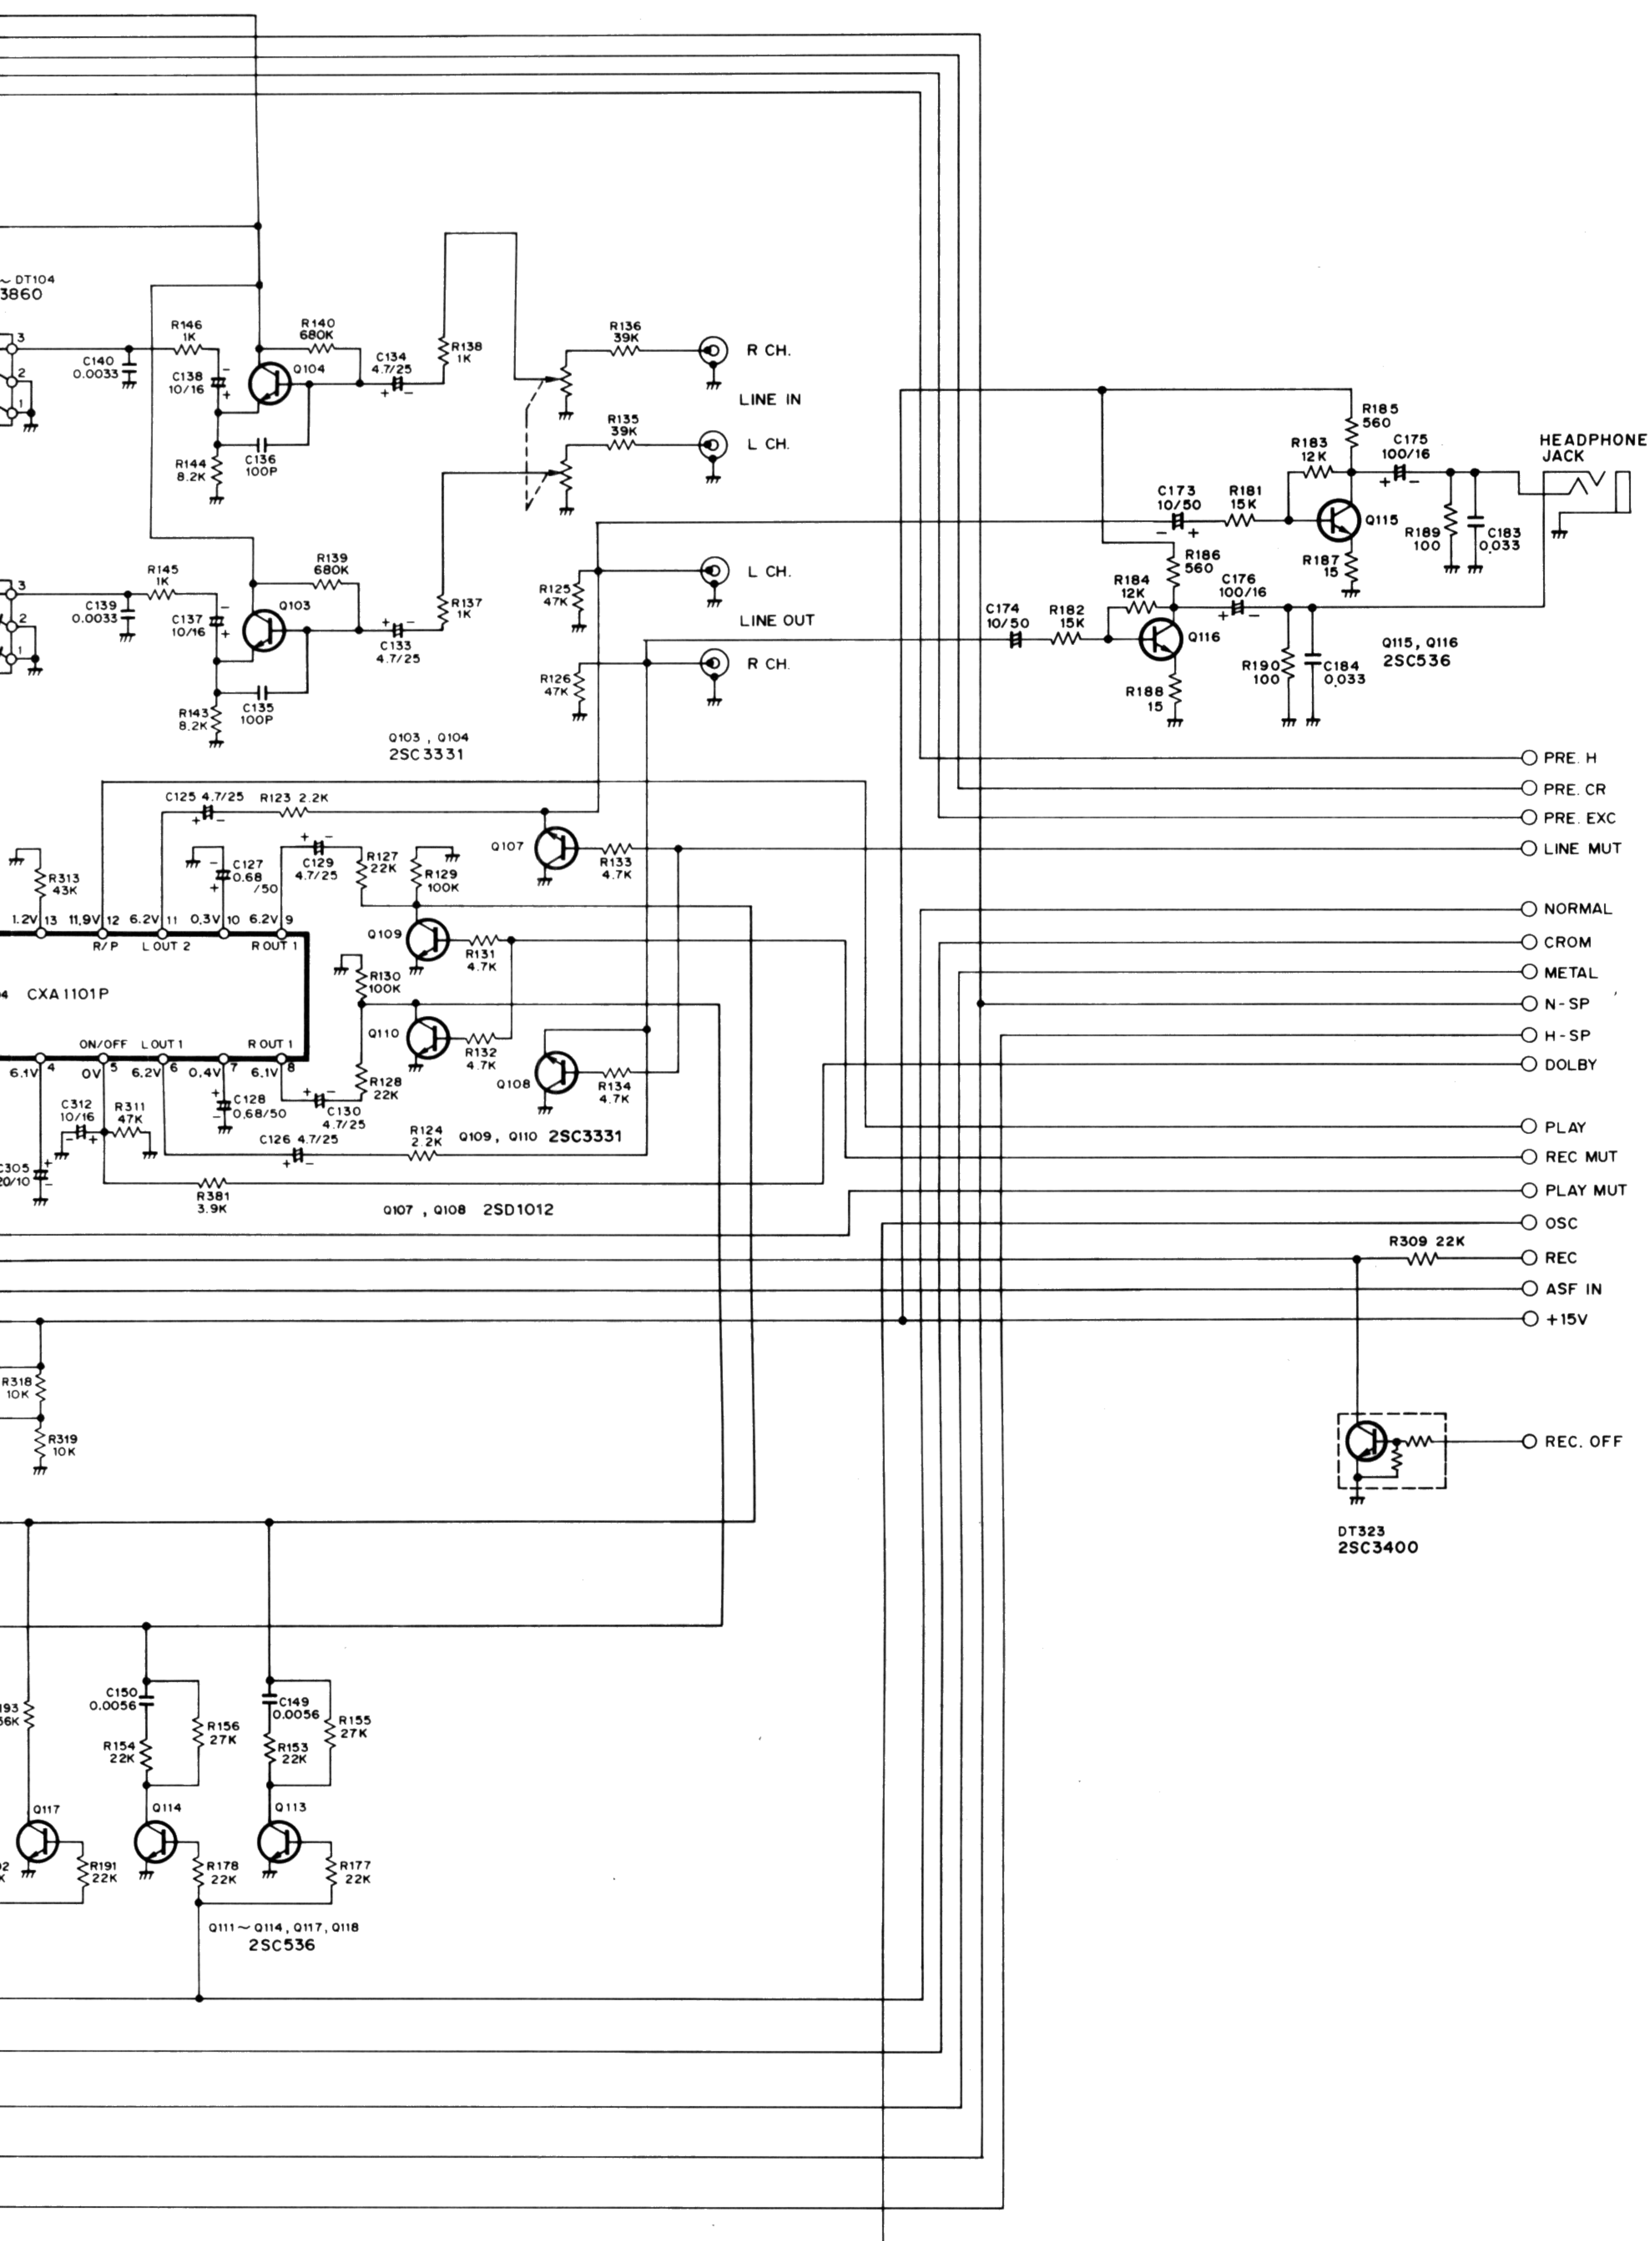

SCHEMATIC DIAGRAM

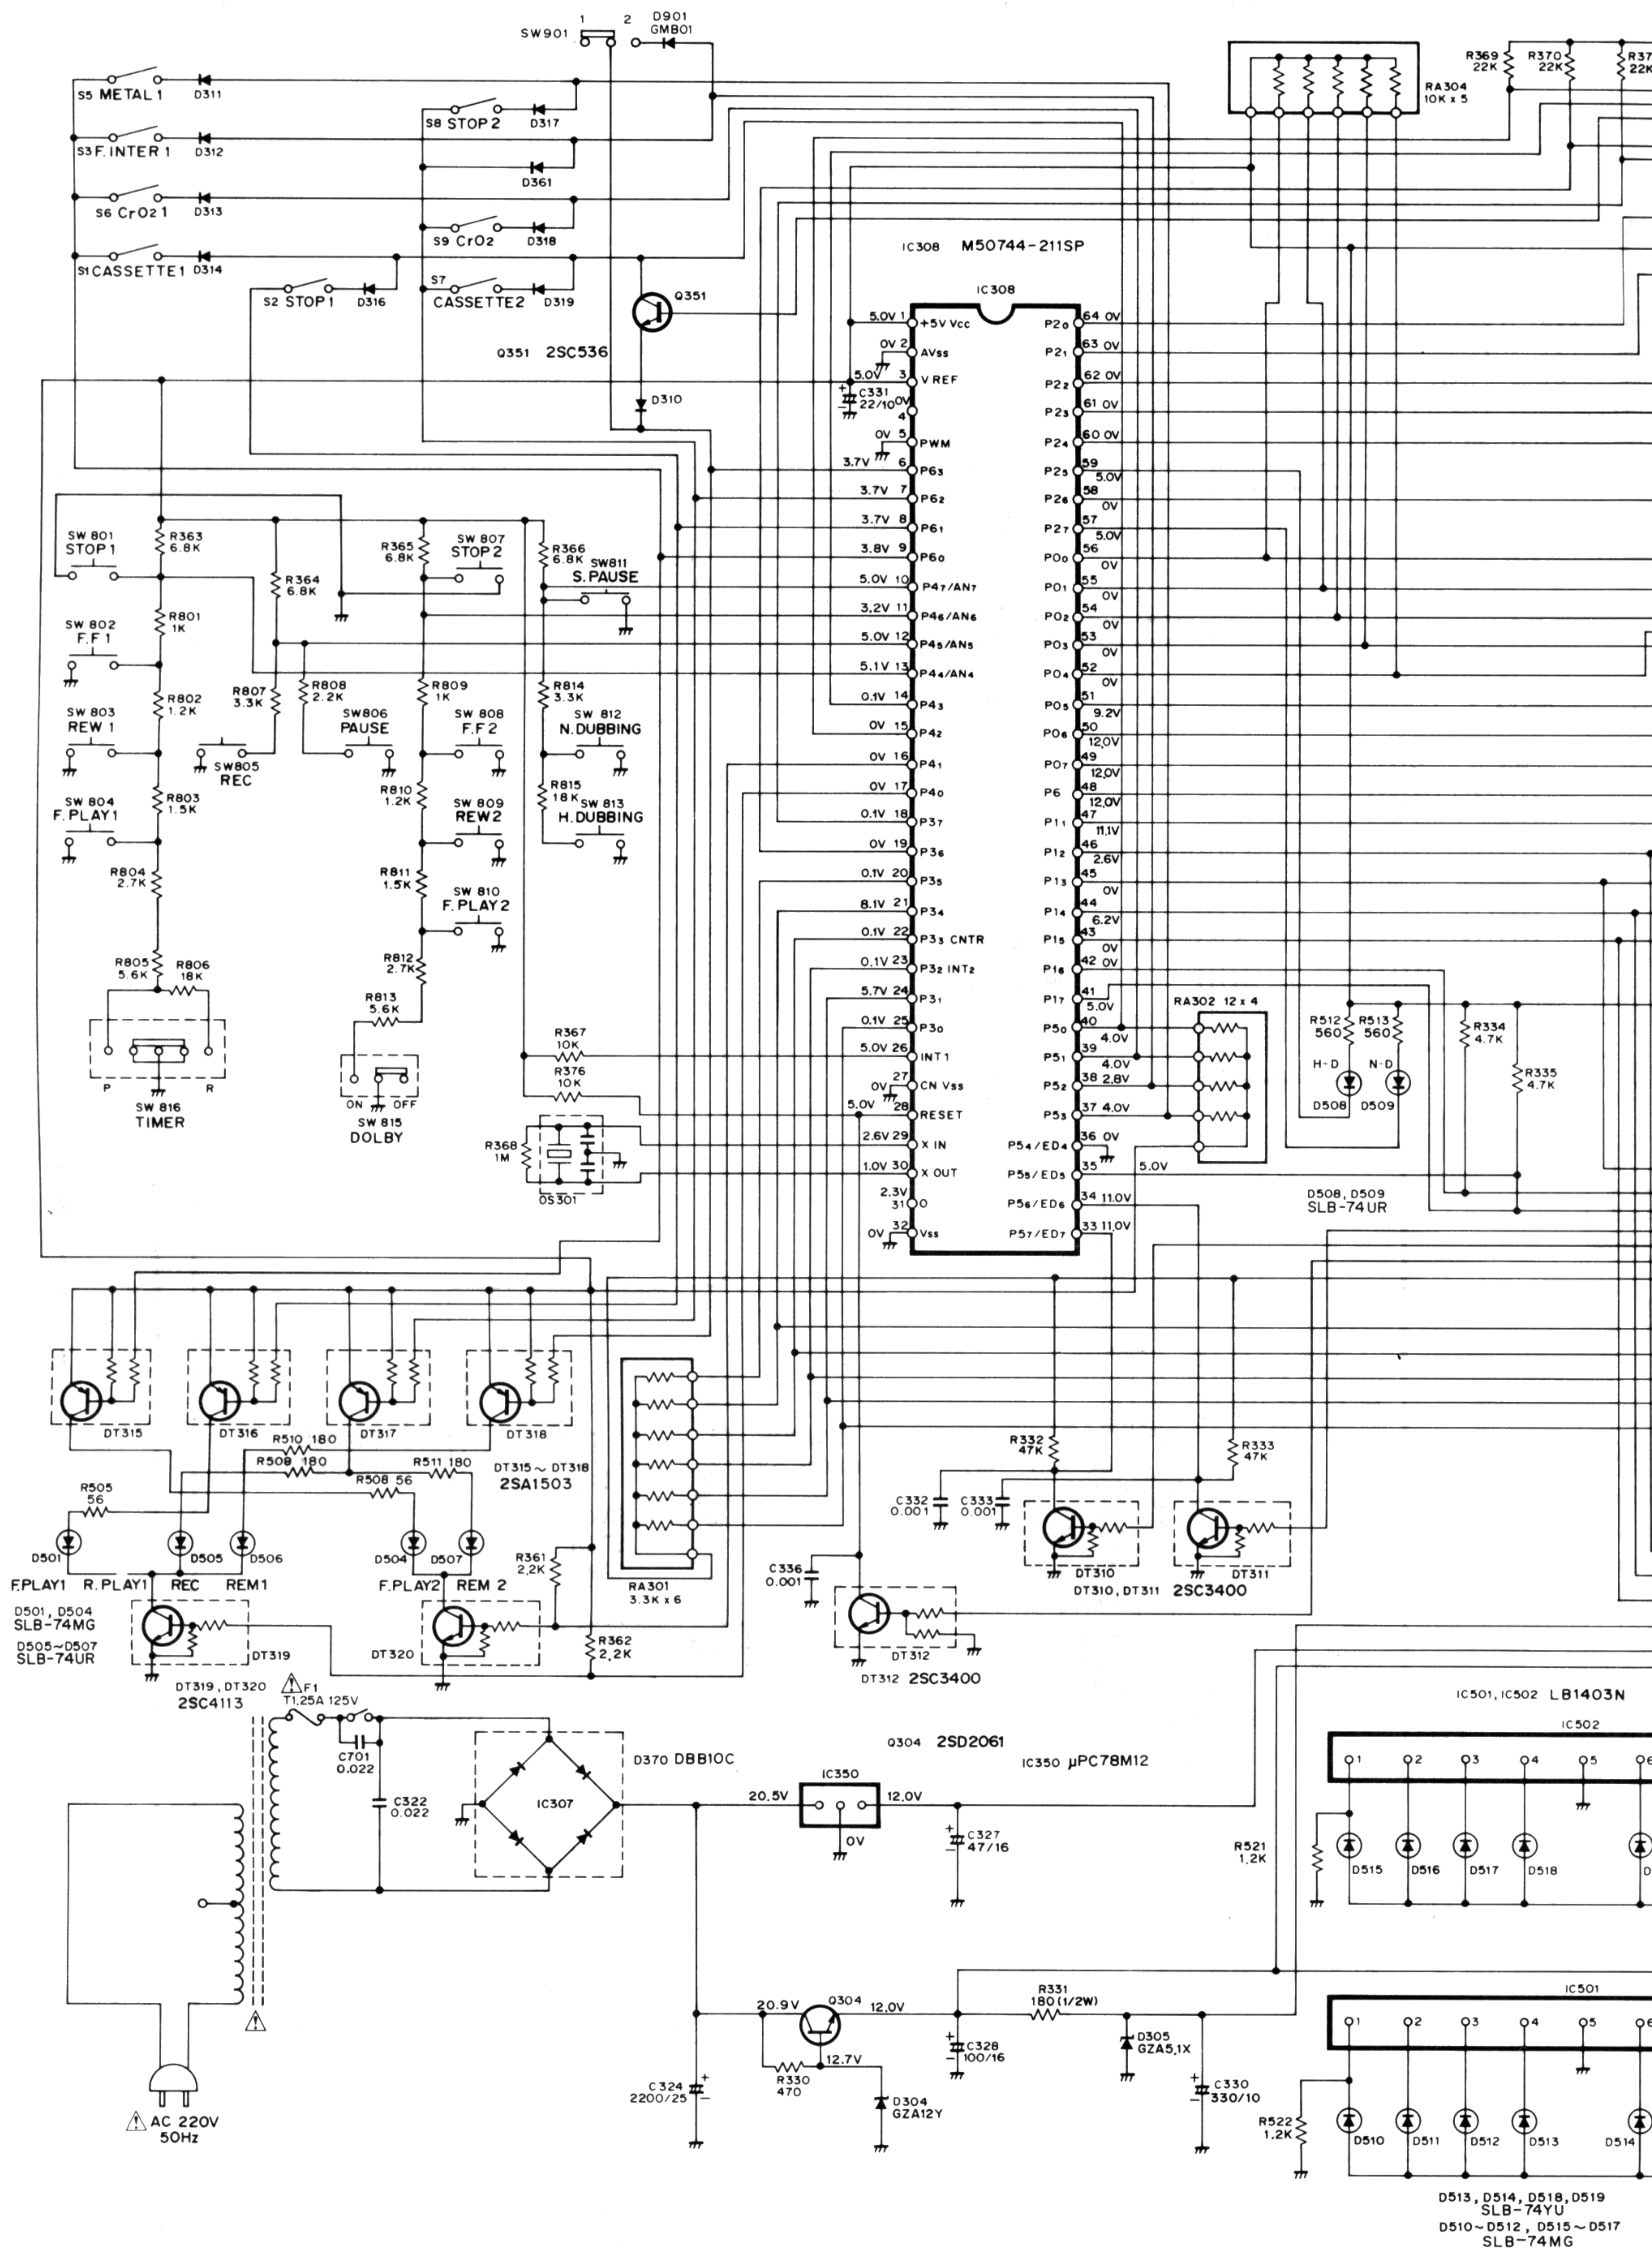


DIAGRAM (Control Section)

