JVC

SERVICE MANUAL

STEREO HEADPHONES

HA-35(E),(K),(N)

The "Product Exchange System" is applicable to this product. For limited spare parts, refer to the parts list.



Specifications

Type
Frequency response
Nominal impedance
Sensitivity

Max.input capability Cord length Mass Moving coil 17 Hz-25,000 Hz 32 ohms 100 dB/1 mW

50 mW


 $1.5\ m$ (4.92 ft) with 3.5mm dia.stereo miniplug

47g (1.66 oz) without cord 65g (2.30 oz) with cord

Design and specifications subject to change without notice.

HA-35(E),(K),(N)

Packing Method

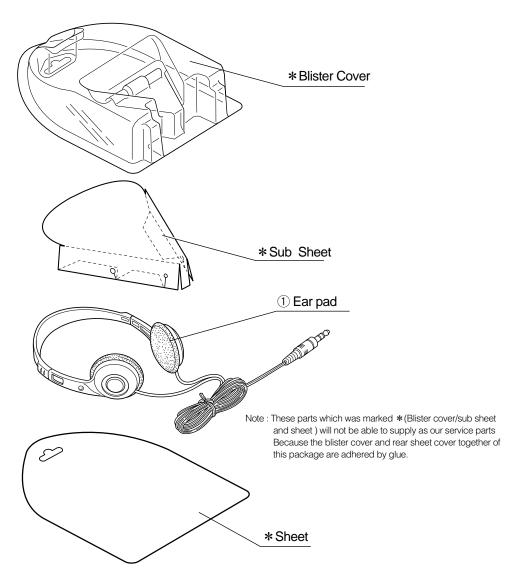


Parts List

\triangle	Item No.	Parts No.	Parts Name	Q'ty	Description
	1	J46231-001	Ear Pad	2	

^{*}Parts marked (\triangle) are safety parts. When replacing, be sure to use the specified one.

Wiring Diagram

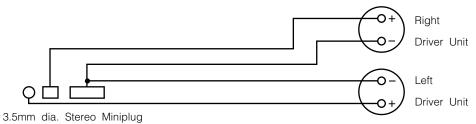



VICTOR COMPANY OF JAPAN, LIMITED

COMMUNICATION NETWORK BUSINESS UNIT, 1644, SHIMOTSURUMA, YAMATO-SHI, KANAGAWA-KEN, 242-8514, JAPAN

