


# SERVICE MANUAL




DIRECT-DRIVE PLAYER SYSTEM WITHOUT CARTRIDGE




# PD 262

AUTO LIFT-UP DIRECT-DRIVE PLAYER SYSTEM

# PD 264

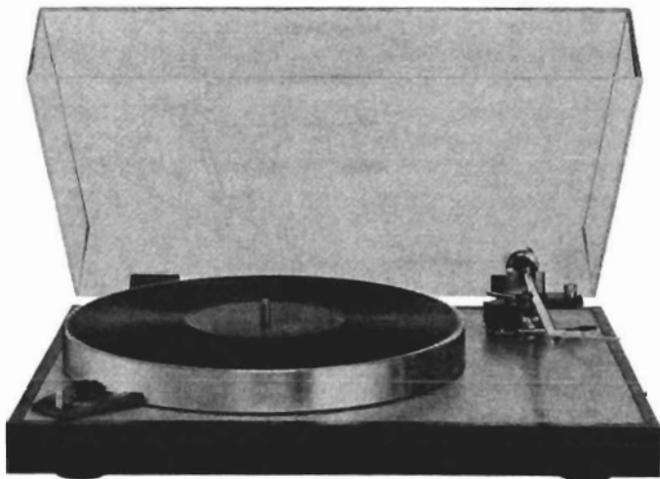


## PD264/PD262 Alignment Procedure

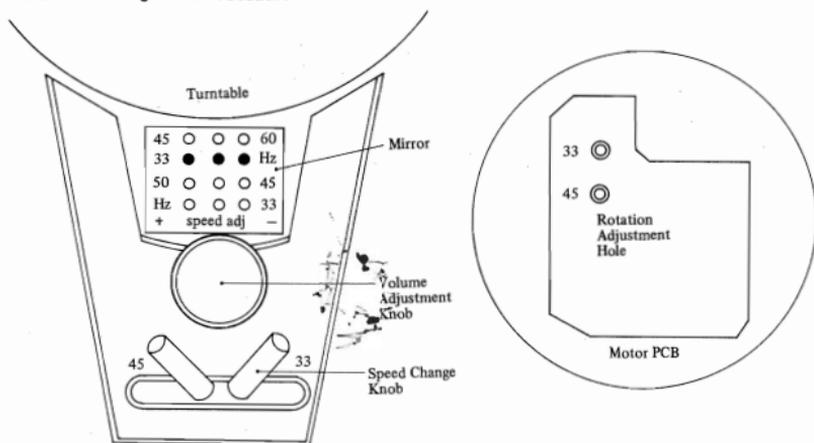


## Stroboscope Adjustment

- 1) Adjust volume adjustment knob turning left or right at the position of 33 on speed change knob to stop dots on mirror.
- 2) Make 4th dot from this side stop at the position of 45 on speed change knob. Unless it would stop, adjust "45" on motor PCB.
- 3) Make sure that more than 2 dots of this end are reflected on mirror.
- 4) Stand still stroboscope by speed adjustment volume at 33-1/3 rpm and make flow of stroboscope within  $\pm 28$  dots when turned on to 45 rpm.

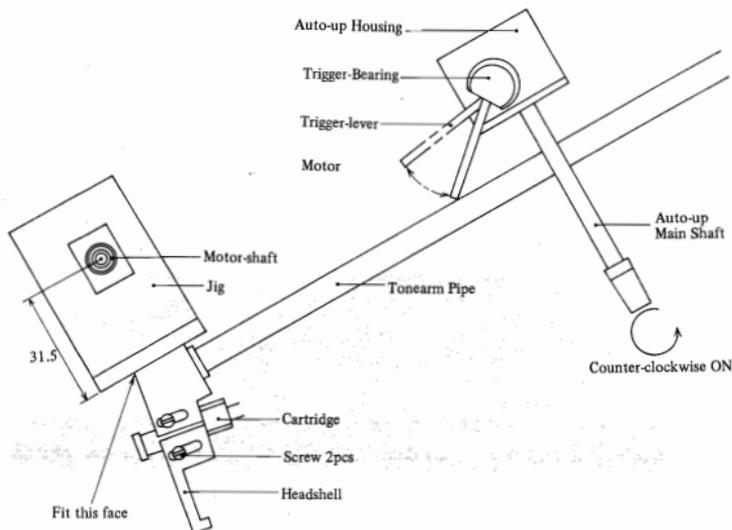



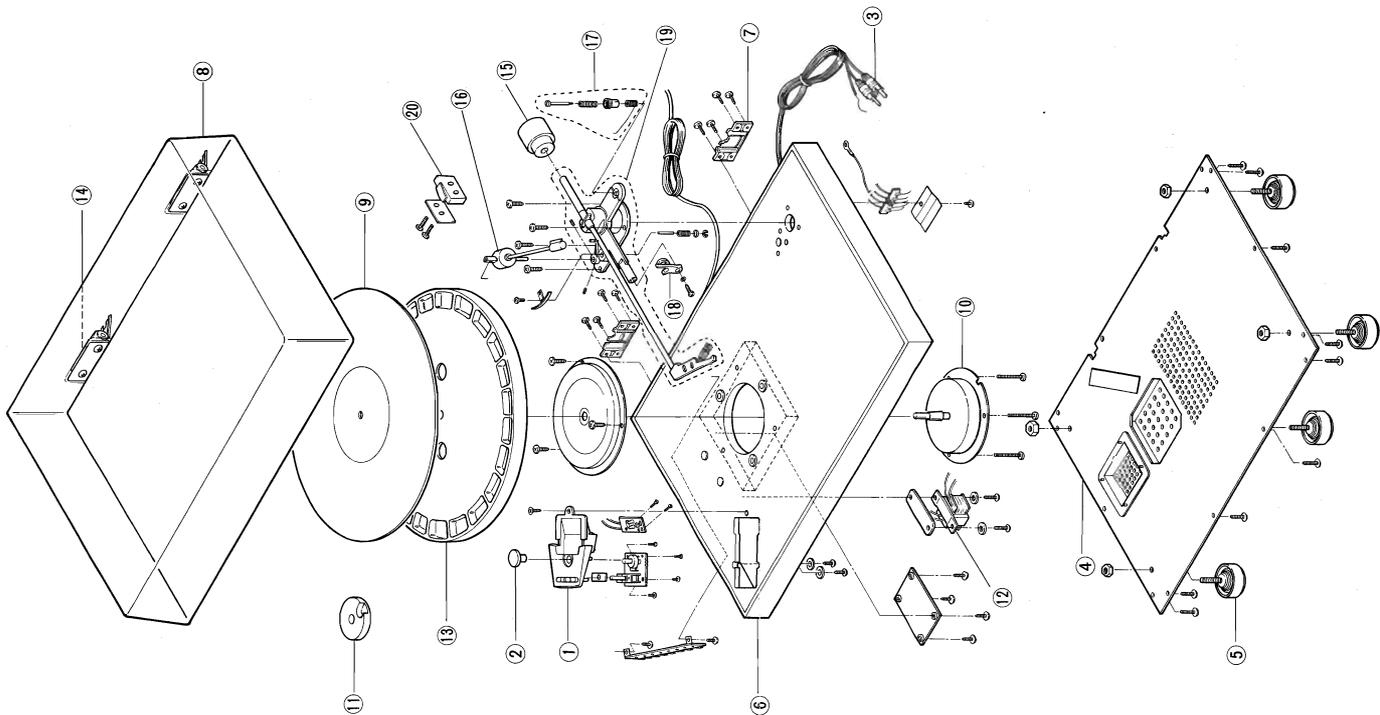

## Replacement Parts List


## Exploded View

Symbol No.	(PD-264) Stock No.	(PD-262) Stock No.	Description
1	B13-0006-00	B13-0006-00	Strobo Mirror Ass'y
2	F02-0054-00	F02-0054-00	Knob (Speed Adjustment)
3	P40-0042-00	P40-0042-00	PU Cord Ass'y
4	B08-0025-00	B08-0025-00	Bottom Plate Ass'y
5	F05-0005-00	F05-0005-00	Foot
6	B05-0050-00	B05-0050-00	Cabinet Ass'y
7	B11-0007-00	B11-0007-00	Lock Plate
8	V10-0009-00	V10-0009-00	Dust Cover Ass'y
9	F10-0008-00	F10-0008-00	Turn Table Sheet
10	M12-0012-00	M12-0012-00	Motor Ass'y
11	Y10-0003-00	Y10-0003-00	EP Adapter
12	L21-0007-00	L21-0007-00	Power Trans. 1915E (S)
	L21-0011-00	L21-0011-00	Power Trans. 1915J (E)
	L21-0002-07	L21-0002-07	Power Trans. 1915C (U)
13	T14-0009-00	T14-0009-00	Turn Table
14	B11-0006-00	B11-0006-00	Spring Hinge
15	A01-0042-MW	A01-0042-MW	Main Weight
16	A01-0042-AM	—	Auto-Up Mecha. Ass'y
	—	A01-0042-LA	Lifter Ass'y
17	A01-0042-AS	A01-0042-AS	Antiskating Ass'y
18	A01-0042-AR	A01-0042-AR	Arm Rest Ass'y
19	A01-0042-TA	A01-0042-TA	Tone Arm Ass'y
20	A01-0042-SW	Non Use	Power SW. (Arm Rest SW.)


## Packing Material

Symbol No.	(PD-264) Stock No.	(PD-262) Stock No.	Description
	H01-0034-00	H01-0034-00	Carton
	H04-0046-00	H04-0046-00	Pad (F)
	H04-0047-00	H04-0047-00	Pad (R)
	MEO135	MEO199	Owner's Manual

Schematic Diagram Model PD-264

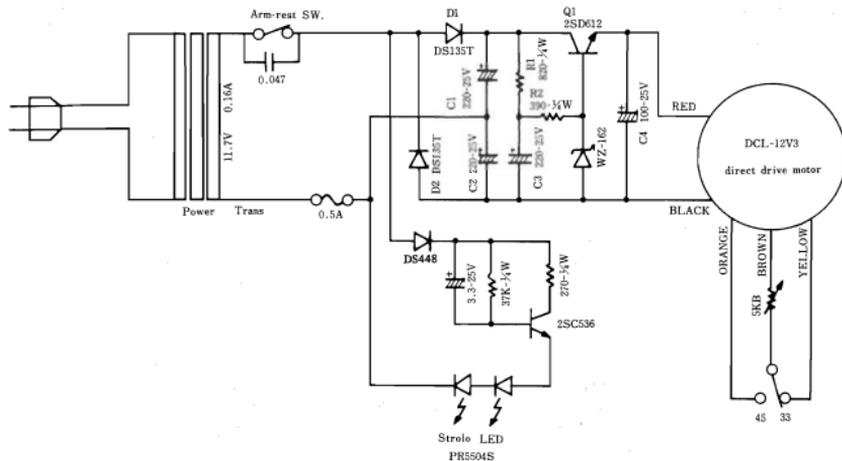

Schematic Diagram Model PD-262

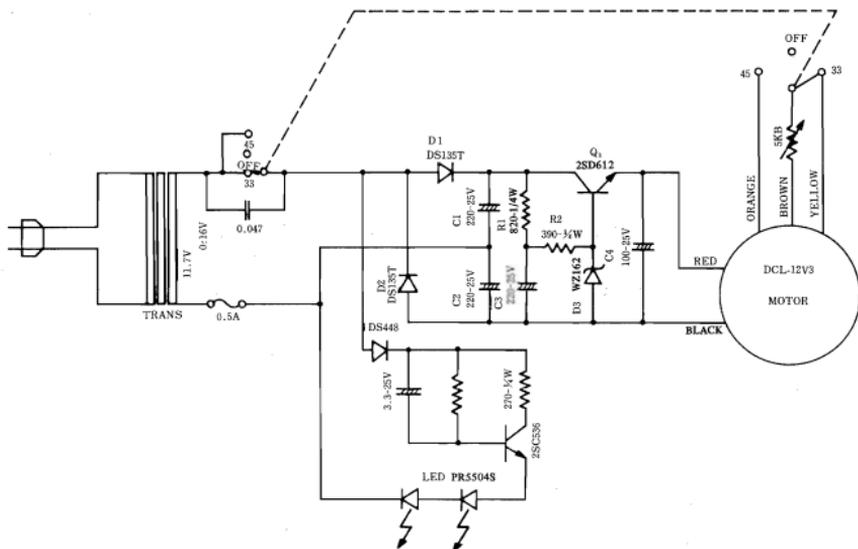

PD264

## SPECIFICATIONS

**[Phono Motor Section]**

- \* Driving System: Direct-Drive System
- \* Motor: DC-servo brushless motor
- \* Turntable Platter: 30cm aluminium die-cast  
(weight 1.8kg including platter-mat)
- \* Rotation: 33-1/3 rpm, 45 rpm (2-speed)
- \* Adjustable Range of Rotation: ±6%
- \* S/N Ratio: better than 60dB (IEC-B)
- \* Wow & Flutter: no more than 0.035% W.R.M.S.

**[Tonearm Section]**

- \* Tonearm: Straight Arm of static balance type
- \* Effective Length: 240mm
- \* Tracking Error: +2° 13', -1° 08'
- \* Overhang: 15mm
- \* Cartridge Weight: 4g - 11g
- \* Cartridge Height: 16mm ~ 19mm (by use of spacers)
- \* Stylus Pressure: 0 - 3g (direct reading)
- \* Accessories: Anti-skating adjustment, Tonearm Elevation, Auto Lift-Up Function, Stylus Height Adjustment Screw

**[Additional Features]**

- \* Dust Cover: Detachable with semi-freestop hinge
- \* Stroboscope: Mirror-reflex type
- \* Shut-Off Switch: Auto Shut-Off of Turntable Rotation

**[General]**

- \* Power Consumption: 5W
- \* Dimensions: 438(W) x 125(H) x 365(D) mm  
(17-1/4" x 4-15/16" x 14-3/8")
- Net 5.8kgs (12.8 lbs.)
- Gross 8 kgs (17.6 lbs.)

Specifications and appearance design subject to change without notice.

PD262

## SPECIFICATIONS

**[Phono Motor Section]**

- \* Driving System: Direct-Drive System
- \* Motor: DC-servo brushless motor
- \* Turntable Platter: 30cm aluminum die-cast  
(weight 1.8kg including platter-mat)
- \* Rotation: 33-1/3 rpm, 45 rpm (2-speed)
- \* Adjustable Range of Rotation: ±6%
- \* S/N Ratio: better than 60dB (IEC-B)
- \* Wow & Flutter: no more than 0.035% W.R.M.S.

**[Tonearm Section]**

- \* Tonearm: Straight Arm of static balance type
- \* Effective Length: 240mm
- \* Tracking Error: +2° 13', -1° 08'
- \* Overhang: 15mm
- \* Cartridge Weight: 4g - 11g
- \* Stylus Pressure: 0 - 3g (direct reading)
- \* Accessories: Anti-skating adjustment, Tonearm Elevation, Stylus Height Adjustment Screw

**[Additional Features]**

- \* Dust Cover: Detachable with semi-freestop hinge
- \* Stroboscope: Mirror-reflex type

**[General]**

- \* Power Consumption: 5W
- \* Dimensions: 438(W) x 125(H) x 365(D) mm  
(17-1/4" x 4-15/16" x 14-3/8")
- Net 5.8kgs (12.8 lbs.)
- Gross 8 kgs (17.6 lbs.)

Specifications and appearance design subject to change without notice.