

Service Service Service



Service Manual



TABLE OF CONTENTS

Handling chip components	1-1
Information about lead-free soldering	1-2
Technical specification.....	2-1
Service tools	2-1
Service measurement setup	2-2
Connections and controls	3-1...3-4
Disassembly diagram	4-1...4-2
Software version and upgrading	5-1
Set block diagram	5-2
Set wiring diagram	5-3
VFD BOARD	
circuit diagram	6-1
layout diagram	6-2
TUNER BOARD	
circuit diagram	7-1
layout diagram	7-2
layout diagram-amp box pcb assy	7-2
AMP BOARD	
circuit diagram	8-1
layout diagram	8-2
CPU BOARD	
circuit diagram	9-1
layout diagram	9-2
ALC VOLUME BOARD	
circuit diagram	10-1
layout diagram	10-2
DVD MPEG BOARD	
circuit diagram	11-1...11-5
layout diagram	11-6
Exploded view diagram.....	12-1
Mechanical partslist	12-2
Electrical partslist.....	13-1...13-3

© Copyright 2005 Philips Consumer Electronics B.V. Eindhoven, The Netherlands
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise without the prior permission of Philips.

Published by LX 0539 Service Audio Printed in The Netherlands Subject to modification

GB 3141 785 30630


Version 1.0



**CLASS 1
LASER PRODUCT**

PHILIPS

HANDLING CHIP COMPONENTS

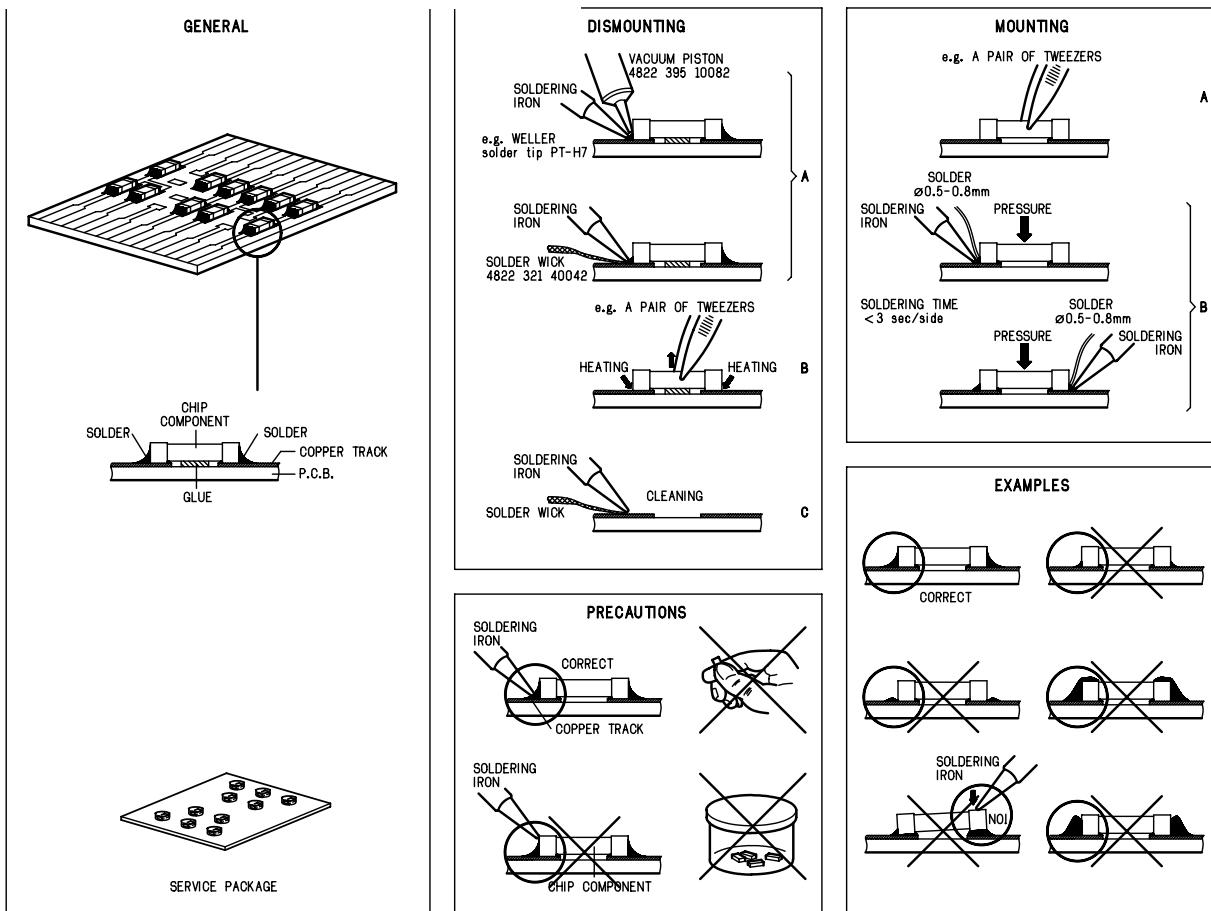

GB) WARNING

All ICs and many other semiconductors are susceptible to electrostatic discharges (ESD). Careless handling during repair can reduce life drastically. When repairing, make sure that you are connected with the same potential as the mass of the set via a wristband with resistance. Keep components and tools at this potential.

F) ATTENTION

Tous les IC et beaucoup d'autres semi-conducteurs sont sensibles aux décharges statiques (ESD). Leur longévité pourrait être considérablement écourtée par le fait qu'aucune précaution n'est prise à leur manipulation. Lors de réparations, s'assurer de bien être relié au même potentiel que la masse de l'appareil et enfile le bracelet servi d'une résistance de sécurité. Veiller à ce que les composants ainsi que les outils que l'on utilise soient également à ce potentiel.

GB)

Safety regulations require that the set be restored to its original condition and that parts which are identical with those specified be used.

Safety components are marked by the symbol

F)

Les normes de sécurité exigent que l'appareil soit remis à l'état d'origine et que soient utilisées les pièces de rechange identiques à celles spécifiées.

Les composants de sécurité sont marqués

D) WARNUNG

Alle IC's und viele andere Halbleiter sind empfindlich gegenüber elektrostatischen Entladungen (ESD). Unsorgfältige Behandlung im Reparaturfall kann die Lebensdauer drastisch reduzieren. Sorgen Sie dafür, daß Sie im Reparaturfall über ein Pulsschleife mit Widerstand mit dem Massepotential des Gerätes verbunden sind. Halten Sie Bauteile und Hilfsmittel ebenfalls auf diesem Potential.

SAFETY



D)

Bei jeder Reparatur sind die geltenden Sicherheitsvorschriften zu beachten. Der Originalzustand des Gerätes darf nicht verändert werden. Für Reparaturen sind Originalersatzteile zu verwenden. Sicherheitsbauteile sind durch das Symbol markiert.

**CLASS 1
LASER PRODUCT**

DANGER: Invisible laser radiation when open.
AVOID DIRECT EXPOSURE TO BEAM.

S) Varning !

Osynlig laserstrålning när apparaten är öppnad och spärren är urkopplad. Beträkta ej strålen.

DK) Advarsel !

Usynlig laserstrålning ved åbning når sikkerhedsafbrydere er ude af funktion. Undgå udsættelse for stråling.

FIN) Varoitus !

Avauttaessa ja suojalukituksen ohitettaessa olet alttiina näkymättömälle laserisäteilylle. Älä katso sääteenseen !

NL)

Veiligheidsbepalingen vereisen, dat het apparaat in zijn oorspronkelijke toestand wordt teruggebracht en dat onderdelen, identiek aan de gespecificeerde, worden toegepast. De Veiligheidsonderdelen zijn aangeduid met het symbool

I)

Le norme di sicurezza estigono che l'apparecchio venga rimesso nelle condizioni originali e che siano utilizzati i pezzi di ricambio identici a quelli specificati. Componenti di sicurezza sono marcati con

GB)

After servicing and before returning the set to customer perform a leakage current measurement test from all exposed metal parts to earth ground, to assure no shock hazard exists. The leakage current must not exceed 0.5mA.

F)

Pour votre sécurité, ces documents doivent être utilisés par des spécialistes agréés, seuls habilités à réparer votre appareil en panne".

INFORMATION ABOUT LEAD-FREE SOLDERING


Philips CE is producing lead-free sets from 1.1.2005 onwards.

IDENTIFICATION:

Regardless of special logo (not always indicated) one must treat all sets from **1 Jan 2005** onwards, according next rules:



Example S/N:

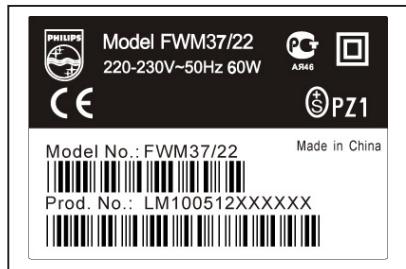

Bottom line of typeplate gives a 14-digit S/N. Digit 5&6 is the year, digit 7&8 is the week number, so in this case 2005 wk12

So from **0501** onwards = from 1 Jan 2005 onwards

Important note: In fact also products of year 2004 must be treated in this way as long as you avoid mixing solder-alloys (leaded/lead -free). So best to always use SAC305 and the higher temperatures belong to this.

Due to lead-free technology some rules have to be respected by the workshop during a repair:

- Use only lead-free solder alloy Philips SAC305 with order code 0622 149 00106. If lead-free solder-paste is required, please contact the manufacturer of your solder-equipment. In general use of solder-paste within workshops should be avoided because paste is not easy to store and to handle.
- Use only adequate solder tools applicable for lead-free solder alloy. The solder tool must be able
 - To reach at least a solder-temperature of 400°C,
 - To stabilize the adjusted temperature at the solder-tip
 - To exchange solder-tips for different applications.
- Adjust your solder tool so that a temperature around **360°C** – 380°C is reached and stabilized at the solder joint. Heating-time of the solder-joint should not exceed ~ 4 sec. Avoid temperatures above 400°C otherwise wear-out of tips will rise drastically and flux-fluid will be destroyed. To avoid wear-out of tips switch off un-used equipment, or reduce heat.
- Mix of lead-free solder alloy / parts with leaded solder alloy / parts is possible but PHILIPS recommends strongly to avoid mixed solder alloy types (leaded and lead-free).
If one cannot avoid or does not know whether product is lead-free, clean carefully the solder-joint from old solder alloy and re-solder with new solder alloy (SAC305).
- Use only original spare-parts listed in the Service-Manuals. Not listed standard-material (commodities) has to be purchased at external companies.
- **Special information for BGA-ICs:**
 - always use the 12nc-recognizable soldering temperature profile of the specific BGA (for de-soldering always use the lead-free temperature profile, in case of doubt)
 - lead free BGA-ICs will be delivered in so-called 'dry-packaging' (sealed pack including a silica gel pack) to protect the IC against moisture. After opening, dependent of MSL-level seen on indicator-label in the bag, the BGA-IC possibly still has to be baked dry. (MSL=Moisture Sensitivity Level). This will be communicated via AYS-website.
 - Do not re-use BGAs at all.
- For sets produced before 1.1.2005 (except products of 2004), containing leaded solder-alloy and components, all needed spare-parts will be available till the end of the service-period. For repair of such sets nothing changes.
- On our website www.atyourservice.ce.Philips.com you find more information to:
 - * BGA-de-/soldering (+ baking instructions)
 - * Heating-profiles of BGAs and other ICs used in Philips-sets

You will find this and more technical information within the "magazine", chapter "workshop news".

For additional questions please contact your local repair-helpdesk.

SERVICE INSTRUCTION

Safety regulations require that after a repair, the set must be returned in its original condition. Pay in particular attention to the following points:

- Route the wire trees correctly and fix them with the mounted cable clamps.
- Check the insulation of the AC Power lead for external damage.
- Check the strain relief of the AC Power cord for proper function.
- Check the electrical DC resistance between the AC Power Plug and the secondary side (only for sets which have a AC Power isolated power supply):
- Unplug the AC Power cord and connect a wire between the two pins of the AC Power plug.
- Set the AC Power switch to the "on" position (keep the AC Power cord unplugged!).
- Measure the resistance value between the pins of the AC Power plug and the metal shielding of the tuner or the aerial connection on the set. The reading should be larger than 4.5 Mohm (For U.S. it should be between 4.2 Mohm and 12 Mohm).
- Switch "off" the set, and remove the wire between the two pins of the AC Power plug.
- Check the cabinet for defects, to avoid touching of any inner parts by the customer.

TECHNICAL SPECIFICATIONS

GENERAL

Mains voltage	-/93 : 220V -/61 : 220V
Mains frequency	-/93 : 50 Hz -/61 : 60 Hz
Battery	remote : 3 V (AAA x 2)
Power consumption	normal : < 52 W Standby : < 4 W
Dimension (W x H x D)	: 147 x 232 x 223 mm
Weight (excluding packing and batteries)	: 5.4 Kg

AMPLIFIER

Output power	mains : 5 x 20W subwoofer : 1 x 50W
Speaker impedance	mains : 5 x 8 ohm subwoofer : 1 x 4 ohm
Frequency response	: 20 Hz - 20 kHz ($\pm 3\text{dB}$)

TUNER - FM SECTION

Tuning range	: 87.5 - 108 MHz
IF frequency	: 10.7 MHz \pm 0.02 MHz
Sensitivity	: < 22 dBf at 26dB
Selectivity	300kHz : > 33 dB
IF Rejection	: > 60 dB
Image Rejection	: > 25dB
Distortion	: < 3 %
Tuning Grid	: 100/50K Hz

TUNER - AM SECTION

Tuning range	: 531 - 1602 kHz
Tuning Grid	: 9/10K Hz
IF frequency	: 450 kHz \pm 1 kHz
Sensitivity	: \leq 3.25 mV/m at 26dB
Selectivity S9/300kHz	: > 12 dB
IF rejection	: > 24 dB
Distortion	: < 5%
Image rejection	: > 20 dB

DVD / MP3 / CD

Laser Type	: Semiconductor
Disc Diameter	: 12cm / 8cm
Video Decoding	: MPEG-2 / MPEG-1
Signal System	: PAL / NTSC
Video S/N	: 53 dB (min.)
Composite Video Output	: 1.0 Vp-p, 75
S-Video Output	: Y - 1.0 Vp-p, 75 C - 0.286 Vp-p, 75
Audio DAC	: 24 Bits / 96 kHz
Frequency Response	: 20 Hz - 20 kHz
Channel Unbalance	: < \pm 2dB
THD Noise	: 0.5%
No. of programmable tracks	: 20
Signal-to-noise ratio	: 70 dBA
Channel separation	: 40 dB (1 kHz) : 35 dB (16 kHz) : 30 dB (20 kHz)
Total harmonic distortion	: < 0.02% (1 kHz)

SERVICE TOOLS


Audio signal disc SBC 429.....	4822 397 30184
Playability test disc SBC 444.....	4822 397 30245
Test disc 5 (disc without errors) +	
Test disc 5A (disc with dropout errors, black spots and fingerprints)	
SBC 426/426A.....	4822 397 30096
Burn in test disc (65 min. 1kHz signal at -30 dB level without "pause")	4822 397 30155

AVAILABLE ESD PROTECTION EQUIPMENT

anti-static table mat	large 1200x650x1.25mm	4822 466 10953
	small 600x650x1.25m	4822 466 10958
anti-static wristband		4822 395 10223
connection box (3 press stud connections, 1M Ω)		4822 320 11307
extendible cable (2m, 2M Ω , to connect wristband to connection box)		4822 320 11305
connecting cable (3m, 2M Ω , to connect table mat to connection box)		4822 320 11306
earth cable (1M Ω , to connect any product to mat or to connection box)		4822 320 11308
KIT ESD3 (combining all 6 prior products - small table mat)		4822 310 10671
wristband tester		4822 344 13999


SERVICE MEASUREMENT

Tuner SW

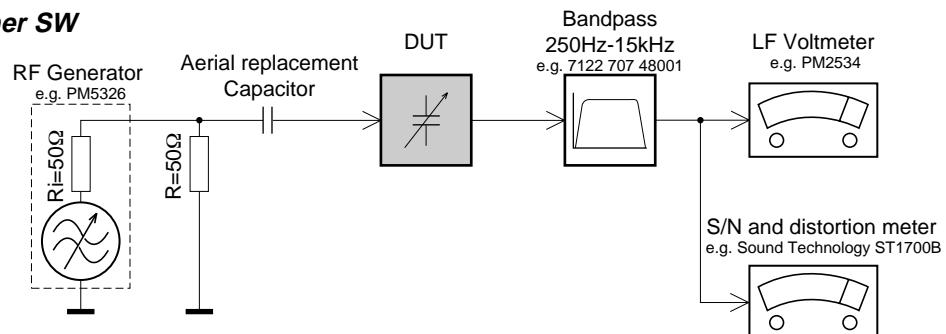

To avoid atmospheric interference all AM-measurements have to be carried out in a Faraday's cage. Use a bandpass filter (or at least a high pass filter with 250Hz) to eliminate hum (50Hz, 100Hz).


Tuner AM (MW,LW)

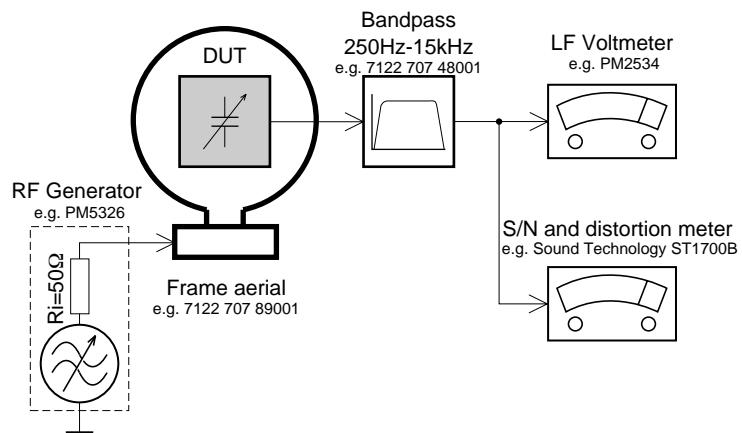

To avoid atmospheric interference all AM-measurements have to be carried out in a Faraday's cage.

CD

Use Audio Signal Disc SBC429 4822 397 30184 (replaces test disc 3)
L.P.F. = 13th order filter 4822 395 30204

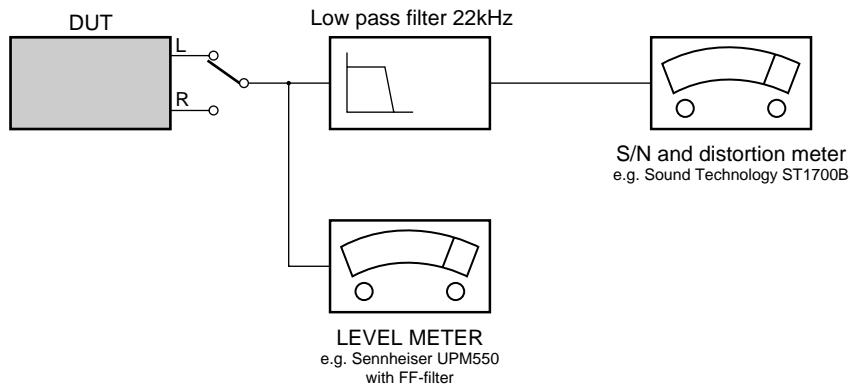


Connections

Connections

IMPORTANT!


- The type plate is located at the bottom of the system.
- Before connecting the AC power cord to the wall outlet, ensure that all other connections have been made.
- Never make or change any connections with the power switched on.

Step 2: Placing the speakers and subwoofer

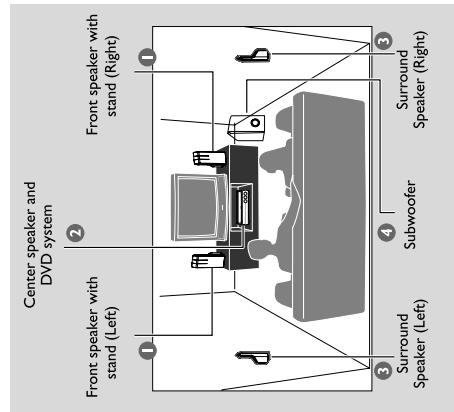

For best possible surround sound, all the speakers (except subwoofer) should be placed at the same distance from the listening position. Place the front left and right speakers at equal distances from the TV and at an angle of approximately 45 degrees from the listening position.


- 1 Before connecting the speakers to the DVD system, firmly attach the mini speaker stands to the surround speakers as shown in the above diagram.

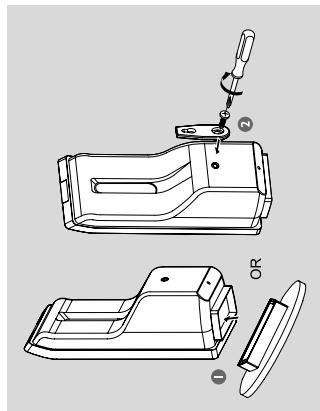

- 2 Alternatively you can choose to mount the speakers on the wall. Attach the supplied bracket firmly to the rear of speakers using the supplied screws. Then mount a screw (not supplied) on the wall where the speaker is to be hung and hook the speaker securely onto the mounted screw.
- 3 **CAUTION!**
- You should get a qualified person to attach the brackets to the wall. DO NOT do it by yourself to avoid unexpected damage to the equipment or injury to personnel.

- Note:
- The surround speakers are labeled as REAR L. (left) or REAR R. (right).

Step 3: Connecting speakers and subwoofer

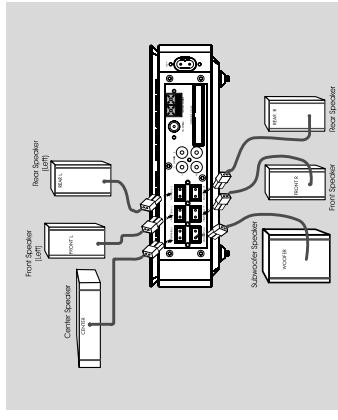

Note:


- Ensure that the speaker cables are correctly connected. Improper connections may damage the system due to short-circuit.

Step 5: Connecting TV

IMPORTANT!

- You only need to make one video connection from the following options, depending on the capabilities of your TV.
- Connect the DVD system directly to the TV.

Step 1: Set up the surround speakers

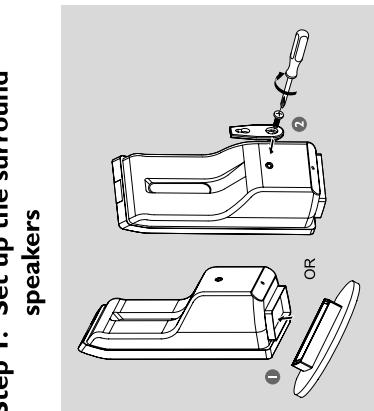


- 1 Before connecting the speakers to the DVD system, firmly attach the mini speaker stands to the surround speakers as shown in the above diagram.
- 2 Place the center speaker above the TV or the DVD system so that the center channel's sound is localized.
- 3 Place the rear speakers at normal listening ear level facing each other or hang on the wall.
- 4 Place the subwoofer on the floor near the TV.

Note:

- To avoid magnetic interference, do not position the front speakers too close to your TV.
- Allow adequate ventilation around the DVD system.

Step 4: Connecting the control cable



Connect the serial port marked '**CONTROL CABLE**' at the rear of the DVD player to the same port at the rear of the power amplifier with the supplied flat control cable.

- 1 Use the composite video connectors (yellow) of the supplied audio and composite video cables (2-in1) to connect the DVD system's **VIDEO OUT** jack to the video input jack (or labeled as A/V In, CVBS, Composite or Baseband) on the TV.
- 2 To hear the TV channels through this DVD system, use the audio connectors (white/red) of the supplied audio and composite video cables (2-in1) to connect **AUDIO IN** jacks to the corresponding **AUDIO OUT** jacks on the TV.

Step 5: Connecting TV

IMPORTANT!

- Connect the DVD system directly to the TV.

Connections


CONNECTION AND CONTROLS

Connections

Using Component Video jacks (Y Pb Pr)

IMPORTANT!

- The progressive scan video quality is only possible when using Y Pb Pr, and a progressive scan TV is required.

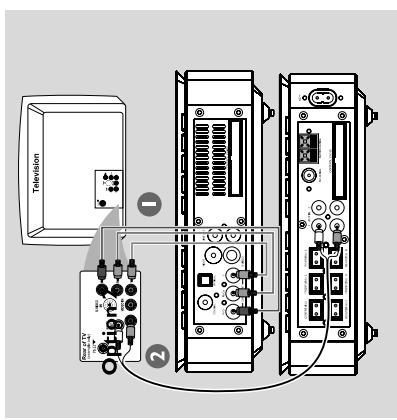

- 1 Use component video cables (red/blue/green - not supplied) to connect the DVD system's Y Pb Pb jacks to the corresponding Component video input jacks (or labeled as Y Pb/Cb/Pn/Cr/Yuv) on the TV.
- 2 To hear the TV channels through this DVD system, use the audio cables (white/red) to connect AUDIO IN-TV jacks on the TV.


- 3 If you are using a Progressive Scan TV (TV must indicate Progressive Scan or ProScan capability), to activate TV Progressive Scan, please refer to your TV user manual. For DVD system Progressive Scan function, see 'Getting Started-Setting up Progressive Scan feature'.

- Note:
- If your TV does not support Progressive Scan, you will not be able to view the picture.
 - Press **SYSTEM** on the remote to exit the system menu and then **DISC** to exit progressive scan.

Using S-Video jack

IMPORTANT!

- If S-Video is used for DVD playback connection, the system's VIDEO OUT setting will need to be changed accordingly.

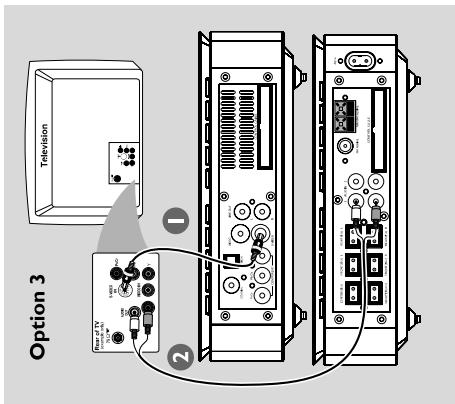


- 1 Use an S-Video cable (not supplied) to connect the DVD system's S-VIDEO OUT jack to the video input jack on the RF modulator.
- 2 To hear the TV channels through this DVD system, use the audio cables (white/red) to connect AUDIO IN-TV jacks to the corresponding AUDIO OUT jacks on the TV.

Using an accessory RF modulator

IMPORTANT!

- If your TV only has a single Antenna In jack (labeled as 75 ohm or RF In), you will need an RF modulator in order to view DVD playback on the TV. See your electronics retailer or contact Philips for details on RF modulator availability and operations.

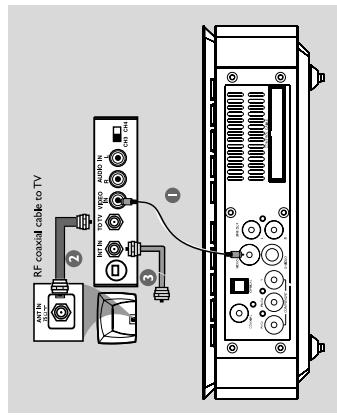


- 1 Use the composite video cable (yellow) to connect the DVD system's VIDEO OUT jack to the video input jack on the RF modulator.
- 2 Use an RF coaxial cable (not supplied) to connect ANTENNA OUT or TO TV jack on the RF modulator to the Antenna IN jack on the TV.
- 3 Connect the Antenna or Cable TV service signal to the ANTENNA IN or RF IN jack on the RF modulator. (It may have been connected to your TV previously. Disconnect it from the TV.)

Step 6: Connecting FM/MW antennas

IMPORTANT!

- fix the claw into the slot
- 1 MW antenna
- 2 FM antenna


3 - 2

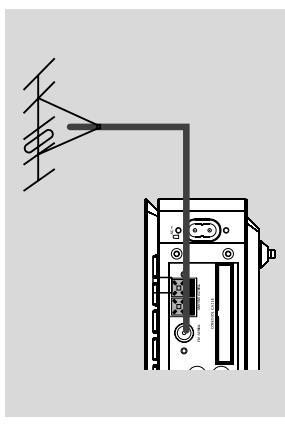

- Note:
- Adjust the position of the antennas for optimal reception.
 - Position the antennas as far as possible from your TV/VCR or other radiation source to prevent unwanted interference.

Connections

Step 7: Connecting the power cord

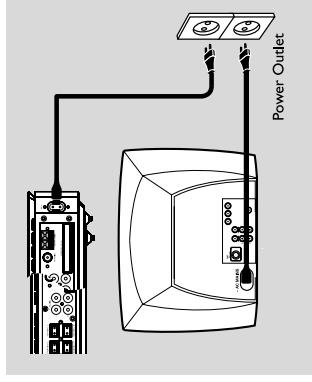

Viewing and listening to the playback of other equipment (A)

- Connect the system's **AUX IN (R/L)** jacks to the AUDIO OUT jacks on the other audio/visual device (such as a TV VCR, Laser Disc player or cassette deck). Before starting operation, press **SOURCE** on the front panel to select AUX or press **AUX** on the remote in order to activate the input source.
- **Recording (digital) (B)**
Connect the system's **COAXIAL** or **OPTICAL** jack to the DIGITAL IN jack on a digital recording device (such as DTS-Digital Theatre compatible, with Dolby Digital decoder). Before starting operation, set the DIGITAL OUT according to the audio connection. (See "DIGITAL OUT".)


After everything is connected properly, plug in the AC power cord to the power outlet.

Never make or change any connection with the power switched on.

Additional: Connecting additional equipment

IMPORTANT!


- Some discs are copy-protected. You cannot record the disc through a VCR or digital recording device.
- When making connections, make sure the colour of cables matches the colour of jacks.
- Always refer to the owner's manual of the other equipment for complete connection and usage details.

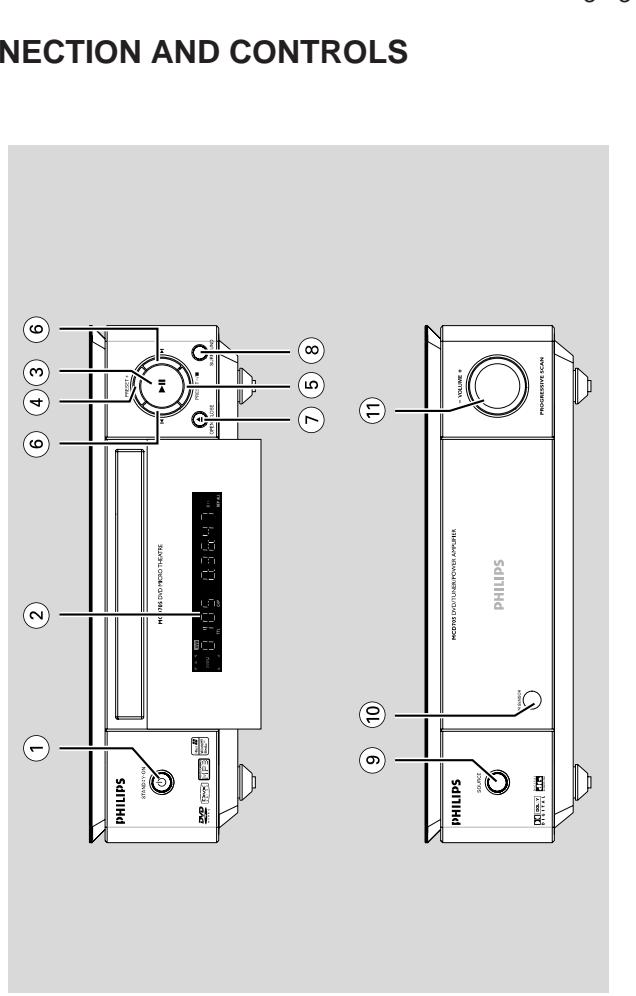

CONNECTION AND CONTROLS

Functional Overview

DVD player and power amplifier	(7) OPEN•CLOSE ▲	opens or closes the disc tray
	(8) SURROUND	selects 2.1 channel output (2.1CH) or 5.1 channel output (SUR5.1 or DVDS5.1).
	(9) SOURCE	selects the respective sound source: DVD/AUX1/AUX2/FM/MMW
	(10) IR SENSOR	switches the set timer ON or OFF.
		point the remote control towards this sensor:
	(11) VOLUME -/+	adjusts the volume upward/downward.
		adjusts the hours and minutes in clock/timer setting mode.
		switches the system on.

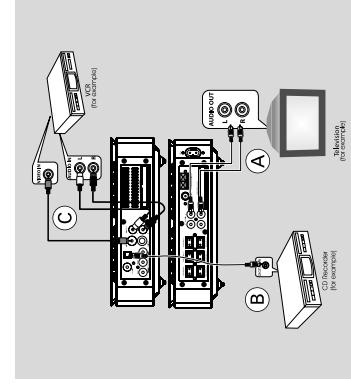


Functional Overview

Functional Overview

Remote control

- (4) PROG**
 - DVD/VCD/CD: enters the program menu.
 - MP3/WMA-CD: adds/deletes a programmed track to/from the program list.
Picture CD: during playback, to select a slide show mode.
(5) GOTO LIST
 - Disc: fast searches in a disc by entering a time, title, chapter or track.
(6) Numeric Keypad (0-9)
 - inputs a track/title/chapter number of the disc.
 - inputs the number of a preset radio station.
(7) ▲
 - opens or closes the disc compartment
(8) ■
 - stops disc playback or erases a program.

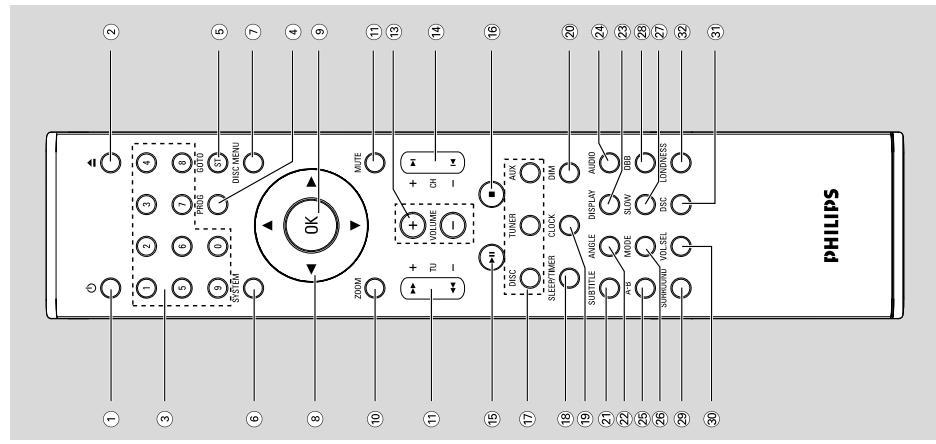

TU +/- (◀▶/▲▼)

- Tuner**
 - press to tune to a lower/higher radio frequency gradually
 - press and hold, then release the key to start automatic search for a radio frequency downward/upward.
Disc
 - searches backward/forward in a disc at different speeds.

VOLUME +/-

- for VCD/DivX**
 - adjusts the volume upward/downward.
for DVD
 - adjusts the hours and minutes in clock/timer setting mode.
for DVD/DivX
 - switches the set timer ON or OFF.
CH +/- (◀▶ / ▲▼)
 - Disc: skips to the previous/next chapter/title/track
Tuner: selects a preset radio station.
►
 - starts or interrupts disc playback.
■
 - stops disc playback or erases a program.

DISC/TUNER/AUX

- OK**
 - confirms a selection.
ZOOM
 - DVD/CD/Picture CD: enlarges or reduces a Picture or active image on the TV screen.
MUTE
 - disables or enables sound output.

SLEEP/TIMER

- Standby mode**
 - sets time for switching on the system automatically.

Power-on mode

- sets the sleep timer function (auto off).

CLOCK

- Standby mode**
 - sets the system clock.
Playback mode
 - displays the system clock.

DIM

- selects different levels of brightness for the display screen.

SUBTITLE

- selects a subtitle language.

ANGLE

- selects a DVD camera angle.

DISPLAY

- displays information on TV screen during playback.

AUDIO

- sets Stereo, Mono-Left or Mono-Right sound mode.

D-BB

- selects an audio language.

A-B

- repeats playback of a specific section on a disc.

MODE

- selects various repeat modes or the shuffle play mode for a disc.

SLOW

- selects different slow playback modes for a DivX/VCD/SVCD/DVD.

D-BB

- enables or disables bass enhancement.

SURROUND

- selects 2.1 channel output (2.1CH) or 5.1 channel output (SUR5.1 or DVDS5.1).

VOLUME

- adjusts volume level for individual speakers.

DSC



- selects different types of preset sound equalizer settings (FLAT, POP, JAZZ, CLASSIC or ROCK).

LOUDNESS (unavailable for this version)







- enables or disables automatic loudness adjustment.

DISASSEMBLY DIAGRAM - DVD PART**A.Remove Bottom Cover**

A1.remove screws M2.5x4(8pcs)

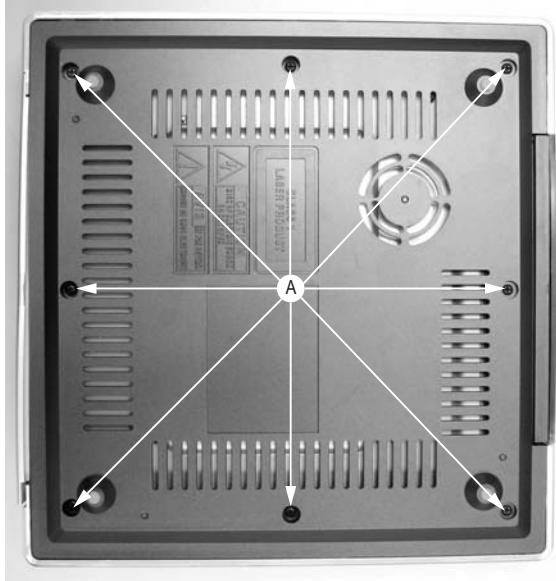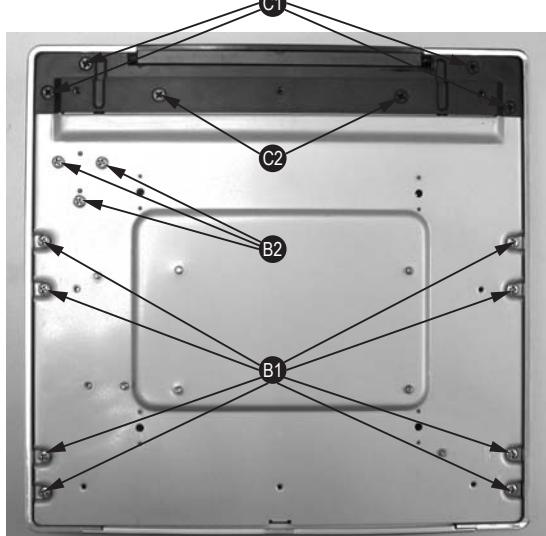B*.remove screws M3x10(8pcs) and M3x8(3pcs)
C*.remove screws M3x8(4pcs) and T3x4(2pcs)**D.Remove Back Panel**



D*remove screws T3x4(5pcs)and M3x10(5pcs)and T3x8(1pc)

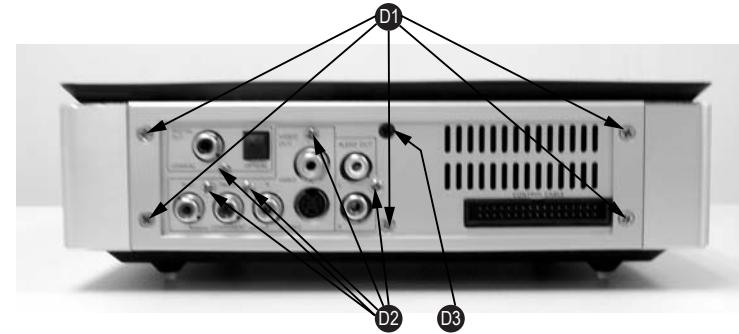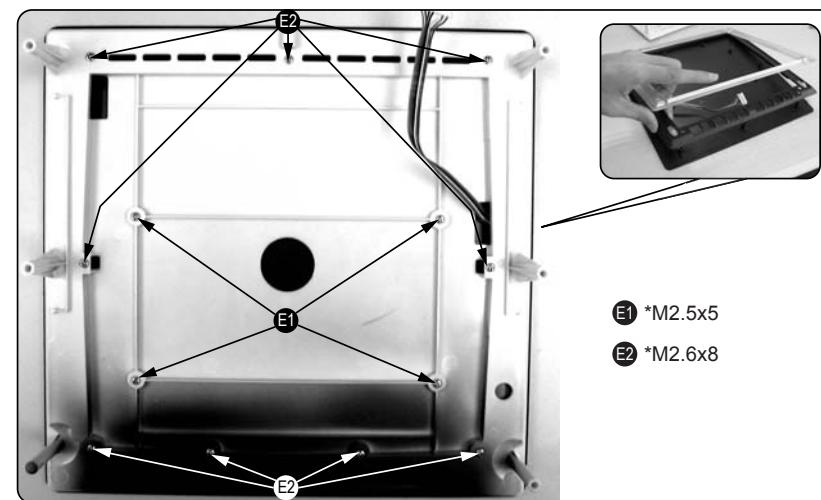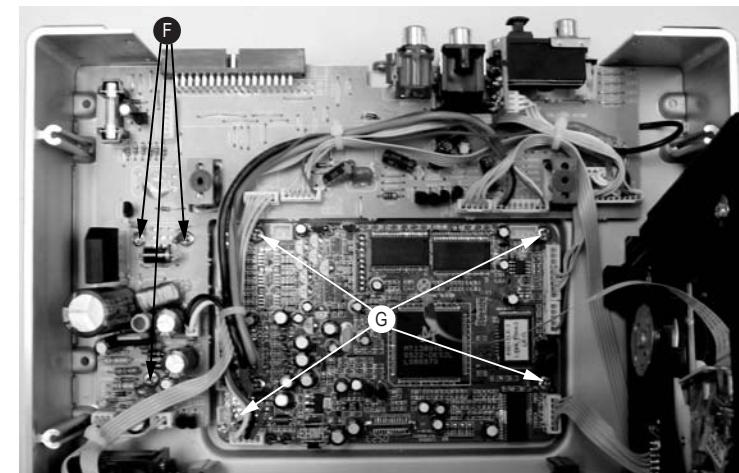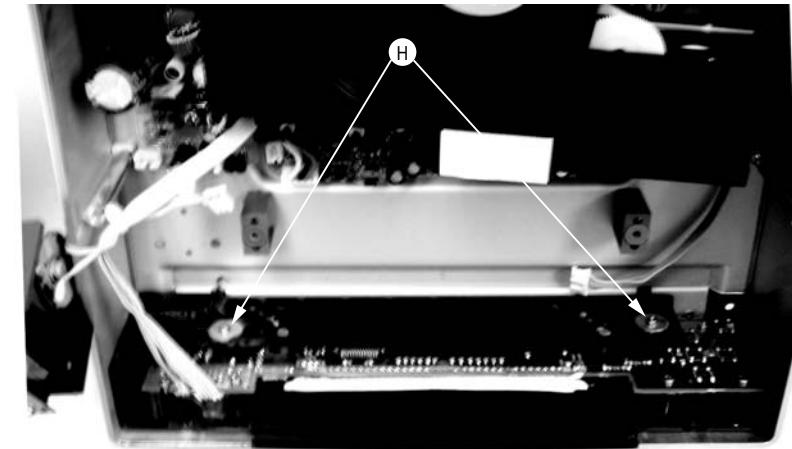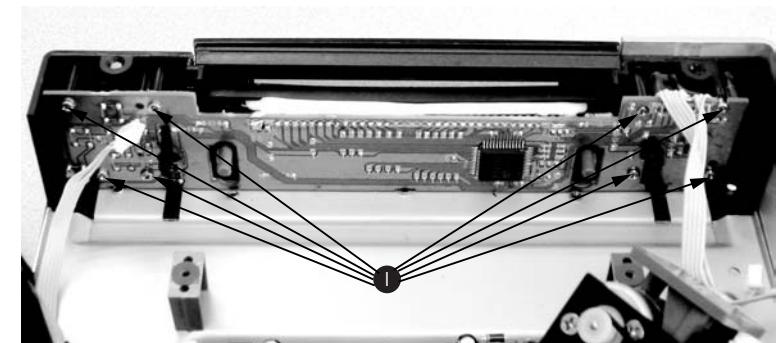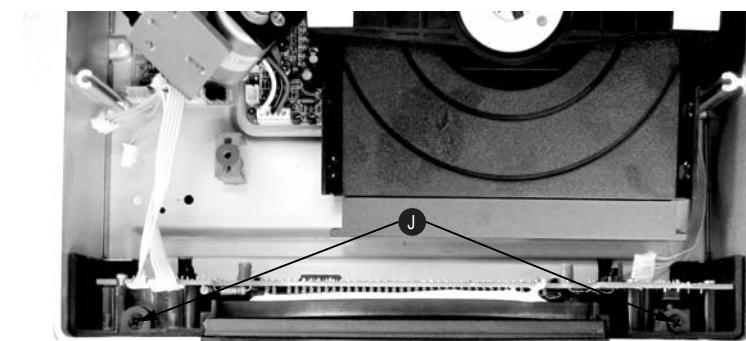**E. Remove Top Cover****G. Remove DVD Rom and then remove DVD Decoder Card Assy****H.Remove Slid Plank****I.Remove VFD board assy****J.Remove Side metal Plate**

DISASSEMBLY DIAGRAM - AMP PART


A.Remove Bottom Cover

A1.remove screws M2.5x4(8pcs)

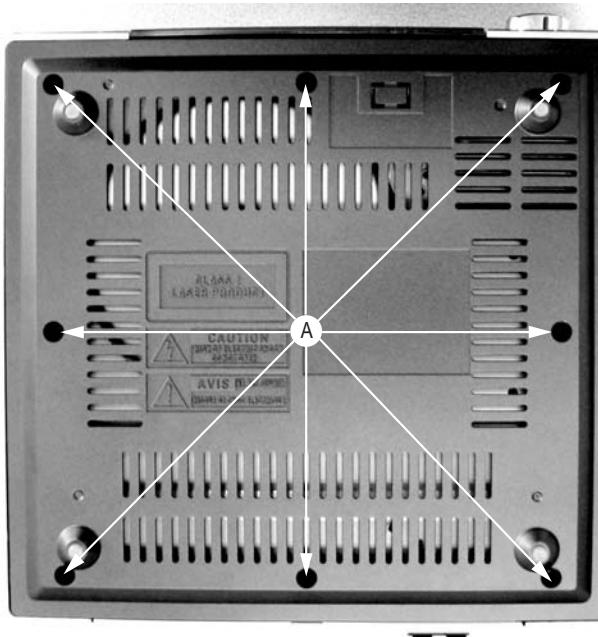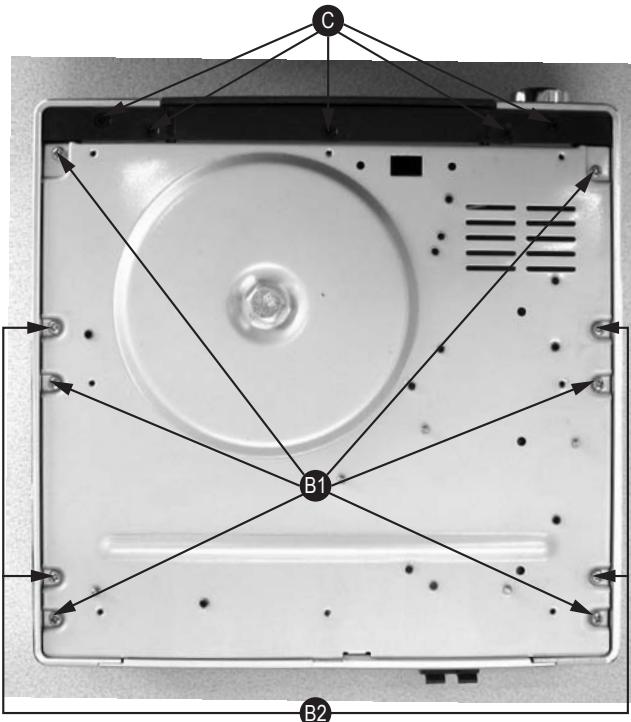
B*.remove screws M3x10(6pcs) and T3x10(4pcs)
C*.remove screws T3x4(5pcs)

D.Remove Back Panel


D*remove screws T3x4(4pcs)and T3x8(2pcs)and M3x10(6pcs)

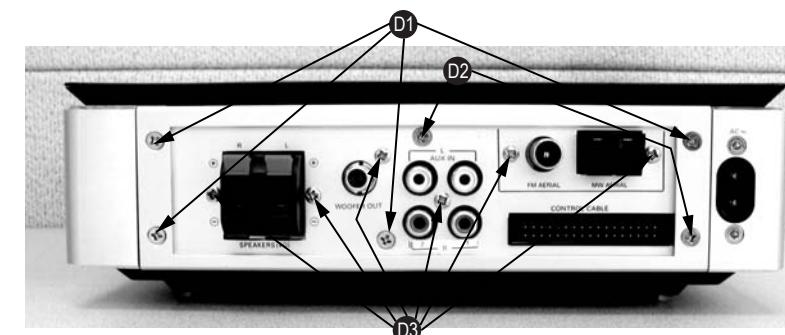


E. Remove Top Cover

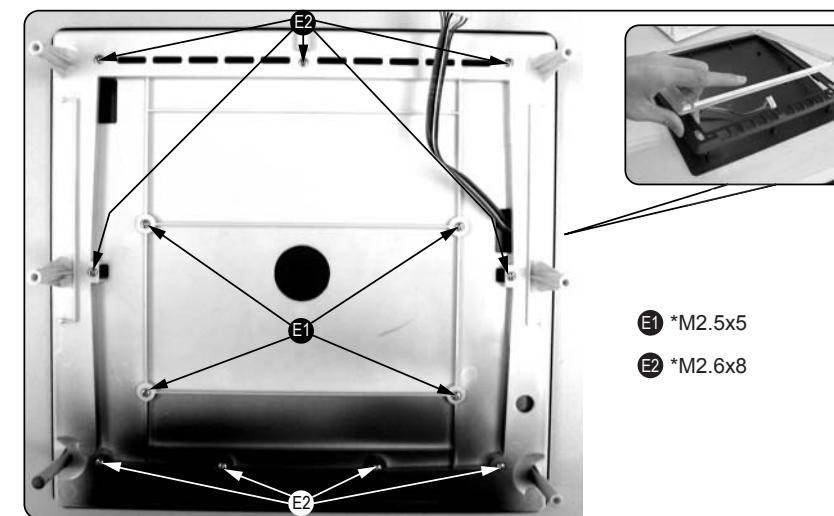E1 *M2.5x5
E2 *M2.6x8


F. Remove AMP Board Assy

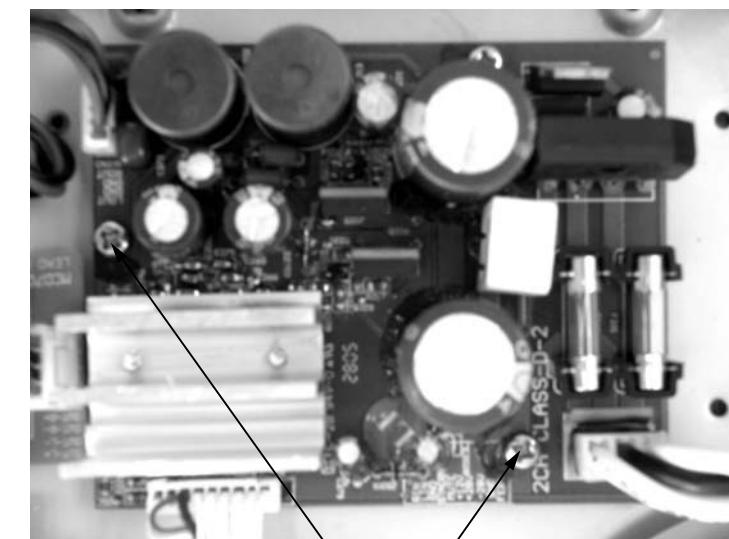


G.Remove ALC Volume board assy

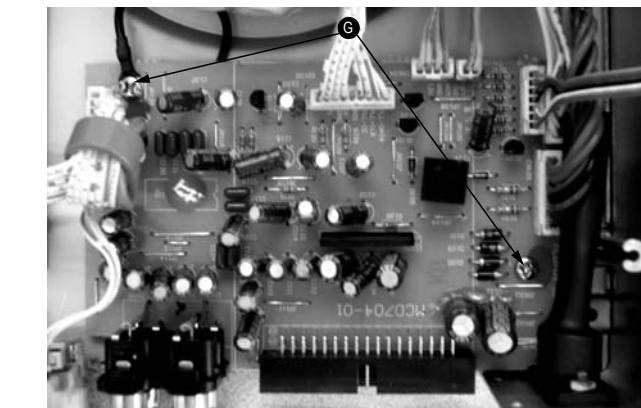

H.Remove AMP Front board assy

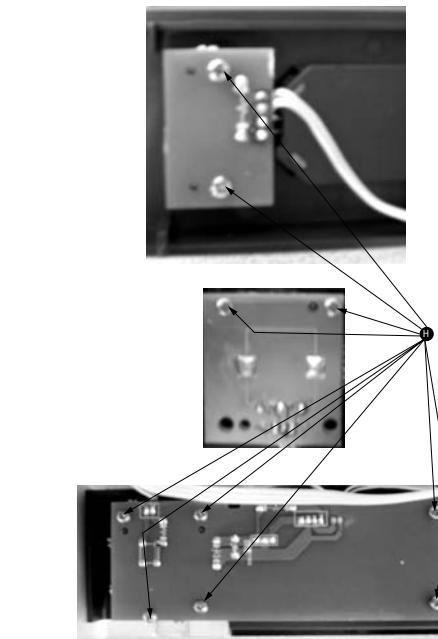

I.Remove Side metal Plate

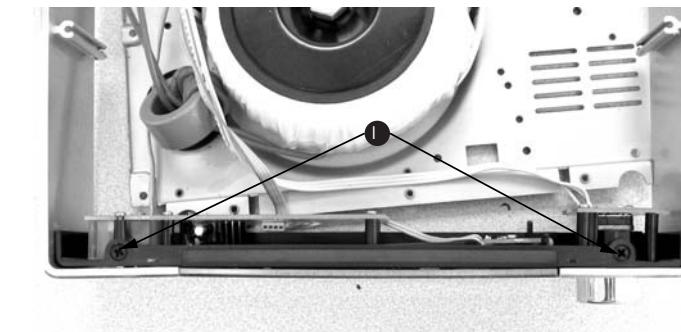


SOFTWARE VERSION AND UPGRADING

A.MPEG SOFTWARE VERSION CHECK


1.Press SYSTEM key to open setup page,

TV Screen shows:

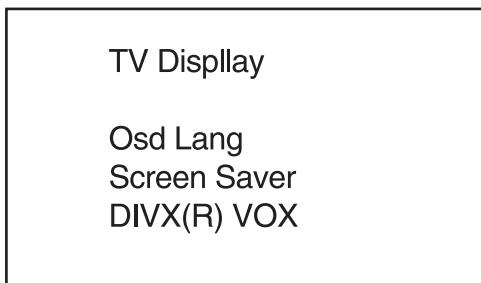


2.Press REMOVAL key to the original setup page,

TV Screen shows:

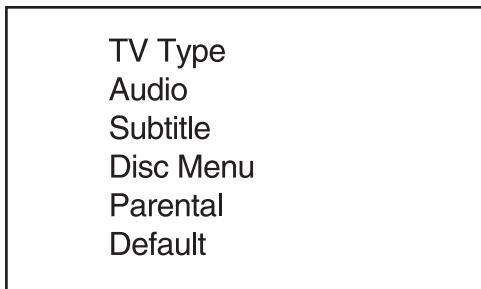

3.Enter the password "811502"

TV Screen shows:

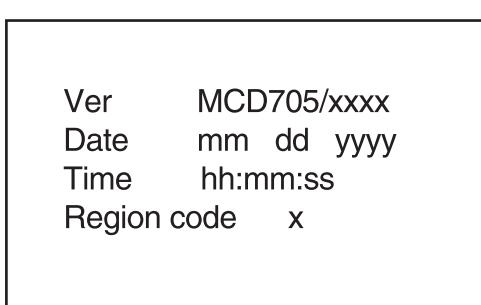

B.CPU VERSION CHECK

Keep PLAY/PAUSE and STOP buttons (on the set) depressed while pressing POWER on.

TV screen shows



C. MPEG SOFTWARE UPGRADING


1. download the firmware from Philips support website

<http://www.philips.com/support>


2. Prepare a uploading CD

3. Put the CD in the CD tray


4. TV Screen shows

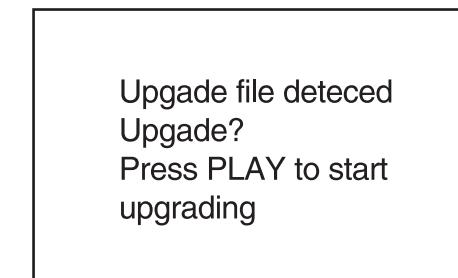


SET BLOCK DIAGRAM

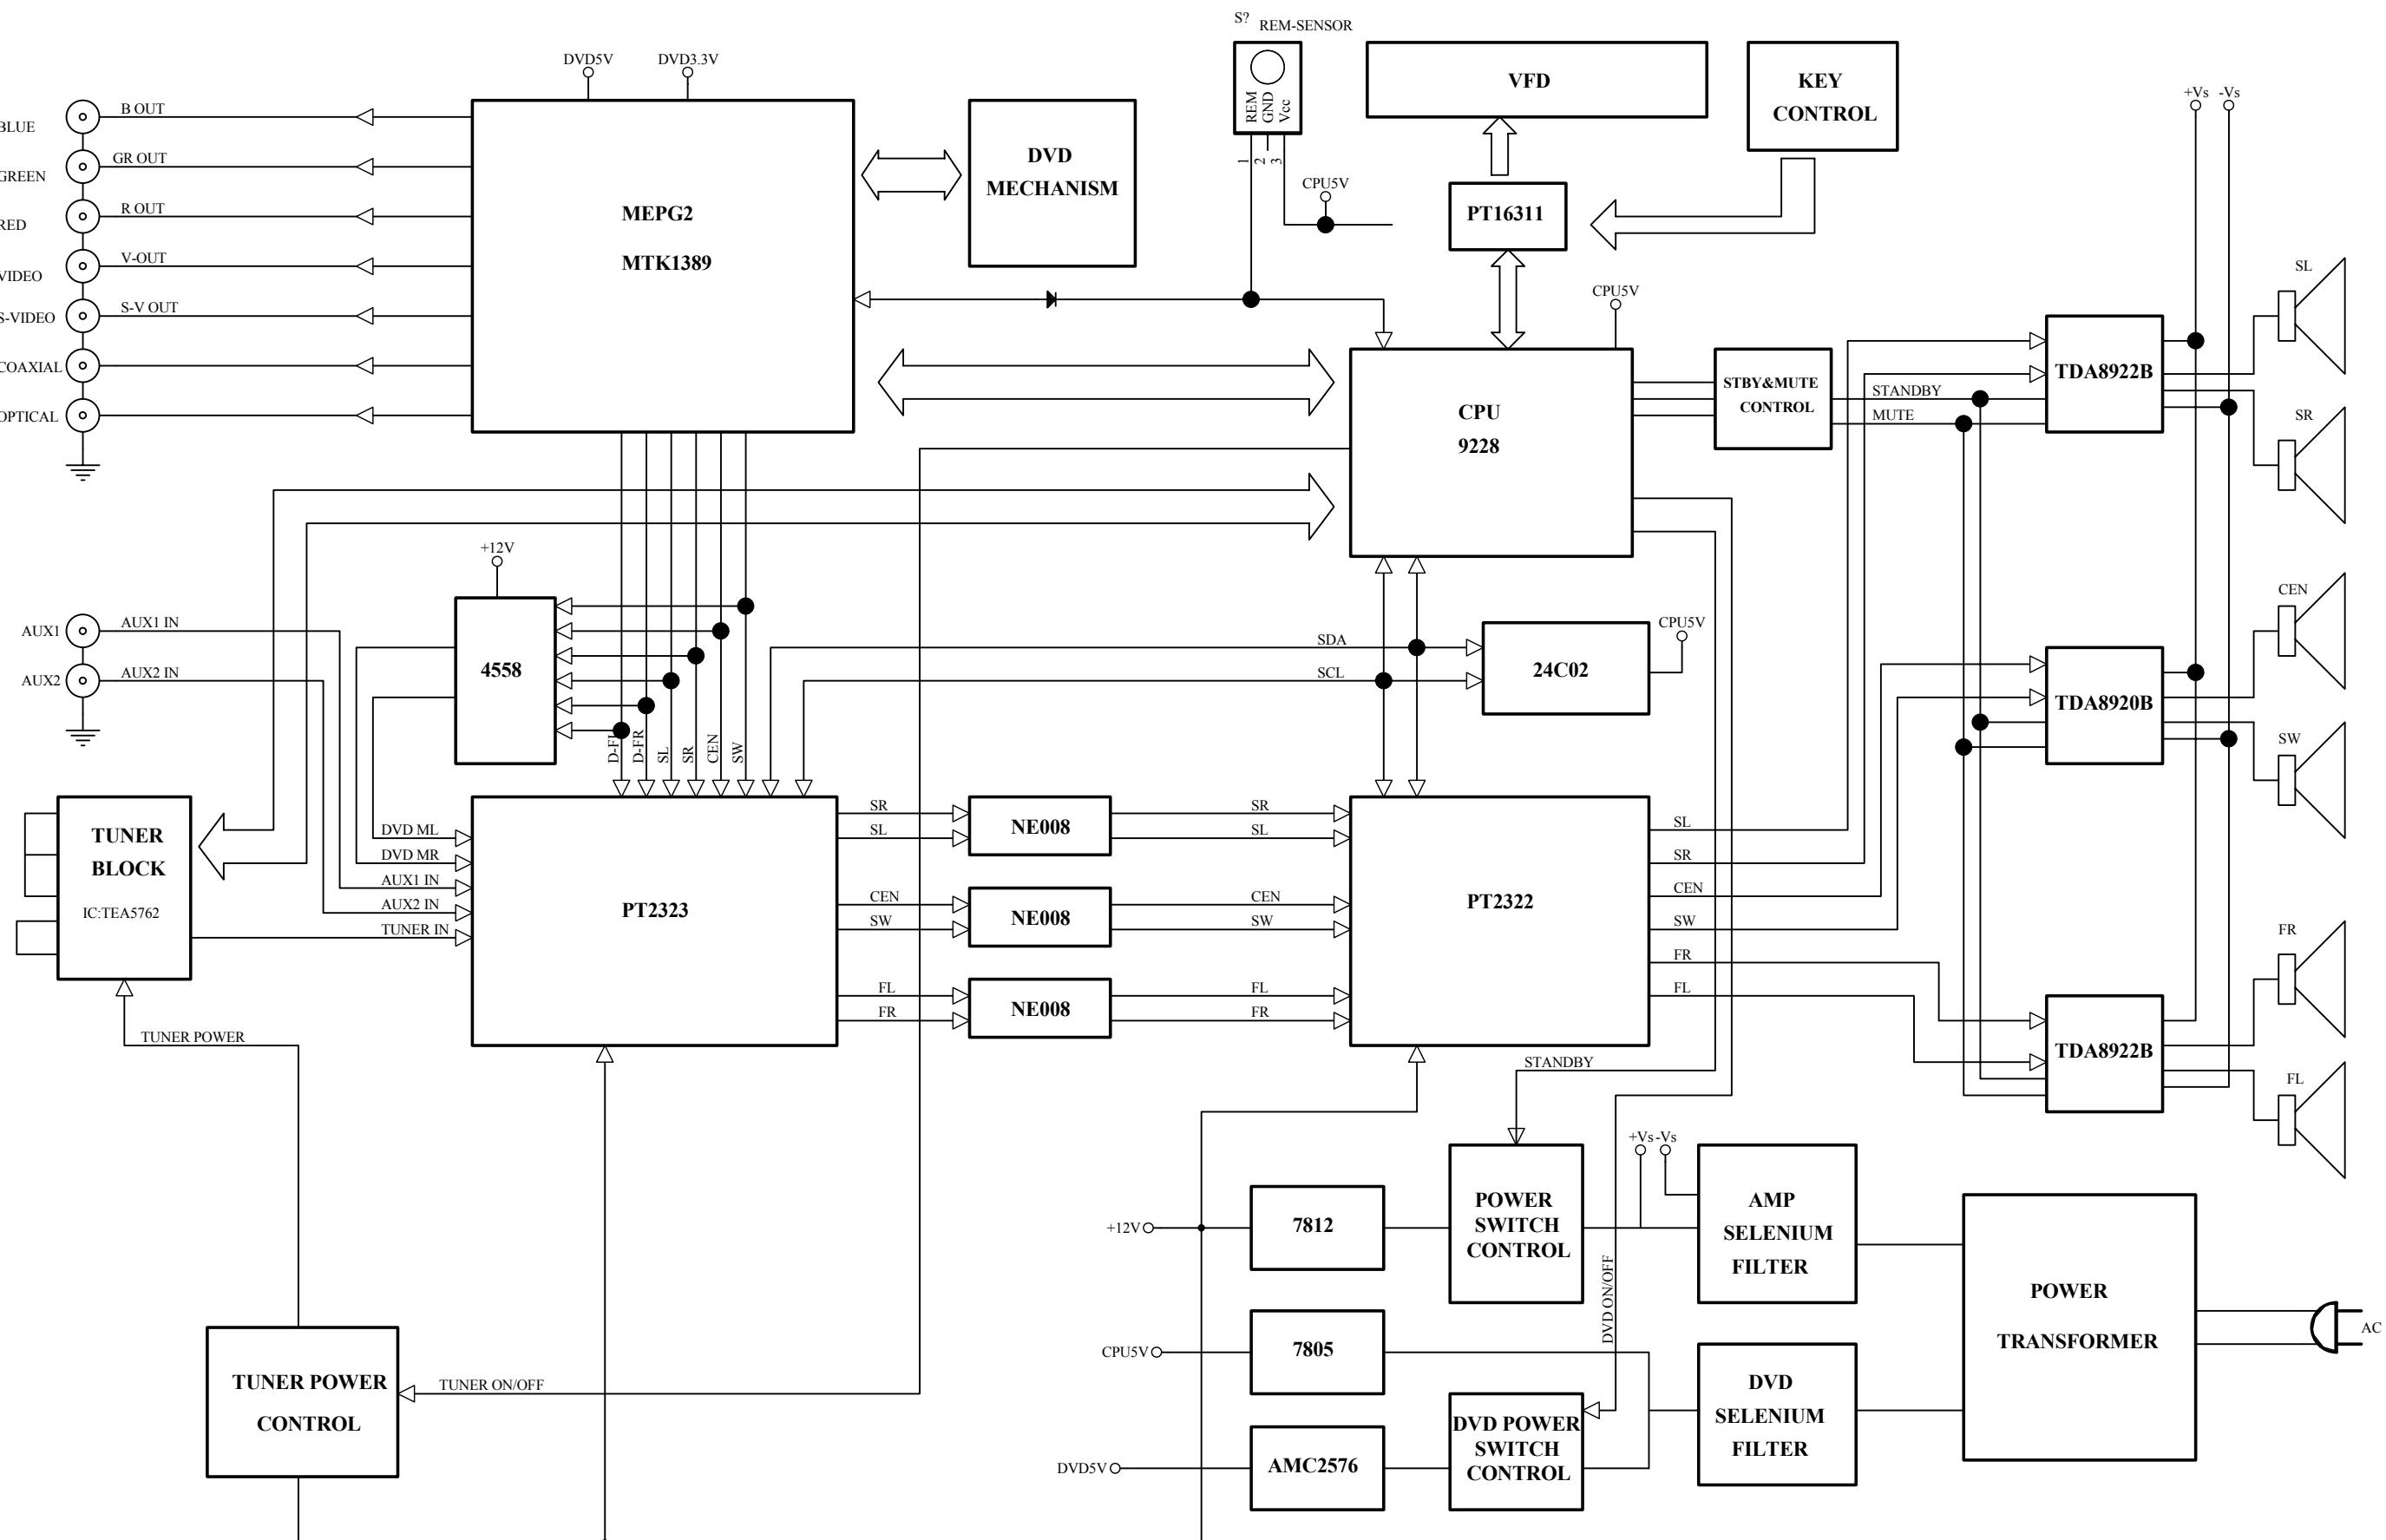



SET WIRING DIAGRAM

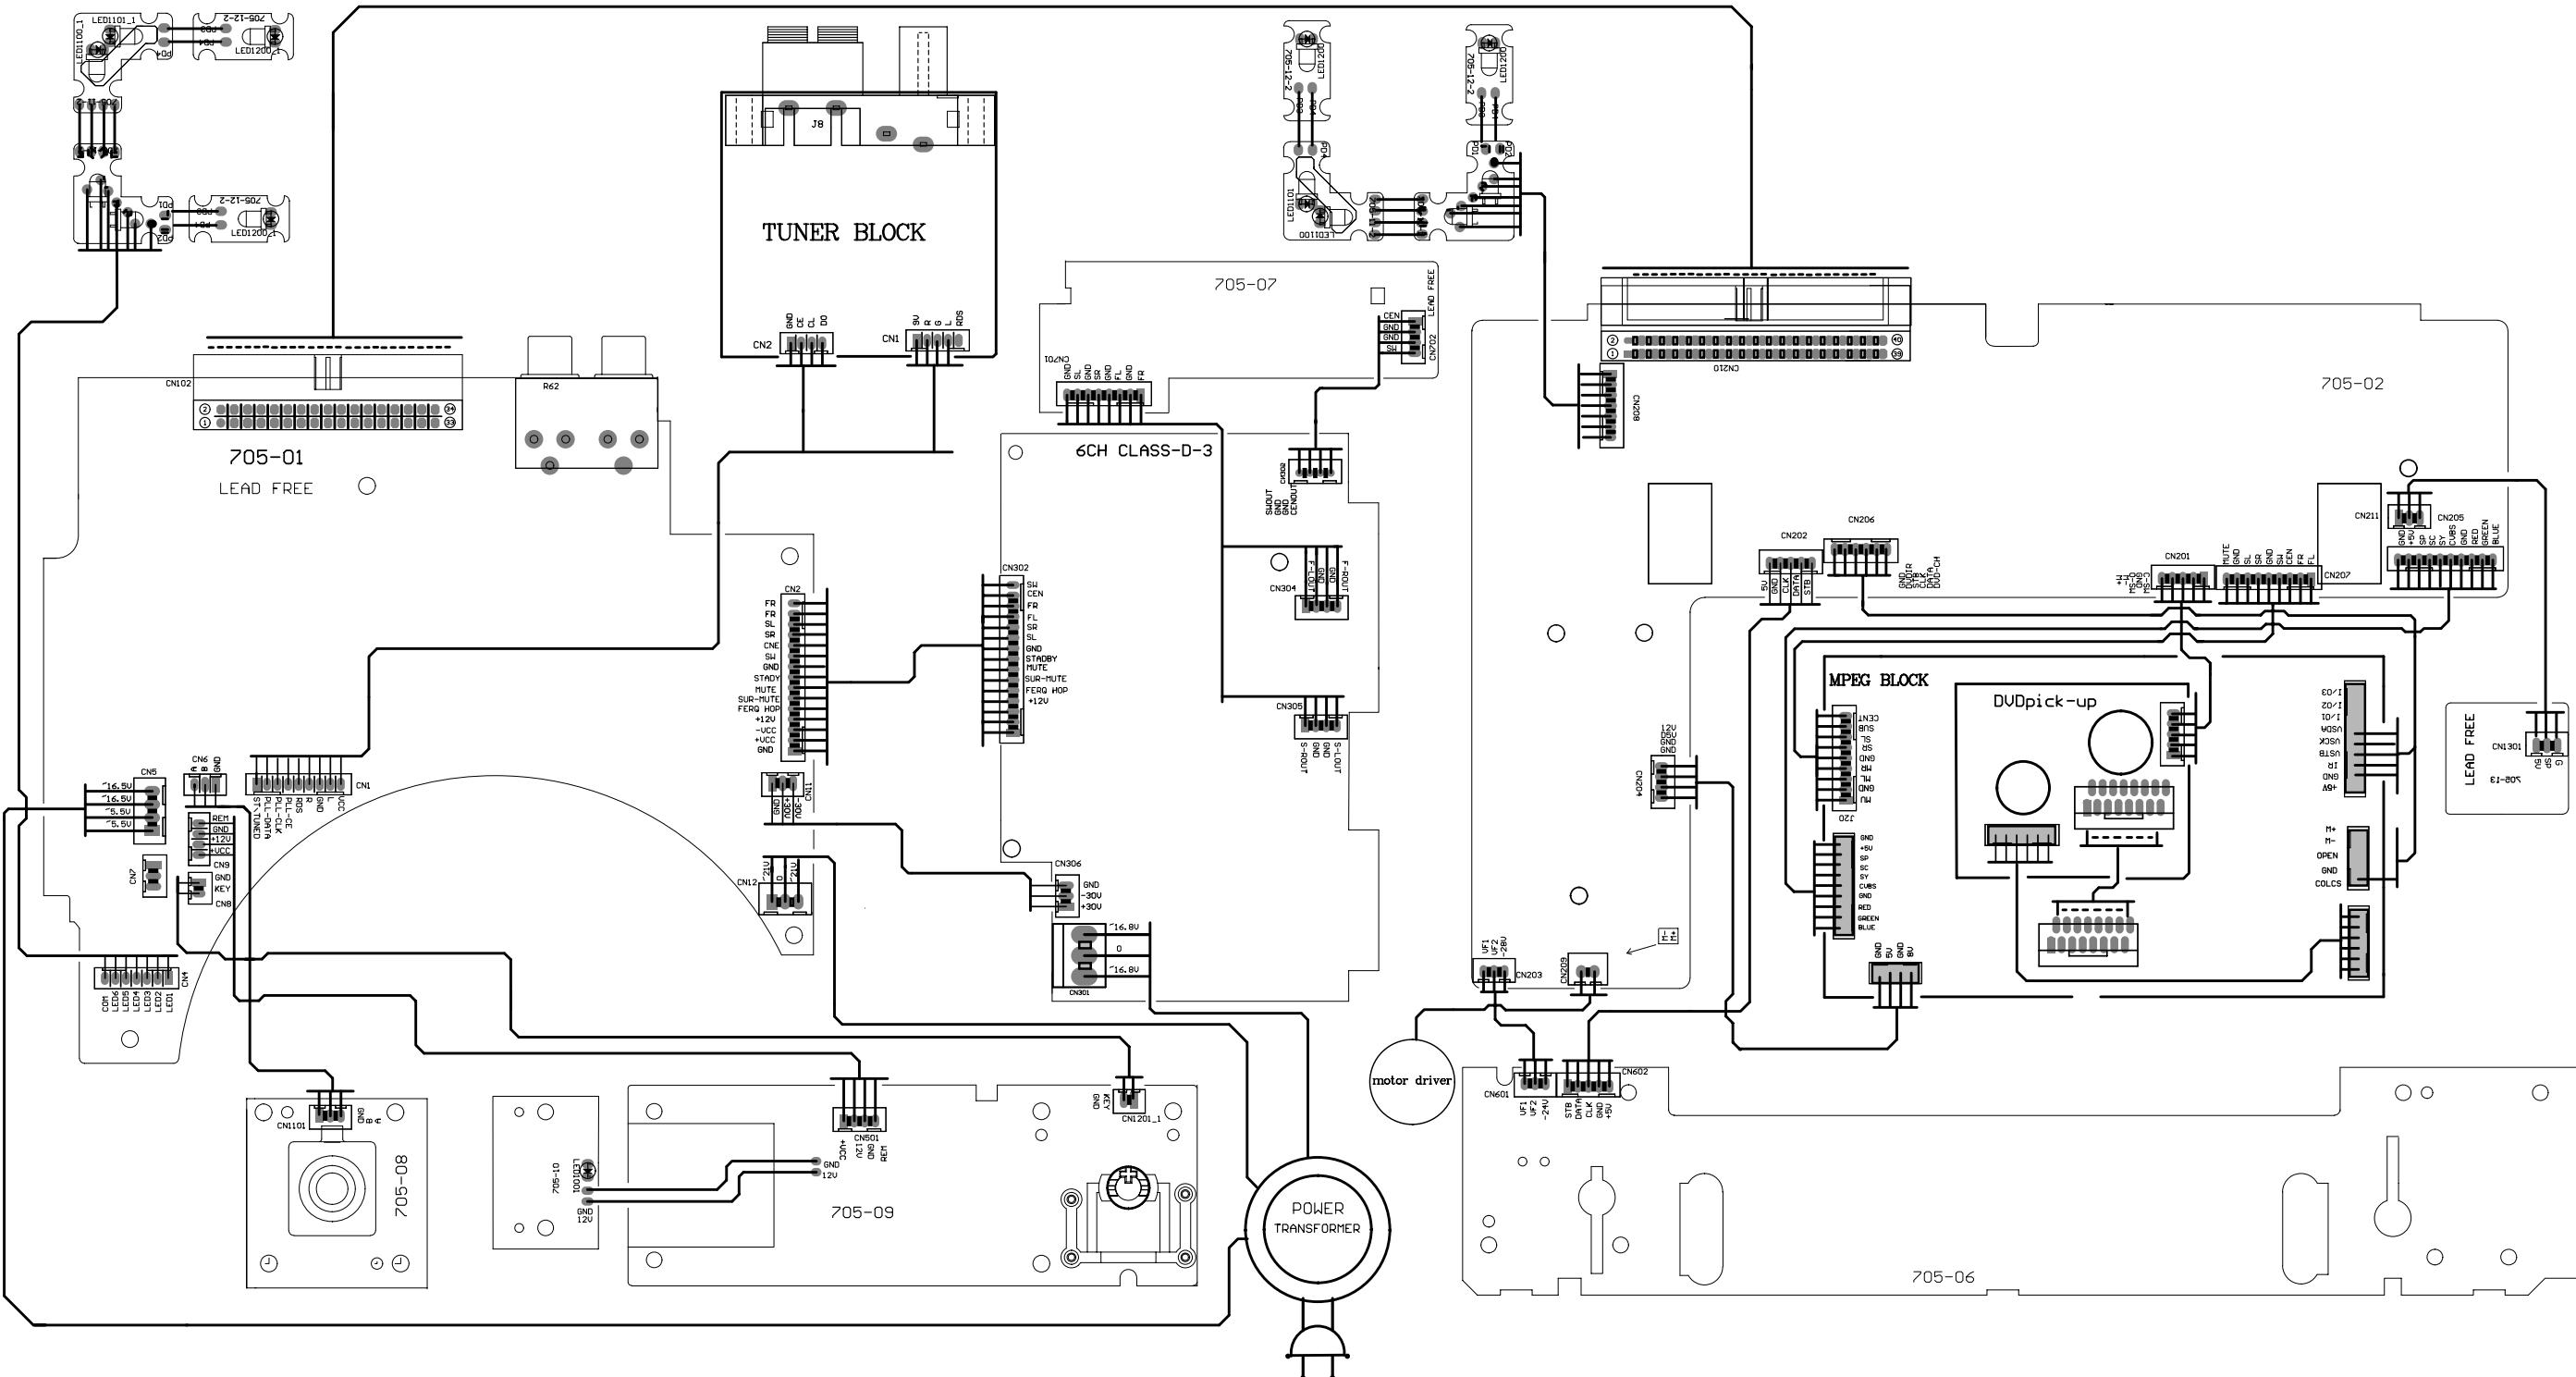


CIRCUIT DIAGRAM - VFD BOARD

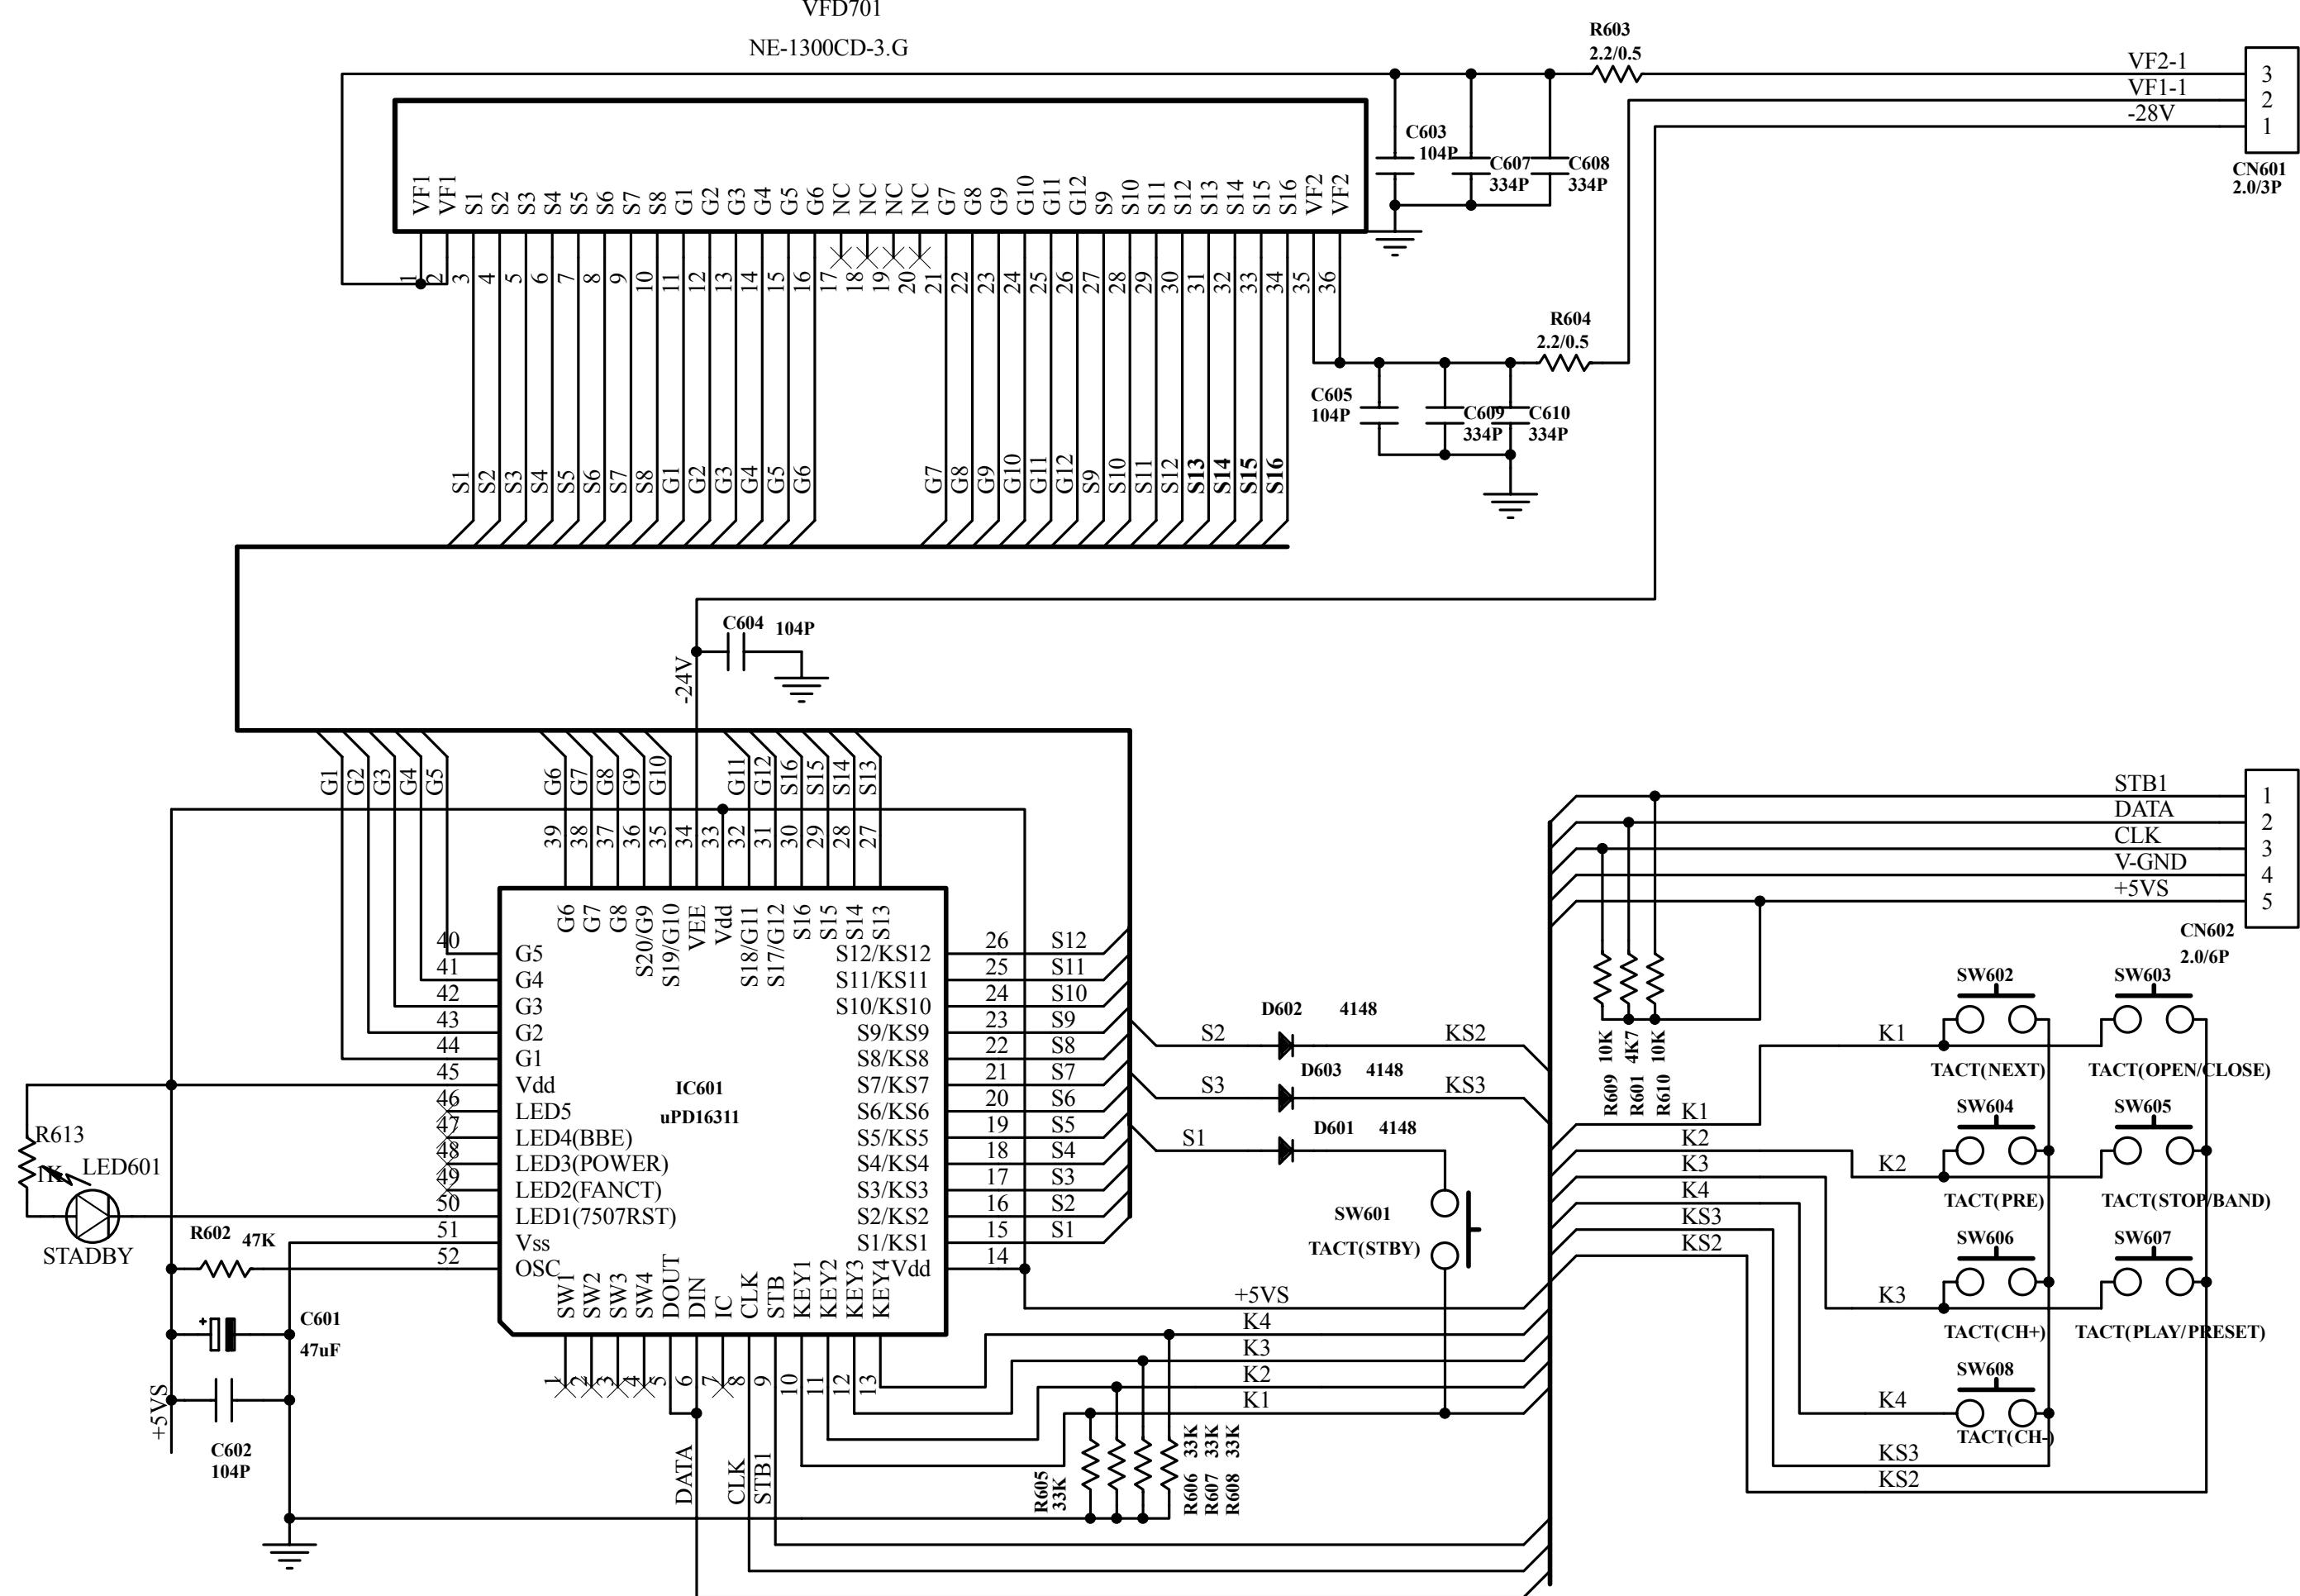



LAYOUT DIAGRAM - VFD BOARD

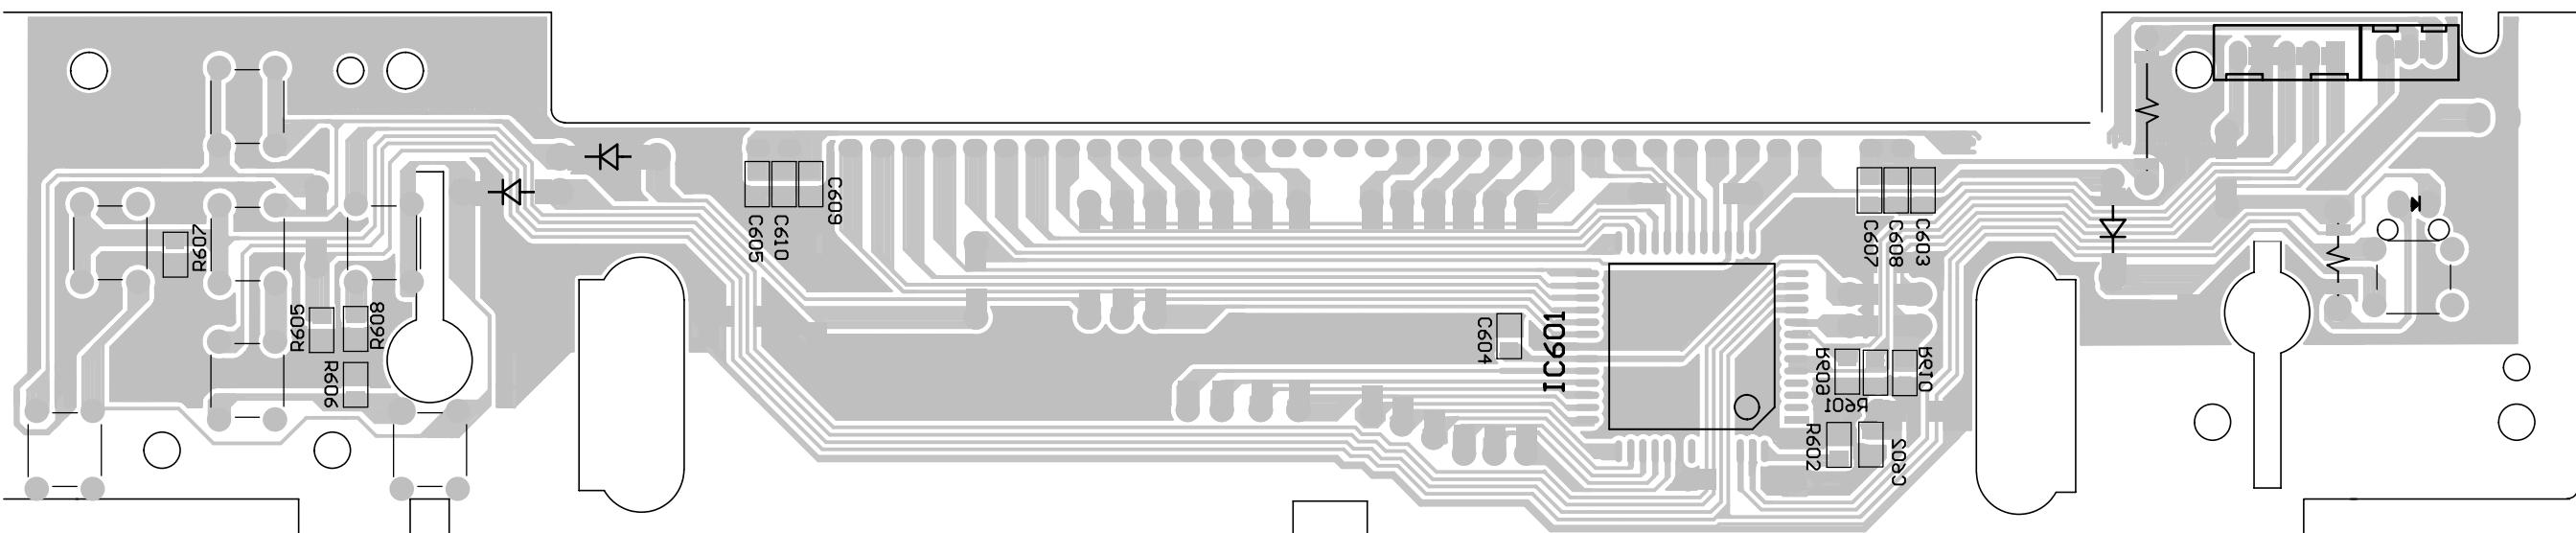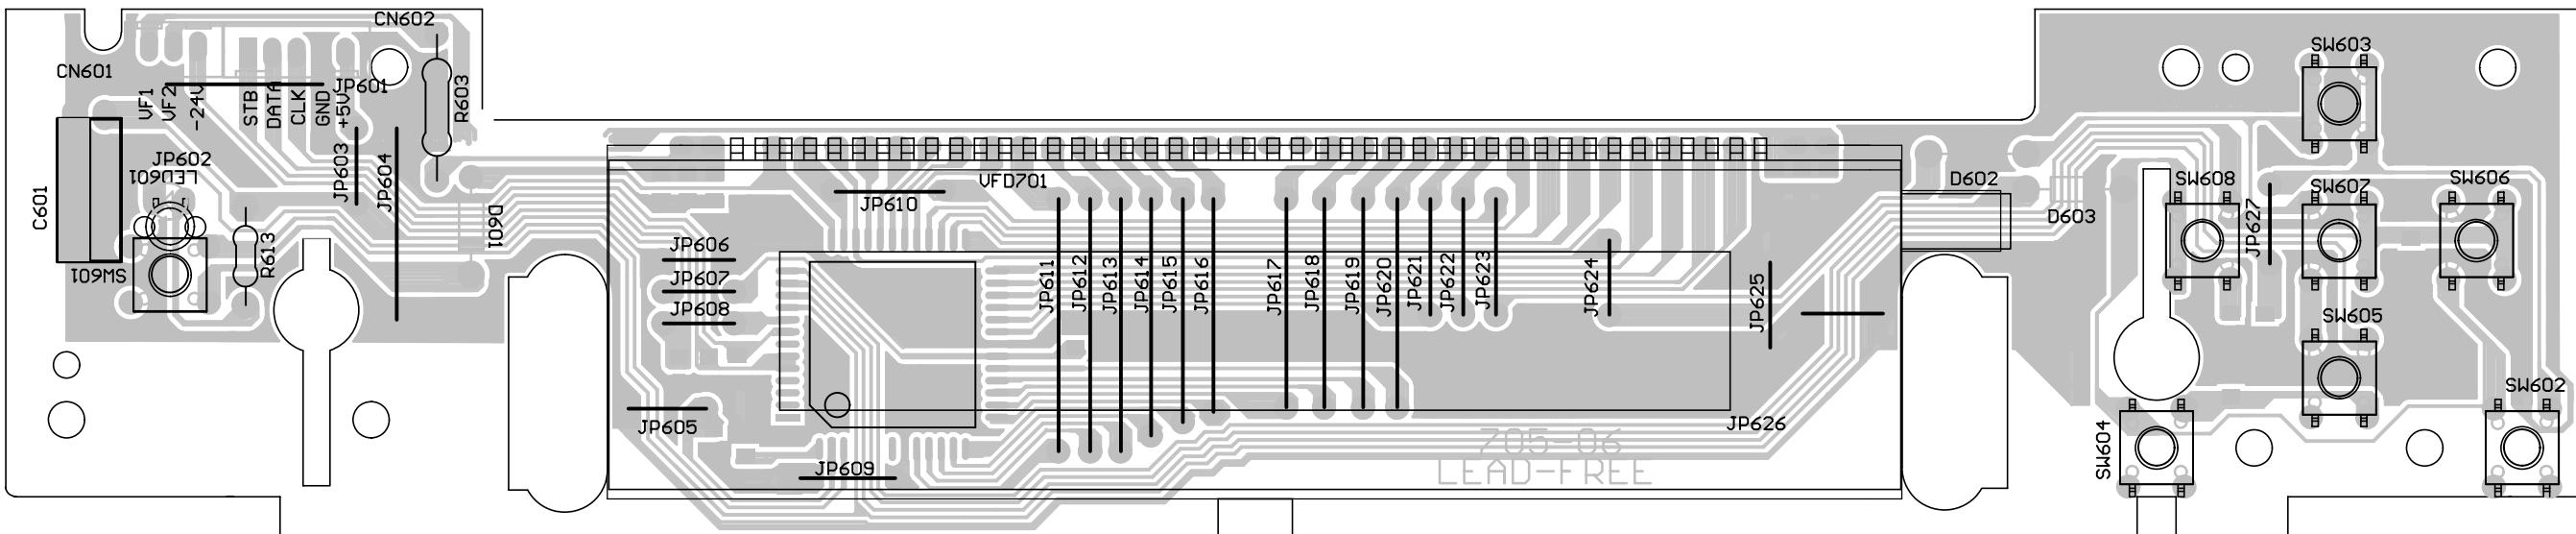


CIRCUIT DIAGRAM - TUNER BOARD

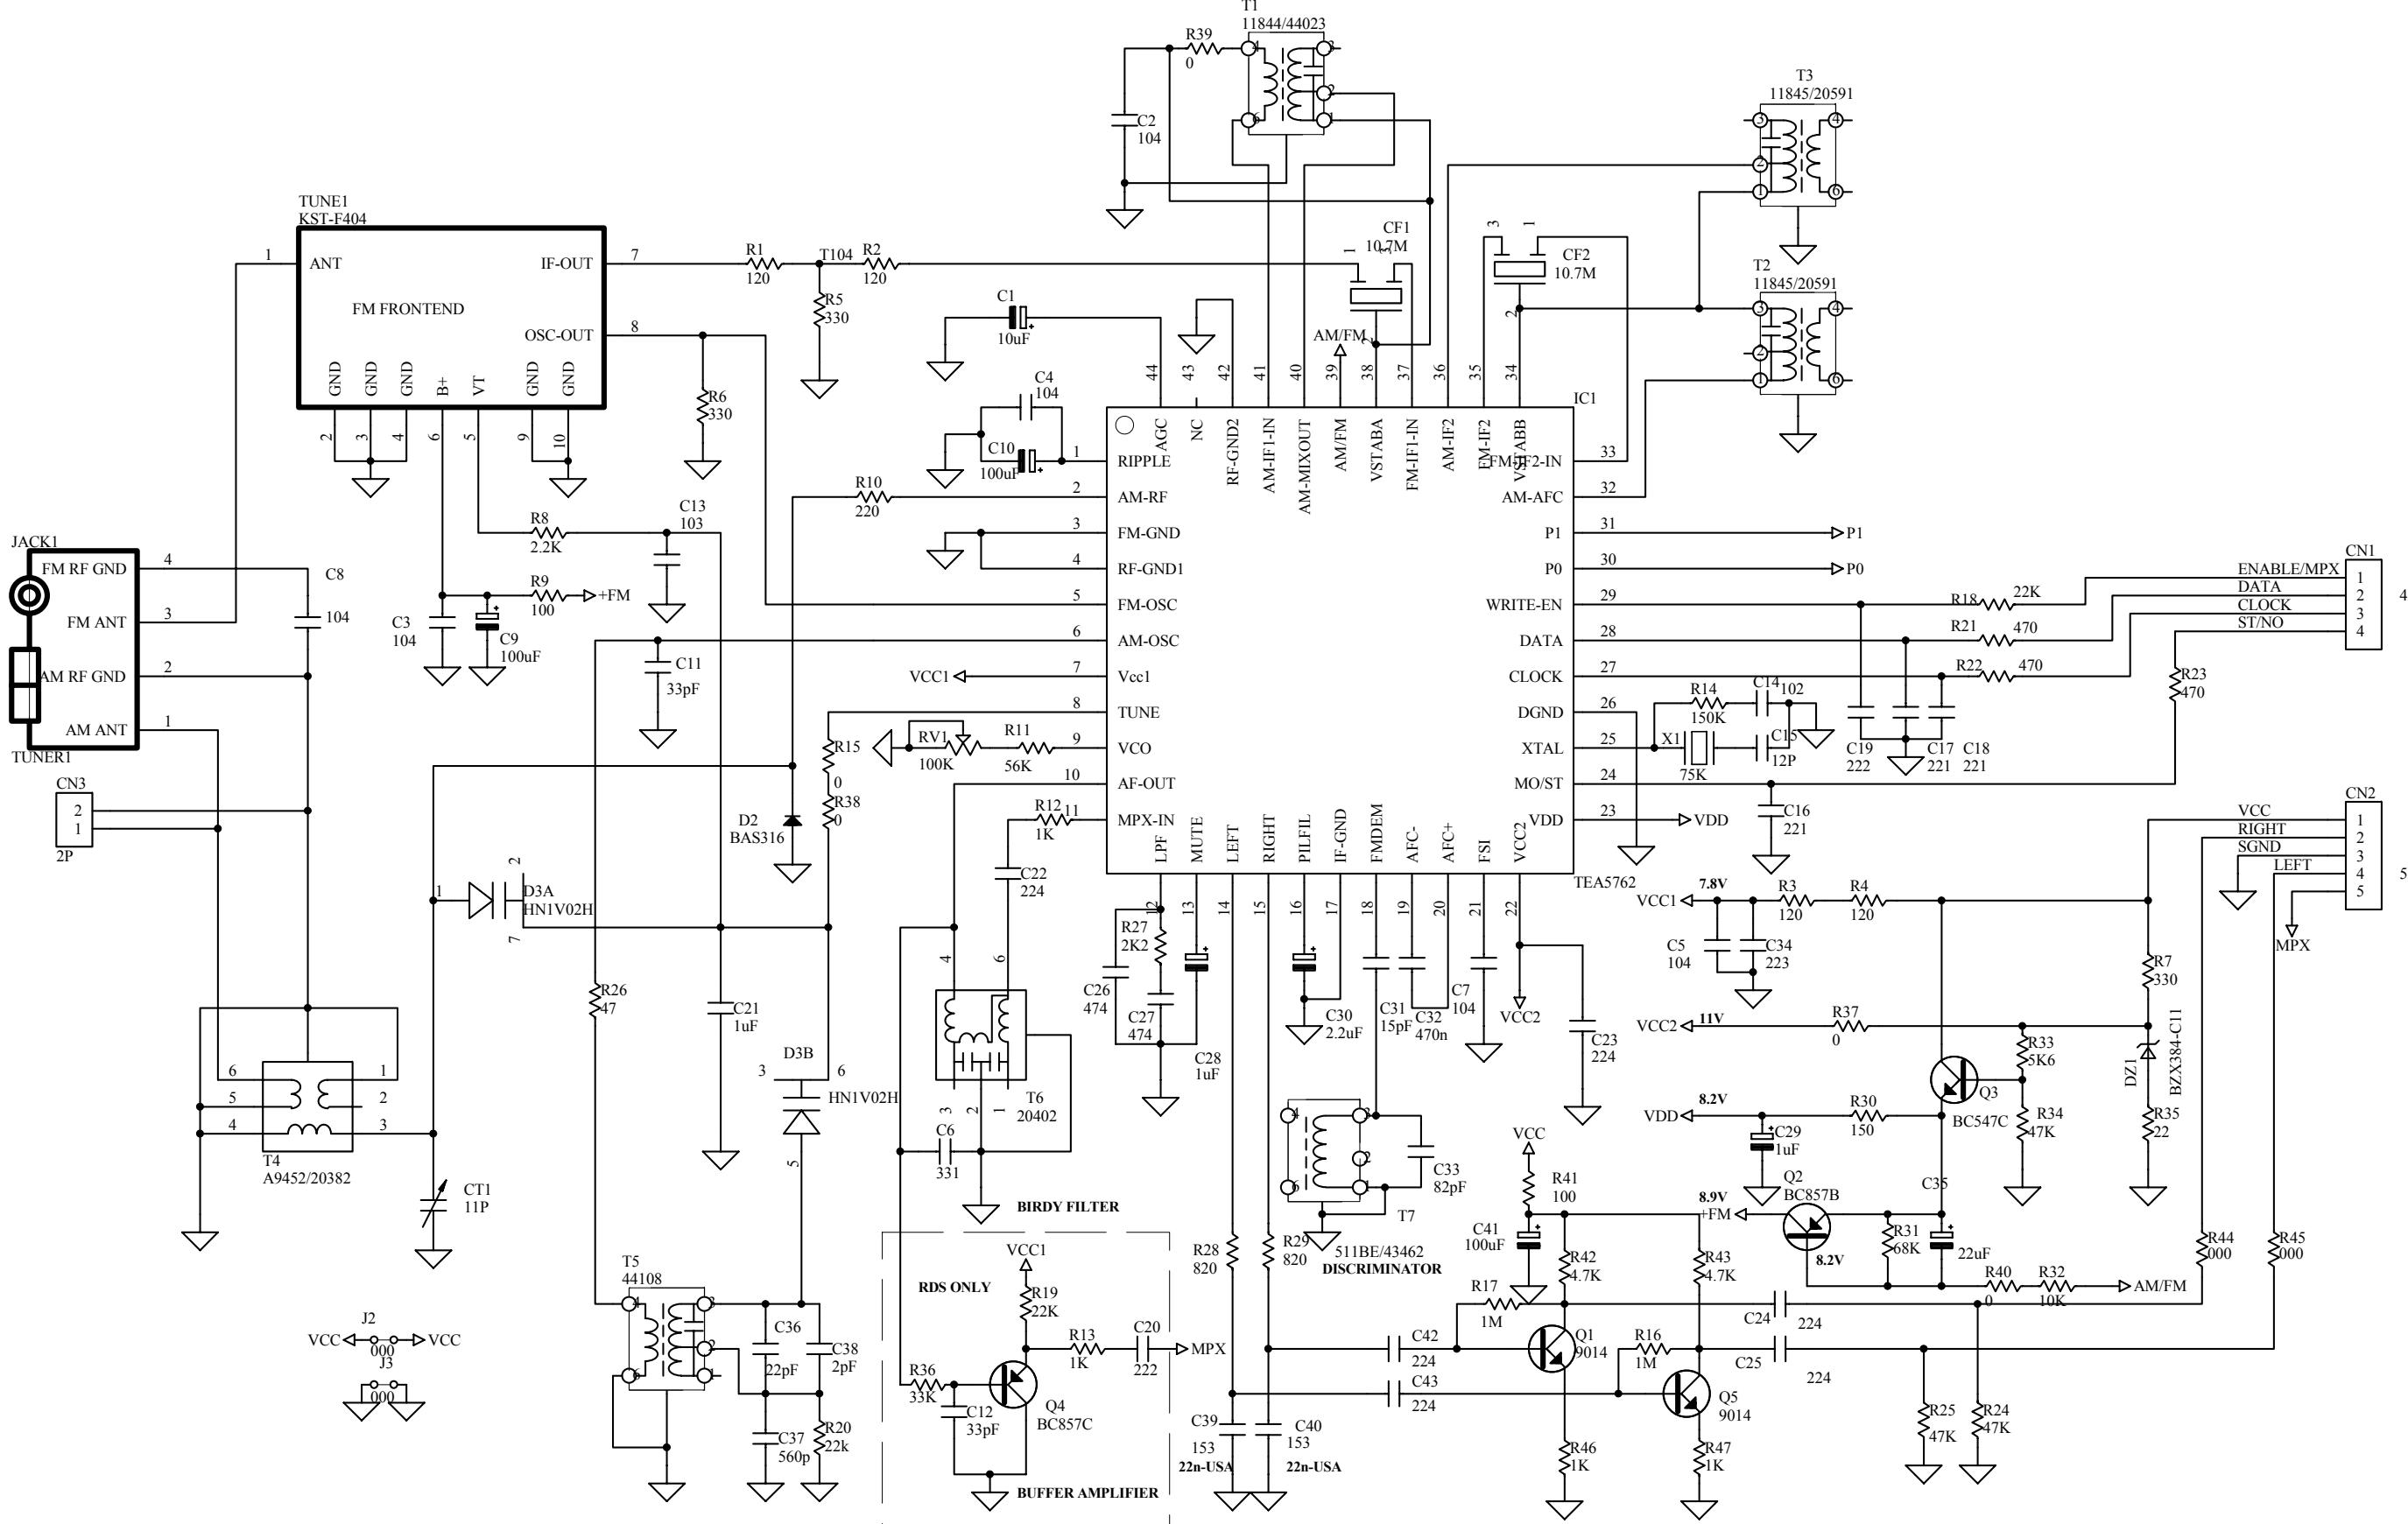



LAYOUT DIAGRAM - TUNER BOARD

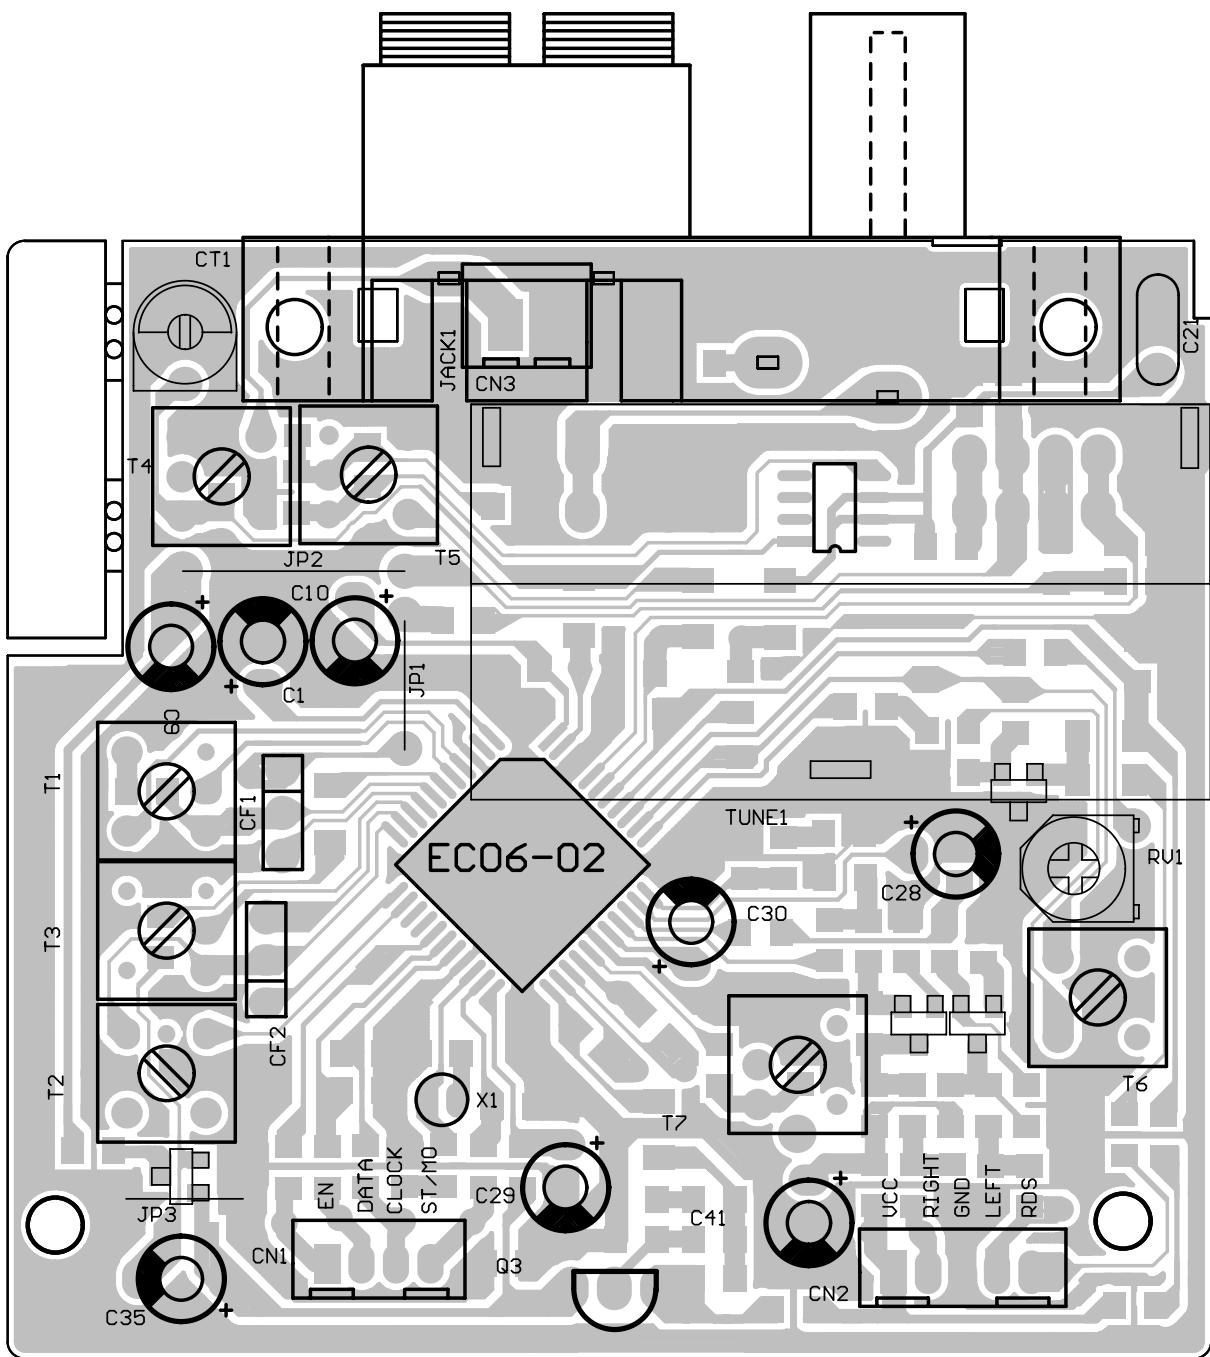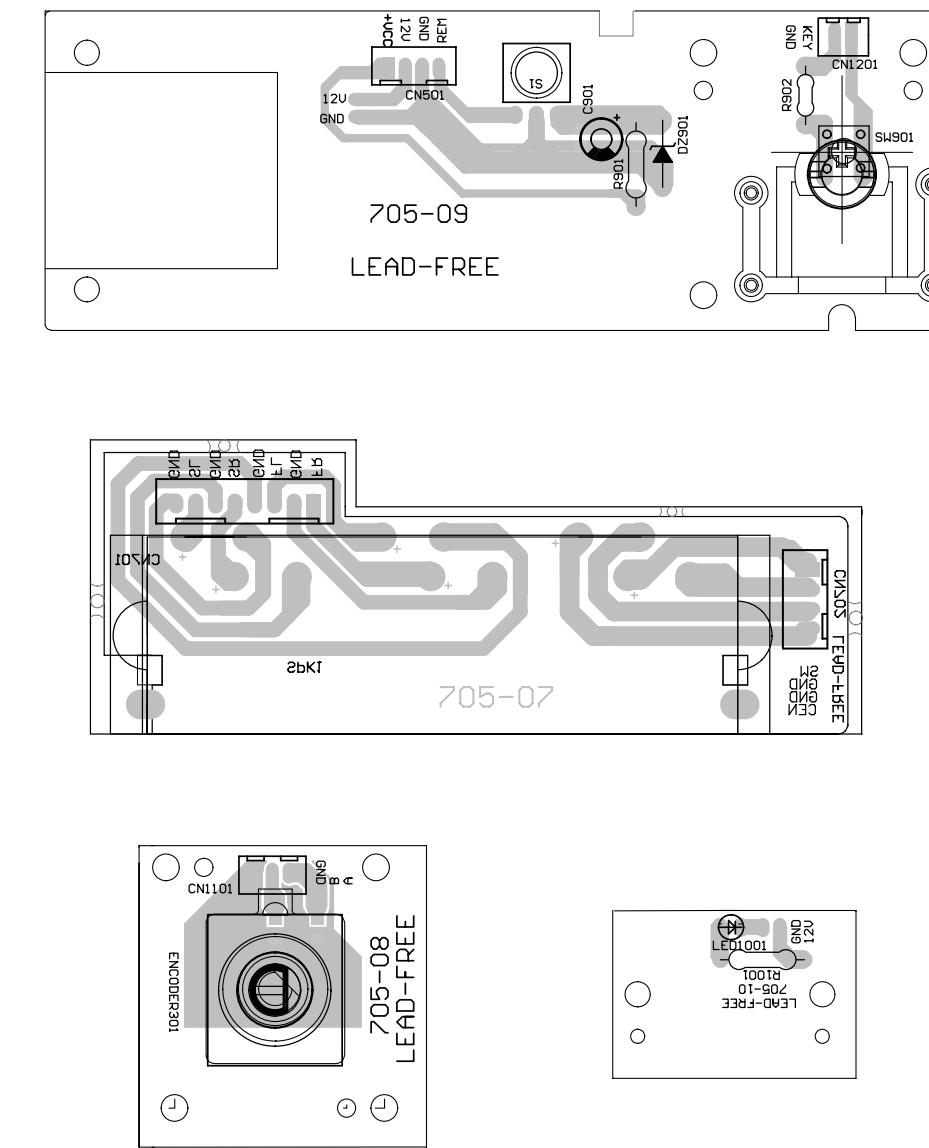LAYOUT DIAGRAM -AMP BOX
PCB ASSY


CIRCUIT DIAGRAM - AMP BOARD

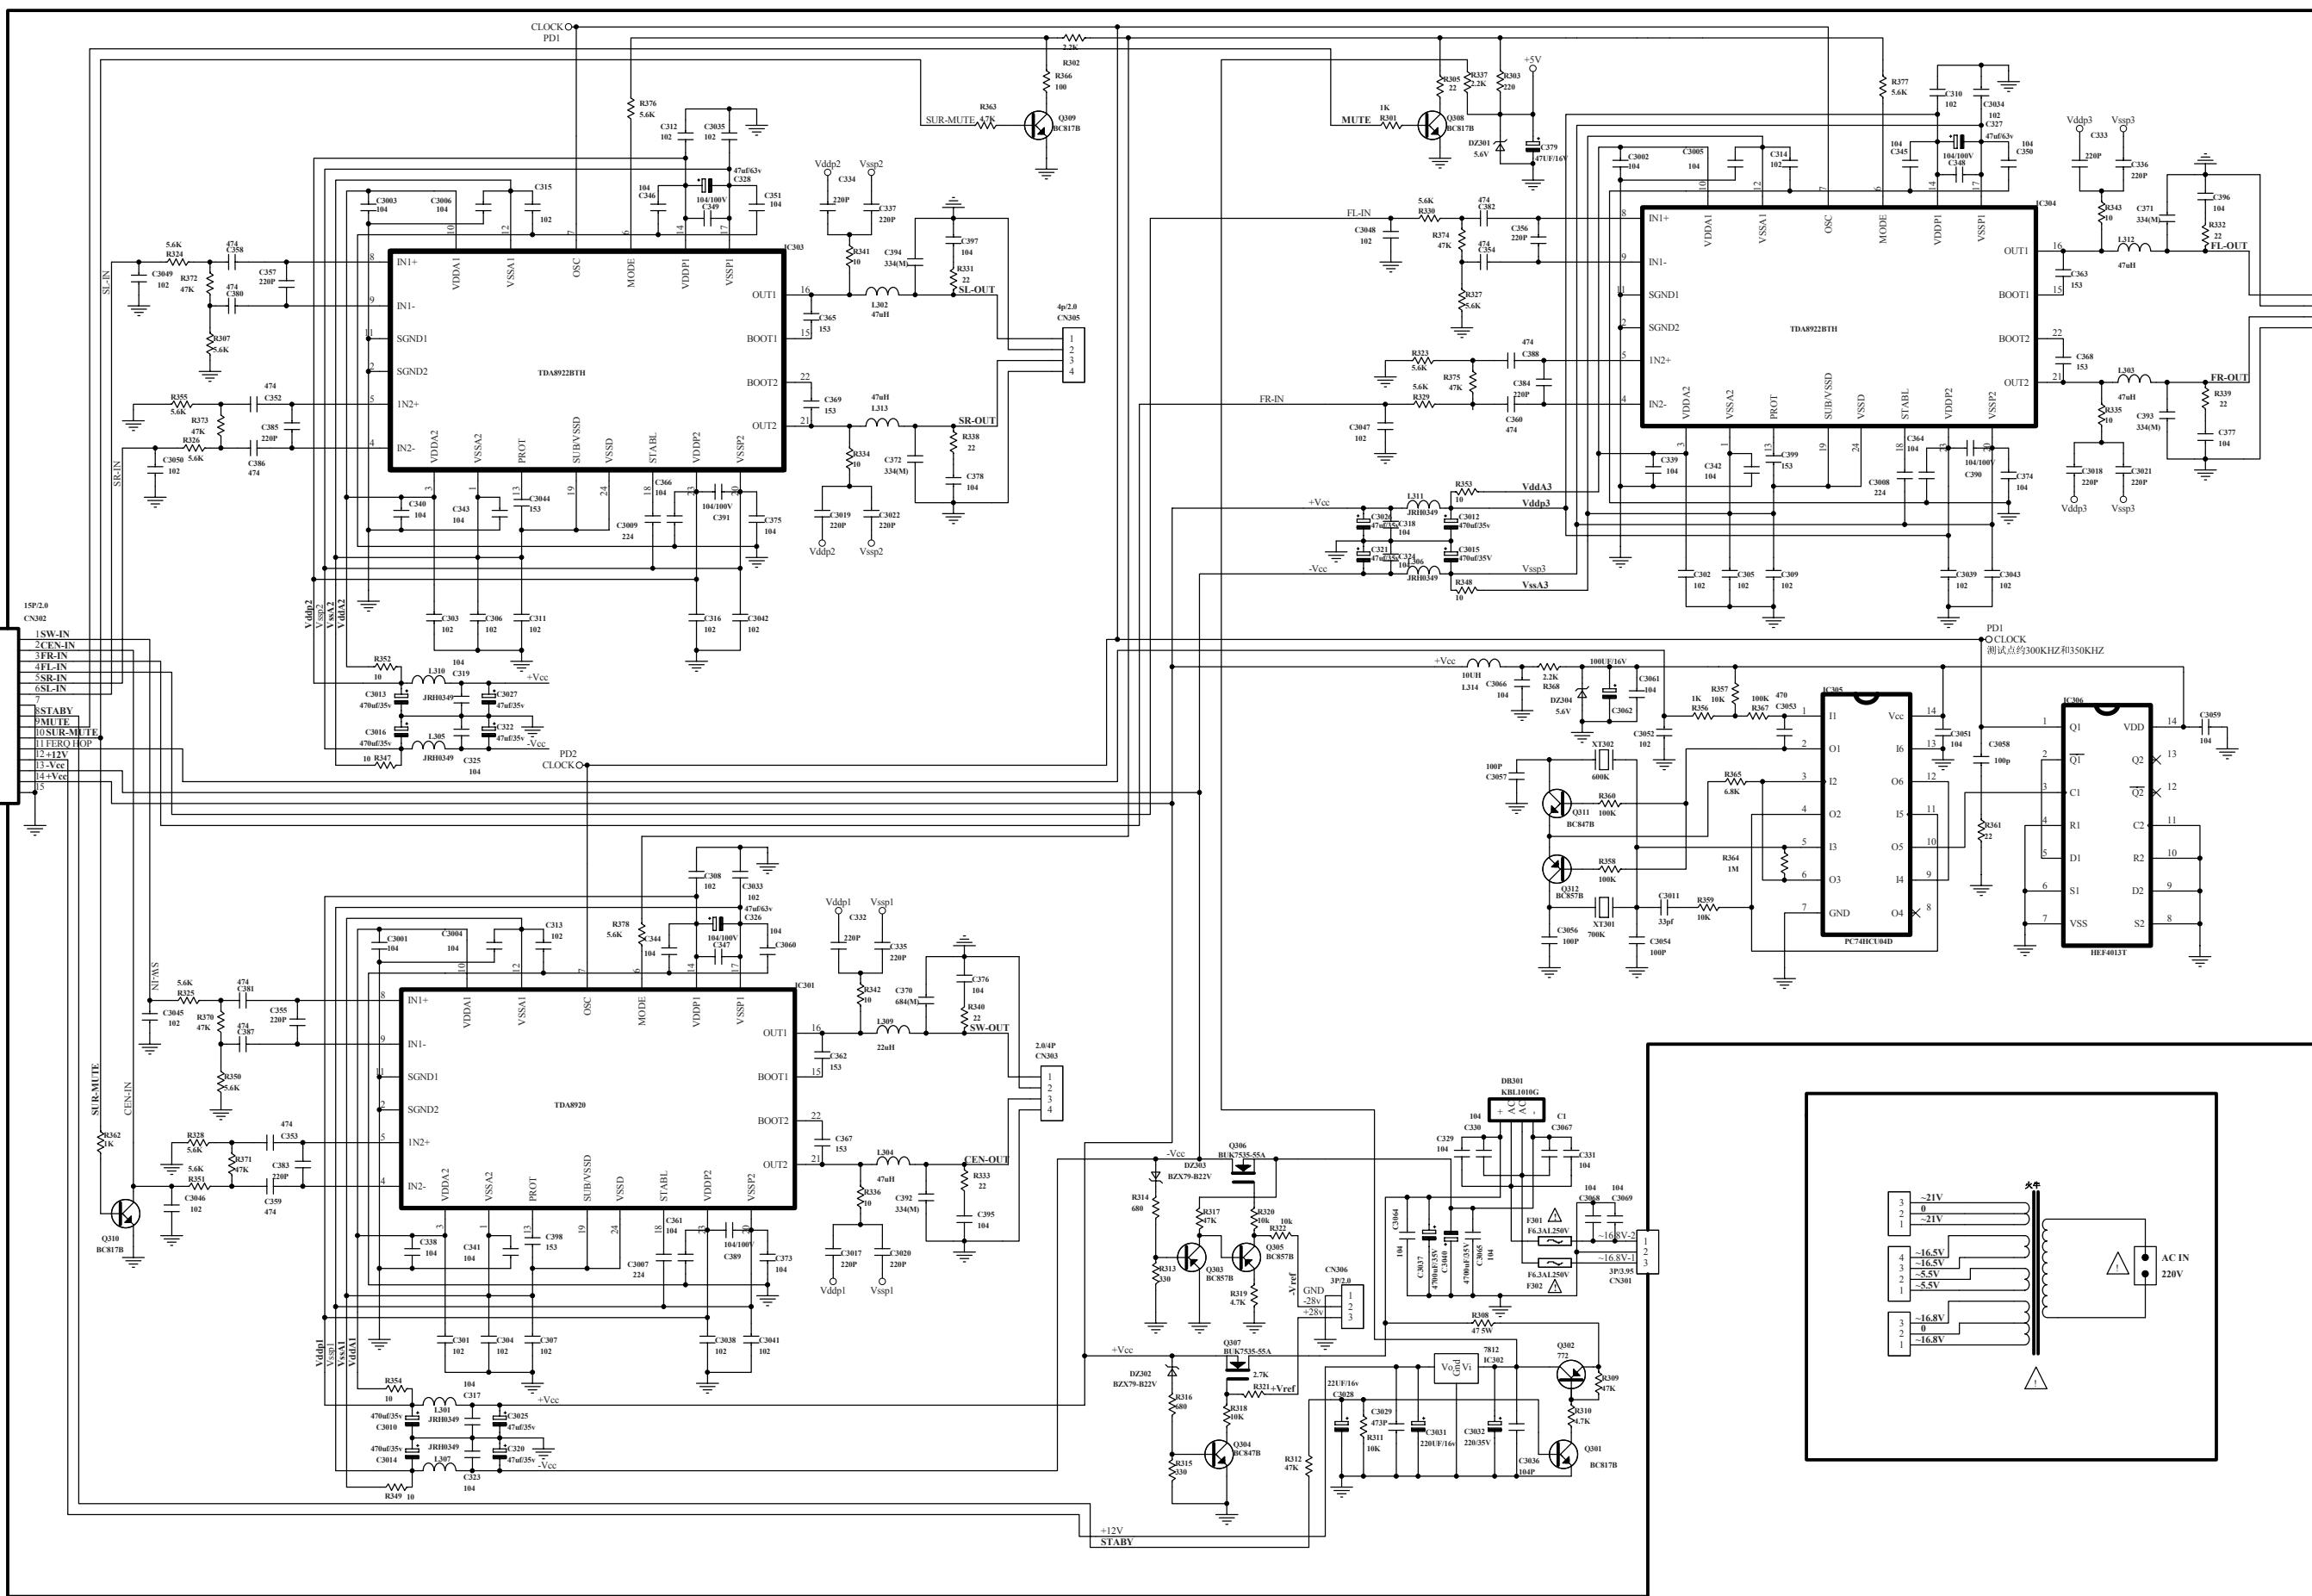



LAYOUT DIAGRAM - AMP BOARD

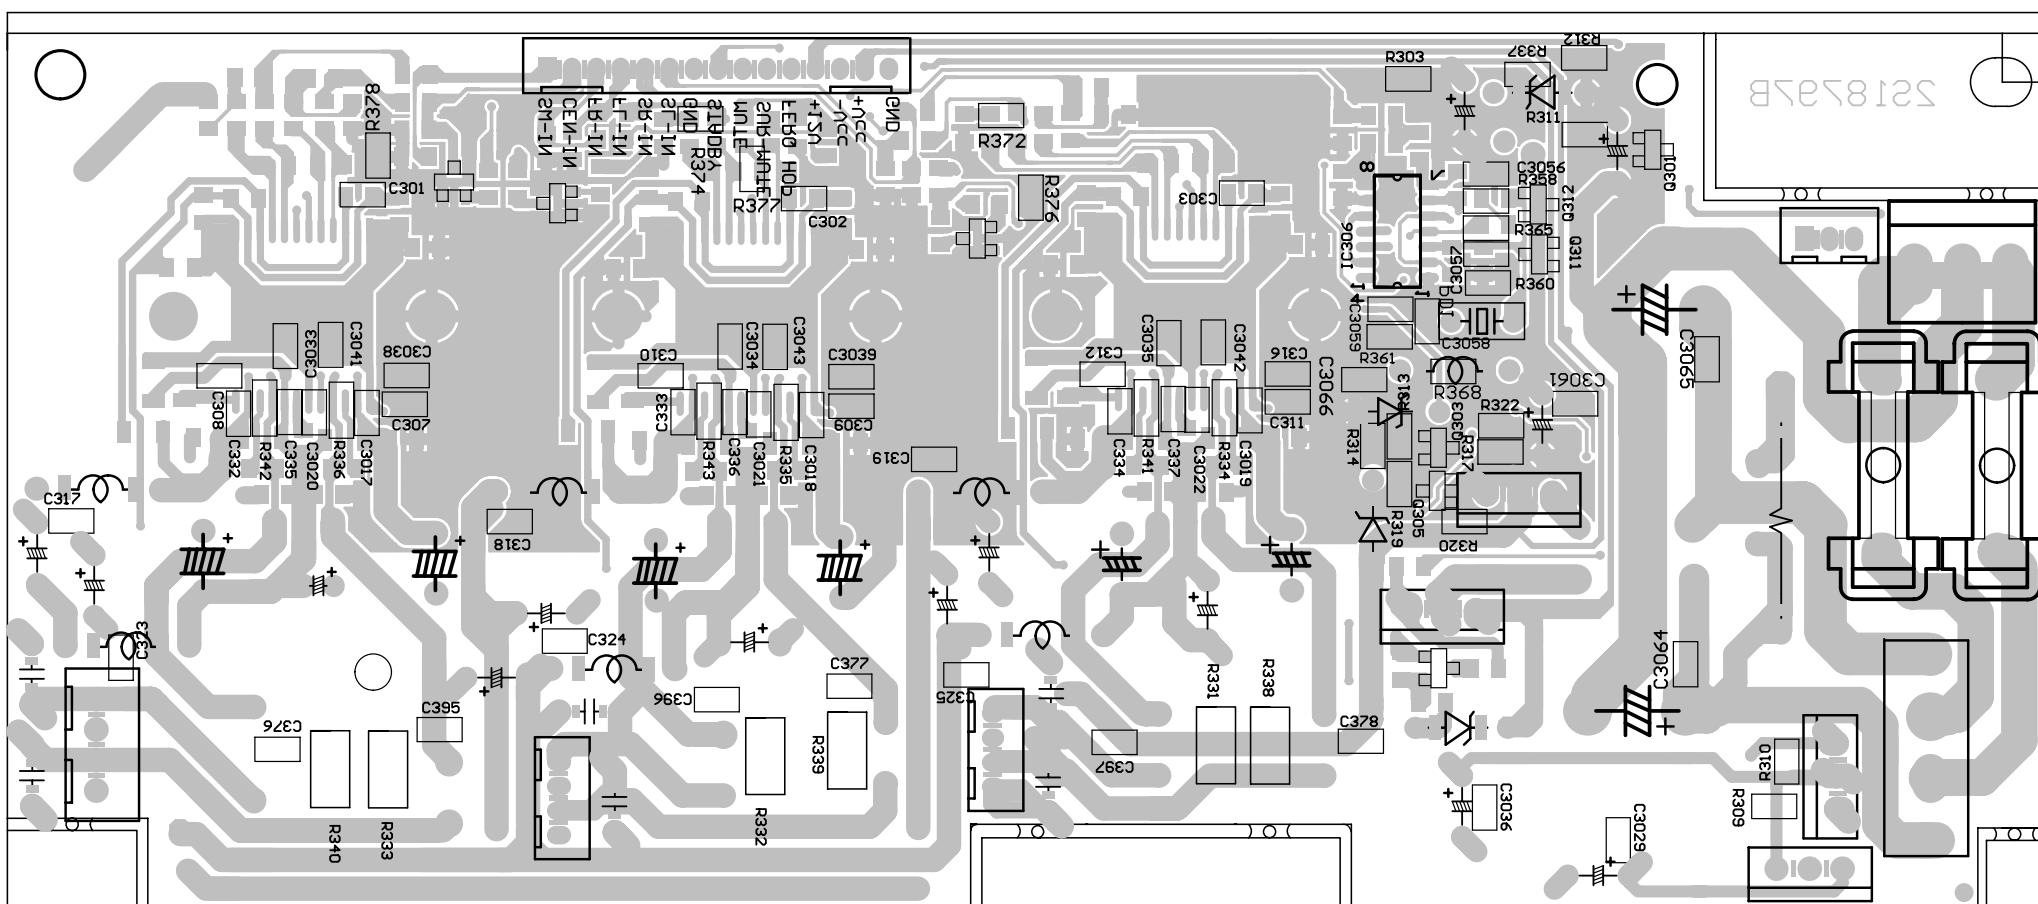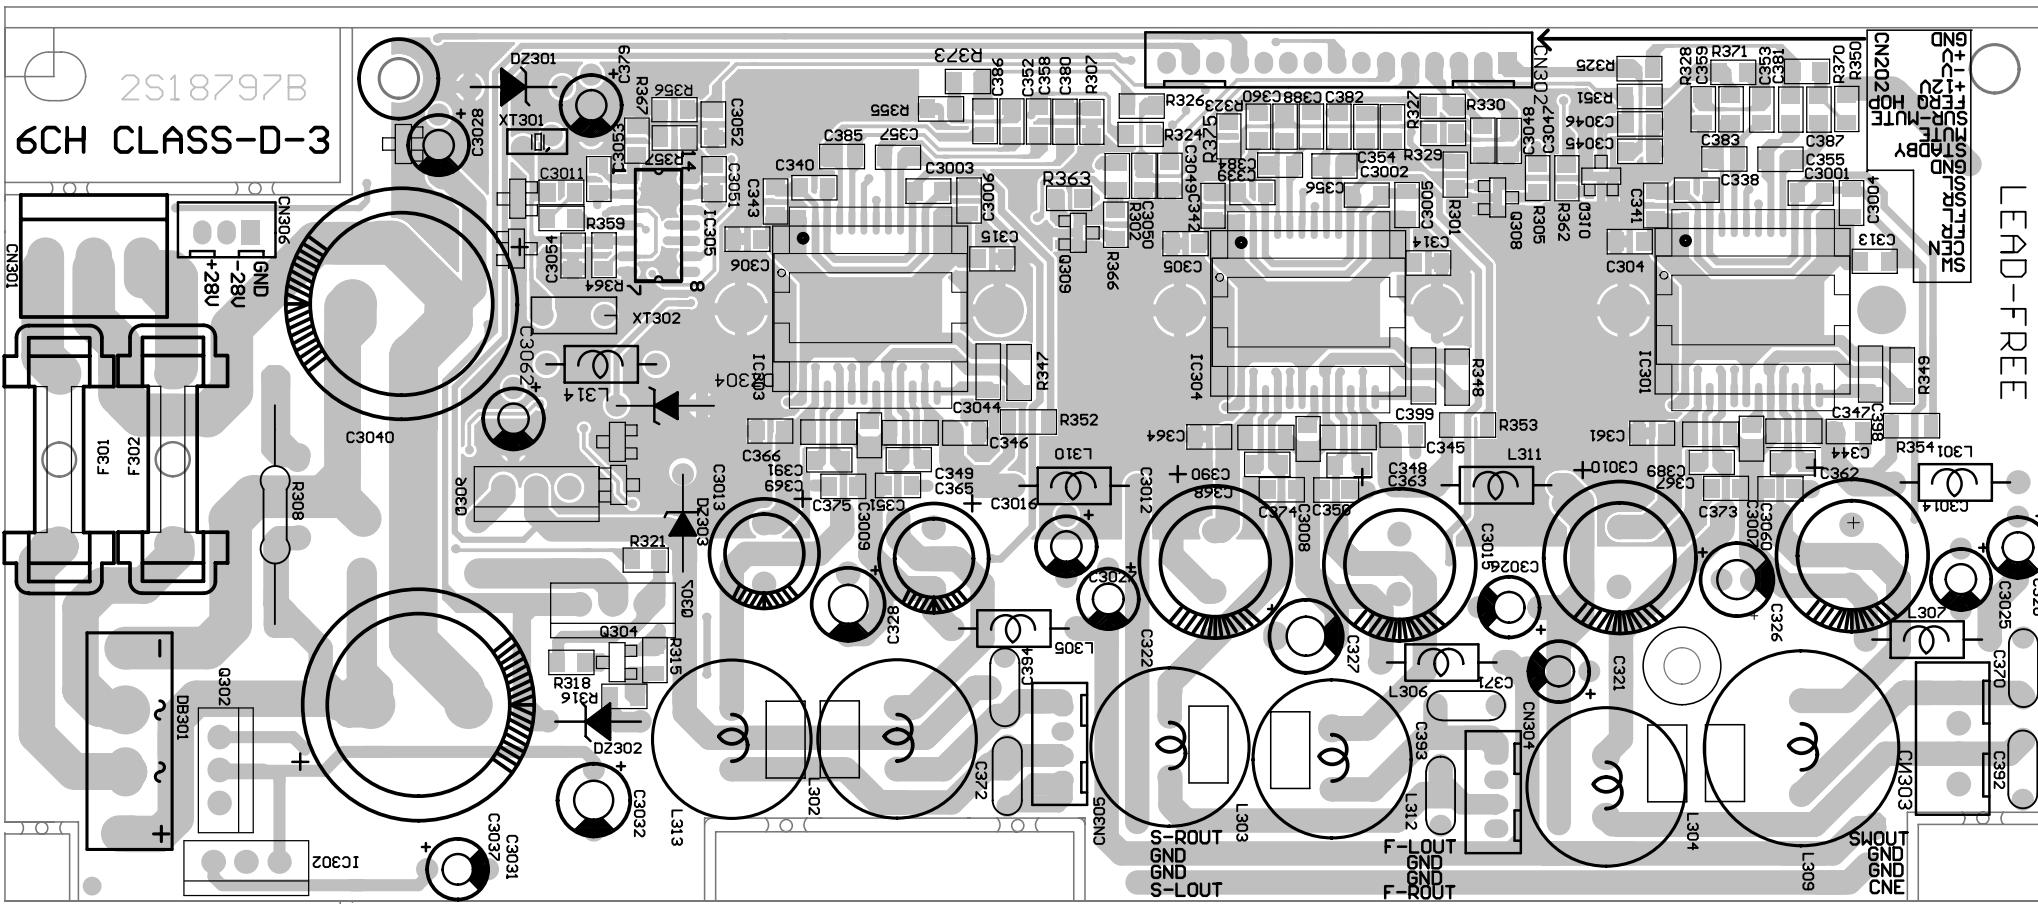


CIRCUIT DIAGRAM - CPU BOARD

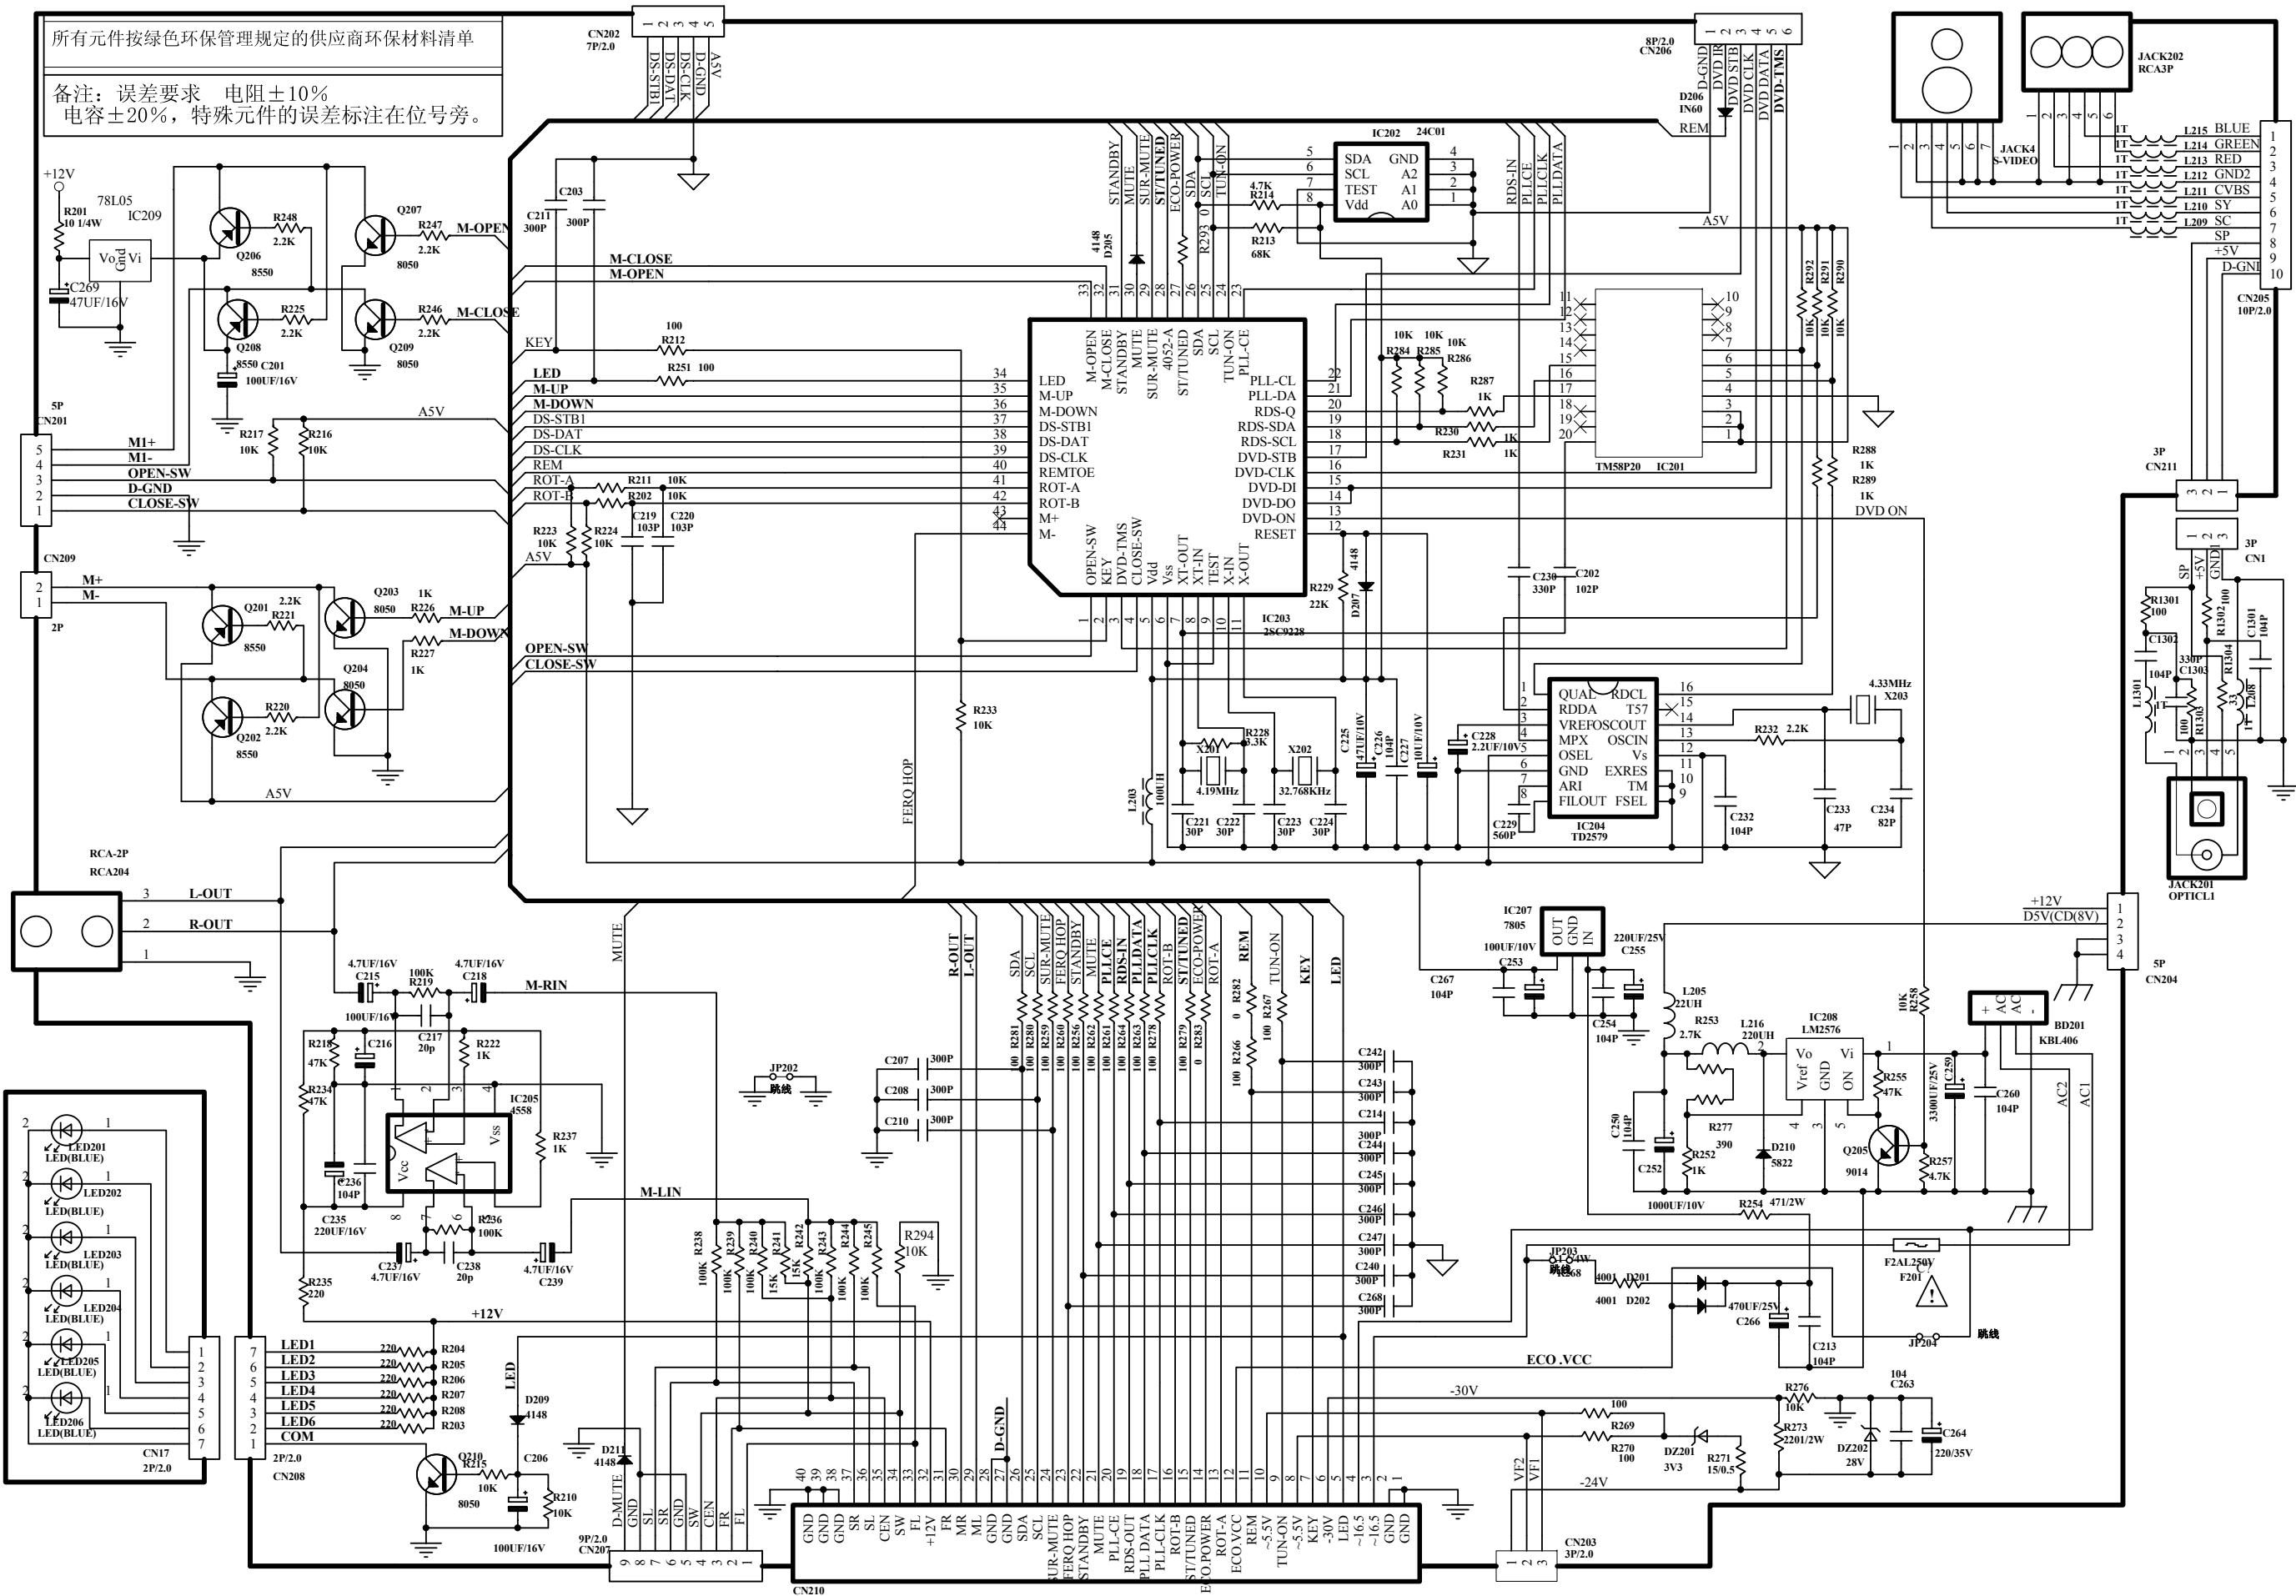

LAYOUT DIAGRAM - CPU BOARD

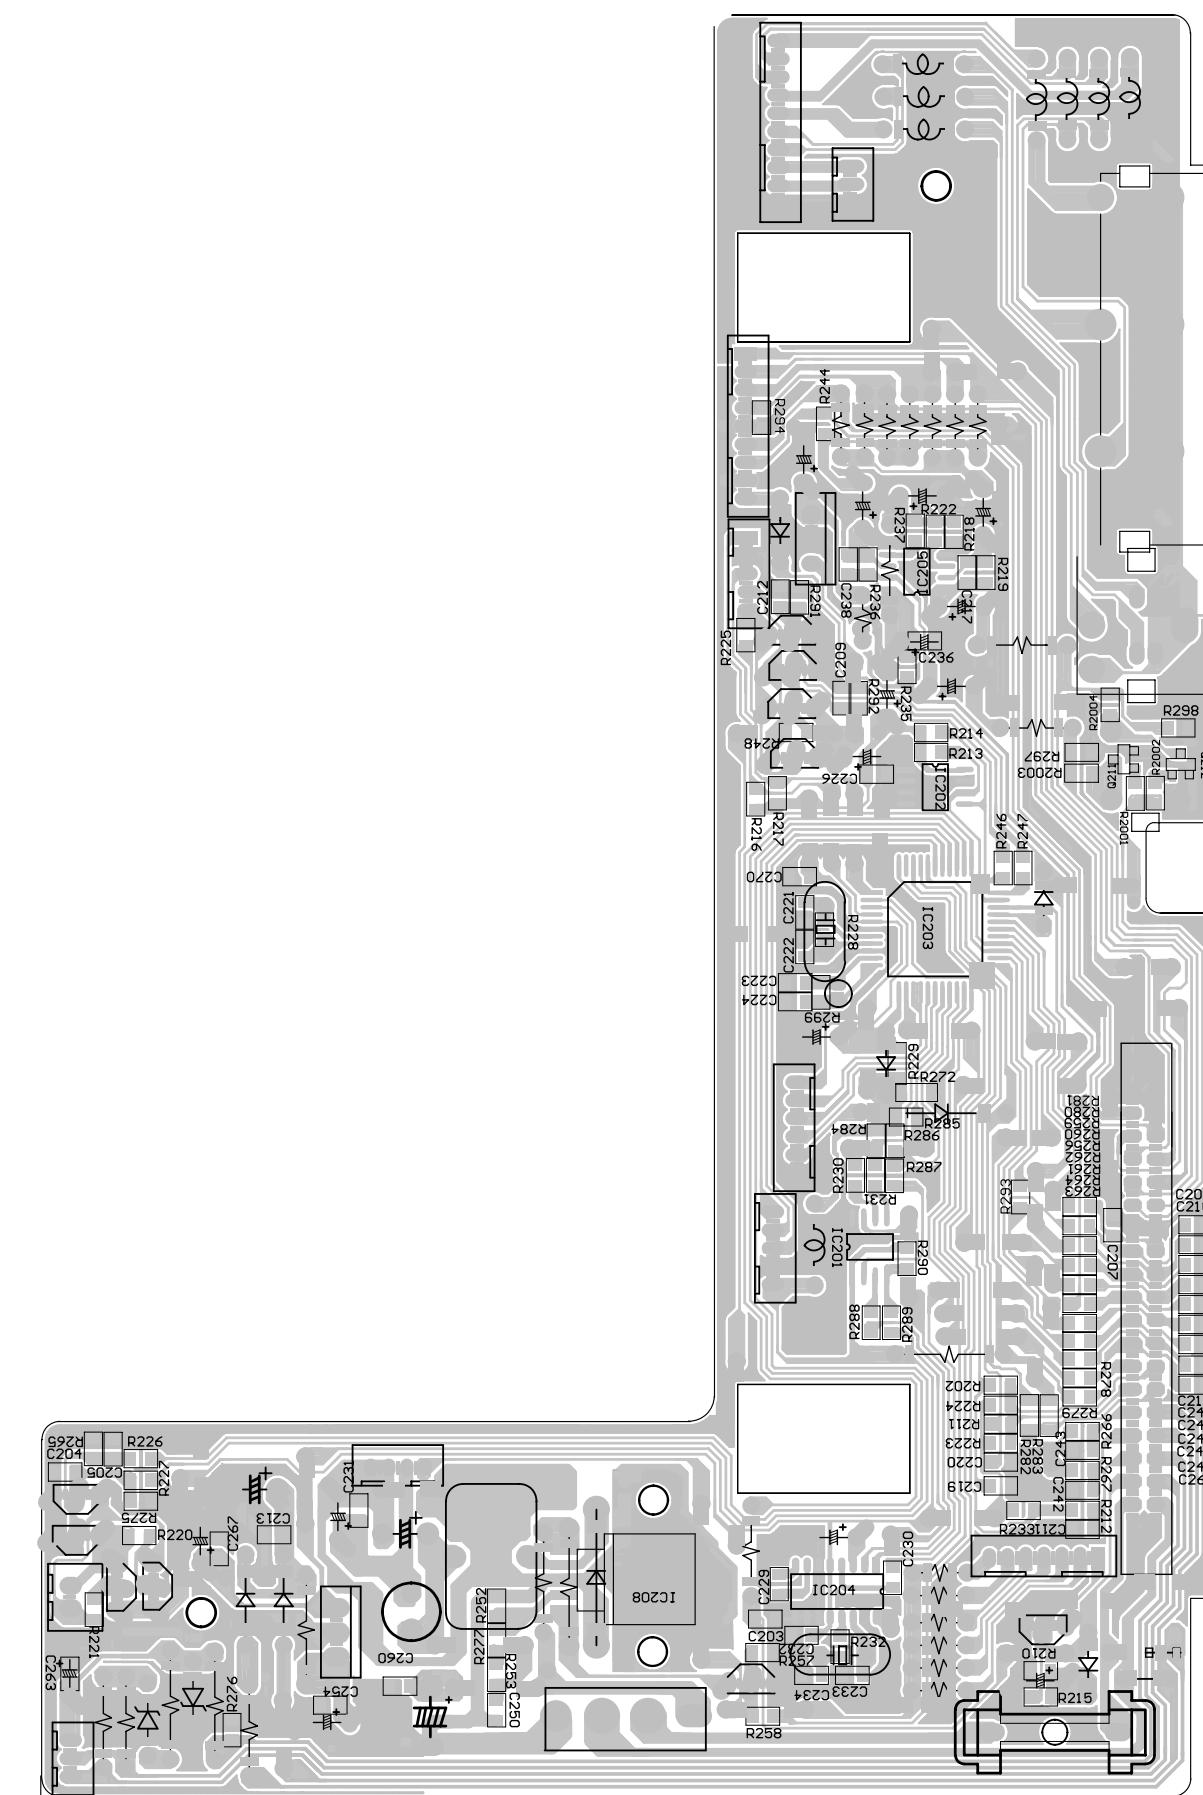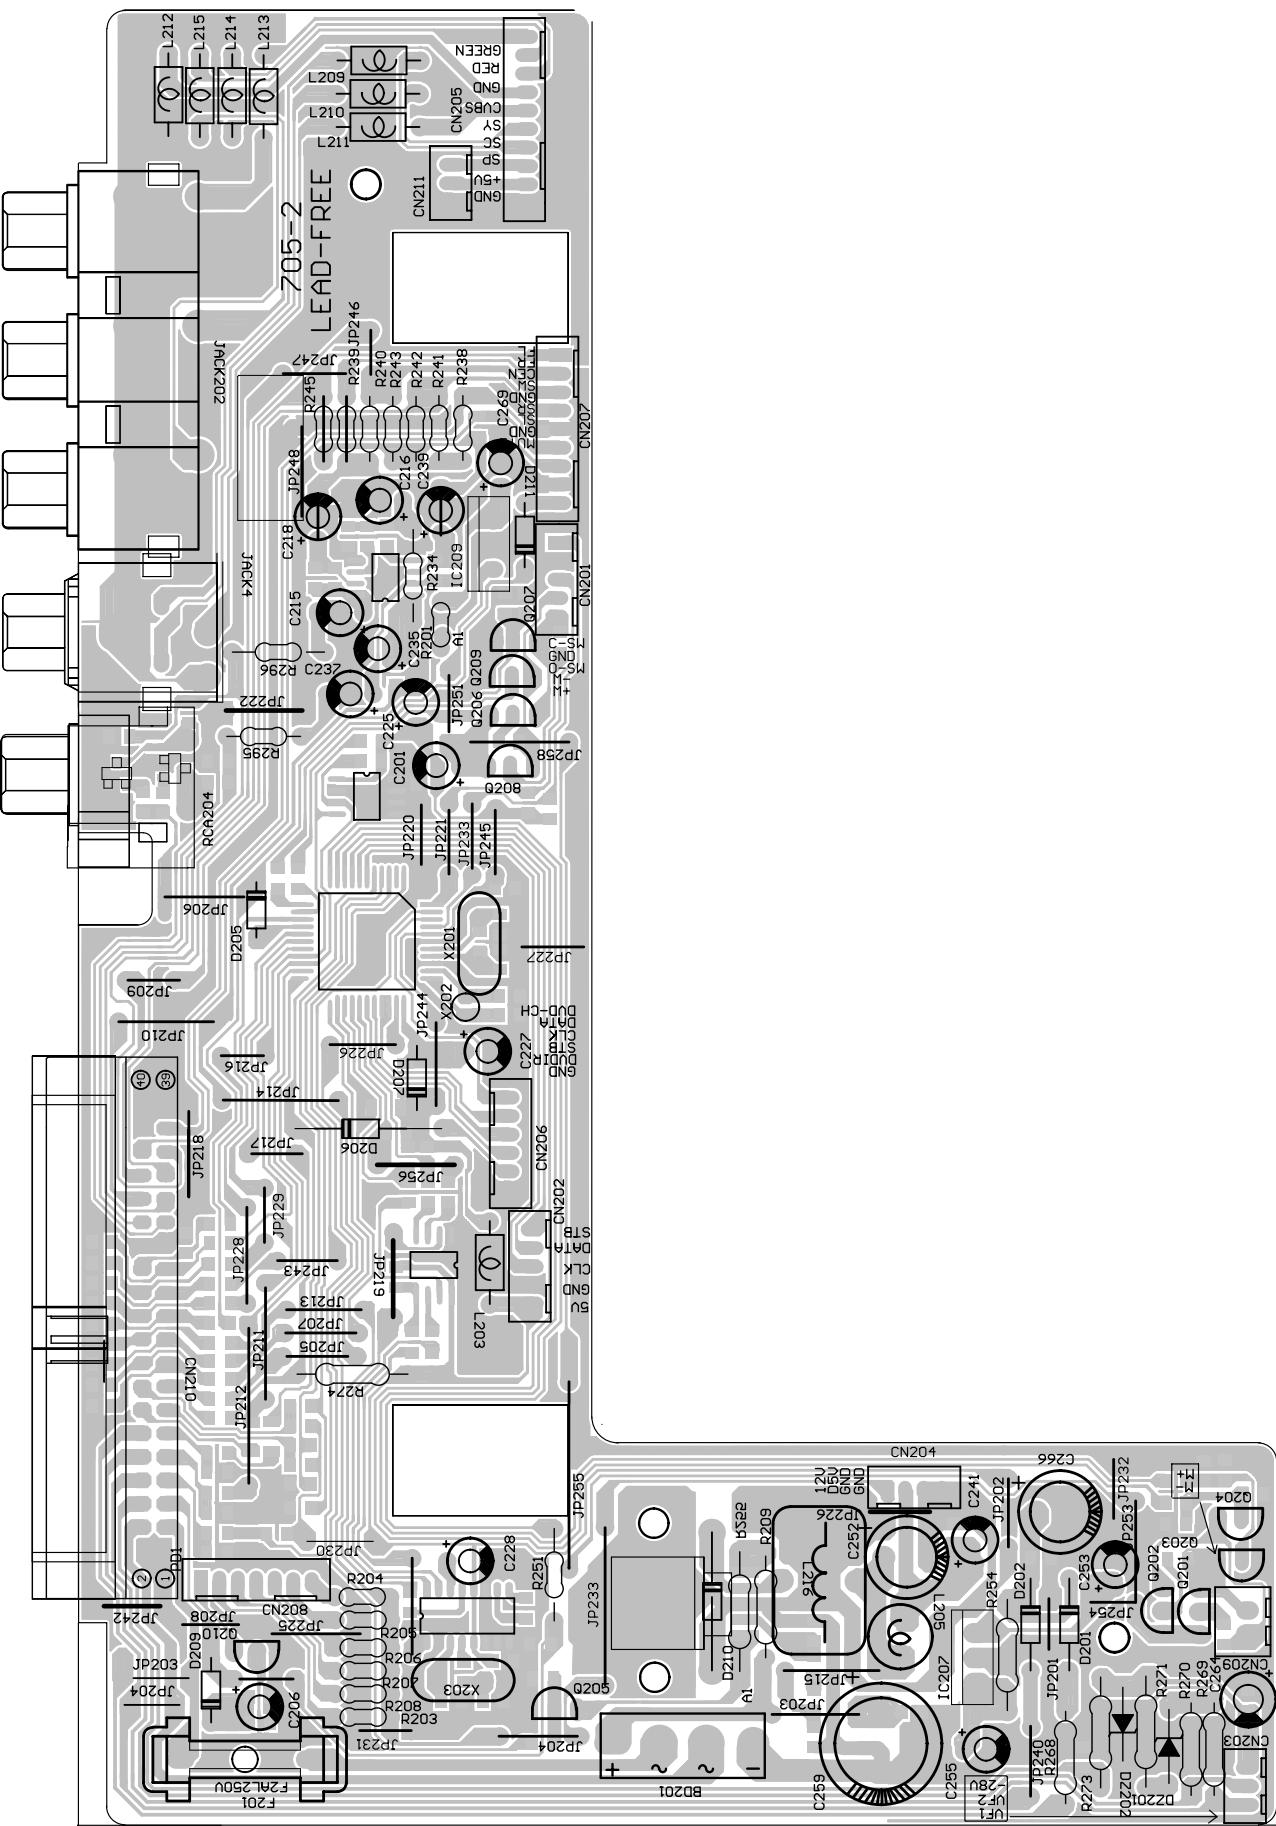


CIRCUIT DIAGRAM - ALC VOLUME BOARD

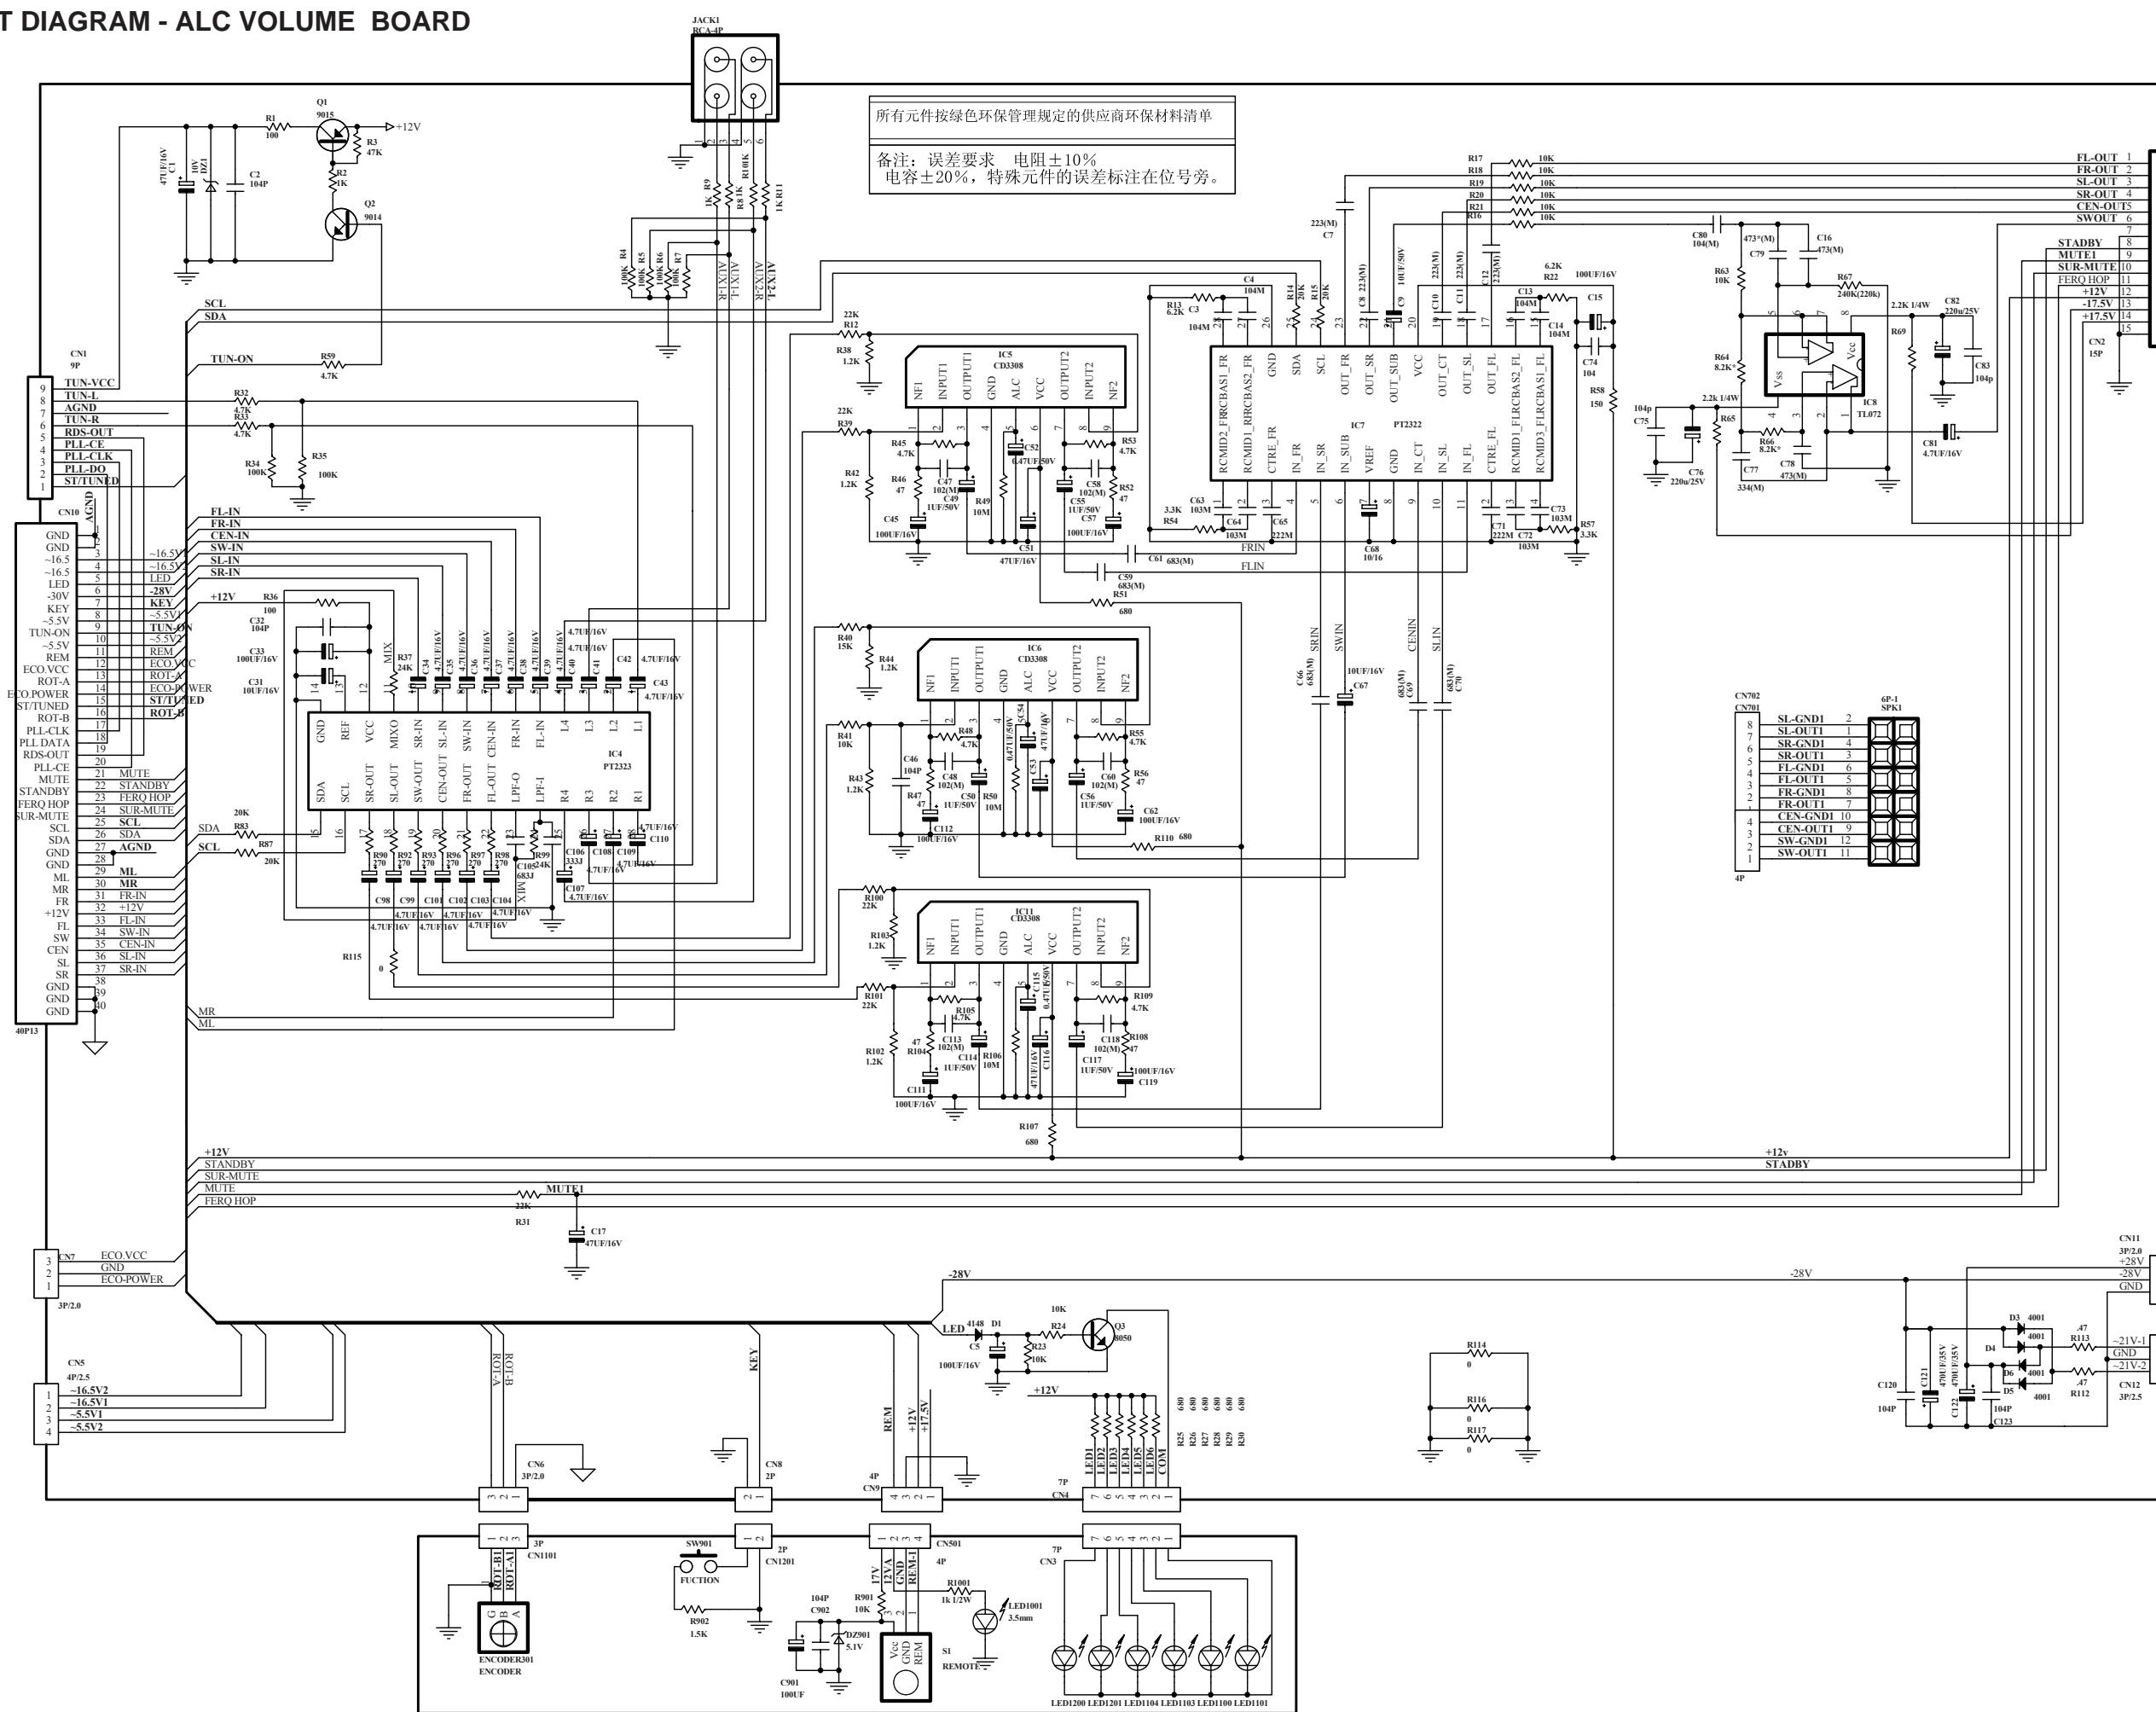












CIRCUIT DIAGRAM - DVD MPEG BOARD

MPEG board is not repaired, program for reference only.

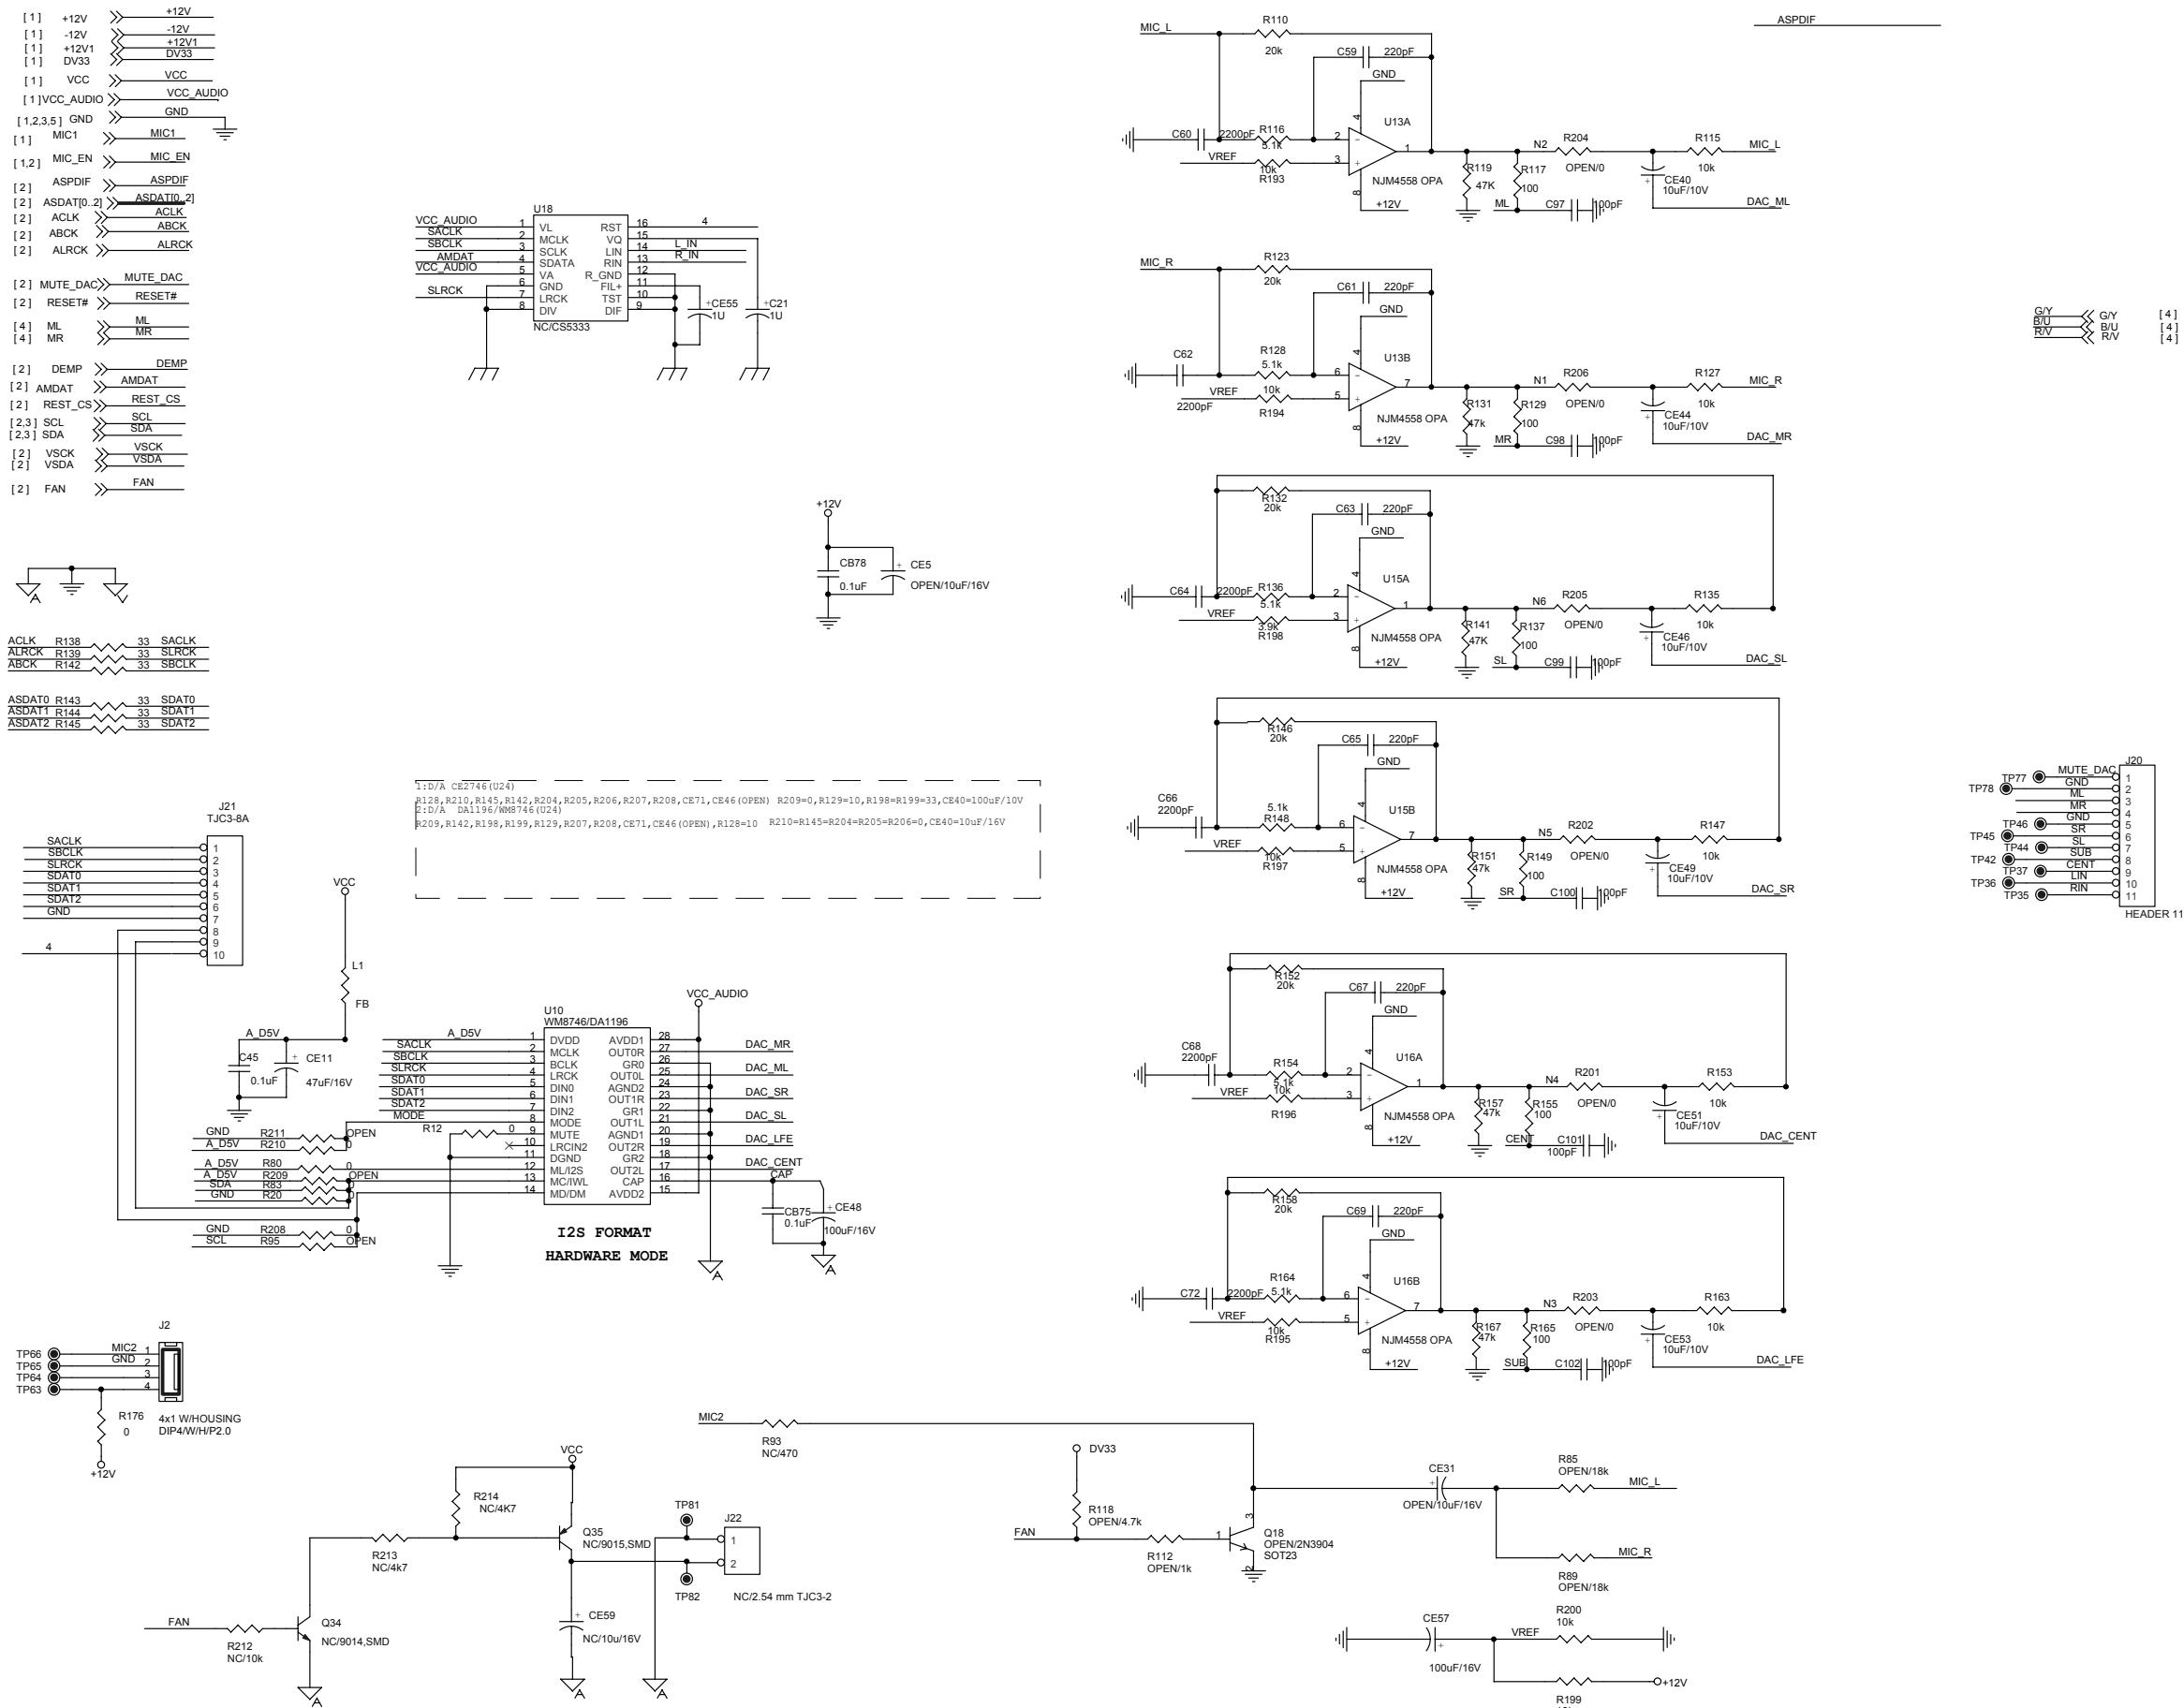









CIRCUIT DIAGRAM - DVD MPEG BOARD

MPEG board is not repaired, program for reference only.

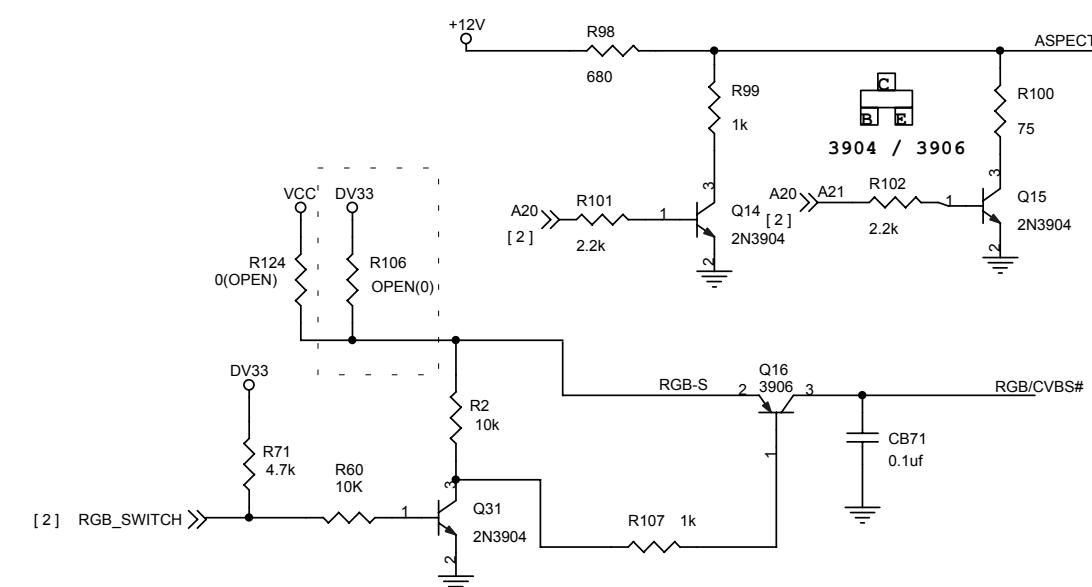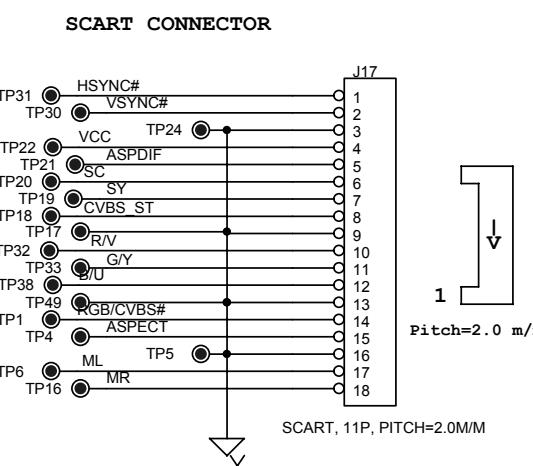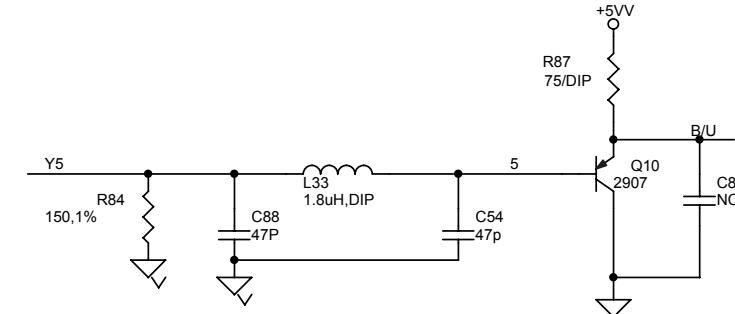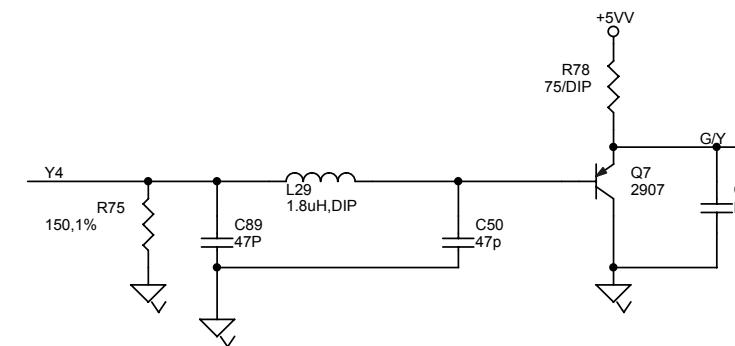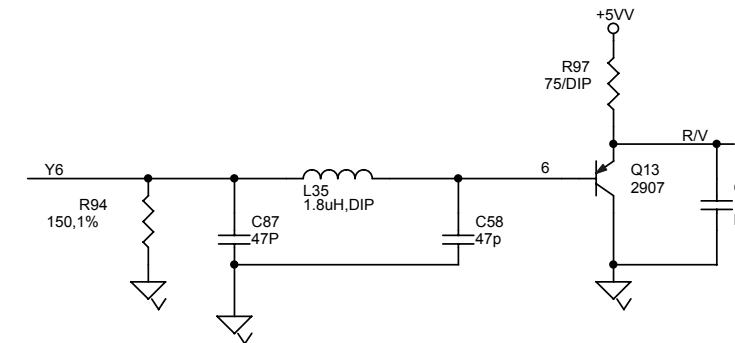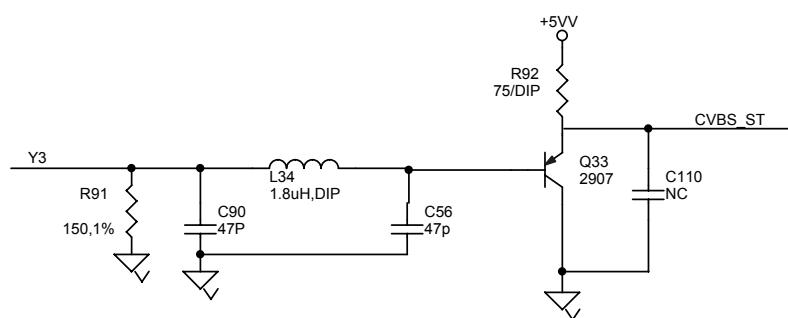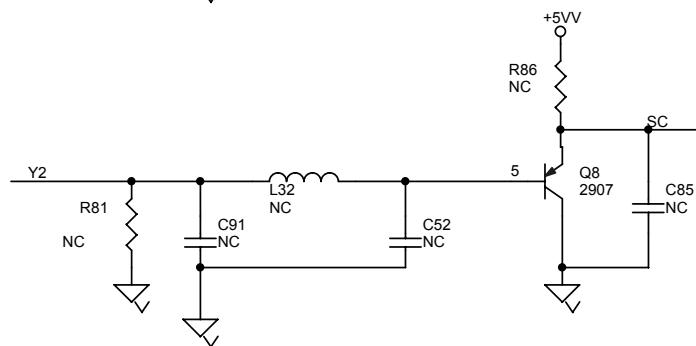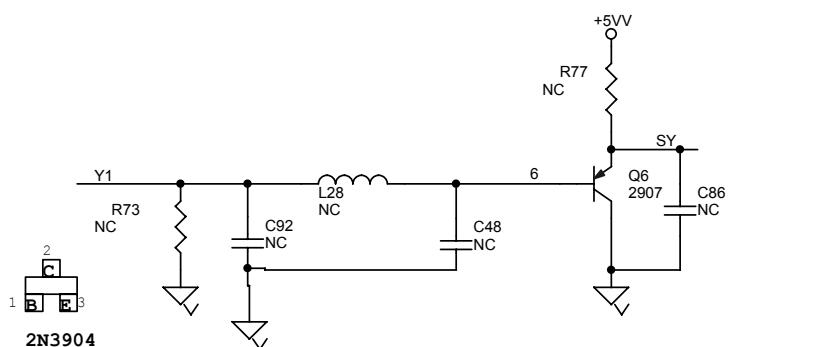

CIRCUIT DIAGRAM - DVD MPEG BOARD

MPEG board is not repaired, program for reference only.

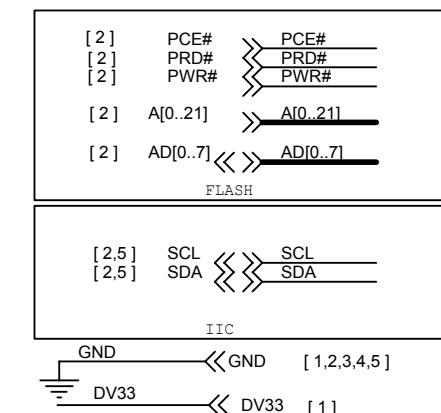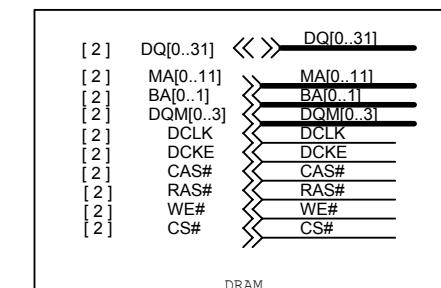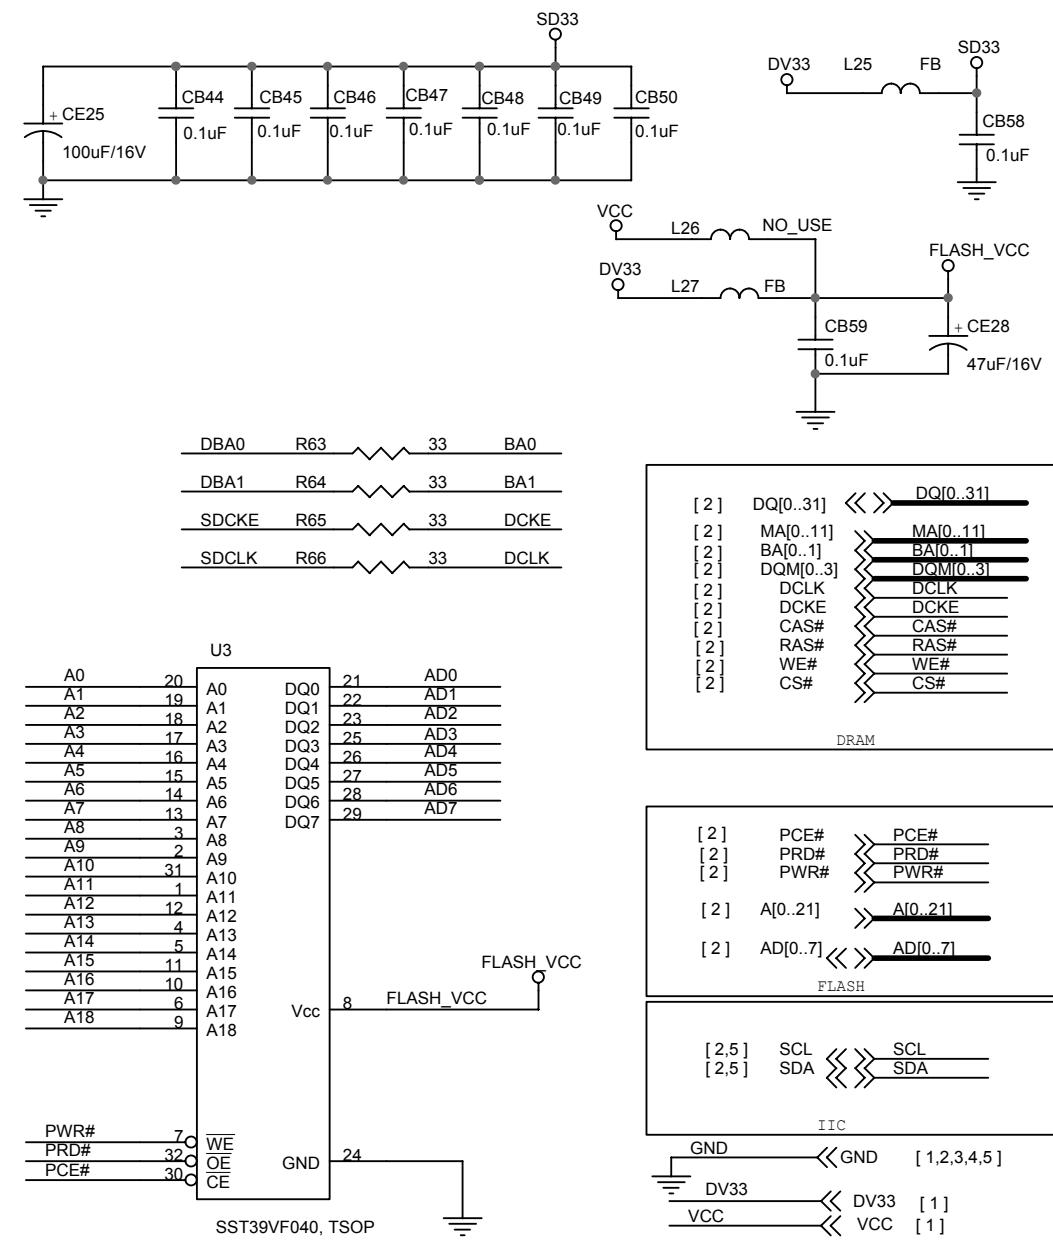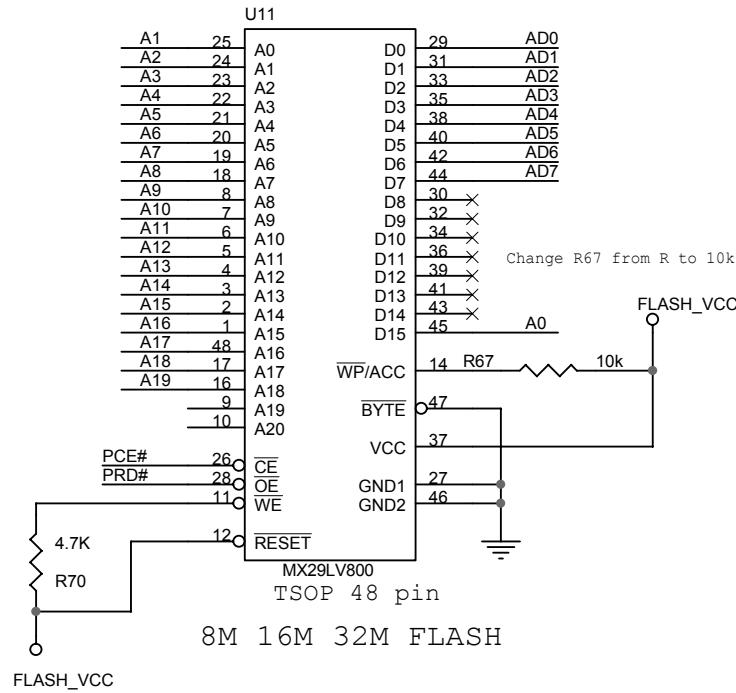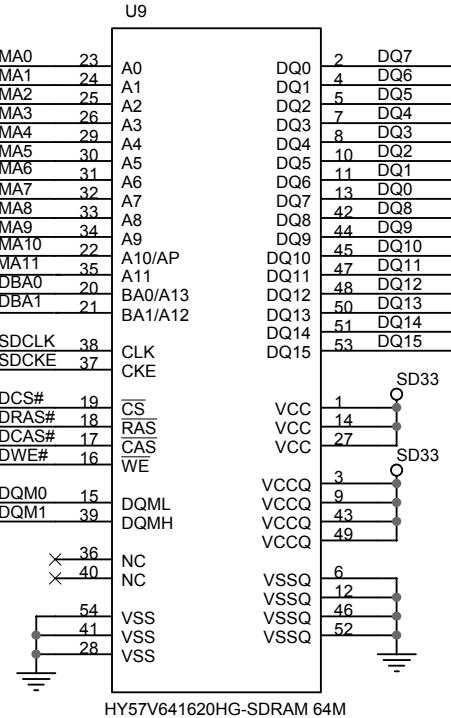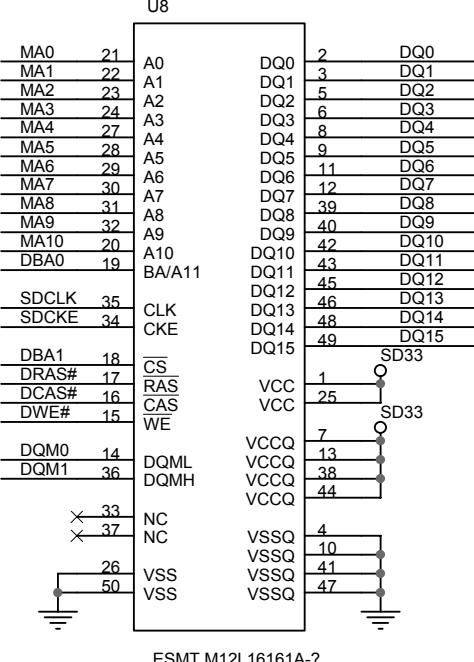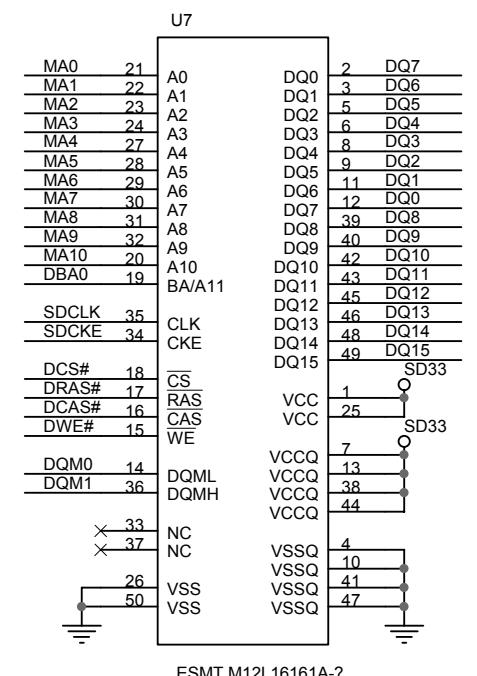


CIRCUIT DIAGRAM - DVD MPEG BOARD

MPEG board is not repaired, program for reference only.


EJS89D18

- 1 INDEX & POWER, RESET
- 2 RF, SERVO & MPEG - MT1389E
- 3 MEMORY - SDRAM, FLASH/EEPROM
- 4 VIDEO OUT
- 5 AUDIO DAC WMA8746&WMA8720 AND AUDIO OUT

NAME	TYPE	DEVICE
VCC	Digital 5V	SUPPLY
DV33	Digital 3.3V	MT1389E
RFV33	Servo 3.3V	MT1389E
LDO_AV33	Laser Diode 3.3V	
AVCC	RF 5V	PICKUP HEADER
V18	Digital 1.8V	MT1389E
SD33	Digital 3.3V	SDRAM
+12V	Audio +12V	OP AMP.
-12V	Audio -12V	OP AMP.
AVDD	Audio 5V	Audio DAC
DVDD	Audio 5V	Audio DAC

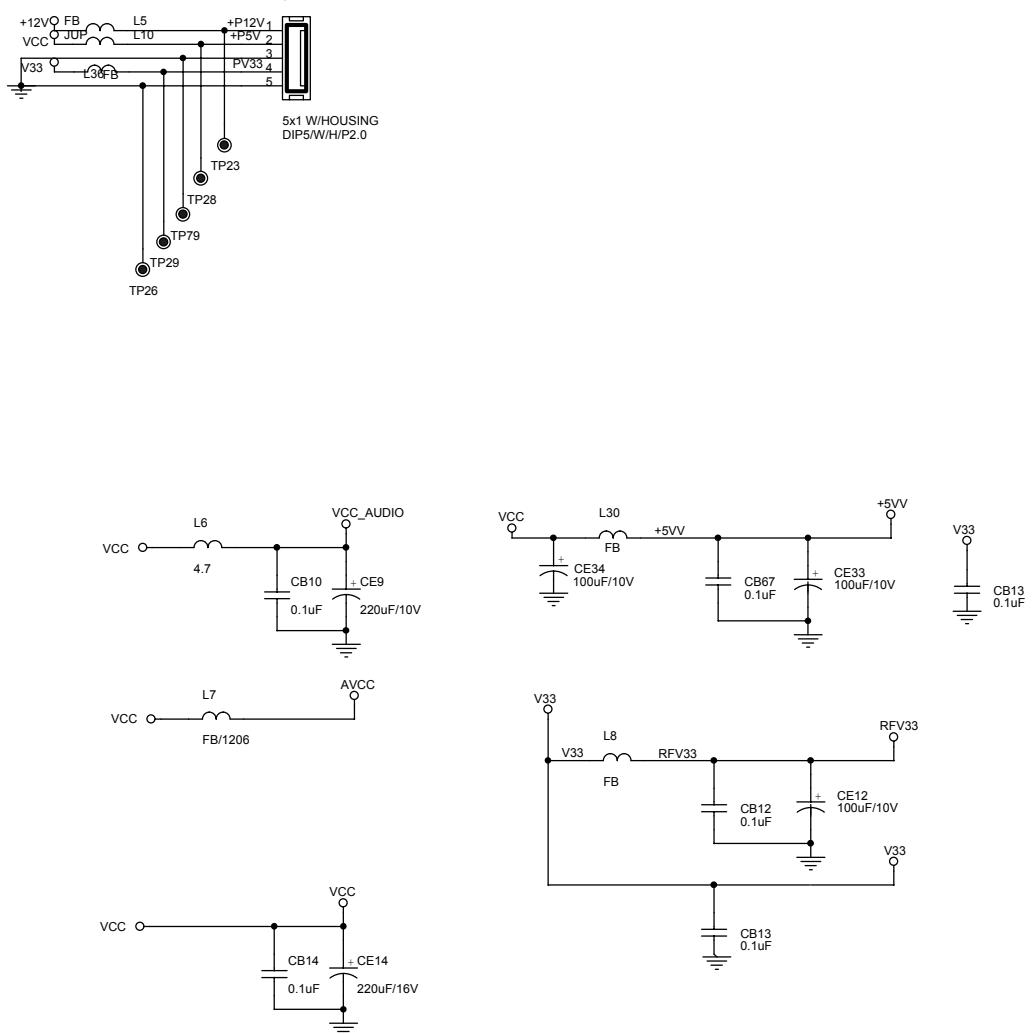


Rev	History	P#	Date
V1	The original released.	2003.6.15	
V2	Change CB11 from 10uF to 100uF Change C3 from C to 220uF Change R10, R15 from 0.1uF to C Change R10, r15 from 750k to 680k Change R17, R19 from 390k to 150k Add C74 2200pF Change R37 from 0 to R Change R38 from 0 to R Change R32 from 15pF to C Change PIN 47 from LIMIT to ADIN Add CE1 10uF Change R15 from 1.5k to 1.8k Remove the LIMIT signal from PIN 46 to PIN136 Change R4, R5, R6, R8, R12 from 1k to R Change TR1, TR2, TR3, TR4, TR5, TR6, TR7, TR8, TR9, TR10 pullhigh power from 5V to 3V3 Add LC circuit Change R67 from R1 to 10k Add the low resistance output circuit Change spdif output port Add the Audio DAC power to reference filtering	2003.7.17	

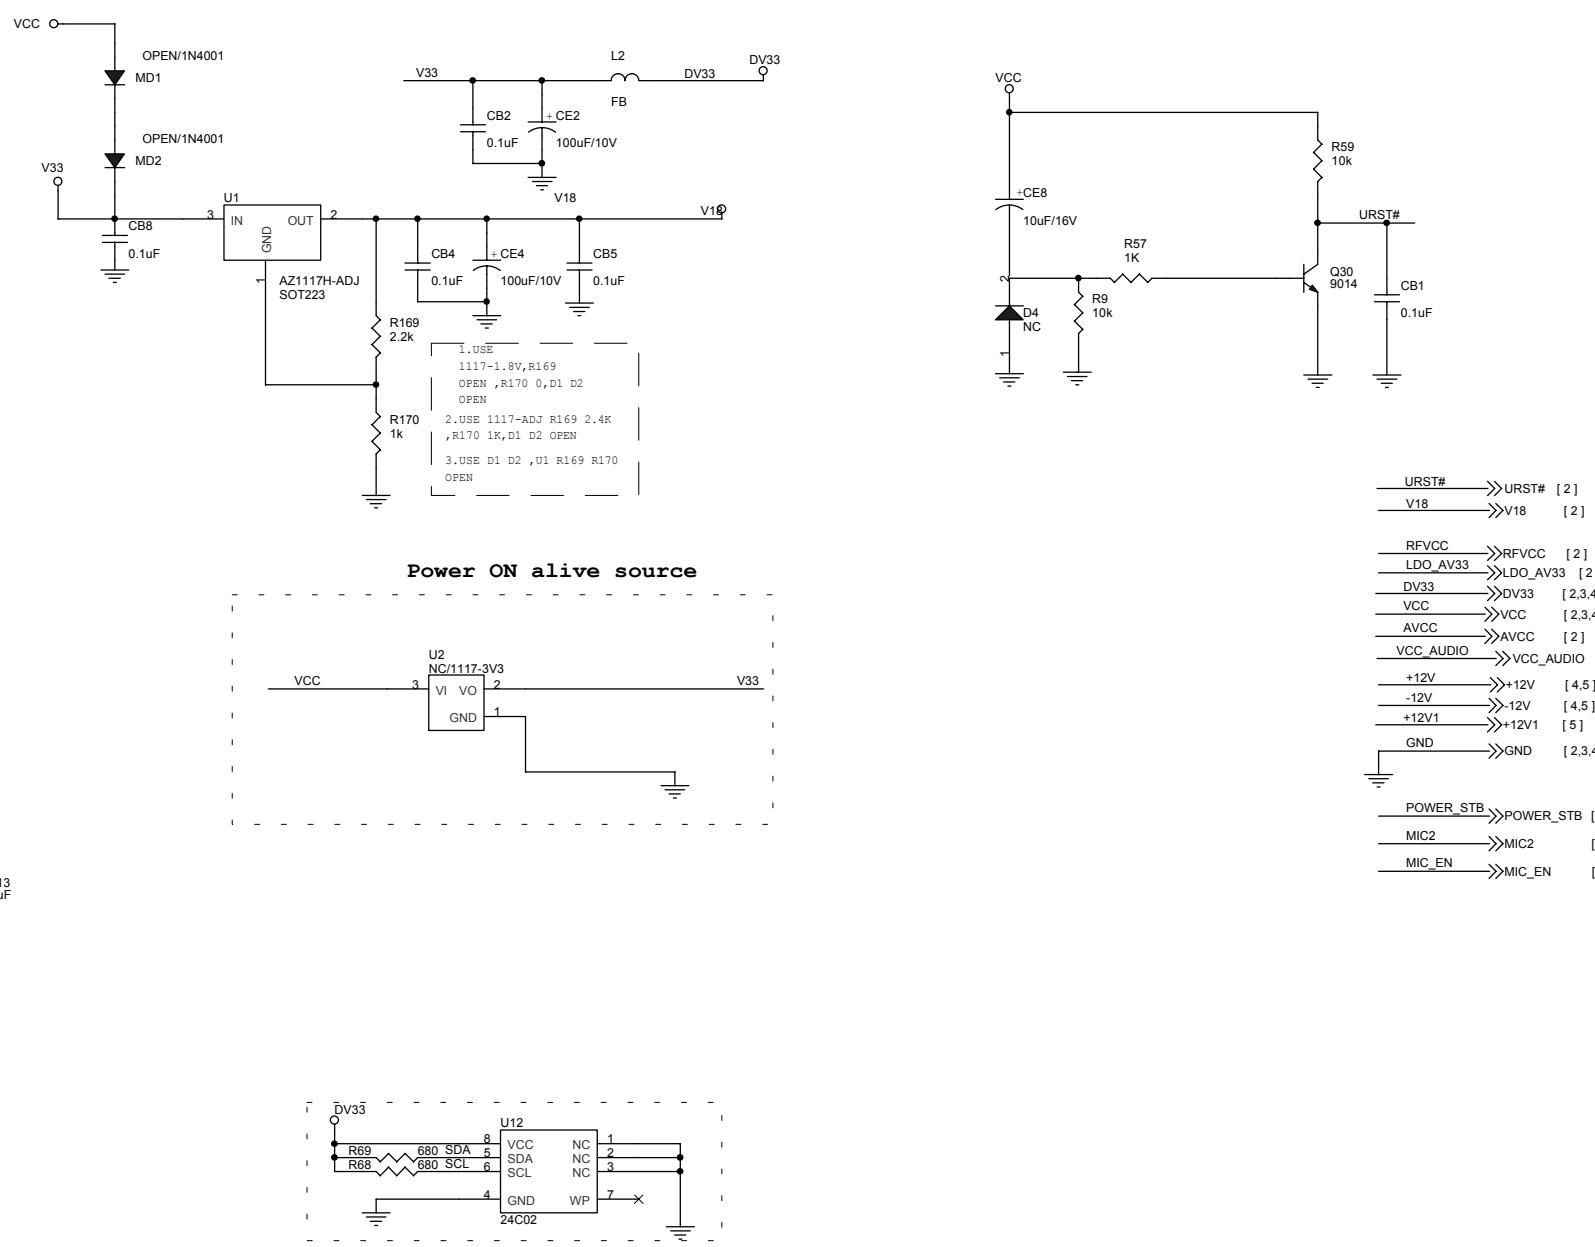


CIRCUIT DIAGRAM - DVD MPEG BOARD

MPEG board is not repaired, program for reference only.

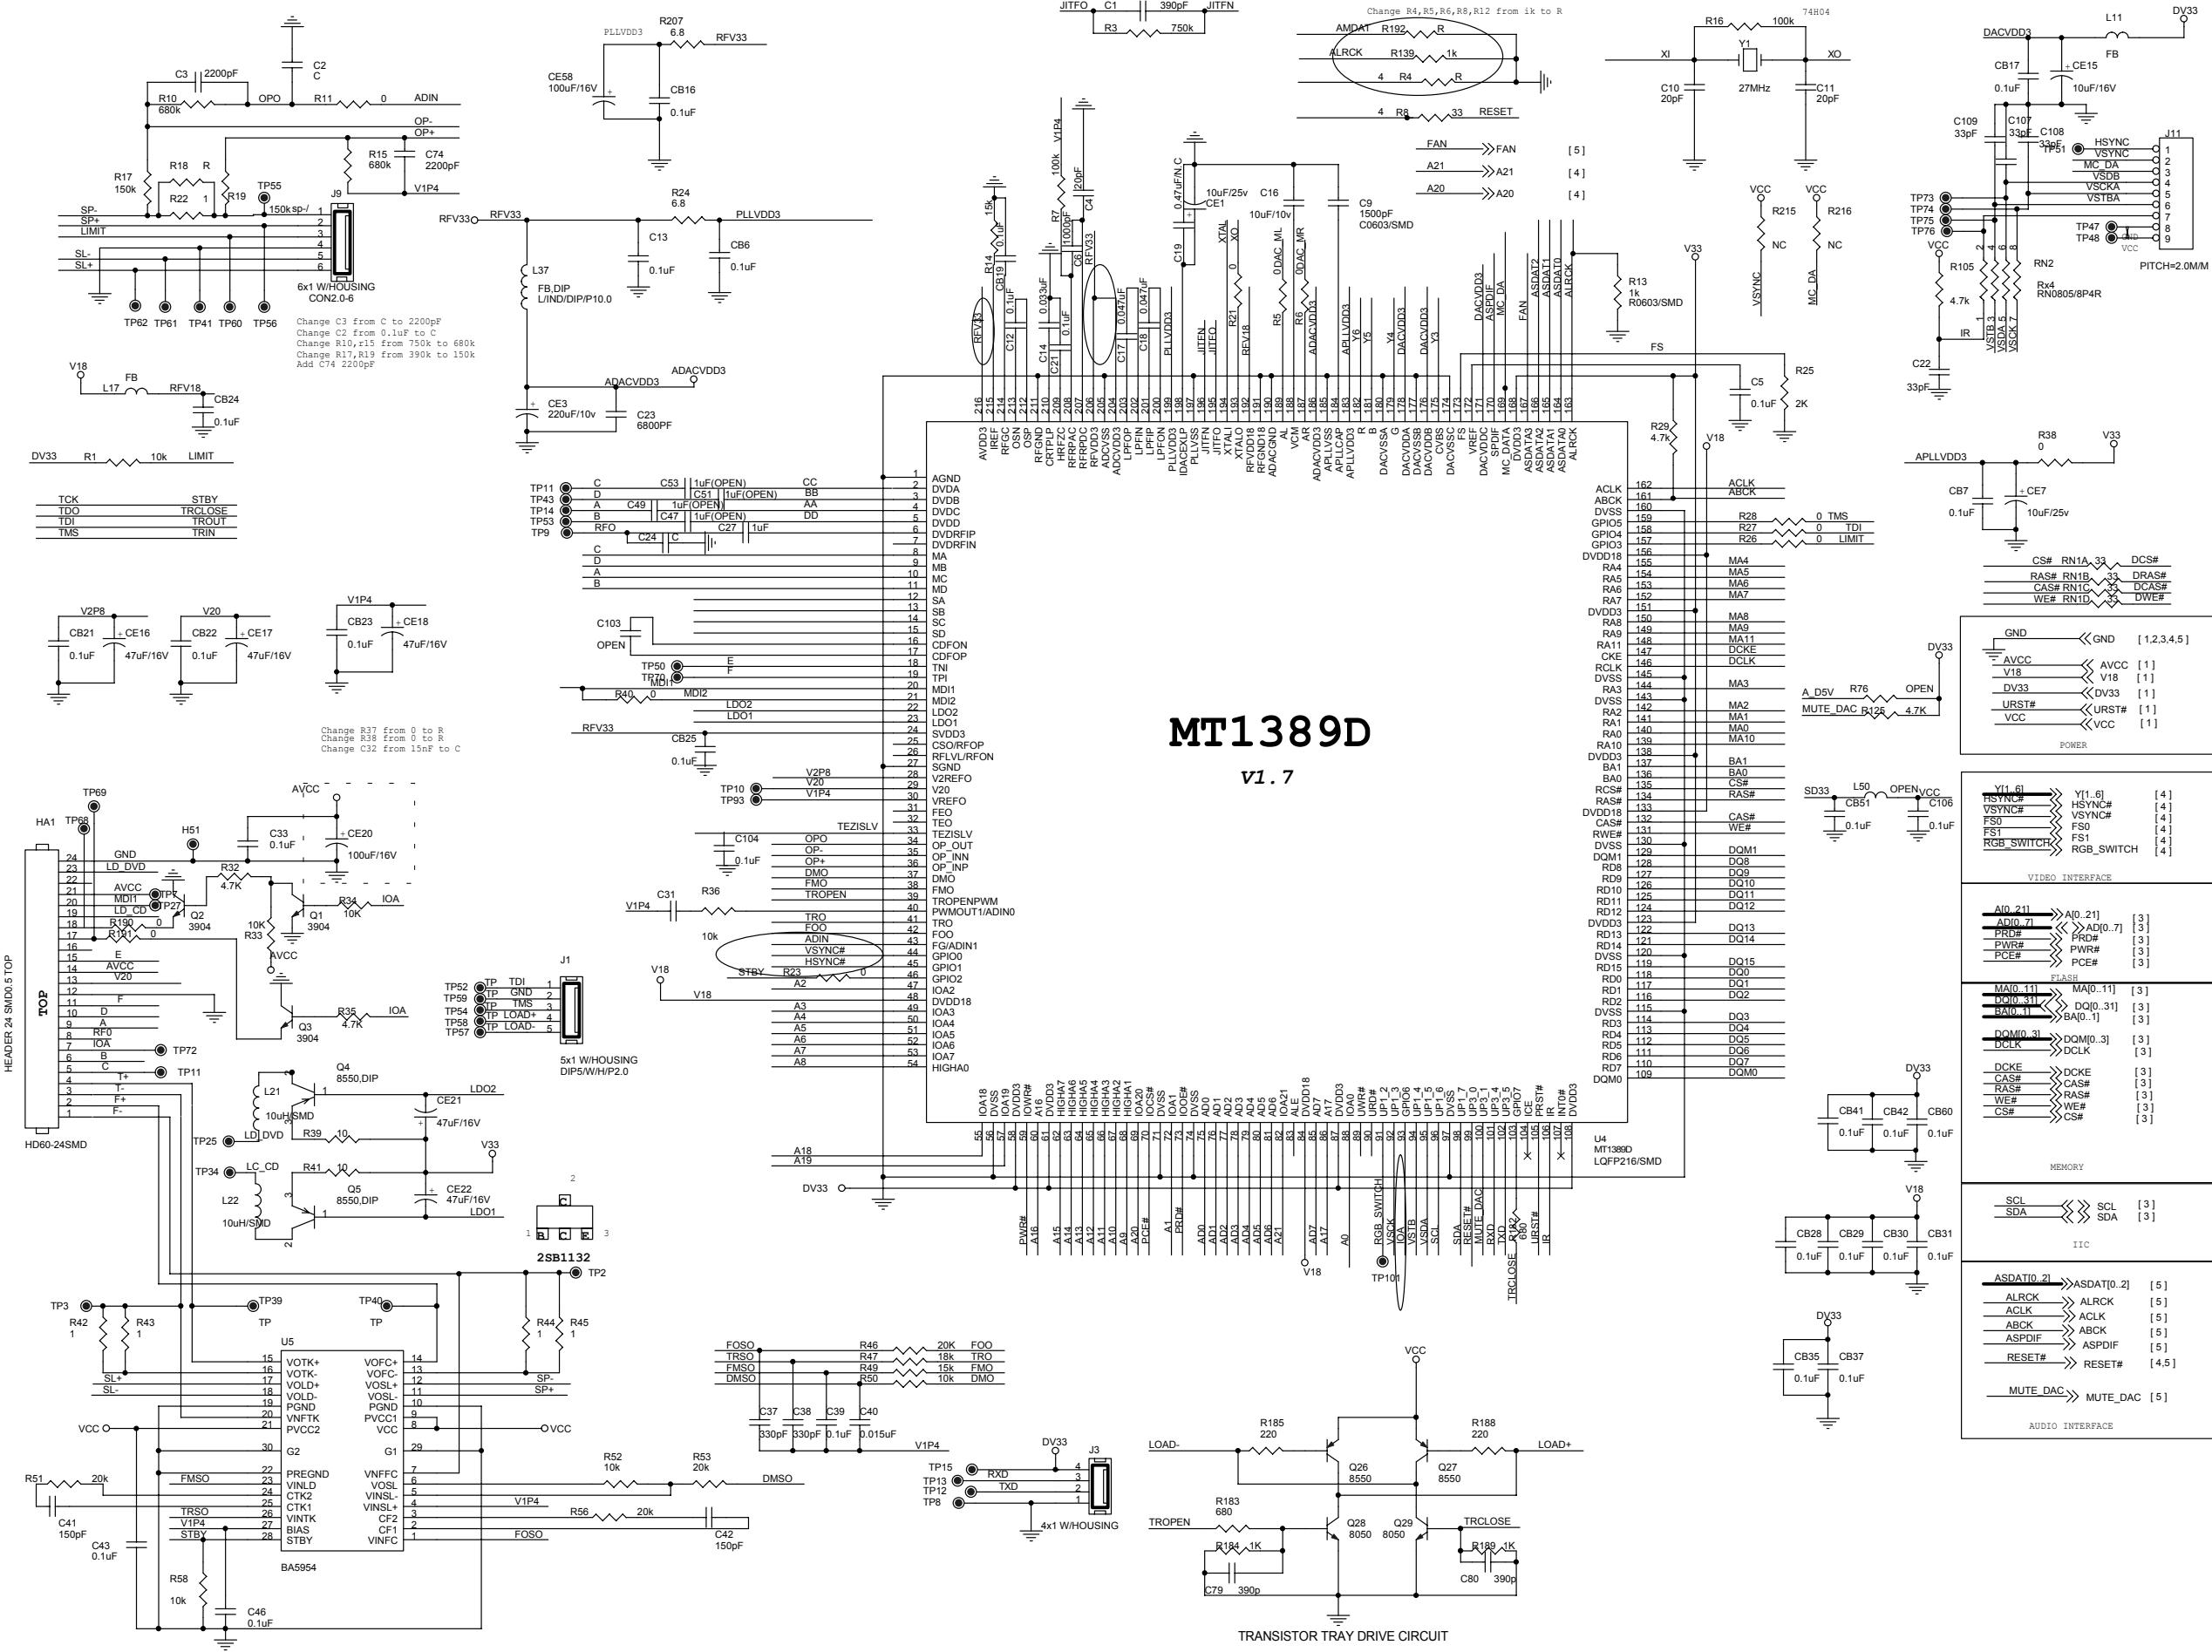

LAYOUT DIAGRAM - DVD MPEG BOARD


MPEG board is not repaired, program for reference only.

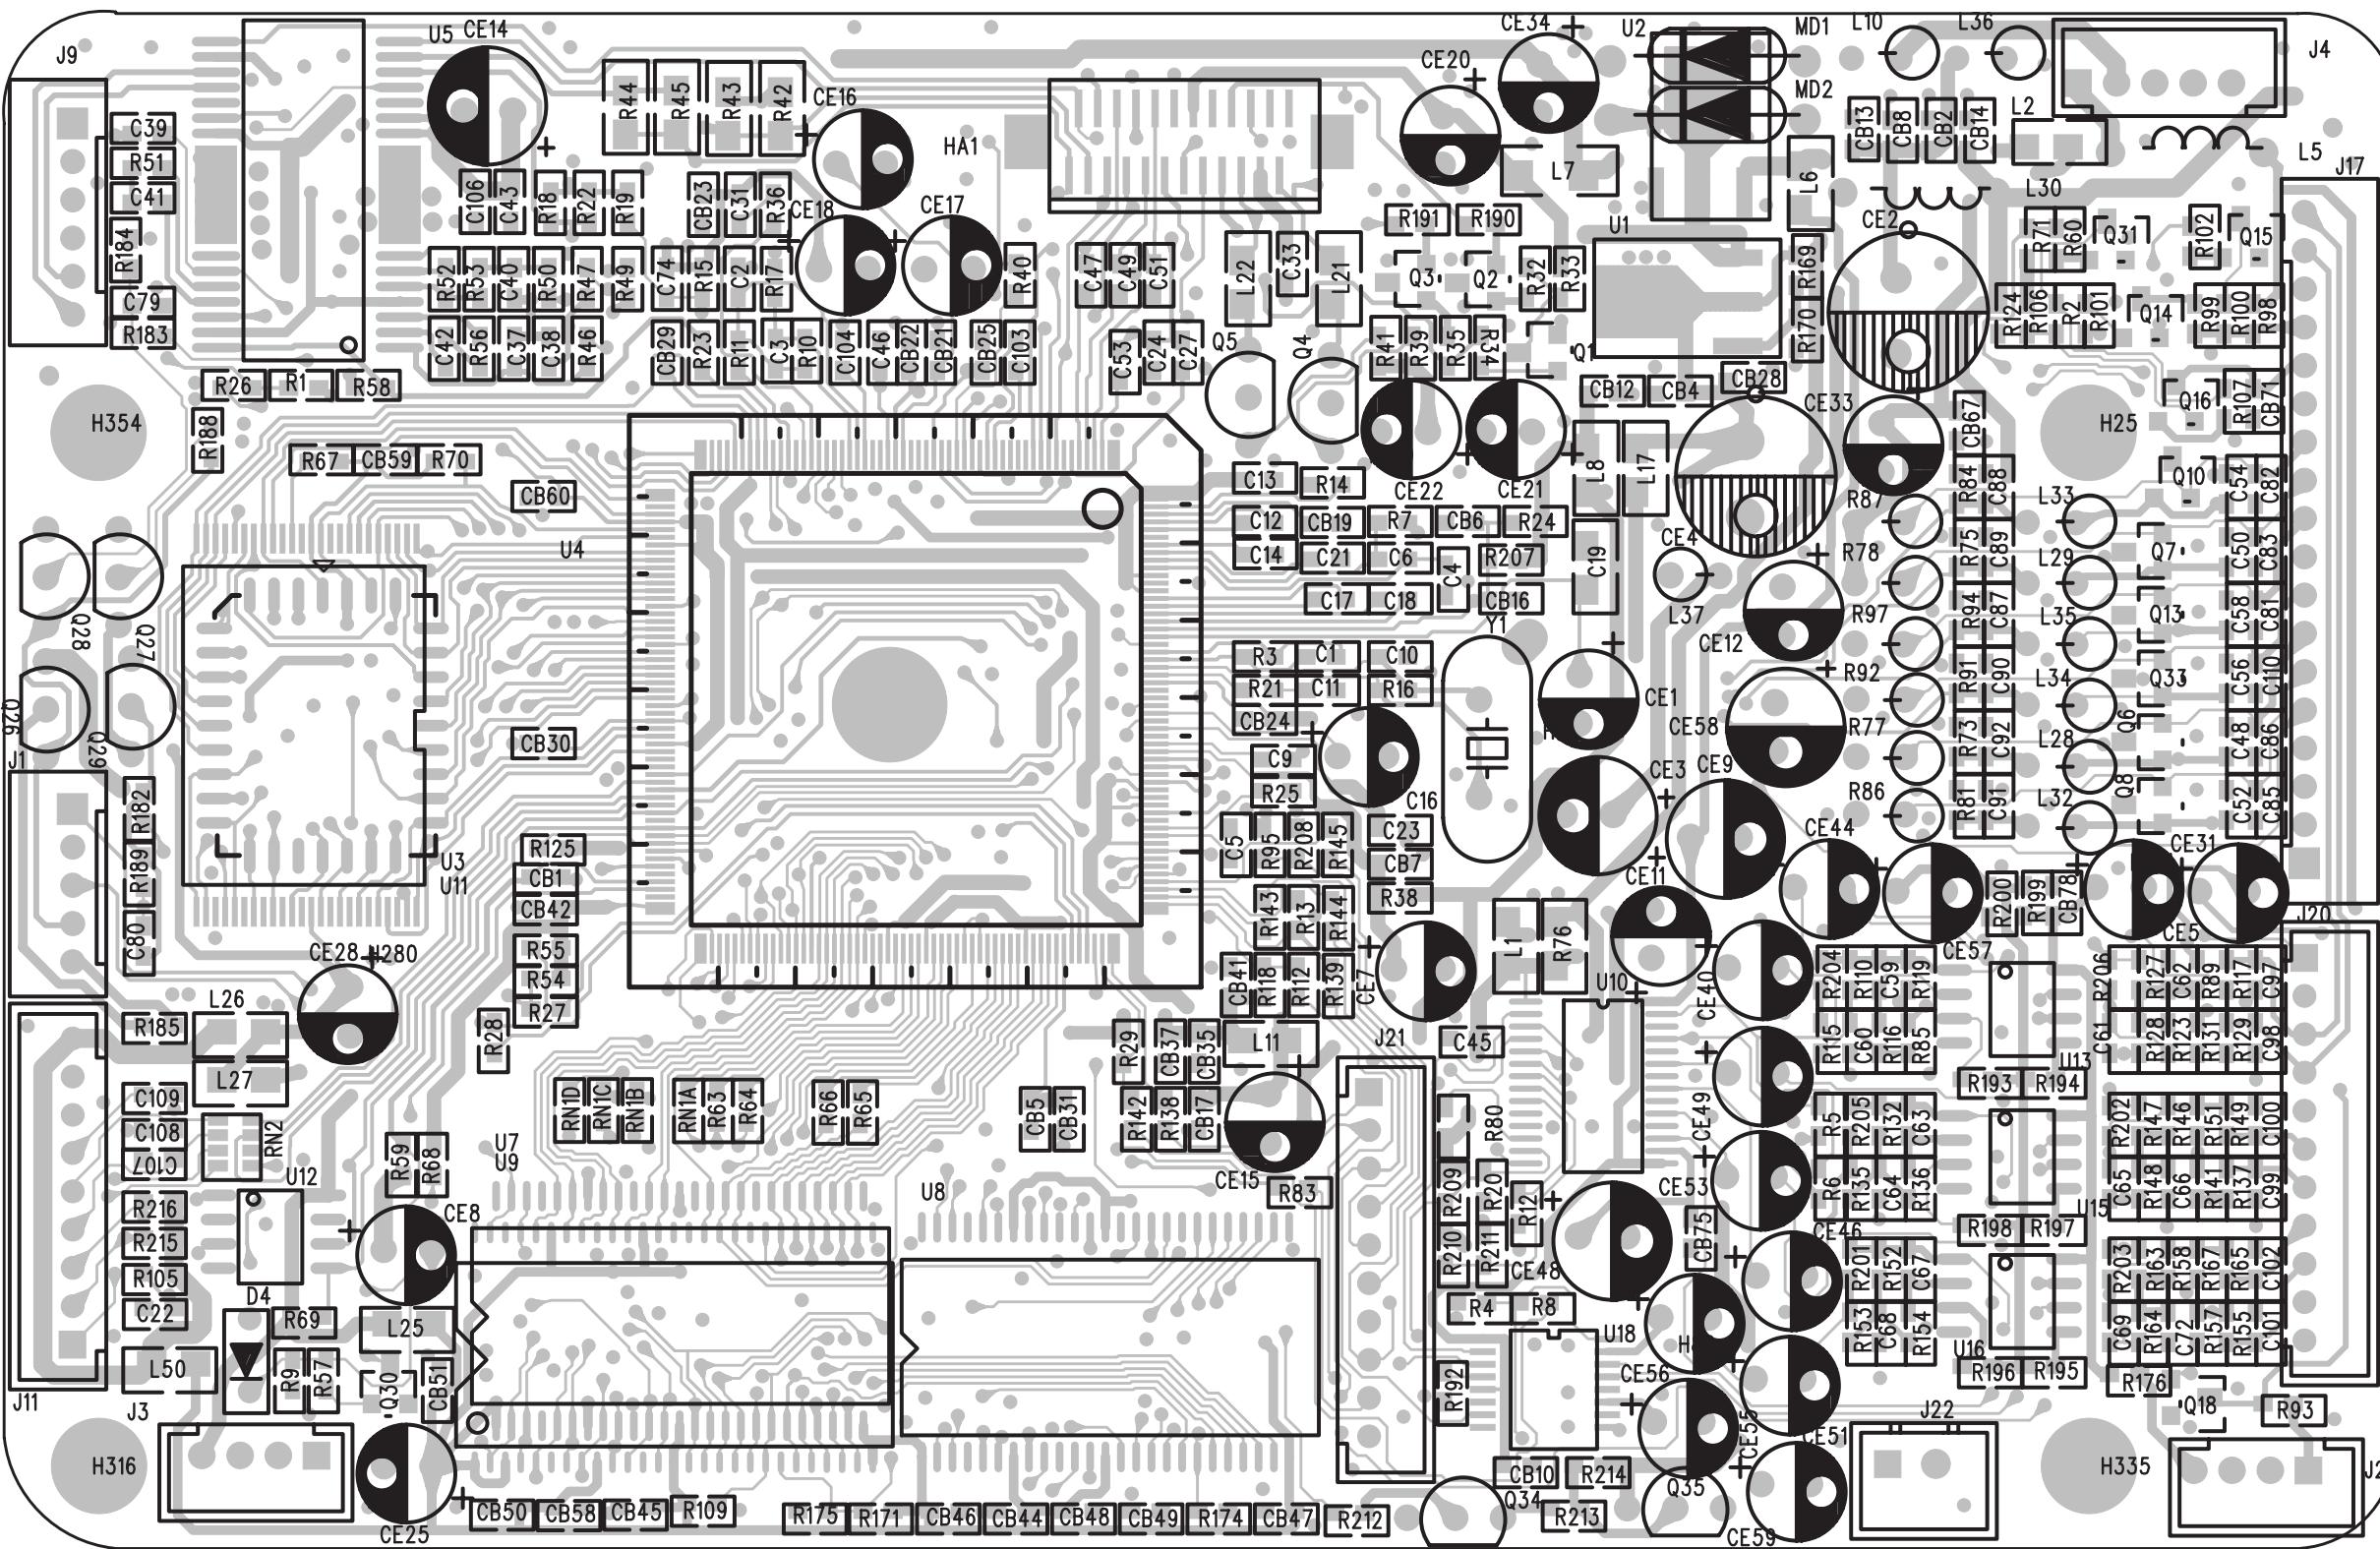

EXPLODED VIEW DIAGRAM

SCREW LIST

(1)	M2.5x5
(2)	M2.5x8
(3)	M2.5x10
(4)	M3x8
(5)	M3x10
(6)	TP2.5x4
(7)	TP2.5x10
(8)	T3 x4
(9)	T3 x8
(10)	T3 x10

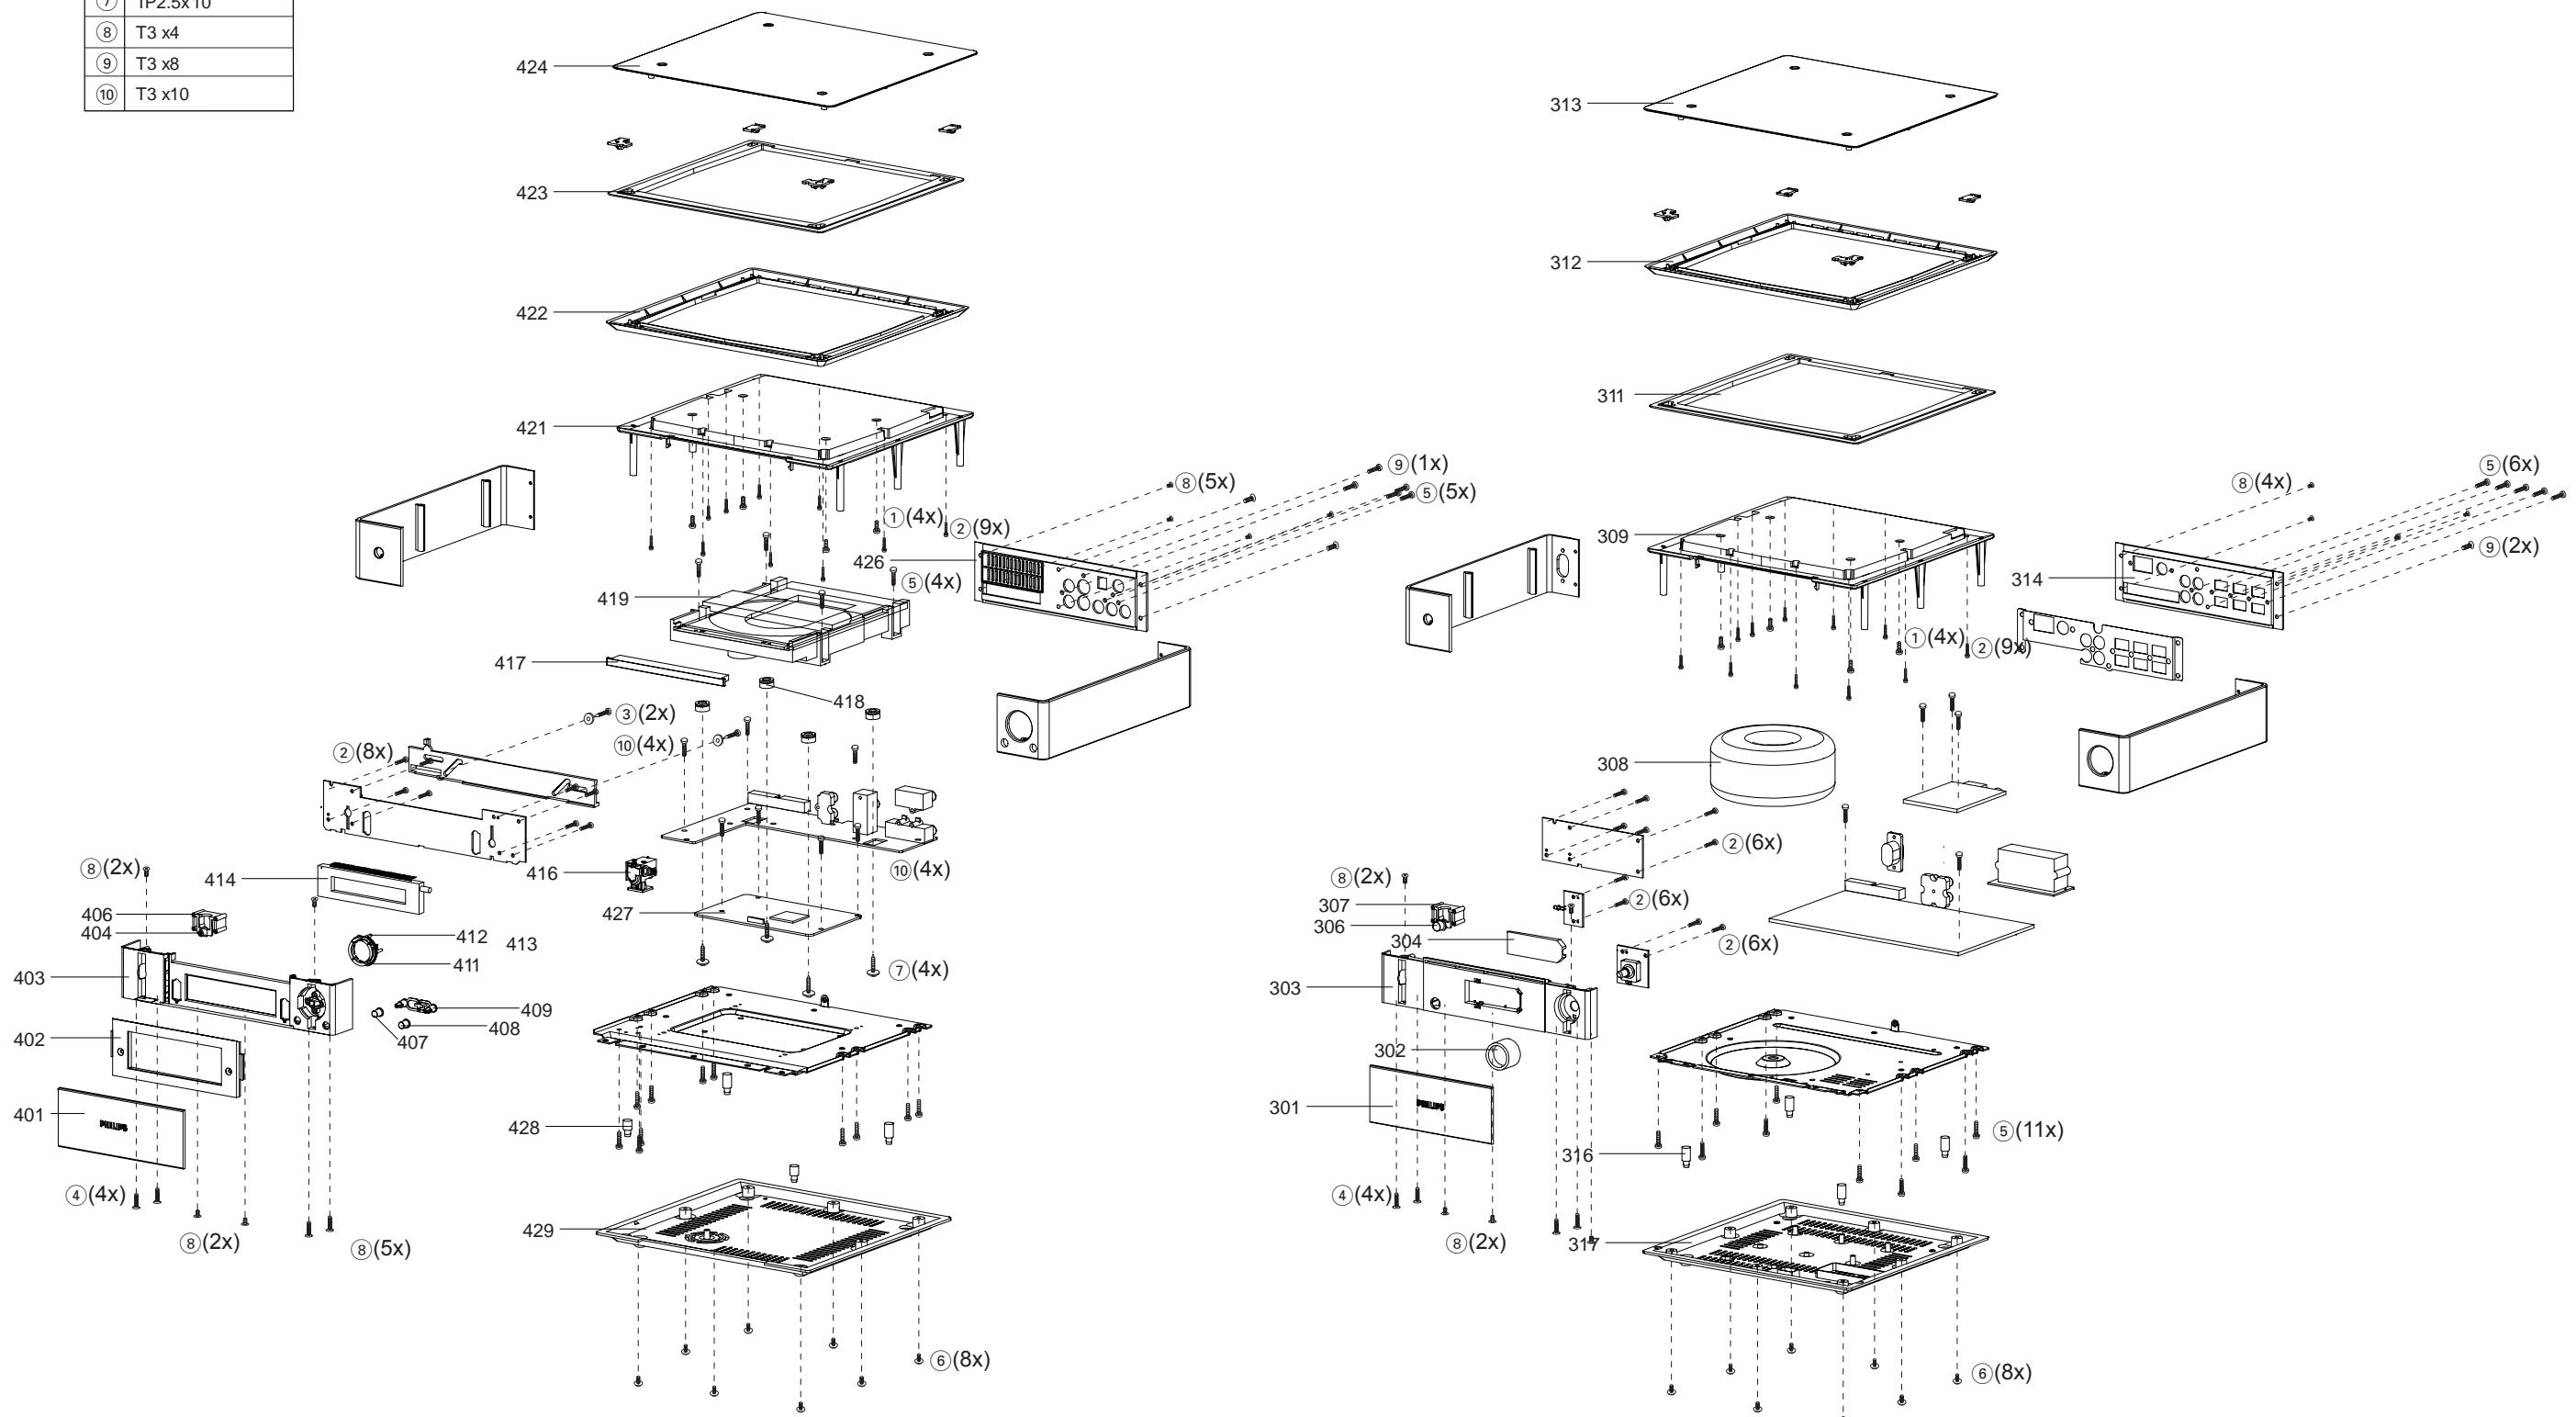

MECHANICAL PARTSLIST**ACCESSORIES**

9940 000 03462	SPEAKER BOX 8OHM 30W
9940 000 03463	SPEAKER BOX ASS'Y 8OHM 30W
9940 000 03464	WOOFER SPEAKER BOX ASS'Y
9940 000 03497	REMOTE HANDSET
9940 000 03506	SPEAKER CONNECTION WIRE
9940 000 03507	AV CABLE
△ 9940 000 03456	AC LINE CORD
9940 000 02562	AM ANTENNA HOLDER
9940 000 03516	1P WIRE 26# 1.5M
9940 000 03517	SINGLE JUMPER WIRE 26#
9940 000 03409	PHILIPS BRACKET ASS'Y

MECHANICAL PARTSLIST - AMP PART

301	9940 000 03478	AMP LENS
302	9940 000 03487	AMP VOLUME KNOB
303	9940 000 03465	AMP FRONT CABINET
304	9940 000 03481	LOGO LIGHT GUIDE
306	9940 000 03482	AMP SOURCE BUTTON
307	9940 000 03492	AMP SOURCE BUTTON-BRACKET
308	9940 000 03458	TOROIDAL TRANSFORMER
309	9940 000 03467	TOP COVER1
312	9940 000 03468	TOP COVER2
313	9940 000 03469	AMP TOP COVER
314	9940 000 03472	AMP BEAR CABINET
316	9940 000 03491	RUBBER FOOT(B)
317	9940 000 03474	AMP BOTTOM

Note: Only these parts mentioned in the list are
normal service parts.

MECHANICAL PARTSLIST - DVD PART

401	9940 000 03479	DVD LENS
402	9940 000 03495	DVD DOOR BRACKET
403	9940 000 03466	DVD FCAB
404	9940 000 03488	DVD STANDBY BUTTON
406	9940 000 03496	DVD STANDBY BUTTON-BRACKET
407	9940 000 03484	DVD CONTROL BUTTON-1
408	9940 000 03485	DVD CONTROL BUTTON-2
409	9940 000 03493	DVD CONTROL BUTTON BRACKET
411	9940 000 03483	DVD SKIP BUTTON
412	9940 000 03494	DVD SKIP BUTTON BRACKET
413	9940 000 03486	DVD CONTROL BUTTON CENTRE
414	9940 000 03413	VFD DISPLAY
416	9940 000 03459	MOTOR RF-360C-13450
417	9940 000 03476	DVD DOOR
418	9940 000 03455	DVD MECHANISM RUBBER CUSHION

419	9940 000 03461	DVD MECHANIS MKENWOOD 510
421	9940 000 03467	TOP COVER1
422	9940 000 03477	TOP LIGHT LENS
423	9940 000 03468	TOP COVER2
424	9940 000 03471	DVD TOP COVER
426	9940 000 03473	DVD BCAB
427	9940 000 03498	DVD MPEG DECODER CARD ASS'Y
428	9940 000 03489	RUBBER FOOT(A)
429	9940 000 03475	DVD BOTTOM
	9940 000 03457	AC SOCKET 1A/250V
	9940 000 03499	FLAT FLEX CABLE 24P

Note: Only these parts mentioned in the list are
normal service parts.

ELETTRICAL PARTSLIST - AMP PART

- DIODES -

DZ901	9940 000 02516	ZENER DIODE 5V1
ZD304	9940 000 03417	ZENER DIODE 5.6V
ZD301	9940 000 03417	ZENER DIODE 5.6V
DB1	9940 000 03418	THYRISTOR RS1010G(10A)
DZ303	9940 000 03419	ZENER DIODE BZX-79-B22V
DZ302	9940 000 03419	ZENER DIODE BZX-79-B22V
LED1001	9940 000 03436	WHITE LED DIODE
LED1100	9940 000 03437	LED 3B4SCB01
LED1101	9940 000 03437	LED 3B4SCB01
LED1103	9940 000 03437	LED 3B4SCB01
LED1104	9940 000 03437	LED 3B4SCB01
LED1200	9940 000 03437	LED 3B4SCB01
LED1201	9940 000 03437	LED 3B4SCB01

- TRANSISTORS -

Q302	9940 000 02517	TRANSISTOR 2SB772
Q1	9940 000 03156	CHIP TRANSISTOR 9014
Q2	9940 000 03156	CHIP TRANSISTOR 9014
Q2	9940 000 02545	TTRANSISTOR 9014C
Q3	9940 000 02518	TRANSISTOR 8050C
Q3	9940 000 03438	TRANSISTOR BC547B
Q301	9940 000 03439	CHIP RESISTOR BC817-25
Q304	9940 000 03439	CHIP RESISTOR BC817-25
Q308	9940 000 03439	CHIP RESISTOR BC817-25
Q309	9940 000 03439	CHIP RESISTOR BC817-25
Q1	9940 000 03441	TTRANSISTOR 9015C
Q303	9940 000 03442	CHIP TRANSISTOR BC857C
Q305	9940 000 03442	CHIP TRANSISTOR BC857C
Q311	9940 000 03442	CHIP TRANSISTOR BC857C
Q306	9940 000 03443	MOSFET BUK7535-55A
Q307	9940 000 03443	MOSFET BUK7535-55A
Q310	9940 000 03444	CHIP TRANSISTOR BC847C
Q312	9940 000 03444	CHIP TRANSISTOR BC847C
Q4	9940 000 03445	CHIP TRANSISTOR BC857C

- IC -

IC302	9940 000 02526	IC 7812
IC1	9940 000 03421	IC TEA5757H
IC301	9940 000 03422	IC TDA8920BTH
IC303	9940 000 03423	IC TDA8922BTH
IC304	9940 000 03423	IC TDA8922BTH
IC305	9940 000 03424	IC 74HCU04D
IC306	9940 000 03425	IC HEF4013T
IC4	9940 000 03426	IC PT2323
IC5	9940 000 03427	IC NE008
IC6	9940 000 03427	IC NE008

ELETICAL PARTSLIST - AMP PART

IC11	9940 000 03427	IC NE008
IC7	9940 000 03428	IC PT2322
IC8	9940 000 03429	IC 4558

- COILS & FILTERS -

XT301	9940 000 03453	CERAMIC FILTER CRB 700KHz
XT302	9940 000 03454	CERMIC FILTER FREQUENCY 600KHz
CF2	9940 000 03153	CERMIC FILTER FREQUENCY 10.7MHz
CF1	9940 000 03153	CERMIC FILTER FREQUENCY 10.7MHz
T1	9940 000 03446	I.F.T. COIL 44023
T2	9940 000 03447	I.F.T. COIL 20591
T3	9940 000 03447	I.F.T. COIL 20591
T4	9940 000 03448	I.F.T. COIL 20382
T5	9940 000 03449	I.F.T. COIL 44108
T7	9940 000 03451	I.F.T. COIL 43462

- MISCELLANEOUS -

X1	9940 000 03452	QUARTZ CRYSTAL 75KHz
JACK1	9940 000 02528	4PINS RCA SOCKET
ENCODER801	9940 000 02535	VOLUME CODER ED-1612-00-F15
S1	9940 000 02542	IR SENSOR
SPK1	9940 000 03431	5.1 SPEAKER JACK 6PZ-1
SW901	9940 000 03432	LIGHT TOUCH SWITCH
F301	⚠ 9940 000 03433	FUSE F6.3AL250V
F302	⚠ 9940 000 03433	FUSE F6.3AL250V
CN10	9940 000 03434	PIN CONNECTOR 40PINS
JACK1	9940 000 03435	ANT. LEADING-OUT JACK

Note: Only these parts mentioned in the list are
normal service parts.

ELETICAL PARTSLIST - DVD PART

- DIODES -

BD201	9940 000 02521	THYRISTOR RS406
D210	9940 000 02544	RECTIFIER DIODE IN5822
DZ201	9940 000 03407	ZENER DIODE 3.3V
DZ202	9940 000 03408	ZENER DIODE 27V

- TRANSISTORS -

Q201	9940 000 02519	TRANSISTOR 8550C
Q202	9940 000 02519	TRANSISTOR 8550C
Q206	9940 000 02519	TRANSISTOR 8550C
Q208	9940 000 02519	TRANSISTOR 8550C
Q203	9940 000 02518	TRANSISTOR 8050C
Q204	9940 000 02518	TRANSISTOR 8050C
Q207	9940 000 02518	TRANSISTOR 8050C
Q209	9940 000 02518	TRANSISTOR 8050C
Q210	9940 000 02518	TRANSISTOR 8050C
Q205	9940 000 02545	TRRANSISTOR 9014C

- IC -

IC202	9940 000 02547	IC AT24C02-PC27
IC203	9940 000 03162	CPU U252
IC205	9940 000 03411	IC D4558/RC4558
IC207	9940 000 02548	IC LM7805/LM340T5 7805
IC208	9940 000 02546	IC YD2576-ADJ
IC601	9940 000 02539	IC PT6311 / SC16311 / CD16311

- MISCELLANEOUS -

X201	9940 000 03152	CERMIC FILTER FREQUENCY 4.19MHZ
X202	9940 000 02551	CRYSTAL OSC FREQ.32.768 KHz
F201	⚠ 9940 000 02529	FUSE F2AL250V
F209	⚠ 9940 000 03412	FUSE F1.5A/125V
VFD701	9940 000 03413	VFD DISPLAY
RCA204	9940 000 03414	RCA SOCKET
SW601	9940 000 02543	LIGHT TOUCH SWITCH
SW602	9940 000 02543	LIGHT TOUCH SWITCH
SW603	9940 000 02543	LIGHT TOUCH SWITCH
SW604	9940 000 02543	LIGHT TOUCH SWITCH
SW605	9940 000 02543	LIGHT TOUCH SWITCH
SW606	9940 000 02543	LIGHT TOUCH SWITCH
SW607	9940 000 02543	LIGHT TOUCH SWITCH
SW608	9940 000 02543	LIGHT TOUCH SWITCH
JACK1301	9940 000 02556	OPTICAL & COAXIAL TERMINAL SOCKET
JACK202	9940 000 02553	3PINS RCA SOCKET(R/B/G)
CN210	9940 000 03415	PIN CONNECOTR 34PINS
JACK4	9940 000 03416	RCA SOCKET+S VIDEO

Note: Only these parts mentioned in the list are normal service parts.