

<R42-179-0>

Service Manual

SPEAKER SYSTEMS

CS-60




<71J02F31K>

PIONEER®

3. SPECIFICATIONS OF CS-60

Enclosure	Bass-reflex type
Speakers	
Woofer	12 in. (30cm) cone type
Mid-range	5 in. (12cm) cone type
Tweeter	3 in. (7.7cm) cone type
Input impedance	8Ω
Frequency range	40 to 20,000Hz
Sensitivity	94dB/W at 1m distance
Maximum input power	60W
Crossover frequency	
Lows . . . Mid-ranges	1,100Hz
Mid-ranges . . . Highs	6,200Hz
External dimensions	25(H) x 23-1/2(W) x 11-1/3(D) in. 630(H) x 419(W) x 290(D) mm
Weight	39lb (17.5kg)

NOTE: Specifications and the design subject to possible modification without notice due to improvements.

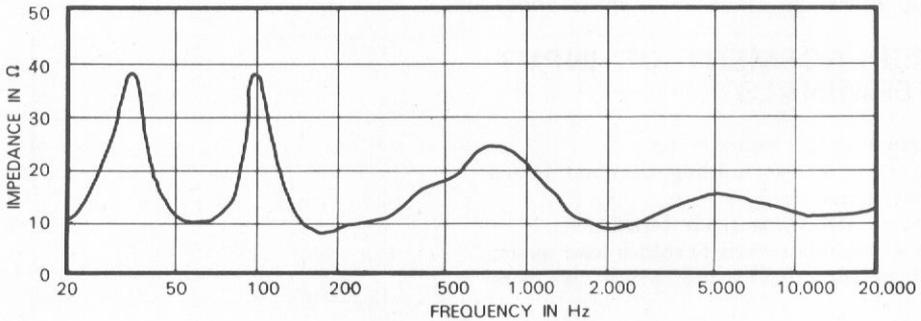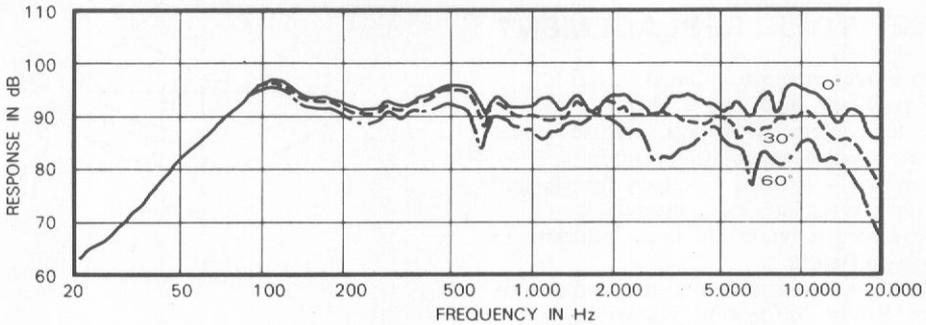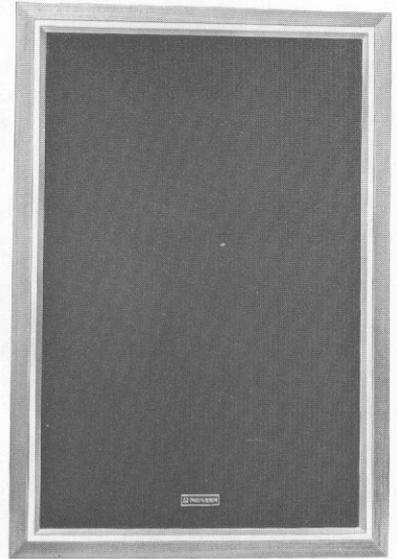

4. REPLACEMENT OF SPEAKER UNIT

4-1 SPEAKER REPLACEMENT

- 1 Remove rear enclosure panel.
- 2 Loosen 4 nuts holding the speakers in place.
- 3 Pull lugs off speaker terminals. Be careful not to lose the terminals. (Fig. 1)
- 4 Make connections to new speakers as follows:

Model CS-40

Woofers: blue lead wire to (+), white lead wire to (-).

Tweeters: red lead wire to (+), white lead wire to (-).

Model CS-50

Woofers: blue lead wire to (+), white lead wire to (-).

Tweeters: red lead wire to (+), white lead wire to (-).

Model CS-60

Woofers: blue lead wire to (+), white lead wire to (-).

Mid-range: green lead wire to (+), white lead wire to (-).

Tweeters: red lead wire to (+), white lead wire to (-).

- 5 Install speakers firmly and securely.
- 6 Tighten nuts in cross-wise pattern (Fig. 2) to assure balanced stress.

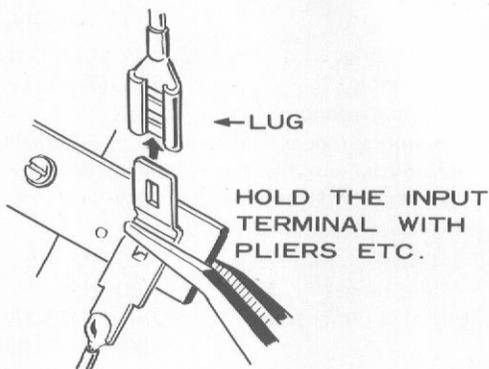


Fig. 1

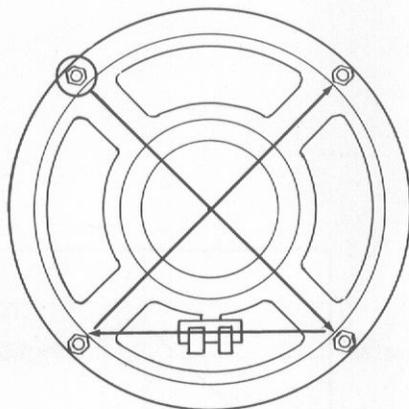


Fig. 2

4-2 NETWORK REPLACEMENT

- 1 Remove rear enclosure panel.
- 2 Take off all lead wires from network. Mark lead wires with tags, etc. to assure correct re-connection afterwards.
- 3 The network is held in place by all self-tapping screws and by adhesive. Remove screws, carefully break adhesive to remove network.
- 4 Affix new network with adhesive and screws. Secure firmly to prevent vibrations.
- 5 Connect again lead wires to network, observing markings made in step 2 above.

4-3 REPLACEMENT OF INPUT TERMINALS


- 1 Remove rear enclosure panel.
- 2 Remove all screws holding terminal board on rear panel.
- 3 Unsolder lead wires from terminals. Replace terminals then re-solder lead wires: blue lead wire to (+) side, white lead wire to (-) side.

NOTE: The input terminal of the CS-60 is incorporated with the network.


5. OPERATIONAL CHECKS OF SPEAKER SYSTEM

- 1 Connect the test equipment (audio oscillator, amplifier, and voltmeter) arranged as shown in the below illustration.
- 2 Be sure that the tweeter produces proper sound when the INPUT terminals are fed with a 10kHz/2V-sine wave which is generated from audio oscillator and amplified by audio amplifier.
- 3 Be sure that the mid-range produces proper sound when the INPUT terminals are fed with a 2kHz/2V-sine wave which is generated from audio oscillator and amplified by audio amplifier.
- 4 Be sure that the woofer produces proper sound when the INPUT terminals are fed with a 400Hz/2V sine wave which is generated from audio oscillator and amplified by audio amplifier.
- 5 Be sure that each of speakers (tweeter and woofer) produces well-balanced sound when the INPUT terminals are fed, in a range from 40 to 20,000Hz, with each of sine waves which is generated from audio oscillator and amplified by audio amplifier.


NOTE: As the CS-40 and CS-50 are composed of two way systems, there is no need to have the equipment test for the mid-range shown in the item 3.

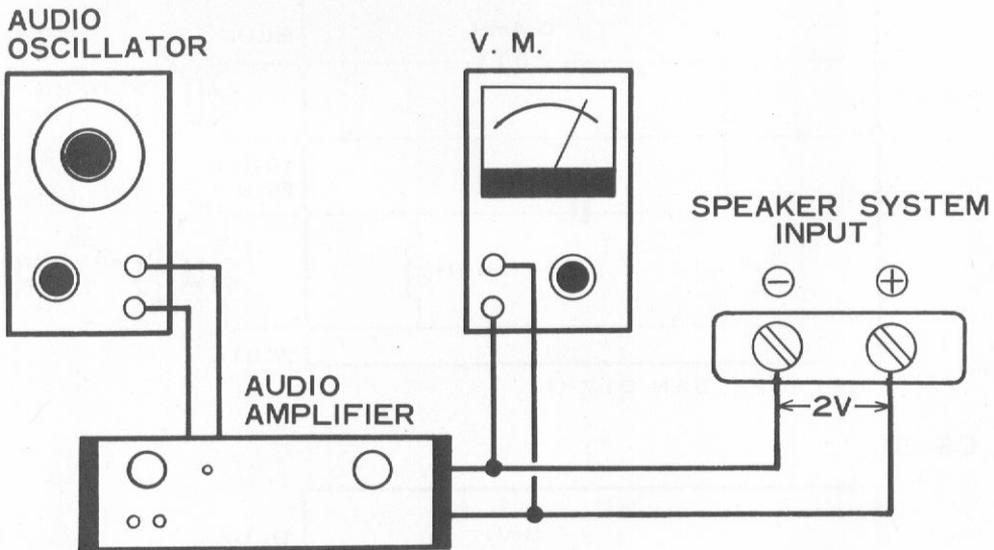

6-3 CS-60

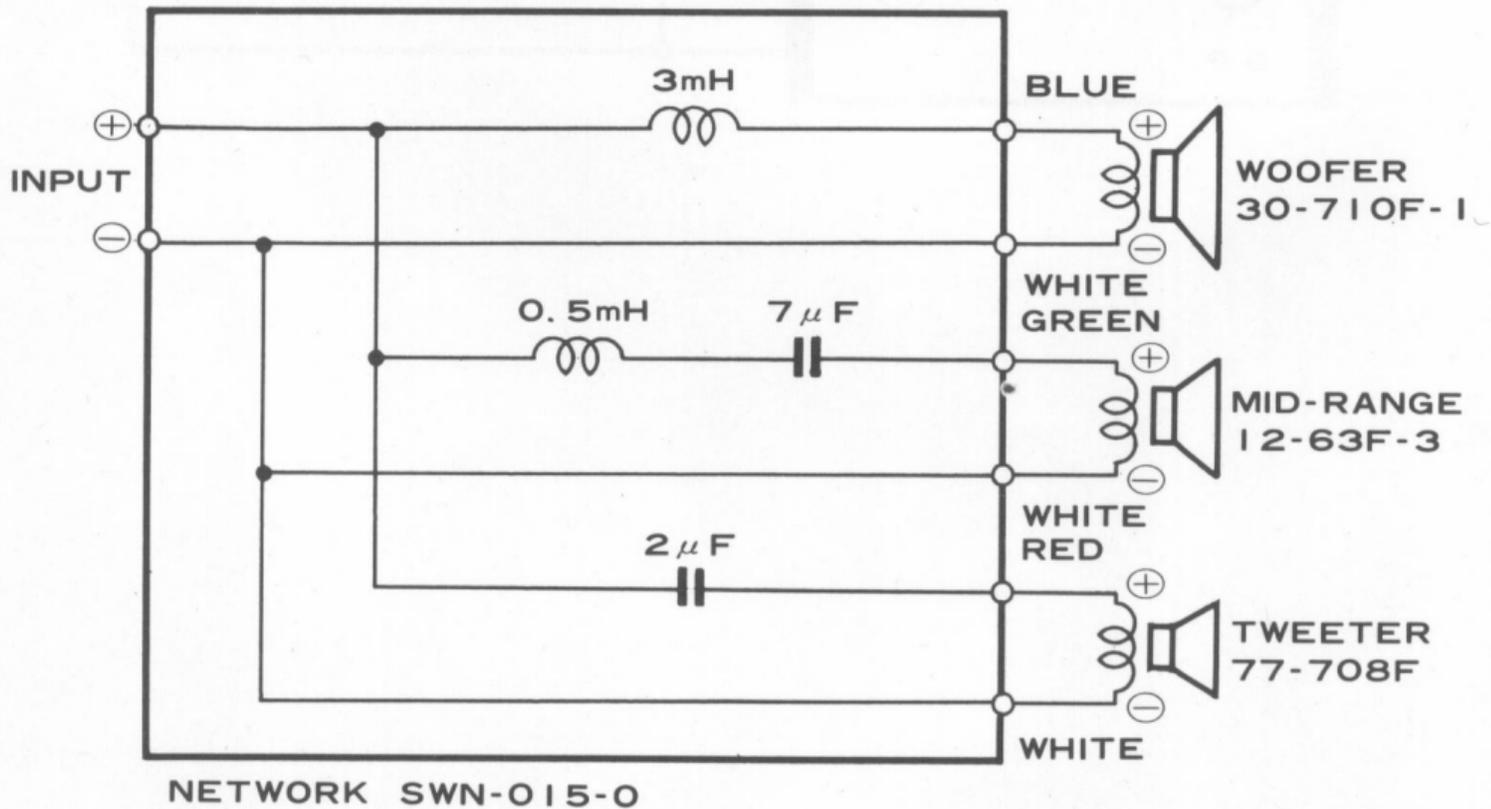



7-3 CS-60

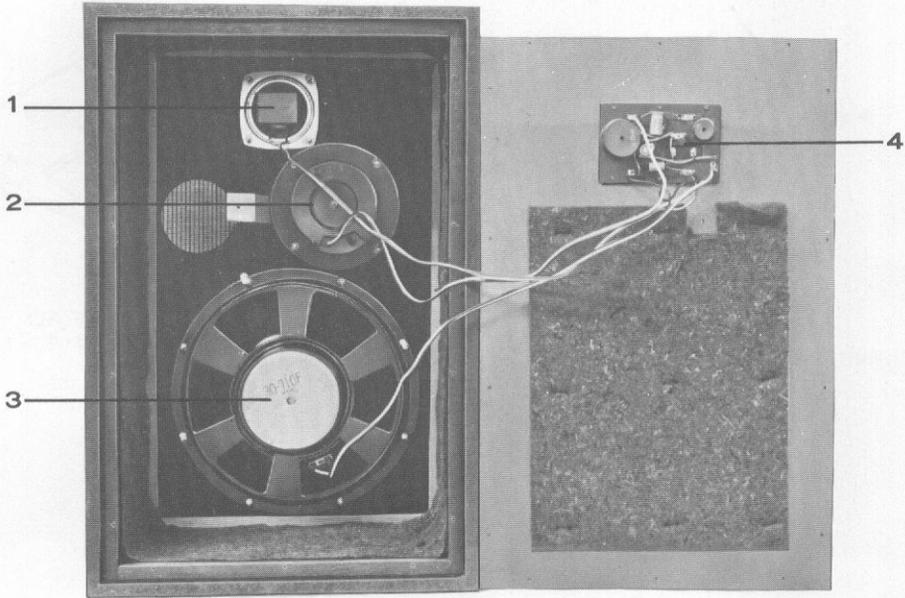

Key No.	Description	Part No.	
1	Tweeter	77-708F	
2	Mid-range	12-63F-3	
3	Woofer	30-710F-1	
4	Network	SWN-015-O	
	Service pad	E11-048-A	
	Speaker cable	D51-007-O	
	Operating guide	SRB-017-O	
	Packing case assembly	SHK-022-O	

8. PACKING METHOD

OPERATING GUIDE
CS-40
(SRB-016-0)
CS-50
(SRB-022-0)
CS-60
(SRB-017-0)

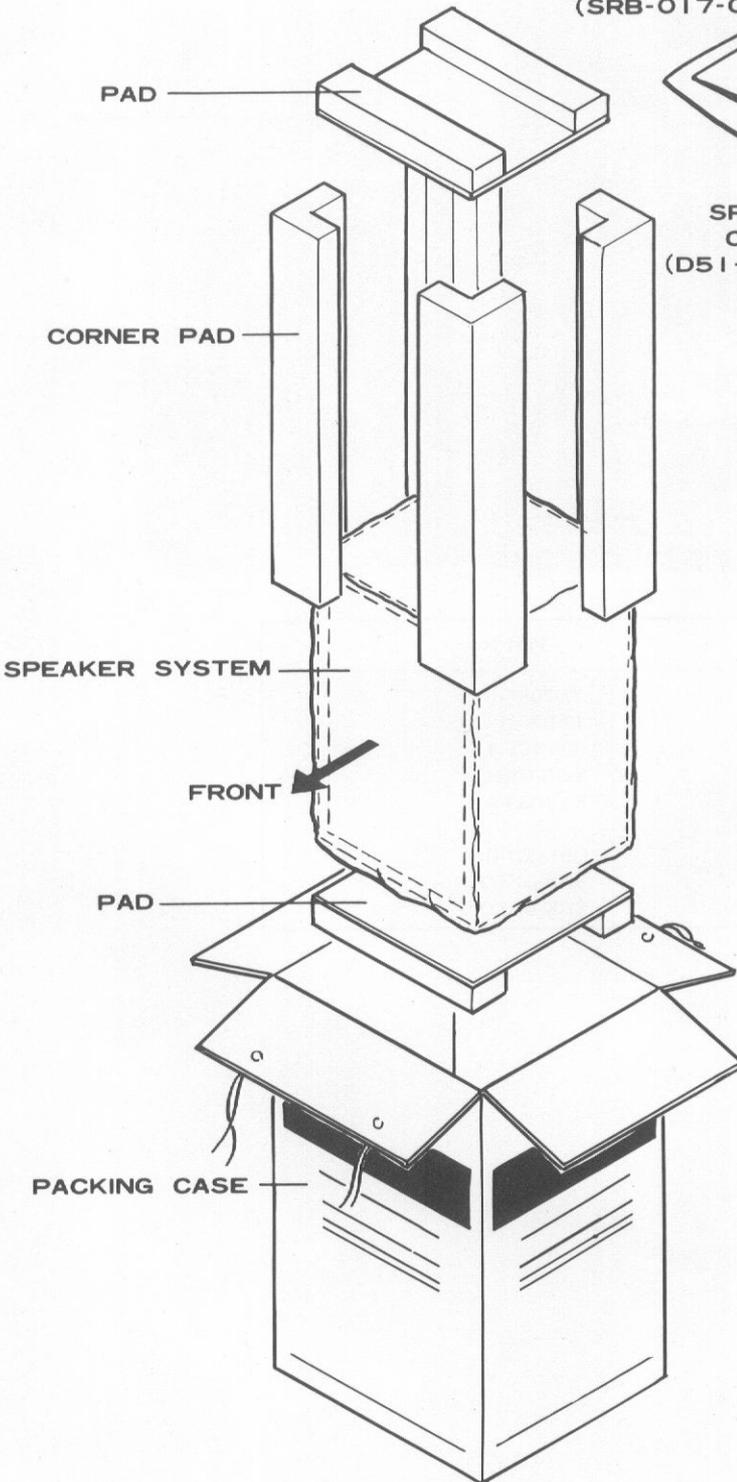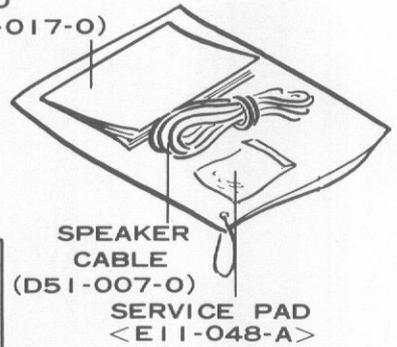

PACKING CASE ASS'Y
CS-40
(SHK-017-0)
CS-50
(SHK-026-0)
CS-60
(SHK-022-0)