



X-1000R

Stereo Tape Deck

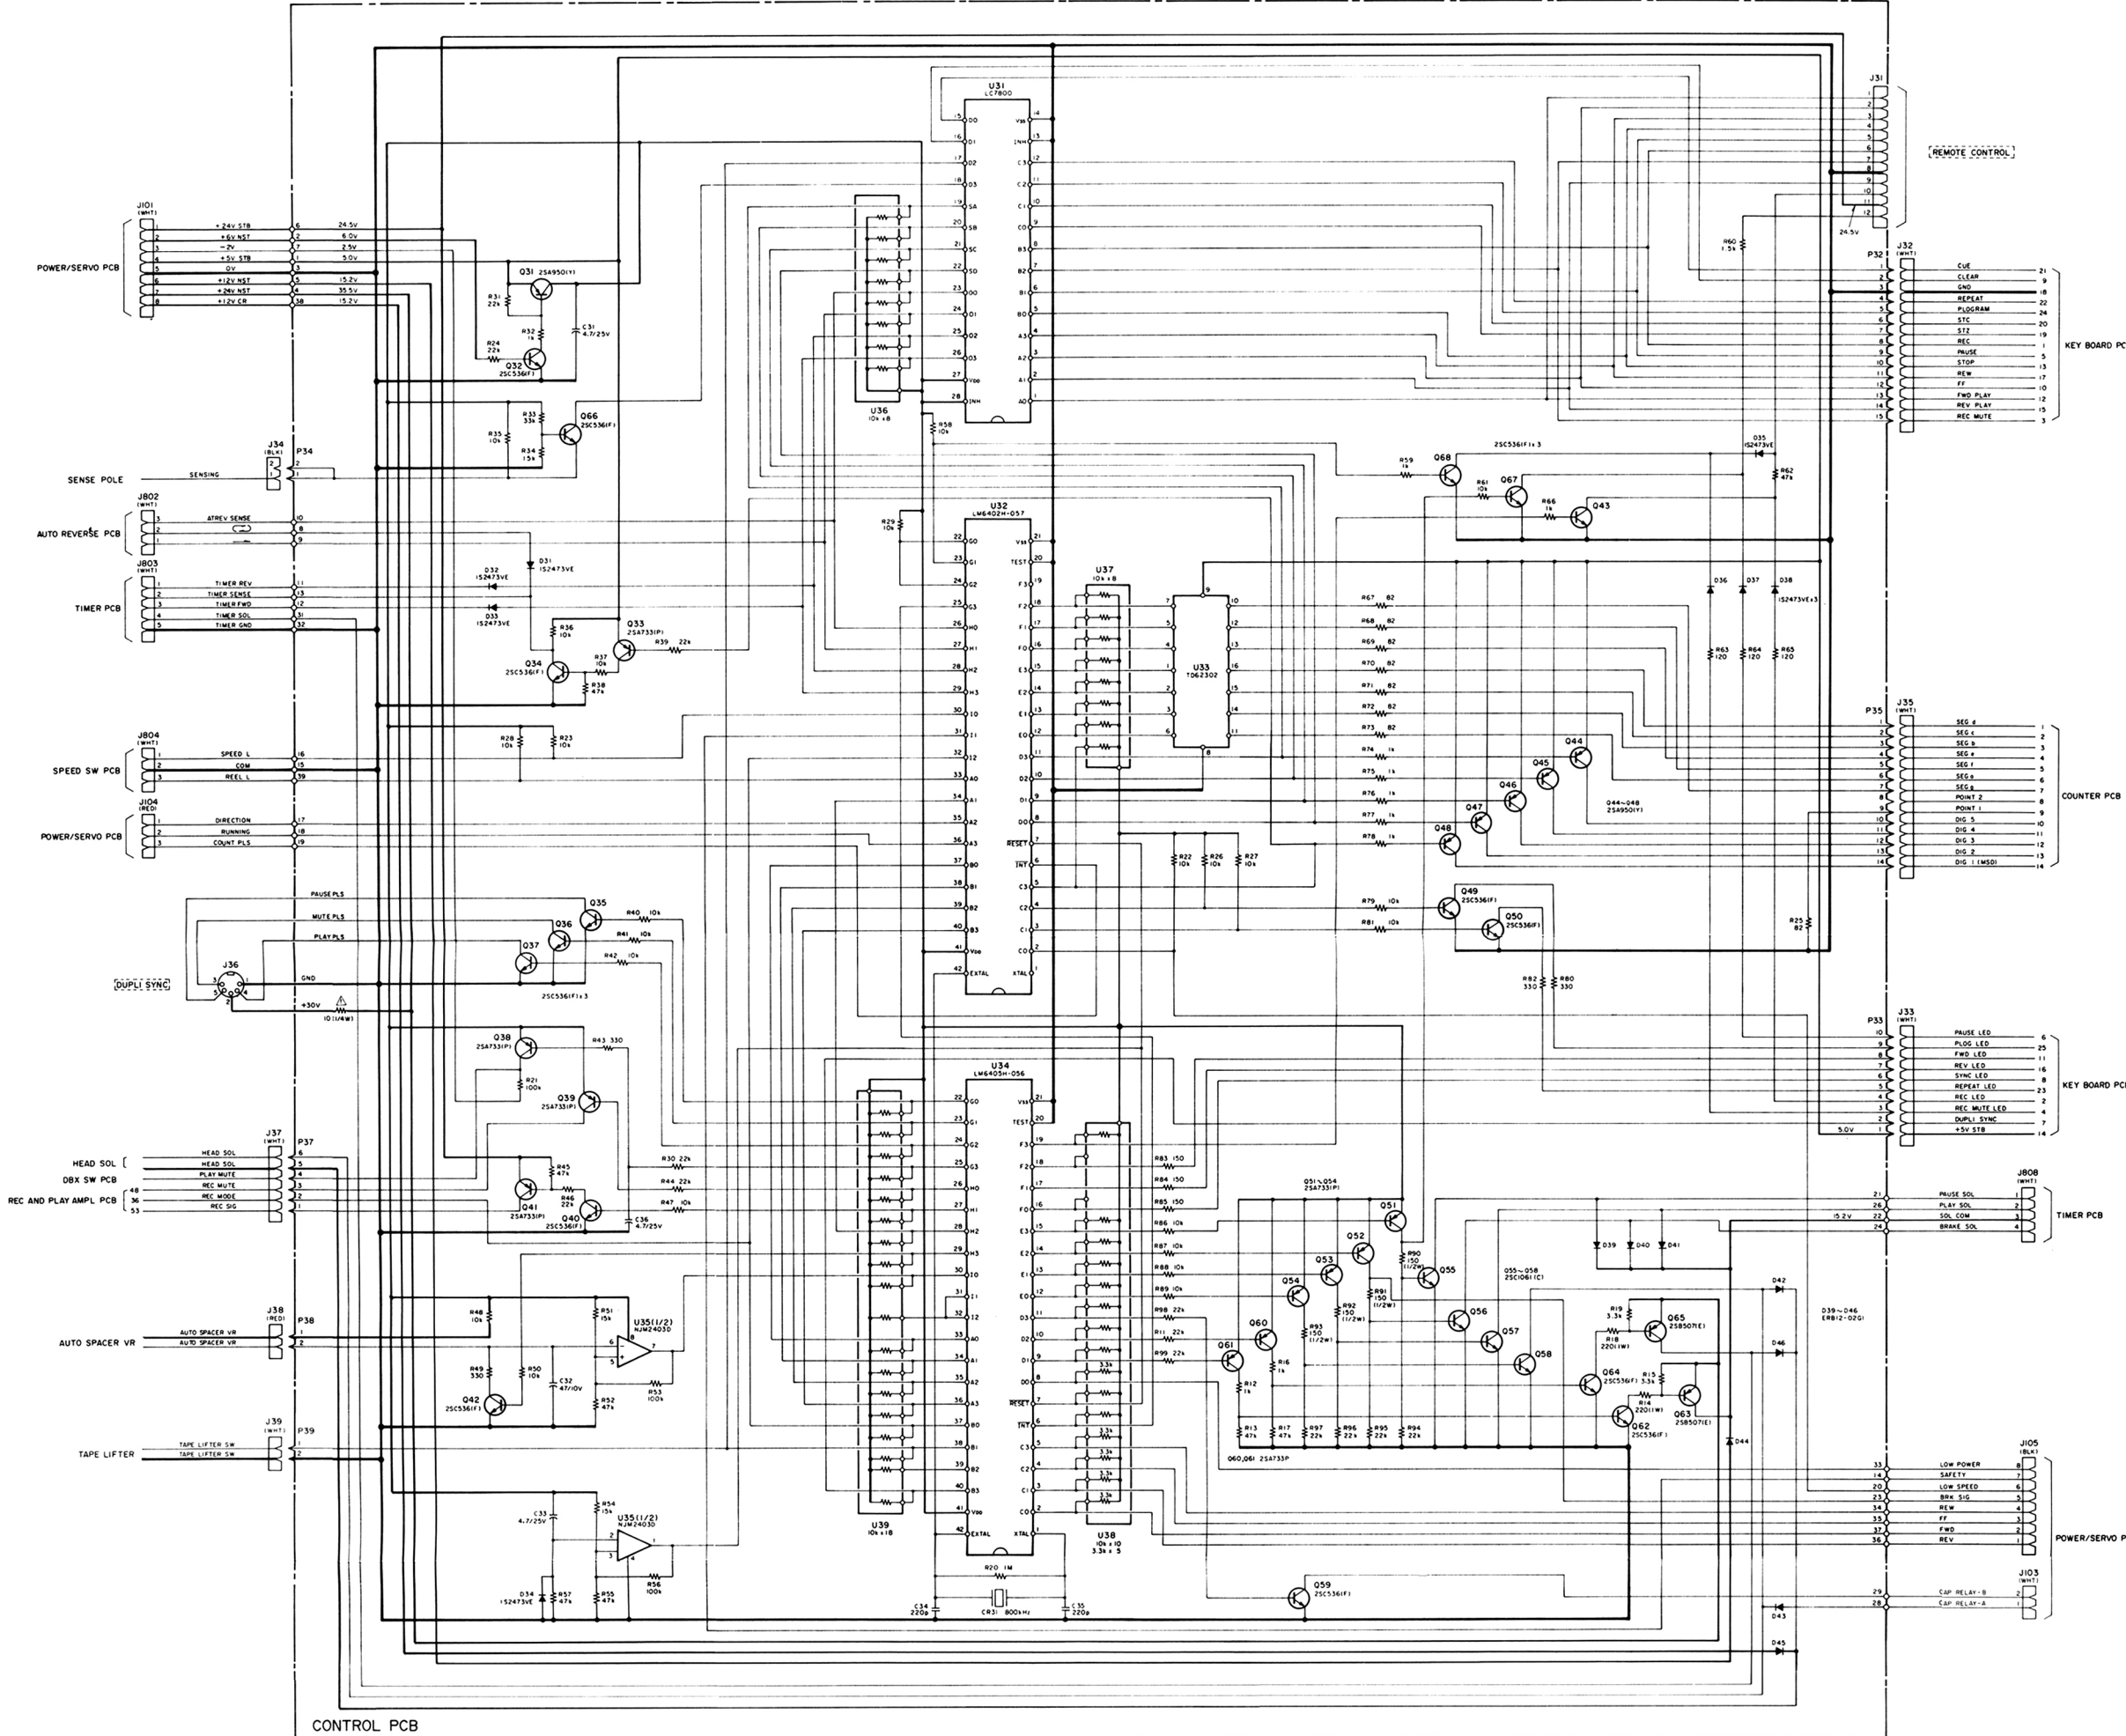


- NOTES
1. Schematic diagram shown for left channel except for some of the components.
 2. All resistors are 1/4 watt, $\pm 5\%$, unless marked otherwise. Resistor values are in ohms (k = 1,000 ohms).
 3. All capacitor values are in microfarads (p = picofarads).
 4. Δ Parts marked with this sign are safety critical components. They must always be replaced with identical components-refer to the TEAC parts list and ensure exact replacement.
 5. Voltage and level values are for reference only.
0dB = 0.775V
Indicated values are those existing when the meter indicates 0VU.
 6. : front panel indication
 7. : rear panel indication
 8. +B power supply circuit.

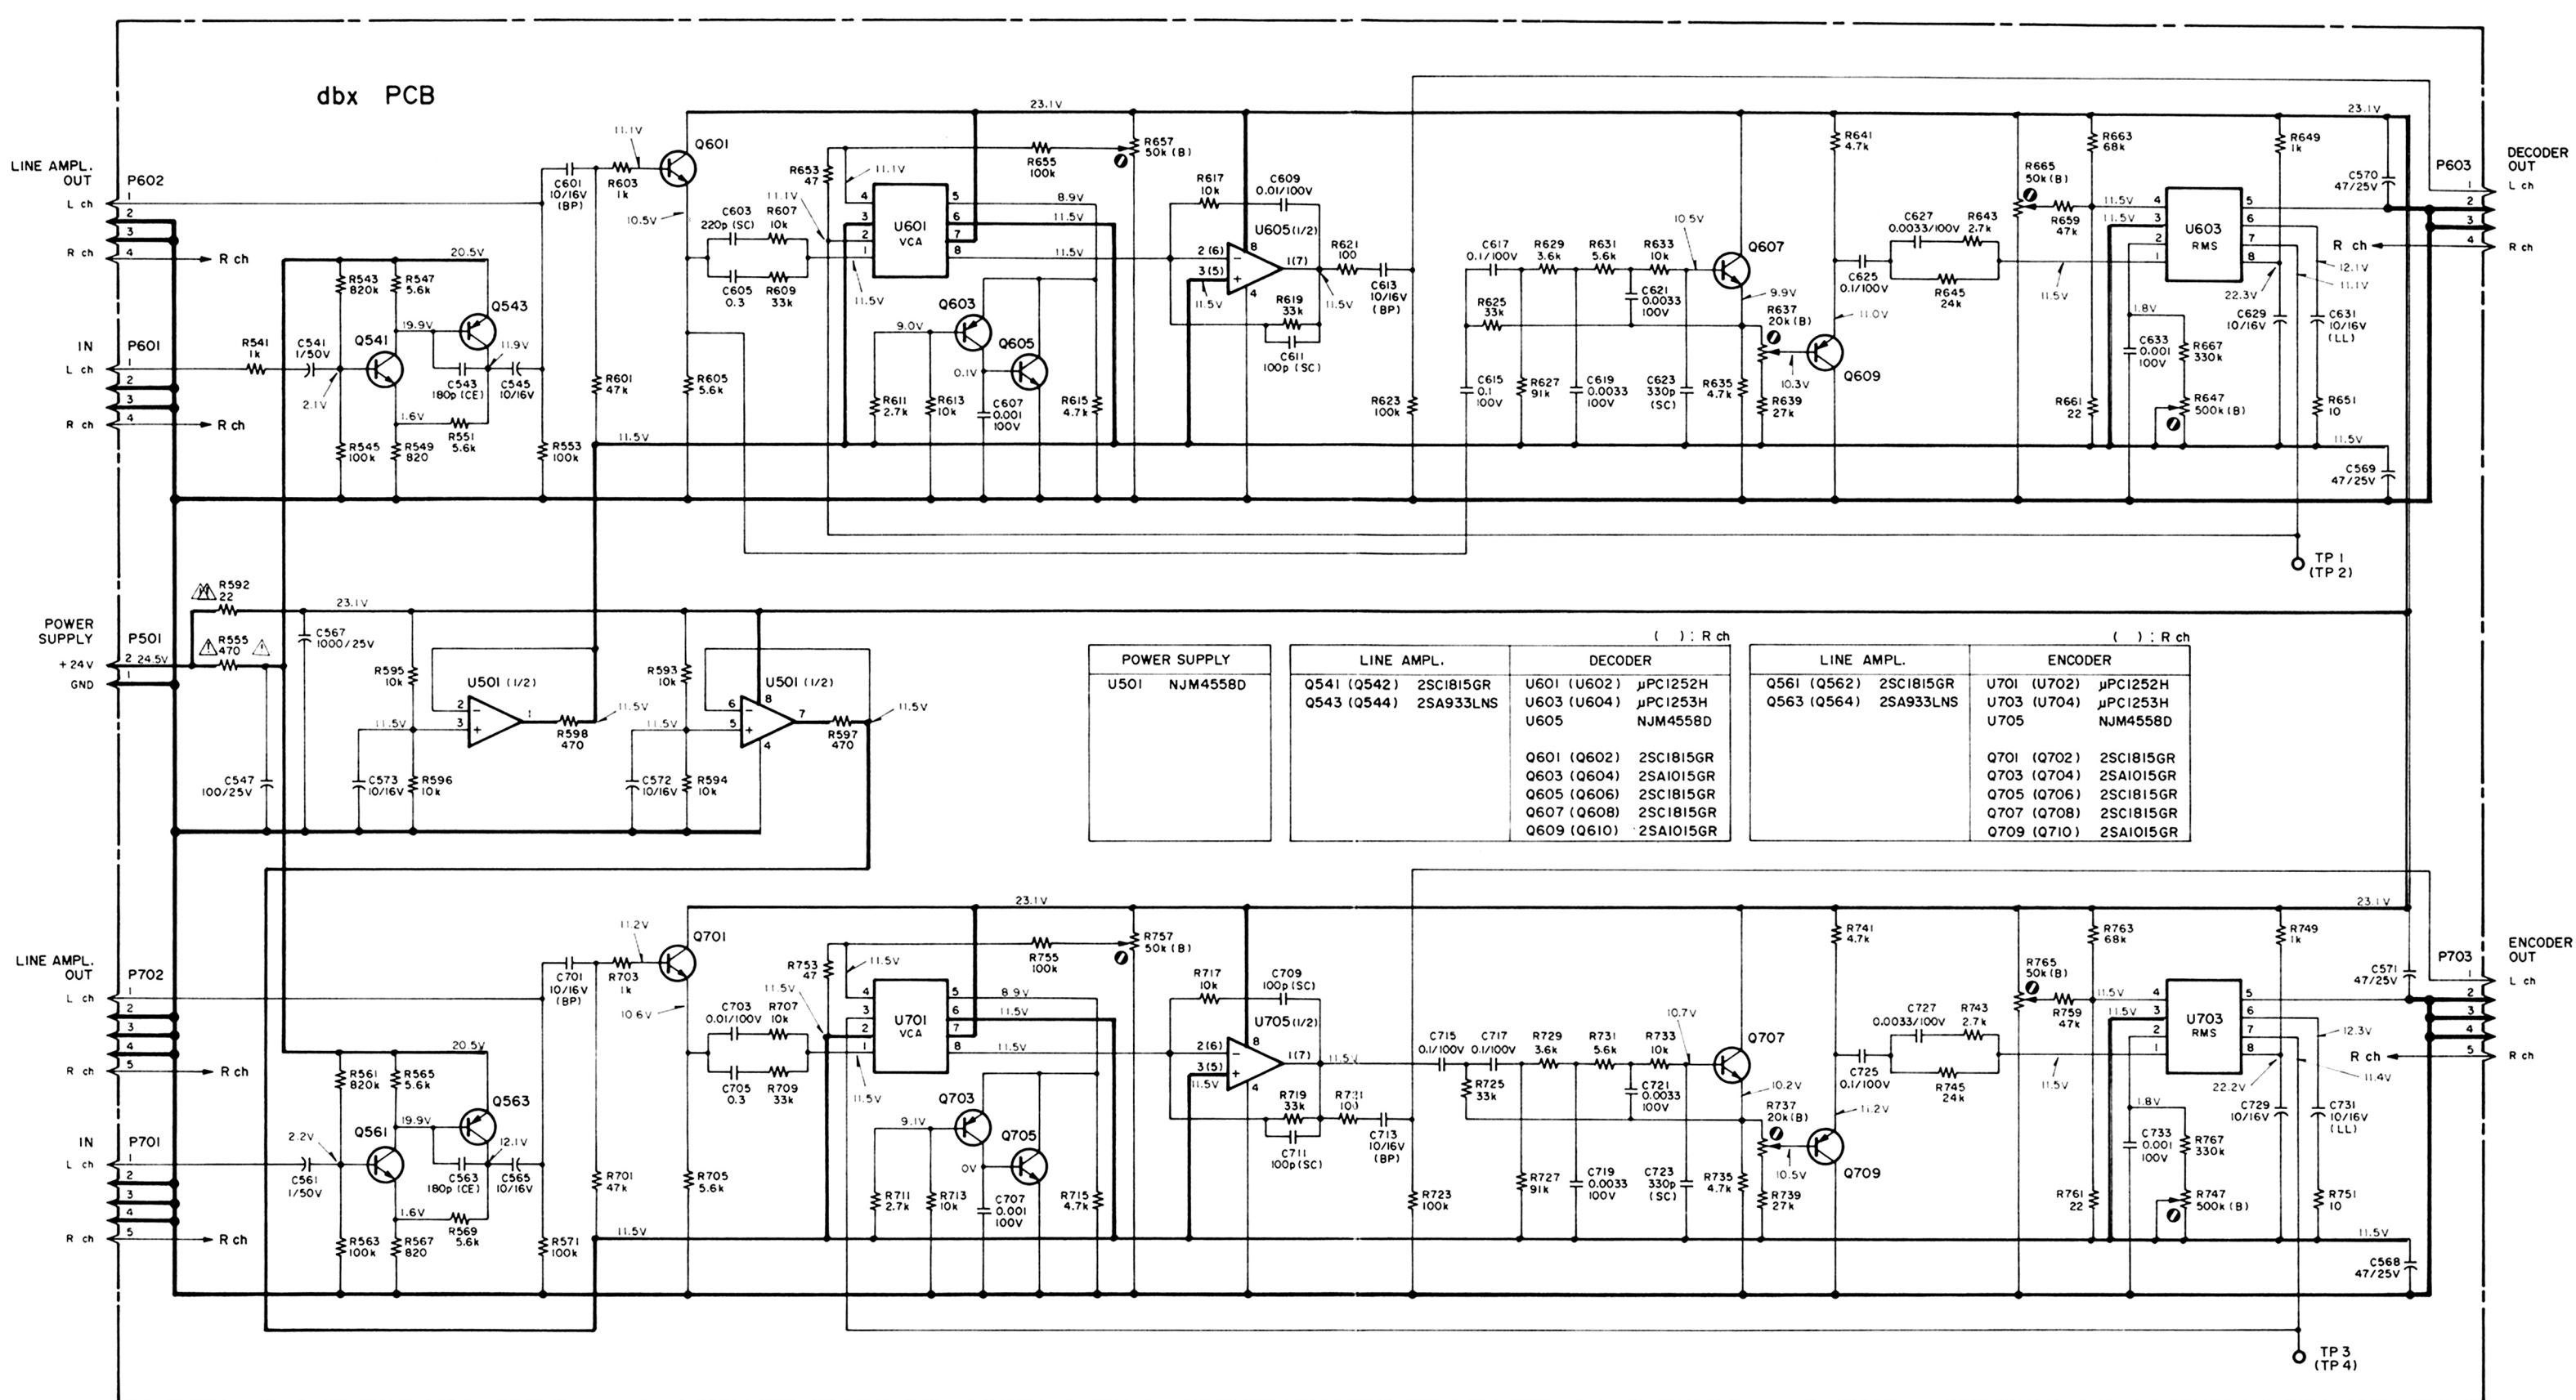





X-1000R

Stereo Tape Deck


SET OF CIRCUIT DIAGRAMS

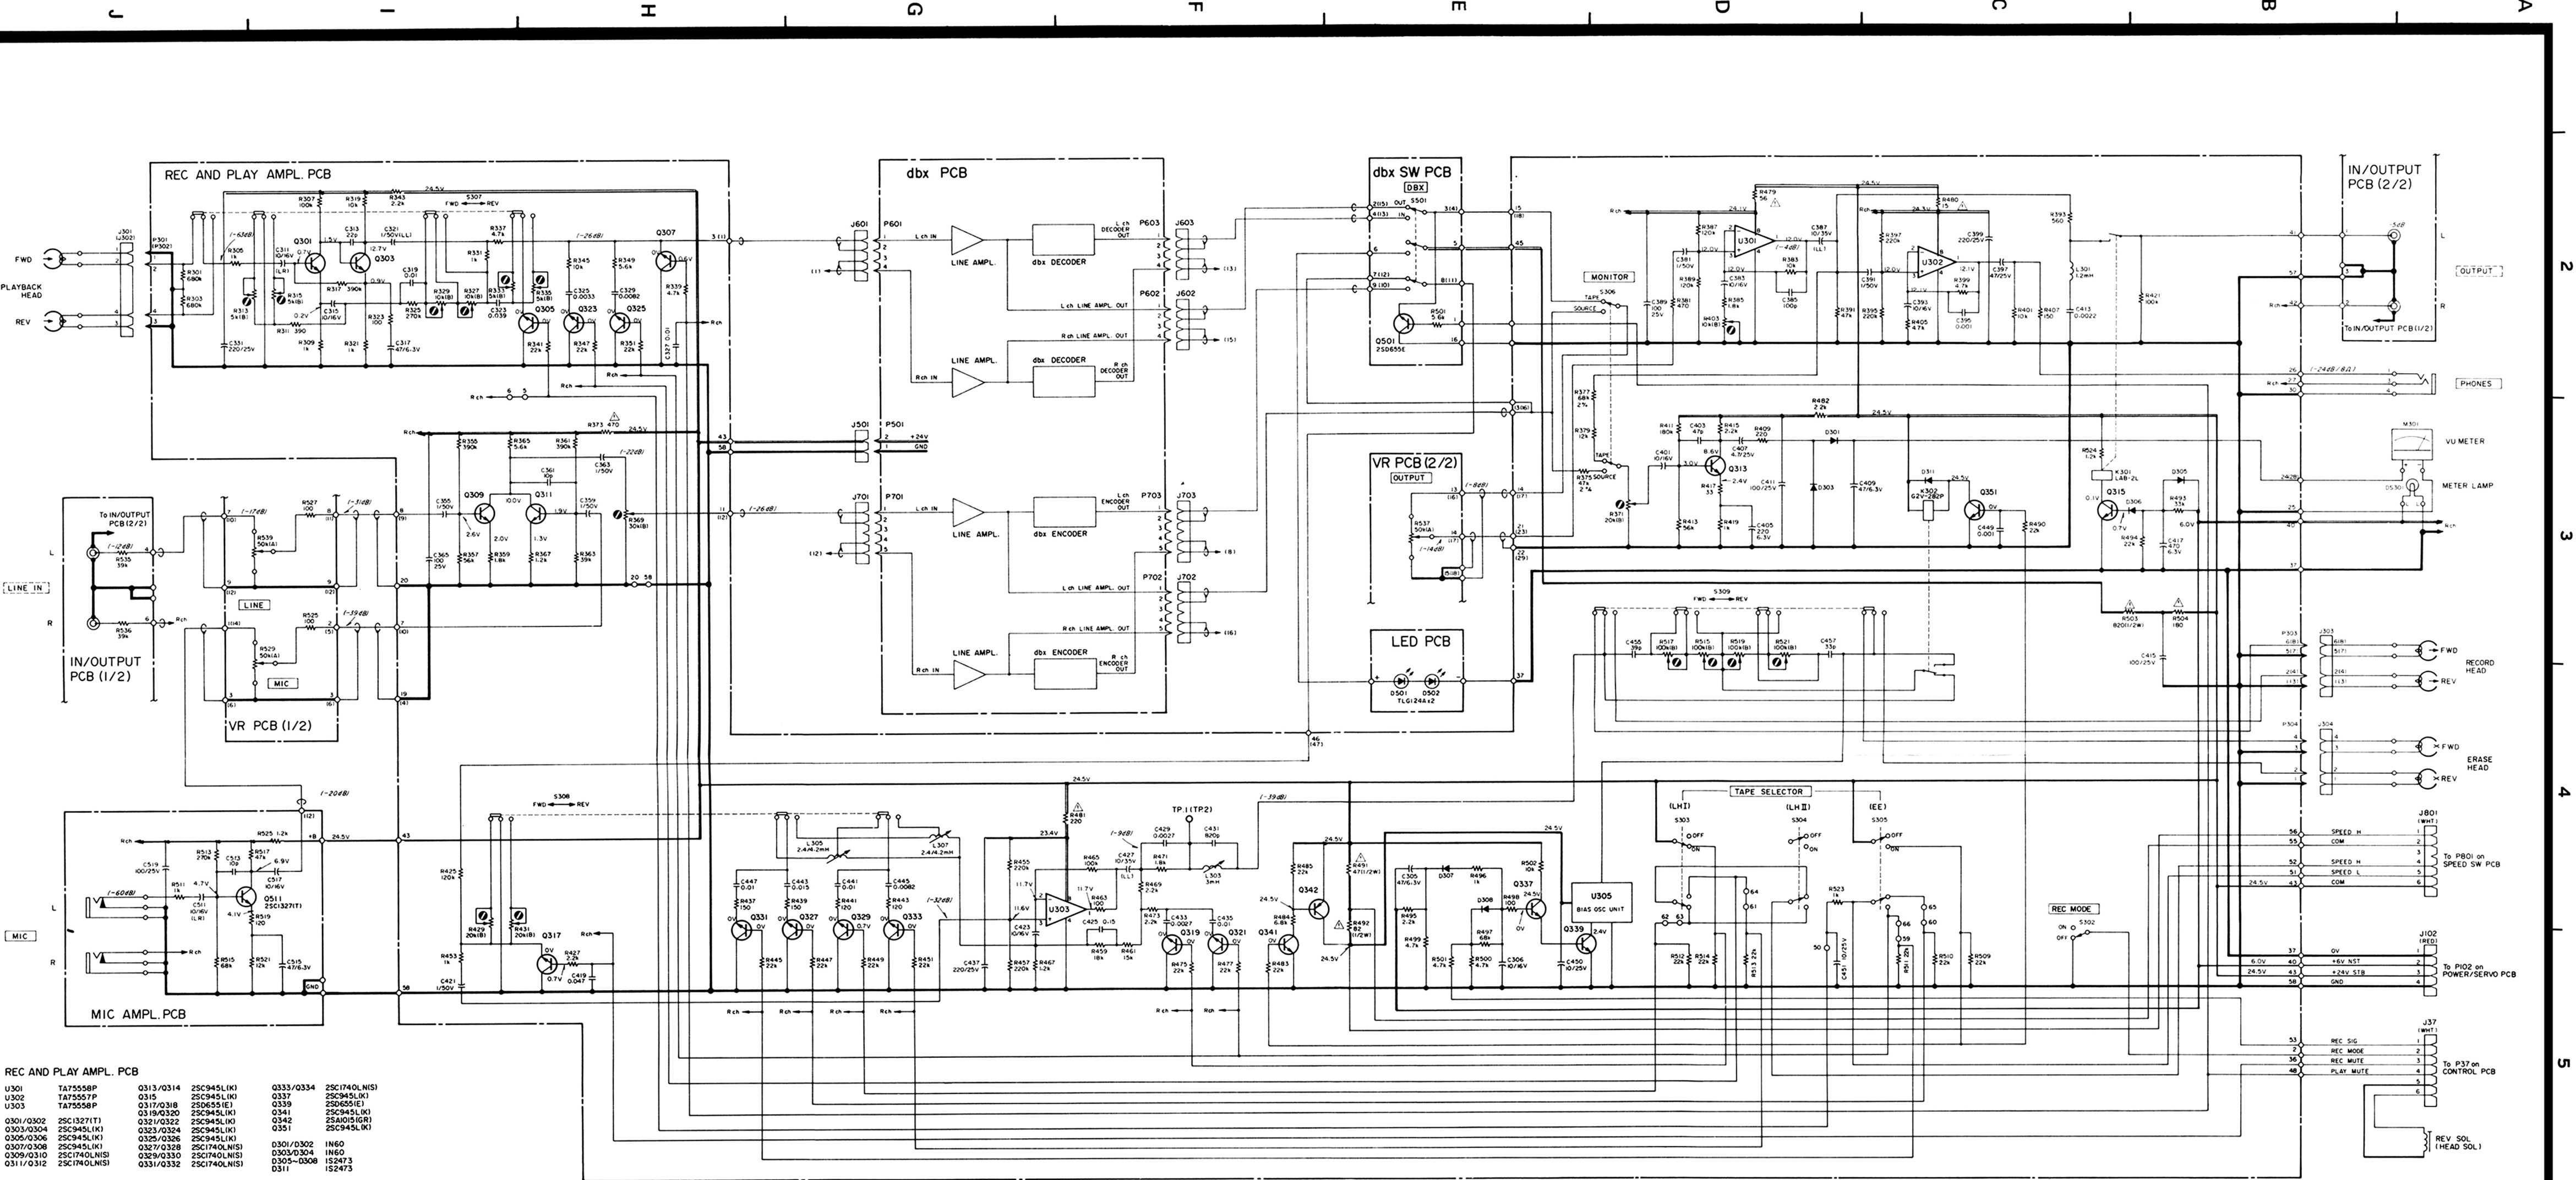



KEY BOARD PCB

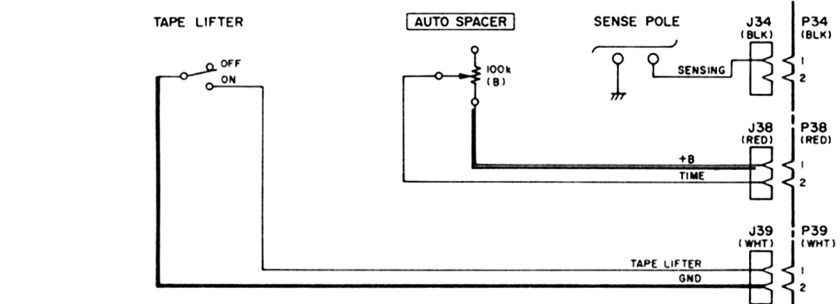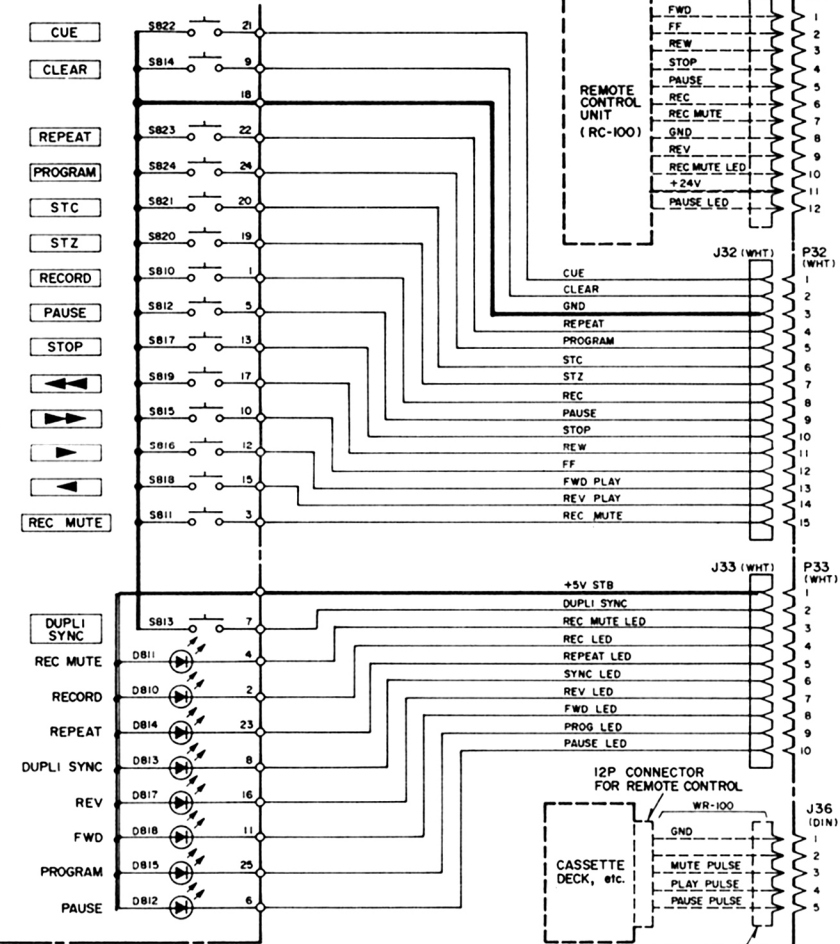


CONTROL PCB

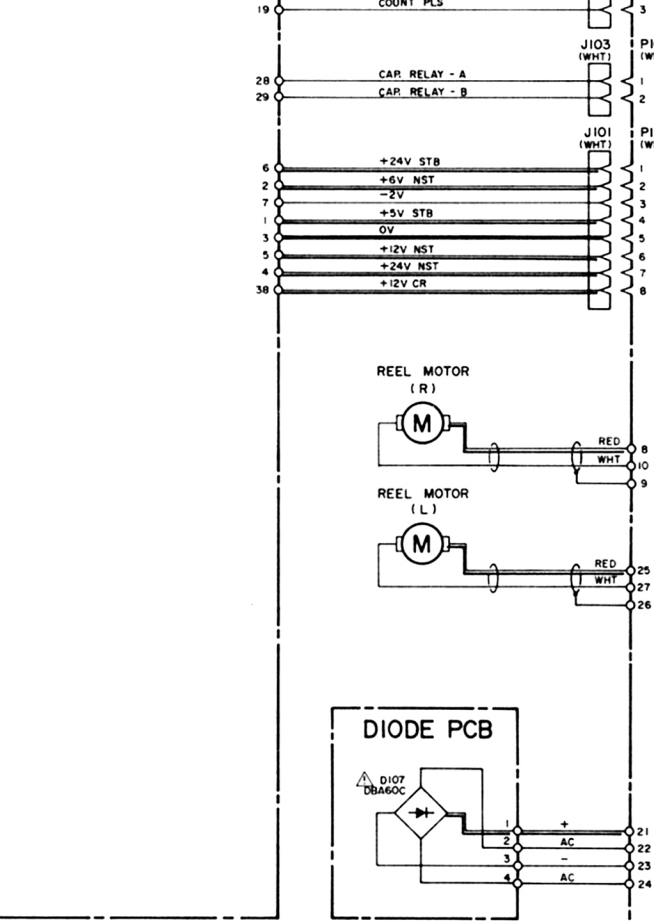









POWER/SERVO PCB

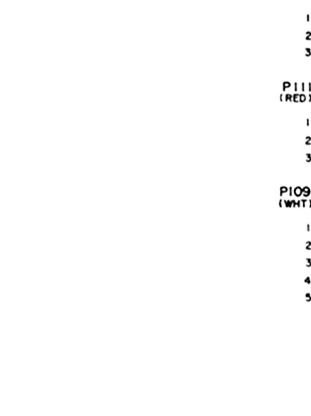

TIMER PCB

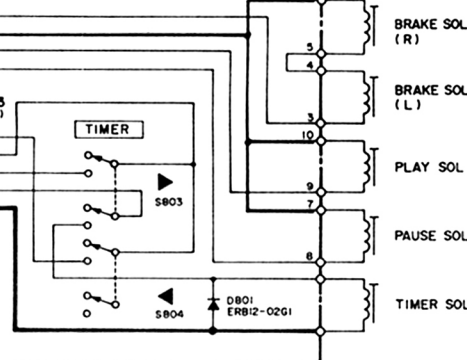

AMPLIFIER SECTION

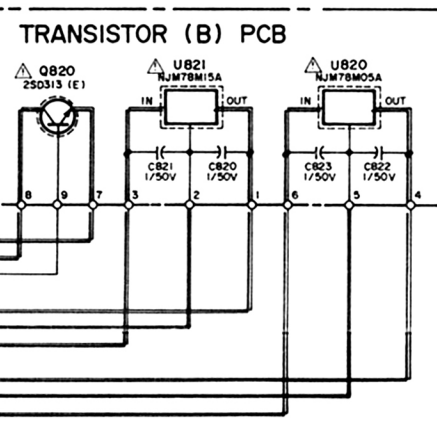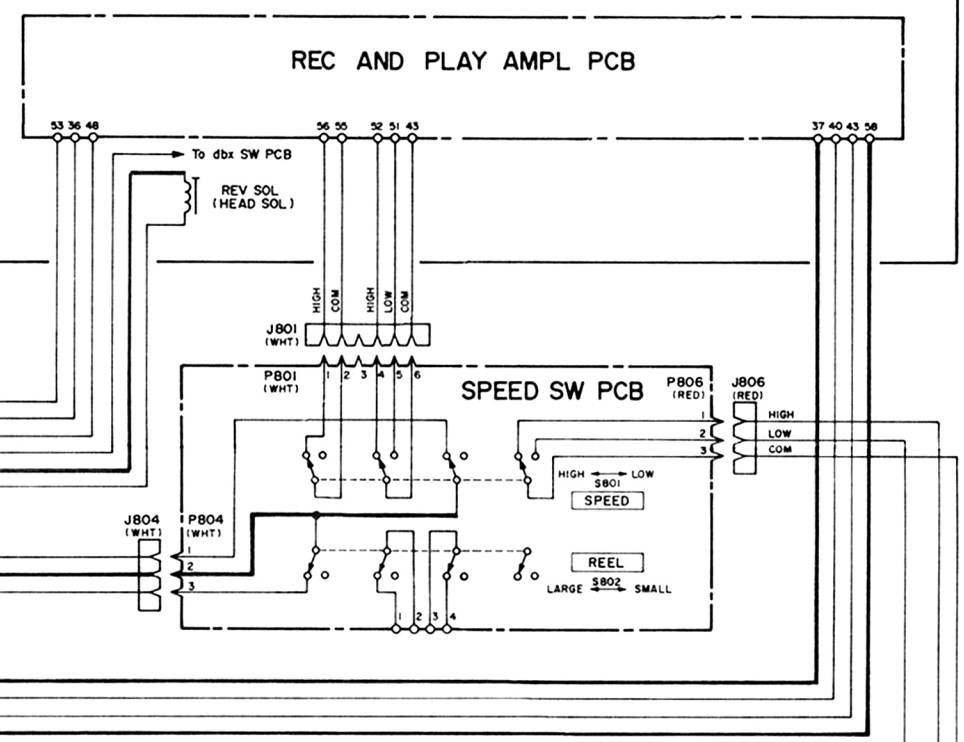

AC POWER SUPPLY CIRCUIT



