

SERVICE MANUAL



FISHER

AUTOMATIC DIGITAL
COMPACT DISC CHANGER
with REMOTE CONTROL REM-200

DAC-195

(EUROPE)



137 335 40

SPECIFICATIONS

System Compact disc digital audio system
Remote Control (REM-200) 30-function,
wireless remote control

AUDIO CHARACTERISTICS

Frequency Response 20 Hz – 20 kHz
Harmonic Distortion Less than 0.07 % (1 kHz)
S/N Ratio More than 90 dB
Wow and Flutter Below measurable limits
Channel Separation More than 80 dB (1 kHz)

FUNCTIONS

Disc Selection With DISC NUMBER (1 ~ 5) buttons
Track Selection With F-FWD/F-BACK buttons,
or TRACK/INDEX NUMBER (0 ~ 9)
buttons on the remote control
Index Selection With INDEX and TRACK/INDEX
NUMBER (0 ~ 9) buttons on the
remote control (normal disc play only)
Program Selection With DISC NUMBER (1 ~ 5),
F-FWD/F-BACK buttons, or TRACK/INDEX
NUMBER (0 ~ 9) buttons on the remote control
Program Functions 32 selections
Program Reset Press CLEAR button

Checking Program With CHECK button
(in STOP mode)

Intro Scan 10 sec., or 1 ~ 99 sec. programmable
with the remote control

Scanning 2 speed fast-forward/back with sound,
2 speed search in PAUSE mode

Random Disc Play Press RANDOM PLAY button

Total Disc Time Display Press DISPLAY button once

Remaining Disc Time Display Press DISPLAY
button twice

Repeat All tracks, all programed tracks

DIGITAL SIGNAL PROCESSING

Optical Pickup 3-beam laser

Error Correction CIRC

Sampling Frequency 44.1 kHz

D/A Conversion 16-bit linear

Filter Digital Filter + (4-pole LC filter)

GENERAL


Power Requirements (50 Hz) AC 110/220 V
20 Watts

Dimensions (W x H x D) 440 x 113 x 290 mm

Weight (approx.) 5.0 kg

– Specifications and design are subject to change without notice. –

REFERENCE No. WM-22478

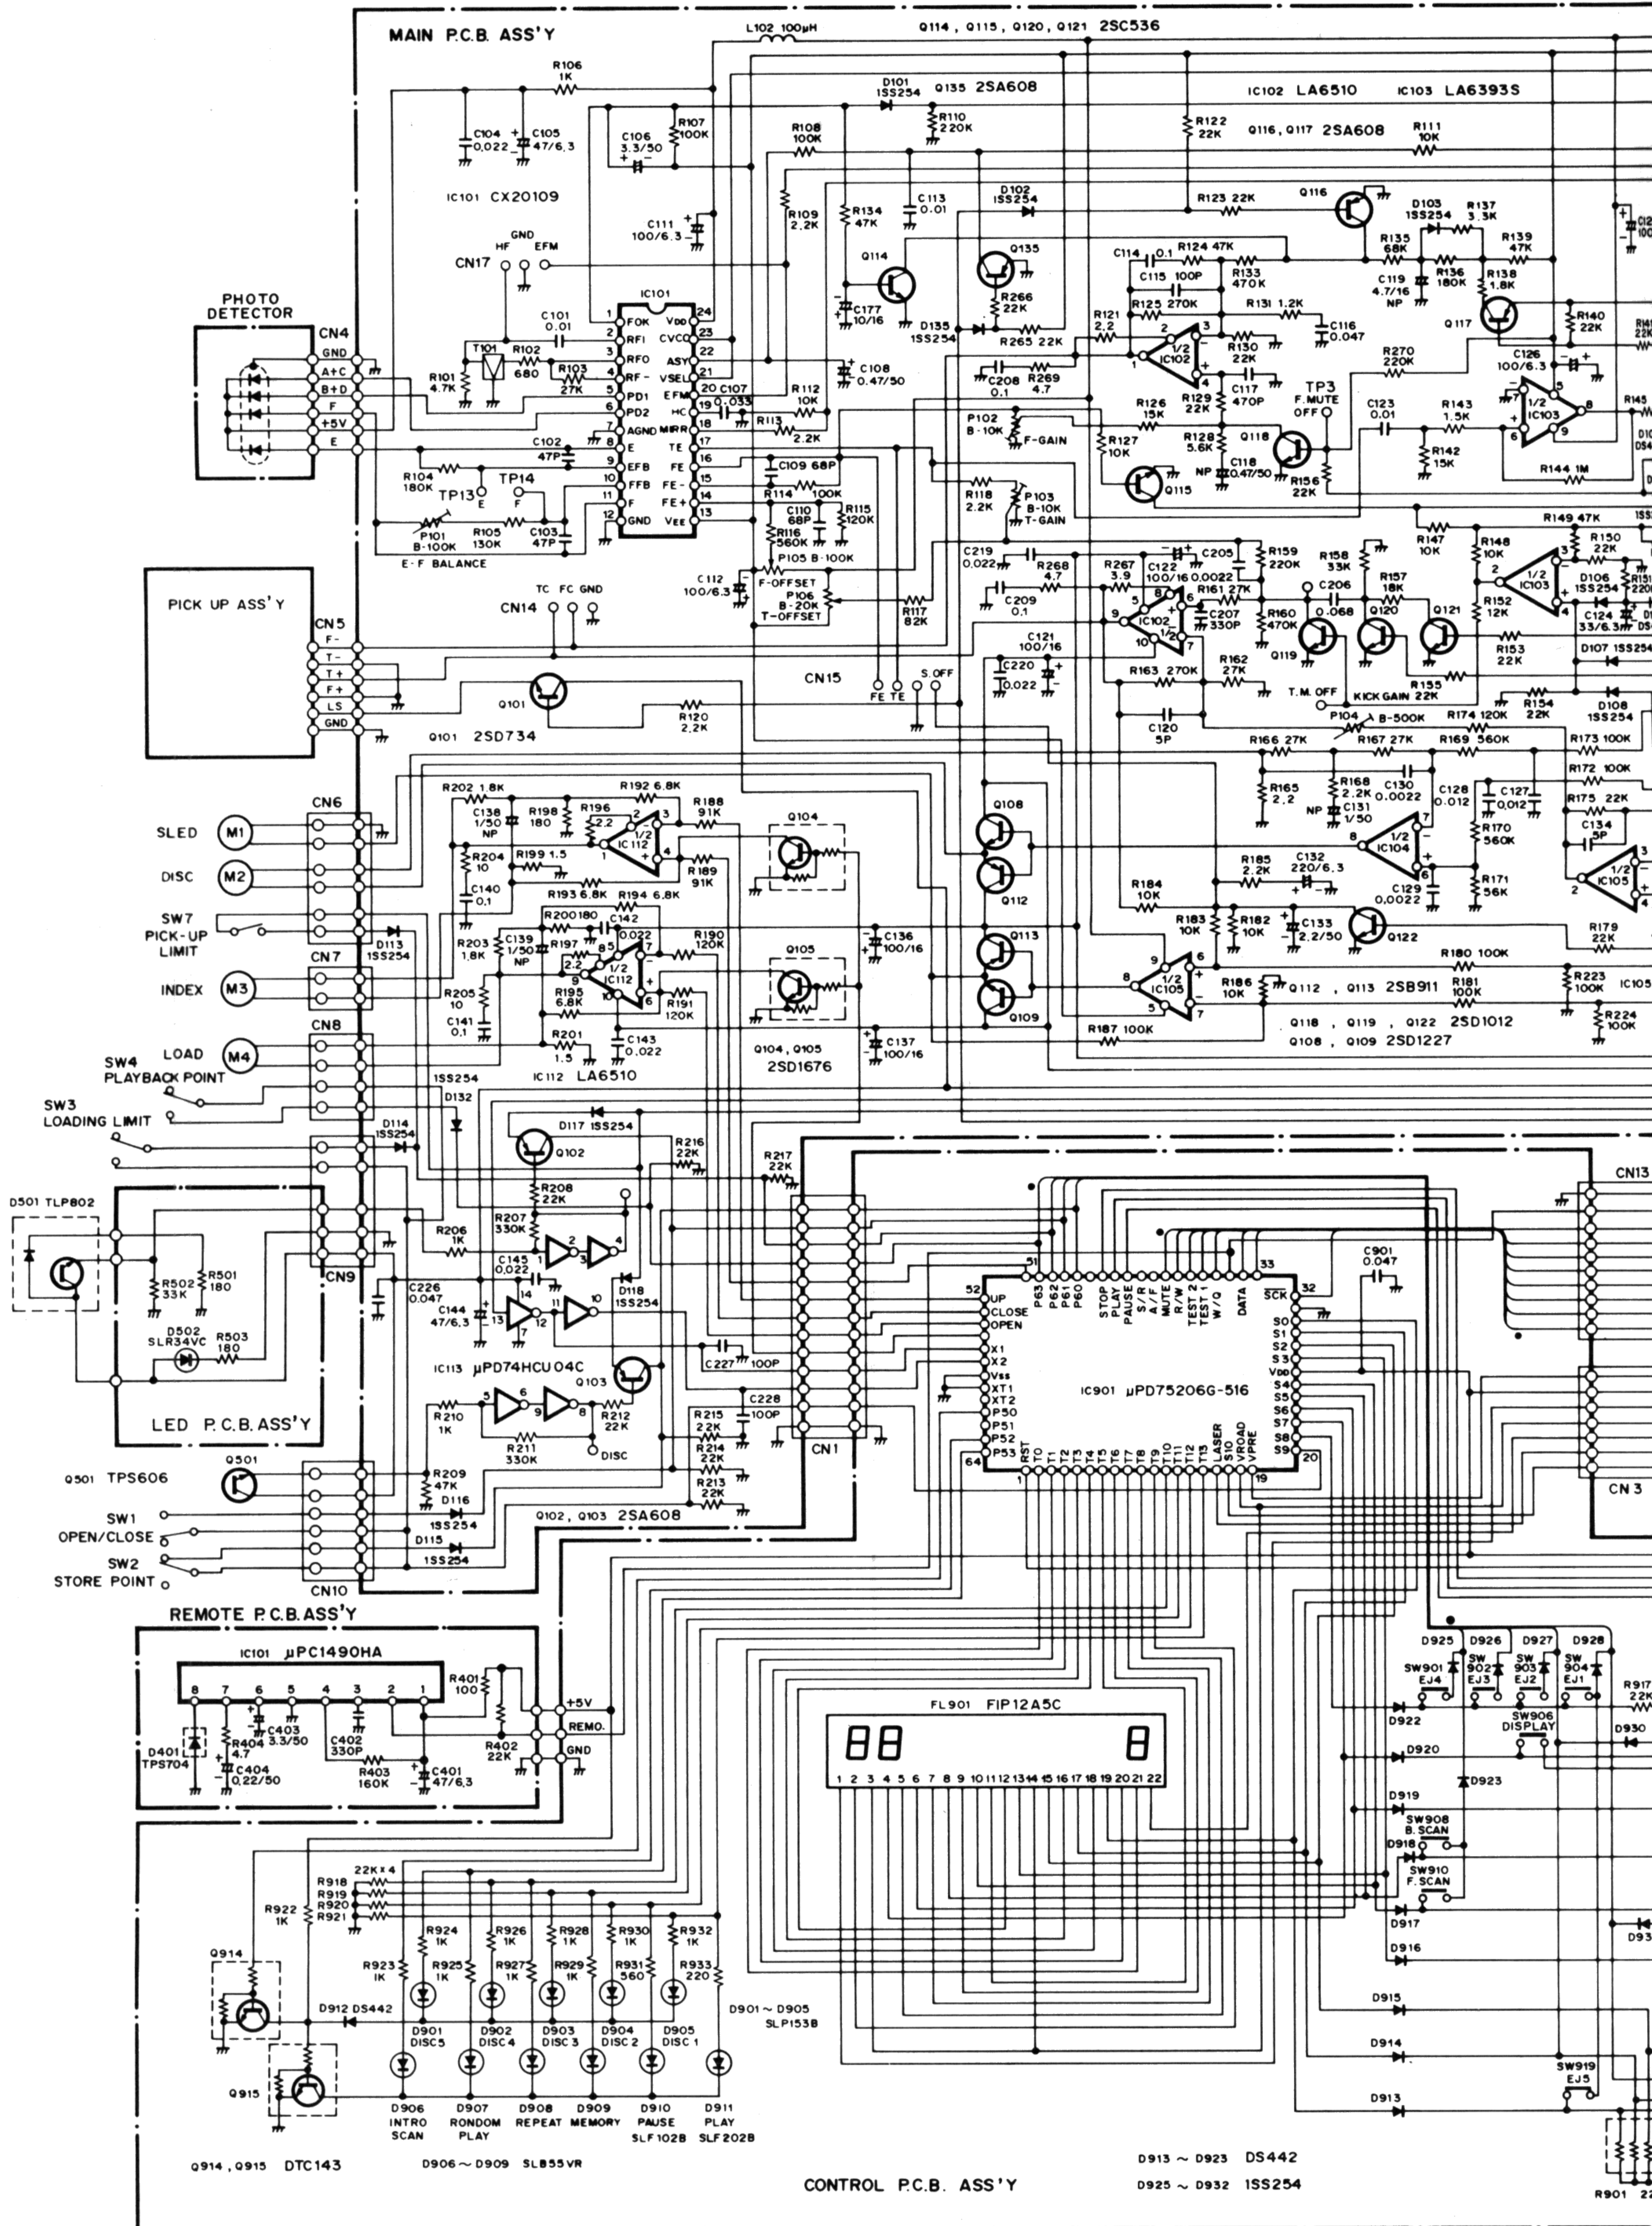

SCHEMATIC DIAGRAM

