

JVC

SERVICE MANUAL

STEREO HEADPHONE

HA-E73

The "Product Exchange System" is applicable to this product.
For limited spare parts, refer to the parts list.




HA-E73-W-E

SPECIFICATION

Type	Moving coil
Frequency response	8 Hz - 24,000 Hz
Nominal impedance	32 ohms
Sensitivity	98 dB/1 mW
Max.input capability	50 mW
Cord length	1.5 m (4.92 ft) with 3.5 mm dia.stereo mini plug
Mass	41 g (0.76 oz) without cord 43 g (1.06 oz) with cord

Design and specifications subject to change without notice.

Packing Method

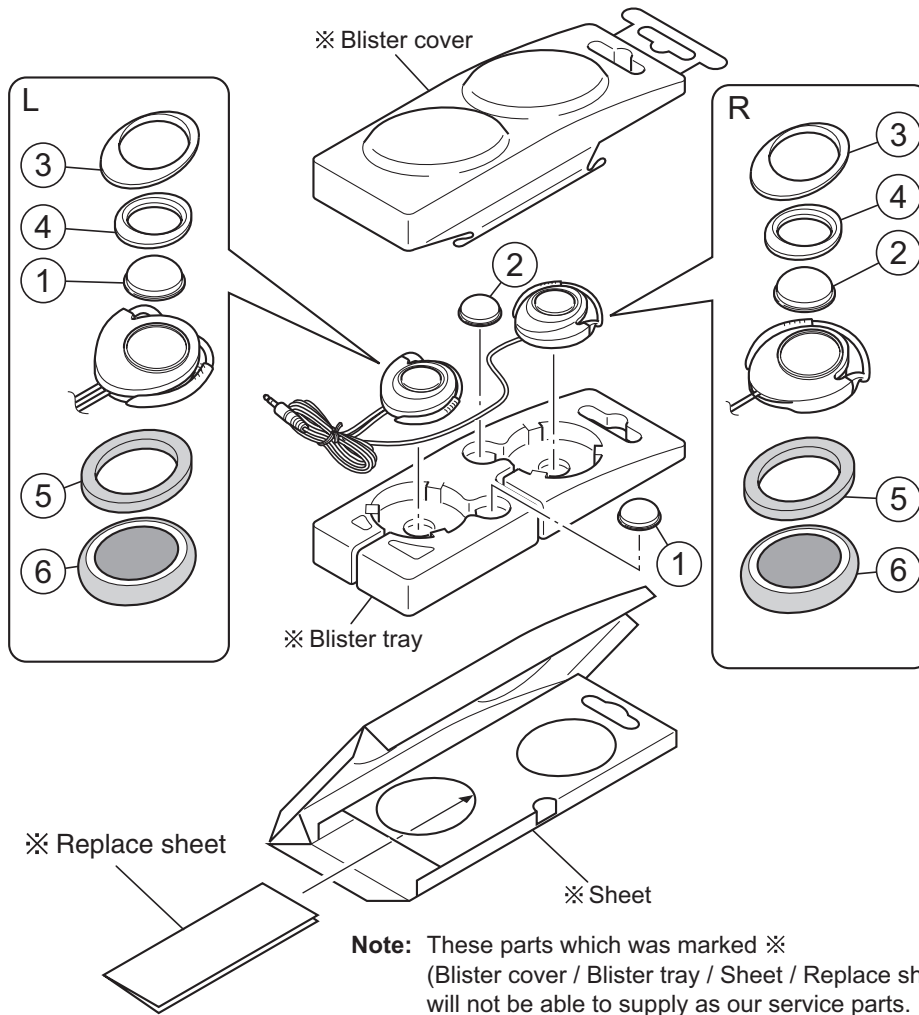


Parts list

△	SYMBOL	PARTS NO.	PARTS NAME	Q'TY	DESCRIPTION
	1	J47186-006	Center Cap L	1	Pink
	1	J47186-007	Center Cap L	1	Blue
	2	J47187-006	Center Cap R	1	Pink
	2	J47187-007	Center Cap R	1	Blue
	3	J34103-002	Cover Units	1	
	4	J47188-001	Dec. Ring	2	
	5	J47189-001	Ear Cushion	2	
	6	J47190-001	Ear Pad	2	

* Parts marked (△) are safety parts. When replacing, be sure to use the specific one.

Wiring Diagram

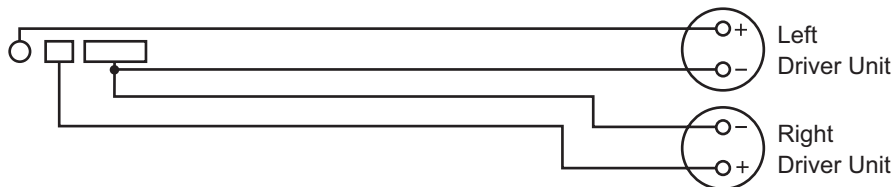

JVC

VICTOR COMPANY OF JAPAN, LIMITED
 AV & MULTIMEDIA COMPANY ACCESSORIES CATEGORY 1644, Shimotsuruma, Yamato, Kanagawa 242-8514, Japan

(No.XC001)