
## RMK8702SR Installation Instructions Rack Mount Kit for the SR8002 / SR7002

## RMK8702SR Rack Mount Kit includes:

- · Left side rack bracket
- · Right side rack bracket
- Front panel faceplate
- 4 front panel mounting acorn nuts
- 1. On the unit, remove the left and right side screws of the unit. (*Figure A*).

  \*\*\*Warning: Do not remove the cover of the unit\*\*\*
- 2. Position the right side bracket on the right side of the unit so the holes on the bracket line up with the corresponding holes on the unit.
- 3. Attach the bracket to the unit using the same screws that were removed (Figure B).
- 4. Repeat step 2 and step 3 for the left side bracket (Figure B)
- 5. Mount the front panel faceplate onto the unit by matching the protruding bolts on the side brackets to the small holes on the faceplate (*Figure C*).
- 6. Use the acorn nuts to secure the front faceplate to the side brackets (*Figure C*).
- 7. The component is now ready to be secured to the frame rails of the equipment rack in accordance to the manufacturer's instructions.
- 8. If additional rack space clearance in needed, the feet of the unit may be removed by taking out the screw in the bottom of each foot.
- 9. Be sure to allow for plenty of ventilation (Bottom, Top and Sides)

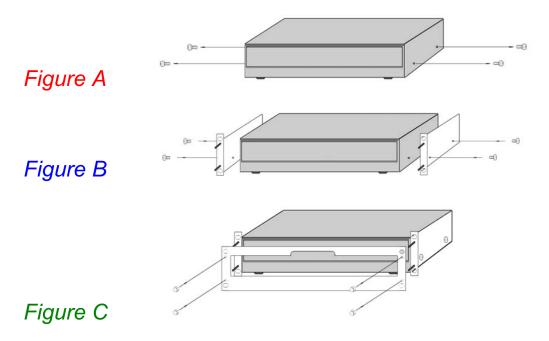

Marantz America, Inc. • 100 Corporate Dr., Mahwah, NJ 07430 • (201) 762-6500 www.marantz.com