
SPEAKER SYSTEM NS-U30

SERVICE MANUAL

■ DIMENSIONS

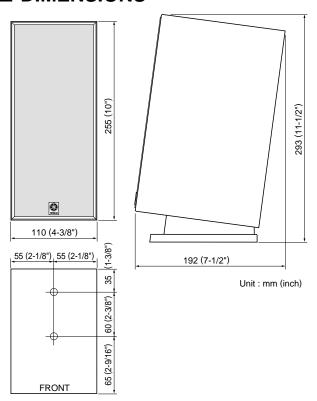

■ ATTACHING STAND

Attach the included stands to the speakers using the two included screws. Place the speakers next to a personal computer on a desktop to achive the optimum listening position. Be sure to attach the stands to the speakers correctly as shown in the figure. If you attach them in the opposite direction or otherwise incorrectly, the




speakers may fall and be damaged or cause injury.

■ Non skid pad

To prevent the speakers from sliding around, attach the supplied pads as shown in the illustration.

You can also use the screw holes on the rear of the speaker for installing the speakers.



A screw with a diameter of 4 mm and a pitch of 0.7 mm can be used.

■ SPECIFICATIONS

Type2-way acoustic suspe	ension magnetic shielding
Speaker Unit	
Woofer	9 cm (3-1/2") cone
Tweeter	2 cm (3/4") piezo
Frequency Response	75 Hz – 25 kHz
Impedance	6 ohms
Nominal Input Power	20 W


Maximum Input Po	wer 60 W
Sensitivity	
Dimensions (W x H	x D) 110 x 293 x 192 mm
Stand included	(4-3/8" x 11-1/2" x 7-1/2")
Weight	. 1.8 kg (4 lbs.) /1 piece (stand included)
Finish	Light Cherry PVC
Accessories	Stand x 2, Screws for stand x 4,
]	Non skid pad x 8, Speaker cord (2m) x 2



^{*} Specifications are subject change without notice due to product improvements.



■ EXPLODED VIEW

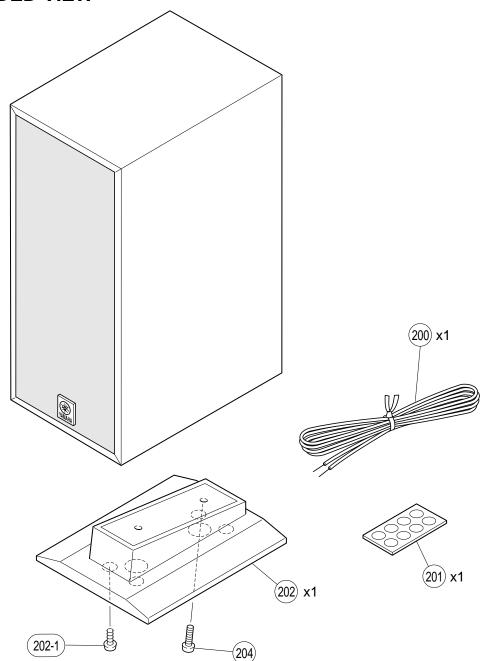

■ PARTS LIST

Ref. No.	PART NO.	Description		Remarks	Markets	
		ACCESSORIES				
200	V4859700	SPEAKER CORD	2.0m	1pc		
201	V4252700	NON SKID PAD	8pcs/s	et		
202	V4252600	STAND ASS'Y	STAND	1pc		
202-1	VB931600	BIND HEAD P-TITE SCREW	4x8	MFZN2-BL		
204	VB132700	BIND HEAD SCREW	4x12	MFZN2-BL		

^{*} New Parts